

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	8590.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	1.0 degrees horizontal

Beam Spread	At 10% of Imax	35.3V x 30.9H
	At 50% of Imax	14.1V x 13.0H
	At 90% of Imax	5.5V x 4.9H

Beam Flux	Total	1001.3 lumens per klm.
	To 10% of Imax	652.0 lumens per klm.
	To 50% of Imax	275.6 lumens per klm.
	To 90% of Imax	60.4 lumens per klm.

Upward LOR	1.0 %
Downward LOR	99.2 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:90.705x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-15D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

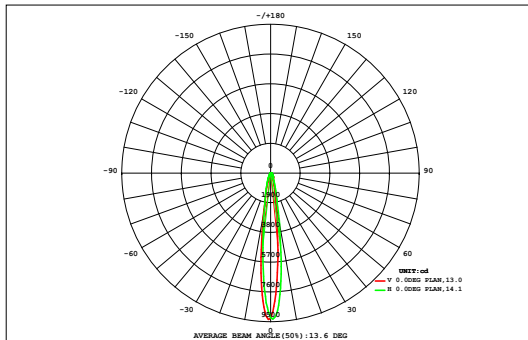

DATA OF LAMP		Eff:61.15lm/W	
MODEL		Imax(cd)	9350
NOMINAL POWER(W)	18	AVAILABILITY(%)	65.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	707.9
NOMINAL FLUX(lm)	90.705	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	1088
TEST VOLTAGE(V)	220	θ @50% (H,V)	13,14DEG

VERTICAL(°)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.39	0.47	0.56	0.67	0.77	0.86	0.94	1.01	1.04	0.99	0.86	0.70	0.54	0.39	0.28	0.20	0.14	0.10	10.9	0.00
27	0.46	0.57	0.69	0.82	0.96	1.10	1.23	1.34	1.40	1.34	1.16	0.95	0.73	0.53	0.38	0.26	0.18	0.12	14.2	0.00
24	0.54	0.67	0.82	0.99	1.19	1.41	1.62	1.79	1.91	1.84	1.60	1.30	0.99	0.72	0.50	0.34	0.22	0.14	18.6	0.00
21	0.62	0.77	0.96	1.19	1.47	1.80	2.15	2.46	2.67	2.61	2.25	1.81	1.35	0.94	0.63	0.41	0.26	0.17	24.5	4.66
18	0.70	0.88	1.10	1.40	1.79	2.29	2.89	3.45	3.82	3.75	3.23	2.54	1.83	1.23	0.78	0.48	0.31	0.21	32.6	18.4
15	0.77	0.98	1.24	1.60	2.14	2.91	3.94	5.08	5.87	5.77	4.80	3.56	2.42	1.55	0.94	0.59	0.39	0.26	44.8	32.6
12	0.83	1.07	1.39	1.83	2.51	3.60	5.36	7.86	9.74	9.61	7.57	4.93	3.10	1.95	1.25	0.77	0.49	0.32	64.2	52.7
9	0.88	1.14	1.50	2.03	2.91	4.37	7.02	11.6	16.1	15.7	11.0	6.69	4.20	2.66	1.63	0.96	0.58	0.36	91.3	80.9
6	0.90	1.18	1.57	2.16	3.17	5.04	8.75	15.0	21.7	21.5	16.2	10.3	5.83	3.35	1.96	1.11	0.66	0.40	121	111
3	0.92	1.21	1.62	2.27	3.43	5.80	10.6	18.4	24.3	24.4	19.6	12.0	6.45	3.58	2.07	1.17	0.69	0.41	139	130
0	0.92	1.22	1.64	2.32	3.56	6.14	10.8	16.6	20.5	19.9	15.6	9.92	5.65	3.27	1.91	1.10	0.66	0.40	122	113
-3	0.90	1.18	1.59	2.22	3.28	5.02	7.78	11.0	13.5	13.1	10.00	6.85	4.35	2.69	1.63	0.97	0.59	0.37	87.0	77.1
-6	0.86	1.11	1.46	1.97	2.71	3.74	5.10	6.70	8.01	7.79	6.15	4.51	3.19	2.10	1.31	0.81	0.50	0.32	58.4	47.7
-9	0.80	1.02	1.30	1.67	2.16	2.82	3.54	4.26	4.79	4.68	3.96	3.11	2.28	1.58	1.04	0.66	0.41	0.27	40.3	27.8
-12	0.72	0.90	1.12	1.39	1.72	2.12	2.55	2.93	3.18	3.09	2.68	2.14	1.61	1.16	0.80	0.53	0.34	0.22	29.2	12.1
-15	0.63	0.77	0.94	1.14	1.38	1.63	1.87	2.08	2.22	2.15	1.87	1.52	1.15	0.85	0.60	0.42	0.28	0.18	21.7	0.00
-18	0.54	0.65	0.78	0.93	1.09	1.26	1.41	1.54	1.61	1.55	1.34	1.09	0.83	0.61	0.45	0.32	0.22	0.15	16.4	0.00
-21	0.45	0.54	0.64	0.75	0.86	0.97	1.07	1.14	1.19	1.13	0.98	0.80	0.62	0.44	0.33	0.23	0.16	0.12	12.4	0.00
-24	0.45	0.54	0.64	0.75	0.86	0.97	1.07	1.14	1.19	1.13	0.98	0.80	0.62	0.44	0.33	0.23	0.16	0.12	12.4	0.00
-27	0.45	0.54	0.64	0.75	0.86	0.97	1.07	1.14	1.19	1.13	0.98	0.80	0.62	0.44	0.33	0.23	0.16	0.12	12.4	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(°)	6	9	12	15	18	21	24	27			
Φ t	12.8	16.3	20.9	27.3	37.1	52.9	78.6	114	144	141	111	74.8	47.1	29.6	18.5	11.3	7.09	4.50	949	---
Φ a	0.00	0.00	0.00	2.29	19.8	39.2	66.8	104	133	131	100	63.2	34.3	13.8	0.55	0.00	0.00	0.00	---	708

one-half-peak spread: U:7.0,D:7.2 , L:6.8,R:6.3


NEMA Beam Type: Type 3

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:90.705x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-15D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

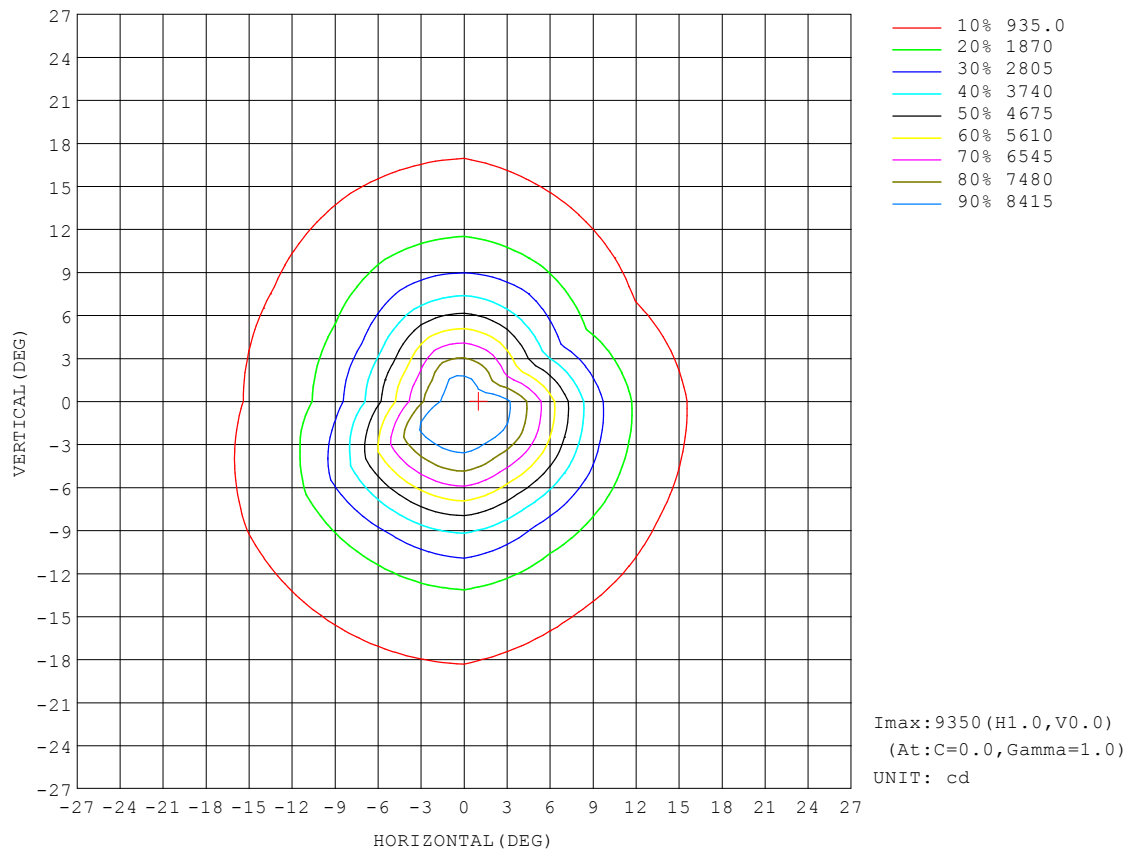


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:90.705x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-15D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

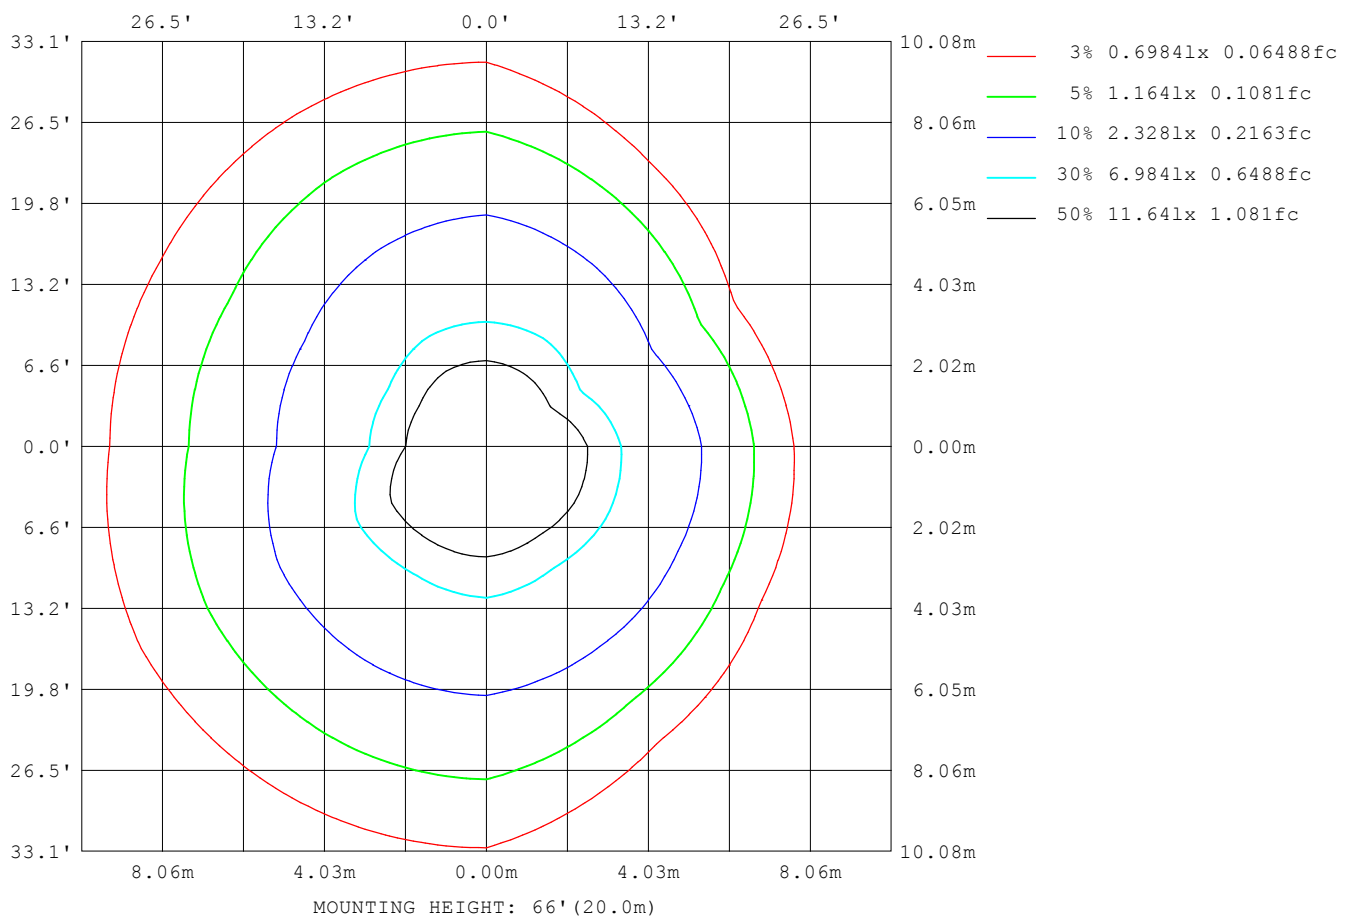

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

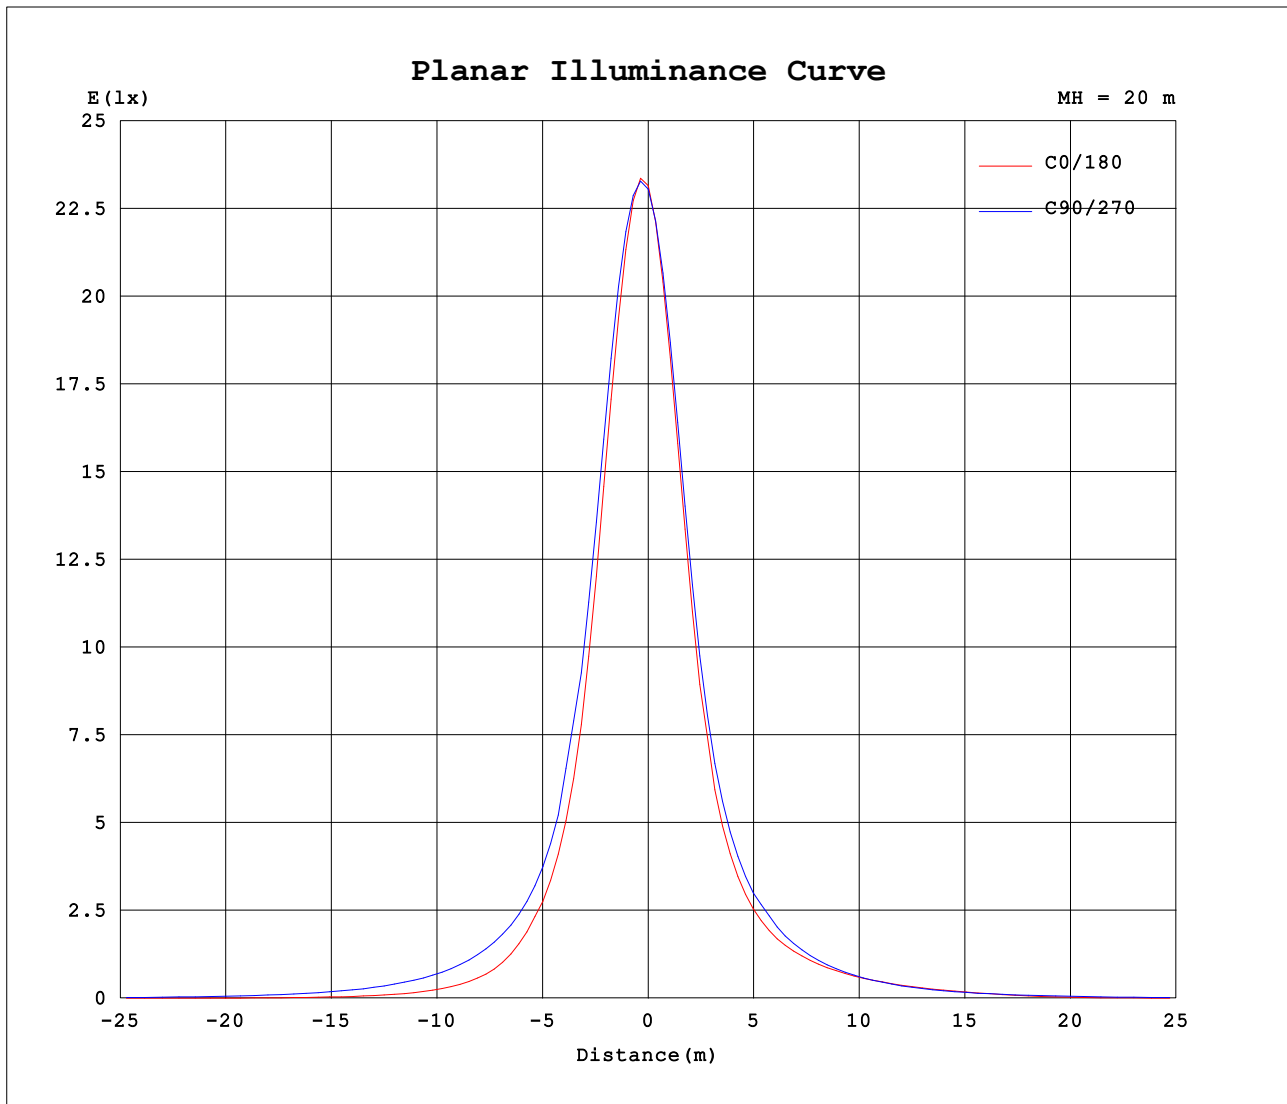


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:90.705x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-15D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

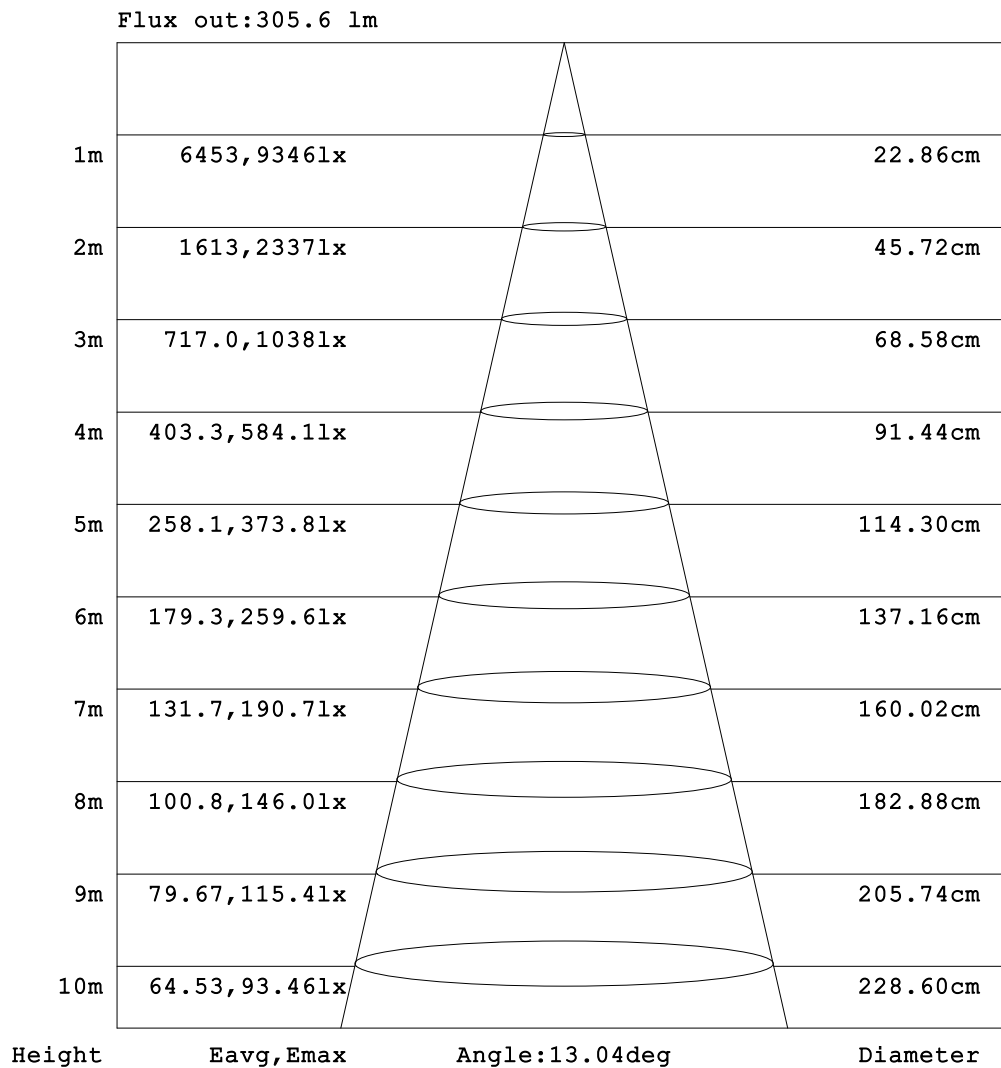

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:90.705x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-15D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.06	0.06	0.06	0.07	0.07	0.07	0.08	0.09	0.13	0.21	0.36	0.73	1.62	3.54	5.96	7.32	6.72	5.51	5.29
-170	0.06	0.06	0.06	0.07	0.08	0.09	0.10	0.12	0.15	0.23	0.38	0.73	1.52	3.10	5.32	6.99	7.43	7.19	7.07
-160	0.06	0.06	0.07	0.08	0.09	0.10	0.12	0.14	0.17	0.22	0.34	0.55	0.98	1.91	3.27	4.54	5.64	6.34	6.62
-150	0.06	0.07	0.08	0.09	0.11	0.12	0.13	0.15	0.18	0.22	0.28	0.42	0.71	1.15	1.75	2.45	3.03	3.52	3.82
-140	0.06	0.07	0.08	0.10	0.11	0.13	0.14	0.16	0.19	0.34	0.51	0.58	0.57	0.62	0.80	1.03	1.15	1.22	1.22
-130	0.06	0.07	0.09	0.10	0.12	0.14	0.15	0.17	0.41	0.76	1.02	1.21	1.32	1.39	1.38	1.36	1.38	1.46	1.59
-120	0.06	0.07	0.09	0.11	0.13	0.14	0.16	0.28	0.71	1.14	1.56	1.95	2.30	2.52	2.54	2.57	2.63	2.72	2.84
-110	0.06	0.08	0.09	0.11	0.13	0.15	0.17	0.37	0.72	1.16	1.63	2.13	2.64	2.83	2.89	2.99	3.10	3.22	3.32
-100	0.06	0.08	0.10	0.12	0.13	0.15	0.17	0.35	0.55	0.76	0.99	1.24	1.50	1.57	1.61	1.64	1.66	1.66	1.66
-90	0.06	0.08	0.11	0.14	0.16	0.19	0.21	0.39	0.58	0.76	0.94	1.12	1.30	1.35	1.41	1.46	1.52	1.57	1.63
-80	0.06	0.08	0.11	0.14	0.17	0.21	0.24	0.35	0.45	0.54	0.62	0.69	0.76	0.80	0.85	0.89	0.93	0.97	1.01
-70	0.06	0.08	0.12	0.16	0.21	0.25	0.30	0.39	0.51	0.64	0.82	1.06	1.48	2.19	2.96	3.67	4.29	4.78	5.16
-60	0.06	0.08	0.14	0.19	0.25	0.33	0.44	0.59	1.03	1.98	3.60	5.85	8.68	11.5	13.1	14.1	14.7	14.9	14.6
-50	0.06	0.09	0.15	0.22	0.32	0.46	0.66	0.94	1.94	4.31	8.68	14.6	21.9	30.4	35.6	38.8	40.9	41.5	40.6
-40	0.06	0.10	0.16	0.26	0.40	0.63	0.97	1.54	3.42	9.31	19.7	35.1	52.7	68.8	82.2	93.6	103	109	110
-30	0.06	0.10	0.18	0.29	0.49	0.80	1.35	3.07	8.29	21.4	48.6	78.8	108	138	173	210	247	273	281
-20	0.06	0.10	0.18	0.32	0.56	0.95	1.76	4.83	14.1	37.3	75.4	125	186	257	343	457	590	712	772
-10	0.06	0.10	0.18	0.33	0.60	1.04	2.06	5.23	16.6	42.7	93.2	161	248	363	548	892	1524	2527	3309
0	0.06	0.09	0.18	0.33	0.59	1.02	1.83	3.85	12.5	34.6	94.3	167	258	380	581	981	2056	5407	9262
10	0.06	0.10	0.19	0.33	0.59	1.00	1.77	4.09	12.9	35.7	85.7	148	225	326	472	708	1177	1915	2351
20	0.06	0.10	0.19	0.32	0.55	0.90	1.52	3.24	9.42	25.6	60.9	107	155	220	298	397	513	615	666
30	0.06	0.10	0.19	0.30	0.48	0.75	1.19	1.96	4.95	12.7	30.4	60.4	91.7	122	155	189	220	242	248
40	0.06	0.10	0.18	0.27	0.40	0.60	0.87	1.29	1.96	5.63	13.4	25.3	41.3	58.5	73.6	84.5	93.2	98.6	99.6
50	0.06	0.10	0.17	0.24	0.34	0.46	0.62	0.82	1.46	3.18	6.18	11.0	17.5	25.2	30.0	33.3	35.6	36.5	36.0
60	0.06	0.09	0.16	0.22	0.29	0.36	0.45	0.56	0.77	1.23	2.18	3.73	5.91	8.34	10.1	11.5	12.4	13.0	13.2
70	0.06	0.09	0.14	0.20	0.25	0.31	0.36	0.43	0.50	0.59	0.71	0.85	1.02	1.41	1.98	2.63	3.30	3.93	4.47
80	0.06	0.09	0.13	0.17	0.22	0.27	0.32	0.39	0.46	0.53	0.59	0.65	0.71	0.77	0.84	0.90	0.97	1.04	1.10
90	0.06	0.09	0.12	0.16	0.19	0.22	0.25	0.37	0.48	0.59	0.70	0.82	0.93	1.00	1.08	1.16	1.23	1.31	1.39
100	0.06	0.09	0.12	0.15	0.18	0.21	0.24	0.38	0.53	0.69	0.84	0.99	1.14	1.21	1.27	1.33	1.39	1.45	1.50
110	0.06	0.09	0.12	0.14	0.17	0.20	0.23	0.34	0.50	0.68	0.90	1.14	1.41	1.59	1.71	1.83	1.93	2.01	2.08
120	0.06	0.08	0.11	0.14	0.16	0.19	0.22	0.29	0.51	0.81	1.21	1.71	2.14	2.05	1.44	1.01	1.14	1.22	1.17
130	0.06	0.08	0.10	0.13	0.15	0.18	0.20	0.22	0.42	0.66	0.63	1.13	1.21	1.23	1.21	1.22	1.31	1.45	1.63
140	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.20	0.22	0.36	0.48	0.45	0.39	0.45	0.61	0.78	0.91	1.04	1.12
150	0.06	0.07	0.09	0.11	0.13	0.14	0.16	0.17	0.19	0.19	0.21	0.33	0.53	0.84	1.34	1.87	2.30	2.58	2.66
160	0.06	0.07	0.08	0.09	0.11	0.12	0.13	0.15	0.16	0.18	0.28	0.48	0.86	1.65	2.94	4.22	5.31	6.00	6.28
170	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.14	0.21	0.35	0.68	1.42	2.96	5.11	6.69	7.04	6.64	6.51
180	0.06	0.06	0.06	0.07	0.07	0.07	0.08	0.09	0.13	0.21	0.36	0.73	1.62	3.54	5.96	7.32	6.72	5.51	5.32

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:90.705x12 lm																		
NAME:LuminoFlex Ground-500mm-3000K-15D-REV2										TYPE:3000K					WEIGHT:00			
SPEC.:15 DEG										DIM.:500mm					SERIAL No.:01			
MFR.: 001										SUR.:0.8					Shielding Angle:			

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.41	7.99	8.29	7.20	4.91	2.73	1.55	1.00	0.65	0.42	0.26	0.15	0.09	0.06	0.06	0.06	0.06	0.07	
-170	7.55	7.99	7.67	6.15	4.00	2.31	1.44	0.95	0.64	0.43	0.28	0.17	0.10	0.08	0.07	0.07	0.06	0.07	
-160	6.58	6.04	4.99	3.64	2.40	1.57	1.10	0.78	0.56	0.38	0.26	0.17	0.11	0.09	0.08	0.07	0.07	0.07	
-150	3.49	2.97	2.39	1.82	1.38	1.03	0.78	0.60	0.44	0.33	0.23	0.17	0.12	0.10	0.09	0.08	0.07	0.07	
-140	1.21	1.15	1.06	0.92	0.78	0.73	0.68	0.62	0.44	0.27	0.21	0.16	0.13	0.11	0.10	0.09	0.07	0.07	
-130	1.45	1.35	1.28	1.25	1.25	1.20	1.09	0.93	0.70	0.40	0.19	0.16	0.14	0.12	0.11	0.09	0.08	0.07	
-120	2.66	2.50	2.37	2.25	2.16	1.95	1.67	1.35	1.00	0.63	0.26	0.16	0.14	0.13	0.11	0.09	0.08	0.07	
-110	3.14	2.95	2.76	2.59	2.44	2.17	1.68	1.22	0.84	0.55	0.31	0.17	0.15	0.13	0.11	0.10	0.09	0.07	
-100	1.58	1.50	1.42	1.33	1.23	1.13	0.96	0.79	0.63	0.47	0.32	0.17	0.15	0.13	0.12	0.10	0.09	0.07	
-90	1.53	1.43	1.33	1.23	1.13	1.03	0.88	0.74	0.60	0.46	0.31	0.17	0.15	0.14	0.12	0.11	0.09	0.07	
-80	0.95	0.88	0.82	0.76	0.69	0.63	0.57	0.51	0.45	0.38	0.30	0.20	0.19	0.17	0.15	0.13	0.10	0.07	
-70	4.39	3.56	2.71	1.91	1.20	0.76	0.64	0.56	0.48	0.40	0.32	0.26	0.23	0.20	0.17	0.14	0.11	0.07	
-60	12.5	10.1	7.67	5.38	3.24	2.13	1.51	1.07	0.74	0.54	0.41	0.34	0.29	0.24	0.20	0.16	0.12	0.07	
-50	33.6	25.8	18.3	11.8	7.21	5.21	3.53	2.19	1.29	0.77	0.54	0.45	0.37	0.30	0.23	0.18	0.13	0.07	
-40	87.6	63.3	40.2	21.2	14.9	10.2	6.34	3.59	1.85	0.98	0.74	0.58	0.46	0.35	0.27	0.19	0.13	0.07	
-30	223	154	85.0	52.2	33.9	21.0	12.3	6.26	3.04	1.61	1.02	0.74	0.55	0.41	0.30	0.21	0.13	0.07	
-20	625	422	256	144	75.9	39.7	21.9	11.5	5.48	2.52	1.38	0.89	0.63	0.46	0.32	0.22	0.14	0.07	
-10	2289	1314	650	302	141	68.7	34.0	16.7	7.52	3.22	1.65	1.01	0.70	0.49	0.34	0.23	0.14	0.07	
0	6905	2621	1032	403	179	83.3	39.1	18.2	7.82	3.28	1.71	1.06	0.73	0.50	0.35	0.23	0.14	0.07	
10	1796	999	469	221	116	59.1	30.2	15.1	6.81	2.95	1.58	0.99	0.70	0.49	0.35	0.24	0.14	0.07	
20	538	363	216	117	59.9	30.7	17.5	9.45	4.50	2.13	1.28	0.87	0.64	0.47	0.34	0.23	0.15	0.07	
30	196	135	75.8	45.7	28.9	17.6	9.88	4.73	2.32	1.41	0.96	0.73	0.56	0.42	0.32	0.23	0.14	0.07	
40	79.5	57.5	36.7	19.2	13.4	9.01	5.58	3.11	1.62	0.90	0.73	0.59	0.48	0.38	0.30	0.22	0.14	0.07	
50	29.8	23.1	16.6	10.9	6.85	4.97	3.39	2.13	1.28	0.77	0.56	0.48	0.40	0.34	0.27	0.20	0.14	0.07	
60	11.3	9.26	7.16	5.11	3.22	2.16	1.53	1.08	0.77	0.58	0.46	0.40	0.35	0.30	0.25	0.19	0.14	0.07	
70	3.82	3.12	2.41	1.74	1.18	0.82	0.72	0.63	0.55	0.48	0.41	0.35	0.31	0.27	0.23	0.18	0.12	0.07	
80	1.04	0.97	0.91	0.85	0.78	0.72	0.66	0.59	0.53	0.46	0.40	0.33	0.28	0.24	0.19	0.15	0.11	0.07	
90	1.32	1.26	1.19	1.13	1.06	1.00	0.87	0.75	0.63	0.50	0.38	0.25	0.22	0.19	0.16	0.13	0.10	0.07	
100	1.46	1.41	1.36	1.32	1.27	1.22	1.05	0.89	0.73	0.56	0.40	0.25	0.22	0.19	0.16	0.13	0.10	0.07	
110	2.04	1.98	1.91	1.81	1.69	1.51	1.22	0.96	0.73	0.54	0.36	0.24	0.21	0.18	0.15	0.12	0.10	0.07	
120	1.36	1.55	1.86	2.43	2.41	2.12	1.69	1.27	0.88	0.55	0.31	0.23	0.20	0.17	0.15	0.12	0.09	0.07	
130	1.52	1.46	1.44	1.44	1.47	1.45	1.35	1.12	0.80	0.44	0.24	0.21	0.19	0.16	0.14	0.11	0.09	0.07	
140	1.13	1.10	1.06	0.98	0.85	0.78	0.76	0.68	0.49	0.29	0.23	0.19	0.17	0.15	0.12	0.10	0.08	0.07	
150	2.66	2.47	2.13	1.69	1.32	1.01	0.78	0.60	0.45	0.34	0.25	0.18	0.15	0.13	0.11	0.09	0.08	0.07	
160	6.17	5.68	4.82	3.51	2.31	1.52	1.06	0.77	0.55	0.39	0.27	0.18	0.13	0.11	0.09	0.08	0.07	0.07	
170	6.91	7.44	7.24	5.92	3.90	2.29	1.41	0.93	0.63	0.43	0.28	0.17	0.11	0.08	0.08	0.07	0.07	0.07	
180	6.41	7.99	8.29	7.20	4.91	2.73	1.55	1.00	0.65	0.42	0.26	0.15	0.09	0.06	0.06	0.06	0.06	0.07	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: