

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2730.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		3.0 degrees horizontal
Beam Spread	At 10% of Imax	82.0V x 48.1H
	At 50% of Imax	52.5V x 17.5H
	At 90% of Imax	23.1V x 6.2H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	861.1 lumens per klm.
	To 50% of Imax	448.0 lumens per klm.
	To 90% of Imax	95.6 lumens per klm.
	Upward LOR	1.2 %
	Downward LOR	98.8 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:84.124x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-15x50D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15x50 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

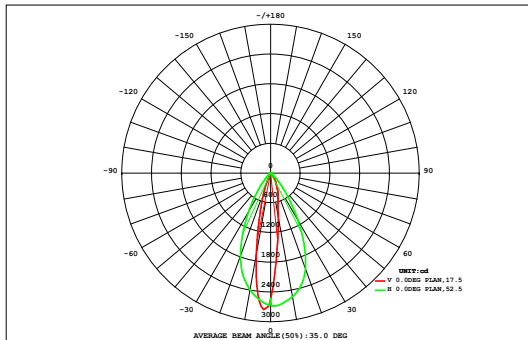

DATA OF LAMP		Eff:56.71lm/W	
MODEL		Imax(cd)	2756
NOMINAL POWER(W)	18	AVAILABILITY(%)	85.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	866.7
NOMINAL FLUX(lm)	84.124	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	1009
TEST VOLTAGE(V)	220	θ @50% (H,V)	18,53DEG

72 64 56 48 40 32 24 -24 -32 -40 -48 -56 -64 -72	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	0.00	0.01	0.01	0.01	0.02	0.03	0.05	0.07	0.09	0.08	0.06	0.05	0.03	0.02	0.01	0.01	0.01	0.00	0.56	0.00	
	0.00	0.01	0.01	0.02	0.04	0.07	0.11	0.15	0.18	0.17	0.12	0.08	0.04	0.03	0.02	0.01	0.01	0.00	1.07	0.00	
	0.00	0.01	0.01	0.03	0.07	0.16	0.30	0.43	0.53	0.47	0.29	0.14	0.07	0.04	0.02	0.01	0.01	0.00	2.60	0.00	
	0.00	0.01	0.02	0.05	0.16	0.44	0.92	1.62	2.46	2.34	1.28	0.46	0.16	0.06	0.03	0.01	0.01	0.00	10.0	0.00	
	0.00	0.01	0.02	0.07	0.30	0.95	1.97	4.19	7.55	7.52	3.98	1.40	0.44	0.11	0.04	0.02	0.01	0.00	28.6	15.8	
	0.00	0.01	0.03	0.10	0.59	1.88	3.42	7.21	16.0	16.8	8.50	3.06	0.82	0.15	0.05	0.02	0.01	0.00	58.7	47.4	
	0.01	0.01	0.04	0.19	1.12	2.84	5.24	9.91	25.3	28.5	14.5	4.73	0.83	0.15	0.06	0.03	0.01	0.00	93.5	84.1	
	0.01	0.01	0.05	0.27	1.53	3.72	7.01	13.3	31.3	39.5	19.6	5.41	0.93	0.20	0.07	0.03	0.01	0.00	123	115	
	0.01	0.01	0.05	0.28	1.71	4.23	8.00	14.5	34.0	46.2	22.2	7.11	1.26	0.23	0.08	0.03	0.01	0.00	140	132	
	0.01	0.01	0.05	0.34	1.82	4.46	8.44	16.9	39.3	49.5	25.8	8.03	1.47	0.25	0.08	0.03	0.01	0.00	157	149	
	0.01	0.02	0.06	0.42	1.82	4.32	8.07	16.4	35.8	43.1	23.1	7.16	1.32	0.24	0.08	0.03	0.01	0.01	142	134	
	0.01	0.01	0.05	0.34	1.58	3.52	6.43	12.6	29.9	32.7	16.6	5.75	1.07	0.19	0.07	0.03	0.01	0.01	111	102	
	0.01	0.01	0.04	0.19	1.02	2.41	4.09	8.95	20.0	20.6	10.1	3.54	0.98	0.19	0.06	0.02	0.01	0.00	72.2	60.7	
	0.01	0.01	0.03	0.10	0.47	1.32	2.43	5.36	9.91	9.86	5.07	1.68	0.52	0.13	0.04	0.02	0.01	0.00	37.0	25.4	
	0.00	0.01	0.02	0.06	0.22	0.59	1.19	2.20	3.47	3.32	1.76	0.57	0.18	0.07	0.03	0.01	0.01	0.00	13.7	1.19	
	0.00	0.01	0.02	0.04	0.10	0.22	0.40	0.58	0.74	0.66	0.38	0.17	0.07	0.04	0.02	0.01	0.01	0.00	3.48	0.00	
	0.00	0.01	0.01	0.02	0.05	0.09	0.13	0.17	0.20	0.18	0.13	0.08	0.05	0.03	0.02	0.01	0.01	0.00	1.20	0.00	
	0.00	0.01	0.01	0.02	0.02	0.04	0.06	0.08	0.09	0.09	0.07	0.05	0.03	0.02	0.01	0.01	0.01	0.00	0.62	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
Φ t	0.08	0.20	0.54	2.56	12.6	31.3	58.2	115	257	302	154	49.5	10.3	2.17	0.79	0.36	0.16	0.08	996	---	
Φ a	0.00	0.00	0.00	0.00	0.00	5.70	41.1	103	249	294	144	30.6	0.00	0.00	0.00	0.00	0.00	0.00	---	867	


one-half-peak spread: U:26.9,D:25.9 , L:9.1,R:8.6NEMA Beam Type: Type 4 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:84.124x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-15x50D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15x50 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

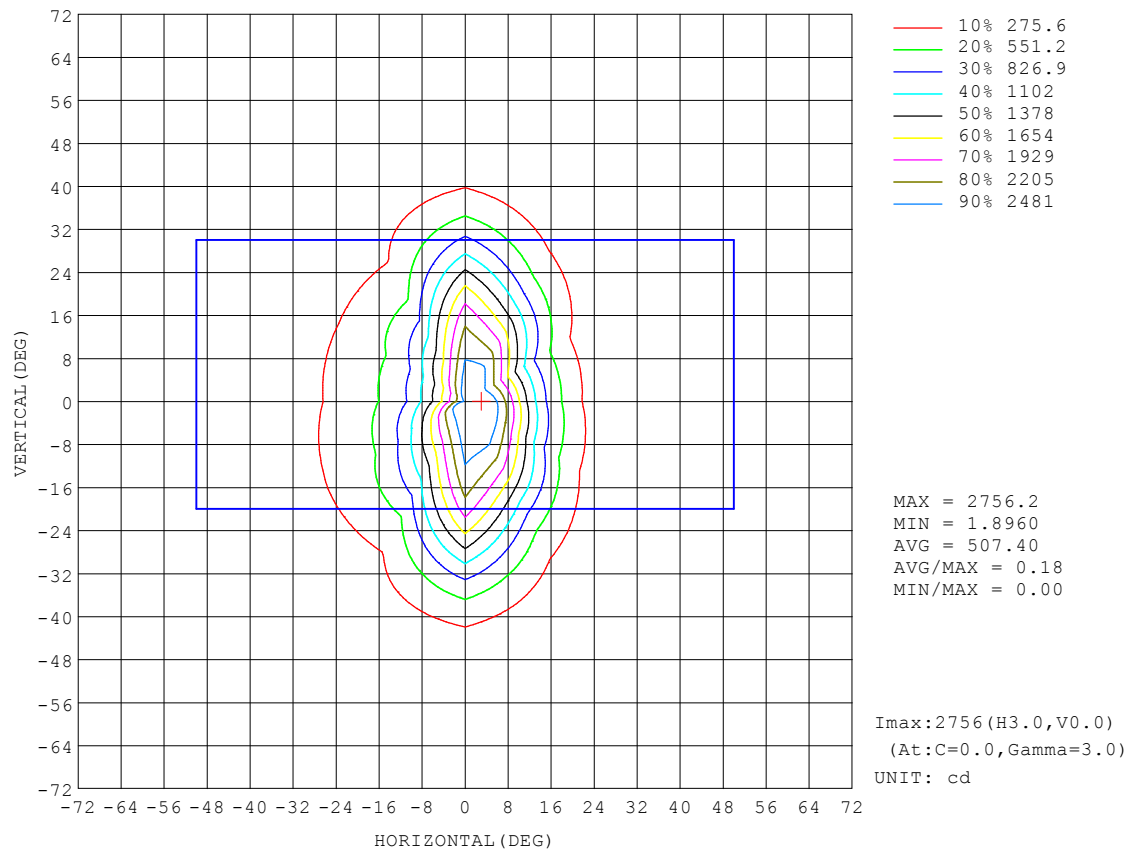


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:84.124x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-15x50D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15x50 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

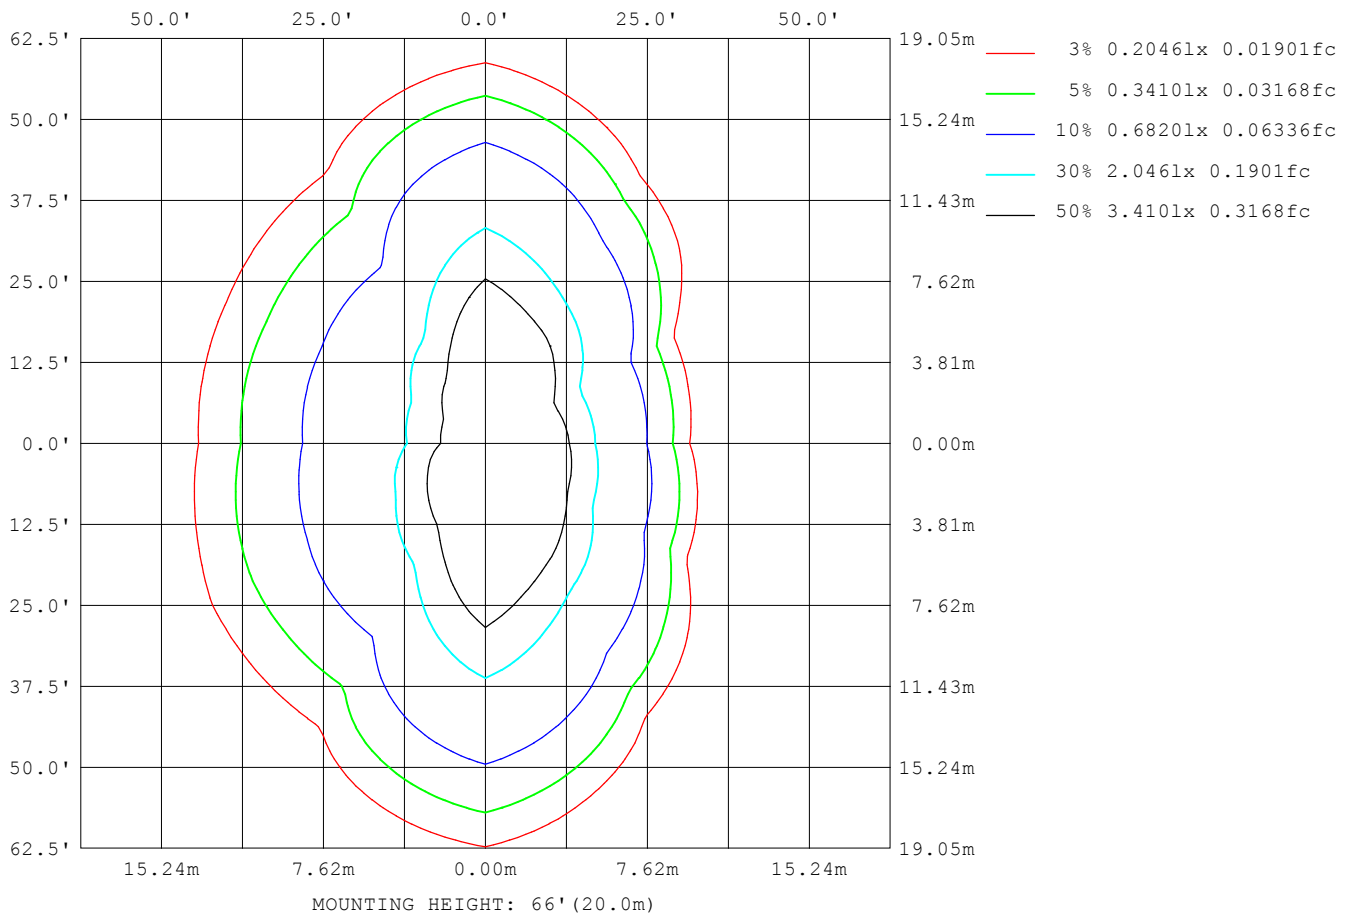

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

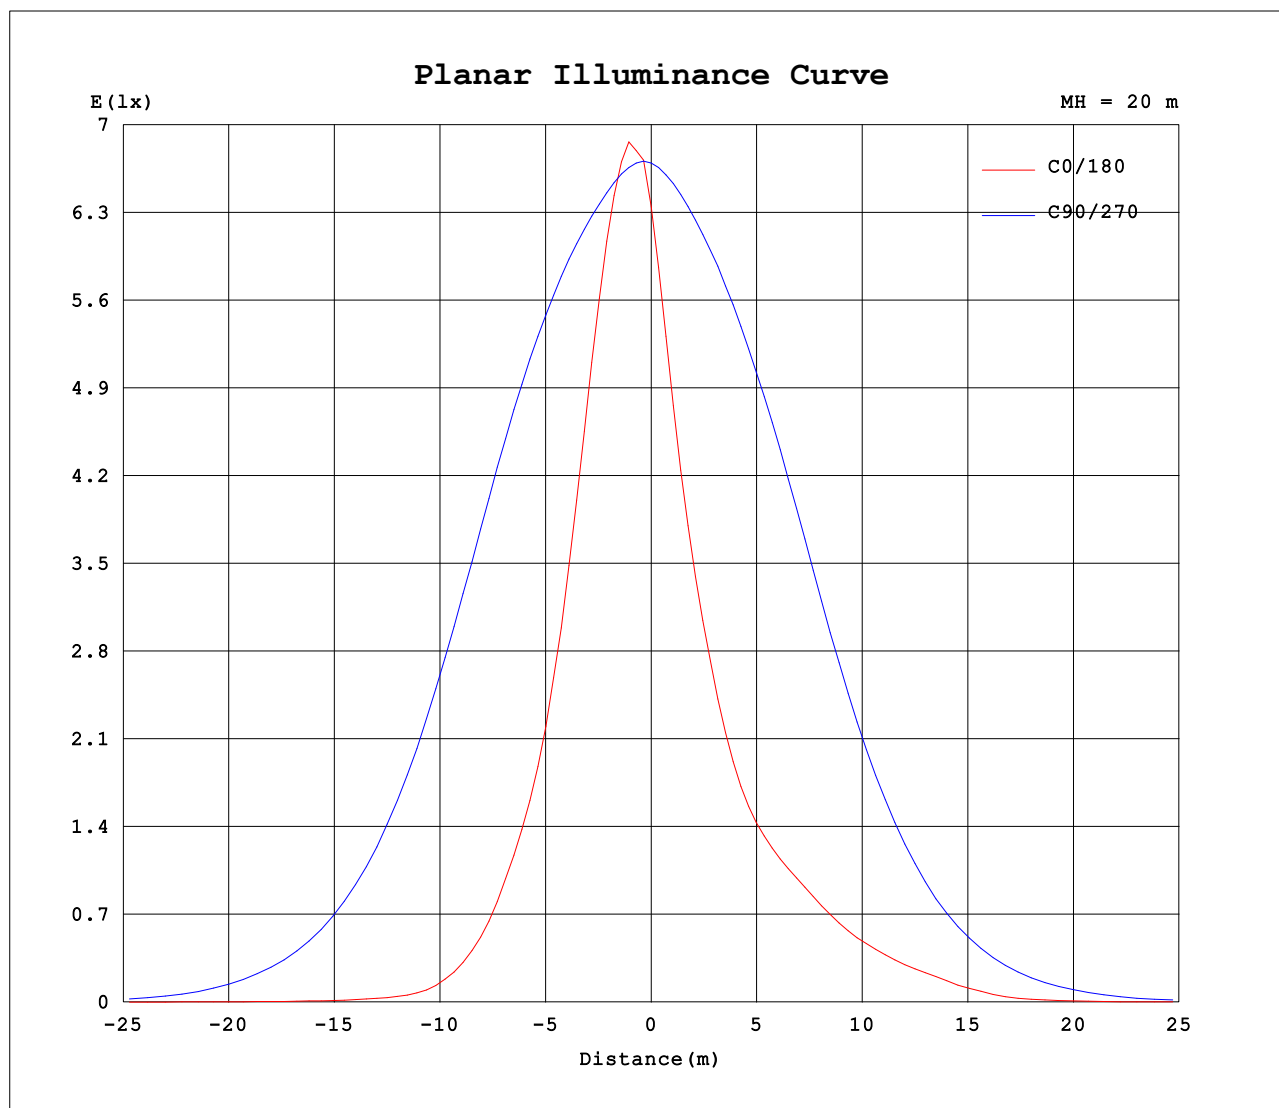


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:84.124x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-15x50D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15x50 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

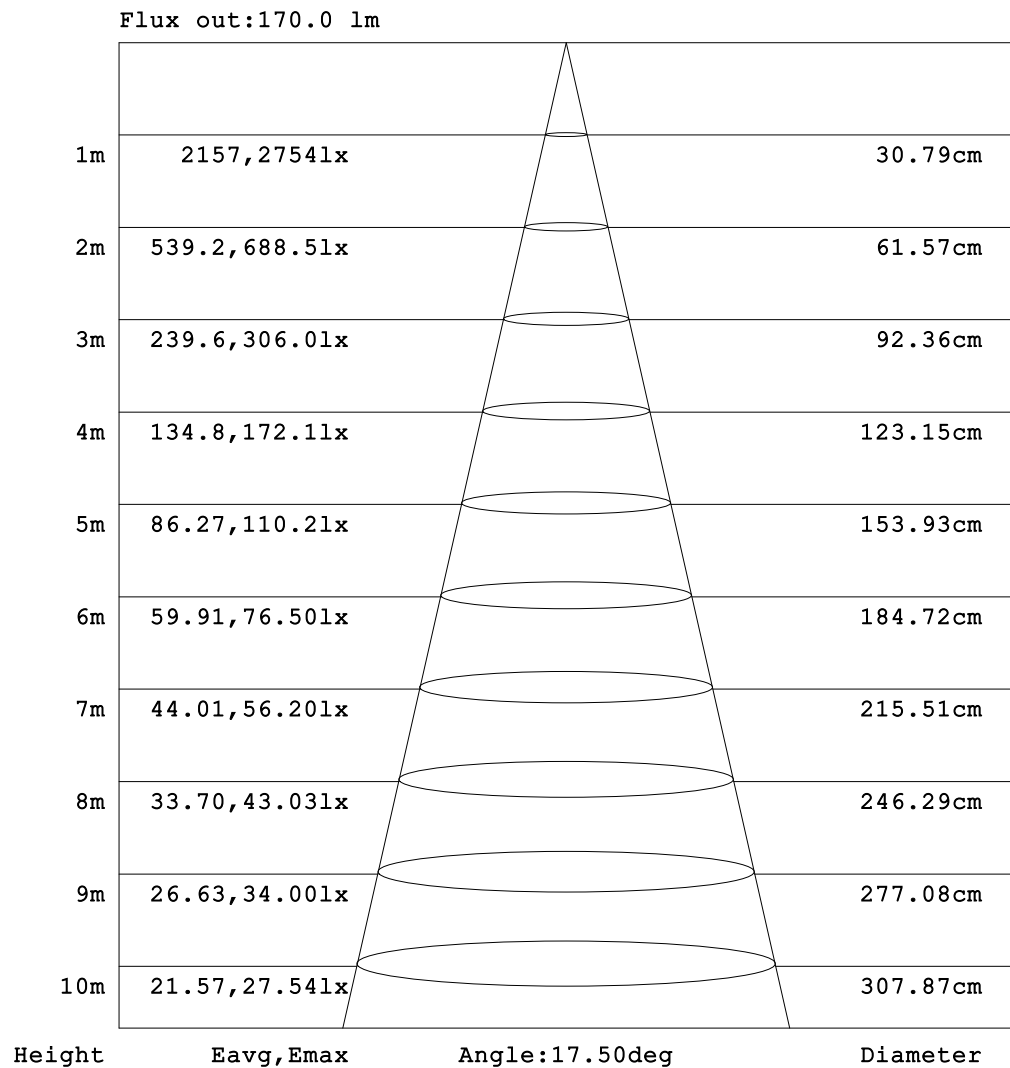

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-08-30

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:84.124x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-15x50D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:15x50 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.05	0.05	0.05	0.09	0.10	0.10	0.10	0.11	0.12	0.18	0.40	0.84	1.71	3.11	4.61	5.48	5.42	5.24	5.55
-170	0.05	0.06	0.07	0.10	0.12	0.13	0.14	0.15	0.17	0.25	0.48	0.95	1.82	3.08	4.38	5.21	5.33	5.18	5.22
-160	0.05	0.07	0.09	0.11	0.15	0.16	0.17	0.19	0.22	0.28	0.43	0.75	1.38	2.50	3.60	4.24	4.62	5.01	5.16
-150	0.05	0.08	0.10	0.13	0.17	0.18	0.20	0.22	0.24	0.29	0.39	0.66	1.19	2.02	2.99	3.87	4.61	5.32	5.98
-140	0.05	0.09	0.12	0.15	0.19	0.22	0.23	0.25	0.28	0.46	0.68	0.81	0.95	1.18	1.62	2.06	2.43	2.77	3.00
-130	0.05	0.09	0.13	0.16	0.20	0.24	0.27	0.28	0.56	0.98	1.28	1.51	1.66	1.79	2.04	2.33	2.63	2.97	3.36
-120	0.05	0.10	0.14	0.18	0.22	0.26	0.30	0.38	0.65	1.12	1.81	2.41	2.87	3.31	3.88	4.42	4.97	5.57	6.22
-110	0.05	0.11	0.15	0.20	0.24	0.29	0.33	0.49	0.69	0.90	1.12	1.38	1.70	2.10	2.59	3.14	3.73	4.27	4.75
-100	0.05	0.11	0.17	0.22	0.27	0.32	0.36	0.53	0.73	0.94	1.16	1.38	1.61	1.73	1.84	1.95	2.06	2.17	2.27
-90	0.05	0.12	0.18	0.24	0.31	0.37	0.43	0.52	0.61	0.70	0.79	0.88	0.97	1.06	1.16	1.25	1.35	1.44	1.54
-80	0.05	0.12	0.21	0.30	0.38	0.46	0.54	0.64	0.74	0.84	0.95	1.05	1.14	1.21	1.28	1.34	1.41	1.47	1.53
-70	0.05	0.13	0.24	0.33	0.43	0.52	0.62	0.75	0.88	1.05	1.22	1.42	1.63	1.99	2.44	2.91	3.37	3.79	4.17
-60	0.05	0.15	0.25	0.36	0.47	0.59	0.74	0.93	1.19	1.60	2.25	3.21	4.47	5.79	6.89	7.94	8.87	9.56	10.0
-50	0.05	0.15	0.27	0.38	0.51	0.69	0.91	1.17	1.70	2.76	4.58	7.62	12.8	21.2	28.5	35.5	43.4	50.7	55.2
-40	0.05	0.16	0.27	0.40	0.56	0.79	1.09	1.52	2.28	4.48	10.3	21.7	40.3	65.2	91.2	145	216	294	364
-30	0.05	0.15	0.27	0.40	0.60	0.88	1.29	2.04	3.66	8.04	21.8	60.2	107	149	194	277	527	827	1118
-20	0.05	0.15	0.26	0.39	0.61	0.94	1.45	2.56	5.58	15.8	52.8	111	176	250	347	489	782	1425	2058
-10	0.05	0.14	0.24	0.38	0.60	0.94	1.51	2.71	6.45	21.4	59.7	130	218	320	444	640	1080	1719	2534
0	0.05	0.13	0.22	0.35	0.55	0.87	1.38	2.32	4.83	12.4	39.6	125	208	307	442	589	901	1538	2538
10	0.05	0.14	0.24	0.38	0.59	0.90	1.40	2.38	5.05	13.4	44.7	115	191	282	399	544	866	1450	2393
20	0.05	0.15	0.26	0.38	0.59	0.88	1.31	2.08	4.02	9.23	29.0	82.5	140	203	282	387	610	1191	1783
30	0.05	0.16	0.27	0.39	0.57	0.81	1.15	1.65	2.69	5.01	11.6	33.5	74.7	121	164	231	422	655	883
40	0.05	0.16	0.27	0.39	0.53	0.73	0.98	1.31	1.75	3.18	7.07	15.6	29.4	49.2	73.1	110	161	215	263
50	0.05	0.15	0.27	0.37	0.50	0.64	0.82	1.03	1.40	2.17	3.51	5.66	9.28	15.2	21.2	26.3	31.0	35.0	36.9
60	0.05	0.15	0.25	0.36	0.46	0.57	0.69	0.84	1.04	1.31	1.72	2.35	3.25	4.38	5.68	6.91	7.97	8.87	9.59
70	0.05	0.13	0.24	0.33	0.43	0.52	0.61	0.72	0.84	0.97	1.11	1.27	1.44	1.71	2.08	2.51	2.96	3.39	3.79
80	0.05	0.12	0.21	0.30	0.39	0.47	0.55	0.68	0.80	0.91	1.02	1.13	1.23	1.31	1.40	1.49	1.58	1.68	1.77
90	0.05	0.12	0.19	0.26	0.32	0.39	0.46	0.67	0.89	1.10	1.32	1.53	1.75	1.85	1.96	2.06	2.16	2.27	2.37
100	0.05	0.12	0.18	0.25	0.31	0.37	0.43	0.67	0.92	1.17	1.41	1.66	1.90	2.02	2.14	2.26	2.38	2.51	2.64
110	0.05	0.11	0.17	0.23	0.29	0.35	0.40	0.58	0.81	1.06	1.34	1.67	2.03	2.42	2.86	3.34	3.85	4.33	4.75
120	0.05	0.11	0.16	0.22	0.27	0.32	0.36	0.47	0.78	1.22	1.73	2.14	2.51	2.92	3.52	4.10	4.68	5.32	6.02
130	0.05	0.10	0.15	0.20	0.24	0.29	0.33	0.35	0.49	0.85	1.12	0.74	1.20	1.45	1.74	2.10	2.52	2.94	3.39
140	0.05	0.09	0.13	0.17	0.22	0.26	0.27	0.18	0.27	0.36	0.59	0.67	0.83	1.09	1.36	1.73	2.11	2.41	2.58
150	0.05	0.08	0.12	0.15	0.20	0.22	0.15	0.22	0.24	0.27	0.27	0.54	0.98	1.76	2.65	3.42	3.88	4.26	4.57
160	0.05	0.07	0.10	0.12	0.17	0.16	0.16	0.19	0.21	0.20	0.35	0.66	1.23	2.25	3.28	4.06	4.37	4.52	4.52
170	0.05	0.06	0.07	0.11	0.13	0.12	0.14	0.15	0.16	0.21	0.44	0.88	1.71	2.94	4.23	5.03	5.14	5.08	5.06
180	0.05	0.05	0.05	0.09	0.10	0.10	0.10	0.11	0.12	0.18	0.40	0.84	1.71	3.11	4.61	5.48	5.42	5.24	5.57

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.91V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:84.124x12 lm																		
NAME:LuminoFlex Ground-500mm-3000K-15x50D-REV2										TYPE:3000K					WEIGHT:00			
SPEC.:15x50 DEG										DIM.:500mm					SERIAL No.:01			
MFR.: 001										SUR.:0.8					Shielding Angle:			

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.10	6.18	5.53	4.20	2.77	1.79	1.21	0.83	0.56	0.38	0.25	0.17	0.13	0.12	0.07	0.09	0.09	0.15	
-170	5.43	5.54	5.05	3.90	2.67	1.77	1.22	0.86	0.58	0.41	0.28	0.20	0.16	0.14	0.09	0.10	0.09	0.15	
-160	5.12	4.74	3.97	3.12	2.22	1.46	1.05	0.77	0.55	0.40	0.29	0.22	0.18	0.15	0.11	0.11	0.10	0.15	
-150	5.14	4.25	3.35	2.57	1.85	1.29	0.90	0.65	0.49	0.37	0.29	0.23	0.20	0.16	0.12	0.12	0.10	0.15	
-140	2.69	2.28	1.91	1.53	1.18	0.95	0.83	0.71	0.51	0.34	0.29	0.24	0.21	0.17	0.15	0.13	0.11	0.15	
-130	2.92	2.52	2.14	1.75	1.42	1.34	1.22	1.05	0.81	0.51	0.28	0.26	0.22	0.19	0.17	0.14	0.12	0.15	
-120	5.44	4.72	4.03	3.34	2.60	2.19	1.91	1.59	1.23	0.84	0.41	0.27	0.24	0.21	0.18	0.15	0.12	0.15	
-110	4.38	3.98	3.59	3.30	3.15	3.00	2.52	2.01	1.43	0.89	0.50	0.28	0.25	0.22	0.18	0.16	0.13	0.15	
-100	2.22	2.16	2.10	2.02	1.94	1.84	1.57	1.30	1.04	0.79	0.53	0.29	0.26	0.23	0.20	0.17	0.15	0.15	
-90	1.55	1.56	1.57	1.58	1.59	1.60	1.40	1.20	1.00	0.80	0.60	0.40	0.36	0.32	0.28	0.24	0.19	0.15	
-80	1.46	1.39	1.31	1.23	1.15	1.07	0.98	0.89	0.80	0.71	0.61	0.52	0.46	0.40	0.35	0.29	0.23	0.15	
-70	3.72	3.23	2.73	2.24	1.80	1.45	1.25	1.09	0.95	0.81	0.68	0.57	0.50	0.43	0.37	0.31	0.25	0.15	
-60	8.67	7.21	5.74	4.37	3.14	2.46	1.99	1.60	1.28	1.03	0.83	0.68	0.56	0.47	0.39	0.32	0.26	0.15	
-50	44.1	31.1	19.2	10.5	5.83	4.30	3.19	2.34	1.67	1.22	0.96	0.80	0.65	0.51	0.41	0.32	0.26	0.15	
-40	284	194	113	48.3	24.9	12.2	6.32	3.75	2.41	1.54	1.13	0.90	0.73	0.56	0.42	0.33	0.26	0.15	
-30	850	561	298	157	79.7	33.9	12.8	5.16	3.35	2.24	1.41	1.00	0.78	0.60	0.43	0.33	0.26	0.15	
-20	1599	1050	607	302	113	28.4	12.5	7.02	4.37	2.85	1.74	1.09	0.80	0.61	0.44	0.33	0.25	0.15	
-10	2320	1575	806	385	149	44.8	17.2	8.53	4.96	3.16	1.92	1.13	0.80	0.60	0.43	0.32	0.24	0.15	
0	2605	1677	835	387	130	36.1	15.4	7.87	4.68	3.06	1.85	1.06	0.76	0.57	0.41	0.31	0.24	0.15	
10	2149	1333	639	286	108	33.6	14.6	7.62	4.58	2.98	1.81	1.08	0.79	0.60	0.43	0.32	0.25	0.15	
20	1391	924	522	247	89.7	21.6	9.95	5.92	3.82	2.54	1.56	1.03	0.79	0.61	0.43	0.33	0.25	0.15	
30	681	459	258	136	66.4	28.1	10.7	4.27	2.83	1.90	1.24	0.95	0.76	0.59	0.43	0.34	0.26	0.15	
40	208	144	85.5	40.2	21.5	10.8	5.49	3.20	2.01	1.31	1.05	0.87	0.71	0.55	0.43	0.34	0.27	0.15	
50	30.1	22.0	14.5	8.70	5.23	3.92	2.91	2.13	1.56	1.15	0.91	0.78	0.64	0.52	0.43	0.34	0.27	0.15	
60	8.32	6.93	5.54	4.21	3.01	2.35	1.91	1.54	1.24	0.99	0.80	0.68	0.58	0.50	0.42	0.34	0.26	0.15	
70	3.40	2.96	2.52	2.09	1.71	1.43	1.26	1.11	0.96	0.83	0.72	0.62	0.55	0.47	0.40	0.33	0.25	0.15	
80	1.68	1.60	1.51	1.42	1.34	1.25	1.14	1.04	0.93	0.82	0.70	0.58	0.52	0.45	0.37	0.30	0.23	0.15	
90	2.28	2.19	2.10	2.01	1.92	1.83	1.60	1.36	1.13	0.89	0.66	0.42	0.38	0.33	0.29	0.24	0.20	0.15	
100	2.54	2.45	2.35	2.25	2.15	2.05	1.77	1.49	1.22	0.94	0.67	0.40	0.35	0.30	0.25	0.20	0.16	0.15	
110	4.50	4.19	3.86	3.53	3.18	2.73	2.11	1.60	1.19	0.86	0.58	0.38	0.33	0.29	0.24	0.19	0.15	0.15	
120	5.38	4.79	4.23	3.68	3.10	2.70	2.35	1.96	1.50	0.94	0.47	0.34	0.31	0.27	0.22	0.18	0.14	0.15	
130	2.95	2.59	2.25	1.94	1.73	1.64	1.49	1.27	0.98	0.61	0.34	0.31	0.27	0.23	0.21	0.17	0.13	0.15	
140	2.46	2.25	1.96	1.63	1.17	0.87	0.90	0.75	0.53	0.34	0.31	0.28	0.25	0.20	0.19	0.15	0.12	0.15	
150	4.29	3.92	3.46	2.71	1.92	1.28	0.84	0.57	0.44	0.35	0.28	0.25	0.22	0.19	0.15	0.14	0.11	0.15	
160	4.59	4.45	3.92	3.23	2.21	1.32	0.95	0.70	0.50	0.37	0.28	0.23	0.20	0.17	0.12	0.12	0.11	0.15	
170	5.20	5.23	4.87	3.86	2.67	1.74	1.16	0.82	0.56	0.39	0.27	0.20	0.16	0.15	0.09	0.11	0.10	0.15	
180	6.10	6.18	5.53	4.20	2.77	1.79	1.21	0.83	0.56	0.38	0.25	0.17	0.13	0.12	0.07	0.09	0.09	0.15	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-08-30

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: