

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4165.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		2.0 degrees horizontal
Beam Spread	At 10% of Imax	50.9V x 46.4H
	At 50% of Imax	24.2V x 21.8H
	At 90% of Imax	9.4V x 7.4H
Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	773.4 lumens per klm.
	To 50% of Imax	370.1 lumens per klm.
	To 90% of Imax	69.6 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.4 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.99V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:83.6603x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

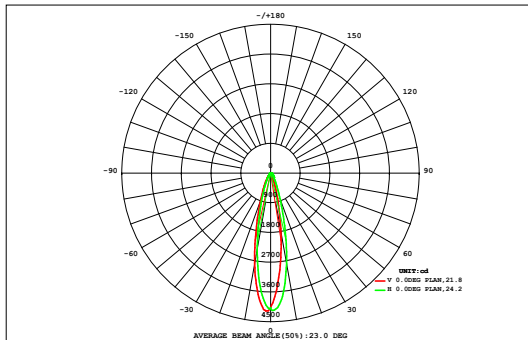

DATA OF LAMP		Eff:56.40lm/W	
MODEL		Imax(cd)	4182
NOMINAL POWER(W)	18	AVAILABILITY(%)	77.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	773.9
NOMINAL FLUX(lm)	83.6603	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	1004
TEST VOLTAGE(V)	220	θ @50% (H,V)	22,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.05	0.09	0.14	0.19	0.27	0.37	0.48	0.58	0.62	0.60	0.55	0.49	0.40	0.29	0.18	0.10	0.04	5.47	0.00
45	0.02	0.05	0.09	0.14	0.19	0.27	0.37	0.48	0.58	0.62	0.60	0.55	0.49	0.40	0.29	0.18	0.10	0.04	5.47	0.00
40	0.03	0.07	0.12	0.18	0.25	0.36	0.52	0.69	0.85	0.92	0.87	0.79	0.68	0.55	0.40	0.26	0.14	0.05	7.75	0.00
35	0.05	0.09	0.16	0.24	0.35	0.51	0.76	1.04	1.30	1.40	1.32	1.16	0.97	0.76	0.56	0.36	0.20	0.08	11.3	0.00
30	0.06	0.12	0.20	0.32	0.50	0.77	1.18	1.70	2.16	2.32	2.14	1.82	1.43	1.08	0.77	0.50	0.28	0.13	17.5	0.00
25	0.08	0.15	0.25	0.42	0.70	1.19	1.95	2.91	3.80	4.07	3.64	2.91	2.15	1.53	1.04	0.67	0.39	0.19	28.0	12.0
20	0.10	0.18	0.31	0.52	0.94	1.77	3.16	5.09	6.97	7.46	6.38	4.70	3.19	2.10	1.38	0.89	0.51	0.25	45.9	34.5
15	0.11	0.21	0.37	0.65	1.20	2.47	5.03	8.86	12.6	13.5	11.0	7.35	4.52	2.84	1.81	1.12	0.64	0.32	74.5	64.5
10	0.12	0.23	0.42	0.77	1.55	3.37	7.33	13.7	20.4	21.7	16.7	10.6	6.40	3.81	2.27	1.34	0.75	0.37	112	103
5	0.13	0.24	0.45	0.84	1.76	4.11	9.33	17.4	26.3	28.5	22.3	14.7	8.47	4.70	2.66	1.52	0.83	0.40	145	136
0	0.13	0.25	0.46	0.90	1.95	4.68	10.8	20.2	28.8	30.3	24.5	15.9	8.95	4.88	2.73	1.55	0.85	0.41	158	150
-5	0.13	0.25	0.47	0.91	1.99	4.70	10.3	17.6	23.6	24.4	19.6	13.0	7.54	4.26	2.47	1.45	0.81	0.40	134	126
-10	0.13	0.24	0.43	0.81	1.69	3.60	7.02	11.4	15.5	16.0	12.7	8.83	5.54	3.39	2.08	1.27	0.72	0.36	91.7	82.4
-15	0.12	0.21	0.37	0.66	1.27	2.40	4.20	6.53	8.64	8.96	7.39	5.45	3.76	2.52	1.67	1.06	0.60	0.30	56.1	45.0
-20	0.10	0.18	0.30	0.52	0.90	1.54	2.47	3.62	4.64	4.85	4.21	3.30	2.48	1.80	1.26	0.83	0.48	0.23	33.7	19.1
-25	0.08	0.15	0.24	0.39	0.62	0.97	1.48	2.09	2.61	2.75	2.48	2.06	1.63	1.26	0.92	0.61	0.35	0.16	20.9	1.20
-30	0.07	0.12	0.19	0.29	0.42	0.62	0.93	1.28	1.59	1.68	1.54	1.33	1.10	0.89	0.66	0.44	0.25	0.11	13.5	0.00
-35	0.05	0.09	0.15	0.21	0.29	0.42	0.62	0.82	1.01	1.08	1.01	0.91	0.78	0.63	0.47	0.31	0.17	0.07	9.12	0.00
-40	0.04	0.07	0.11	0.16	0.21	0.31	0.43	0.57	0.69	0.73	0.70	0.64	0.56	0.46	0.34	0.22	0.12	0.05	6.40	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.56	2.90	5.09	8.93	16.8	34.1	67.8	116	162	171	139	96.0	60.6	37.9	23.8	14.6	8.19	3.92	970	---
Φ a	0.00	0.00	0.00	0.00	0.00	18.8	55.8	105	151	160	128	83.7	47.2	21.9	3.25	0.00	0.00	0.00	---	774

one-half-peak spread: U:12.1,D:12.3 , L:10.9,R:11.0


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.99V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:83.6603x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

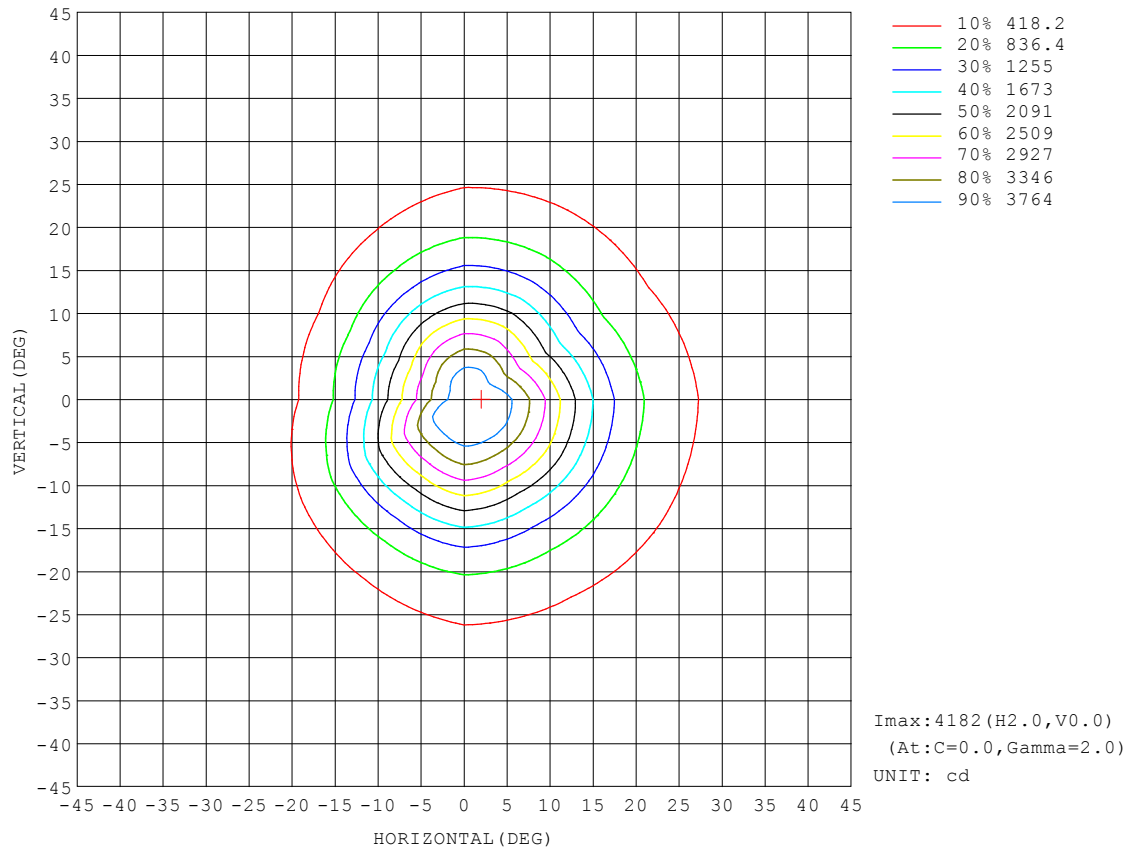


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.99V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:83.6603x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

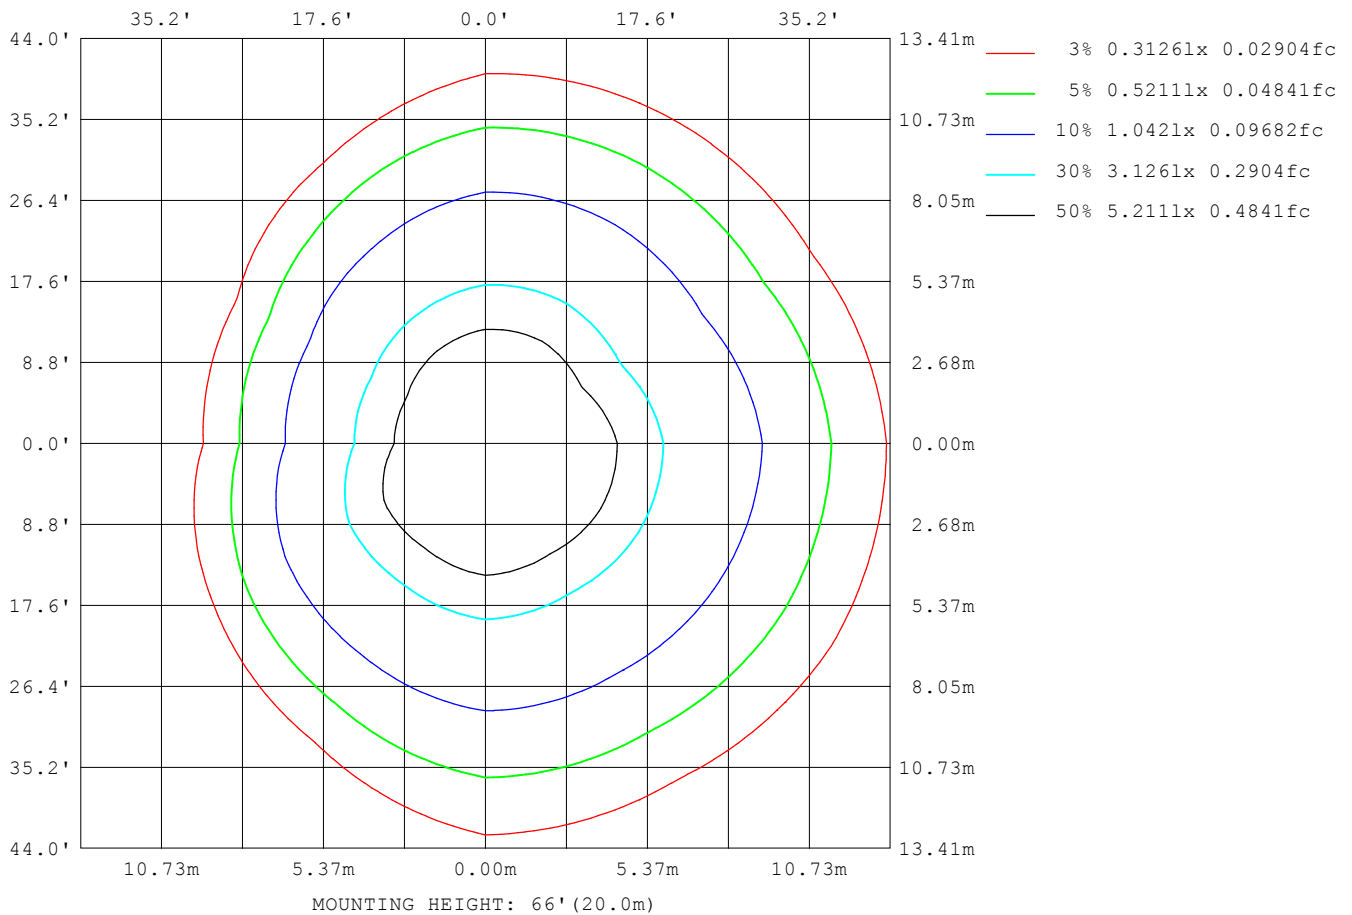

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

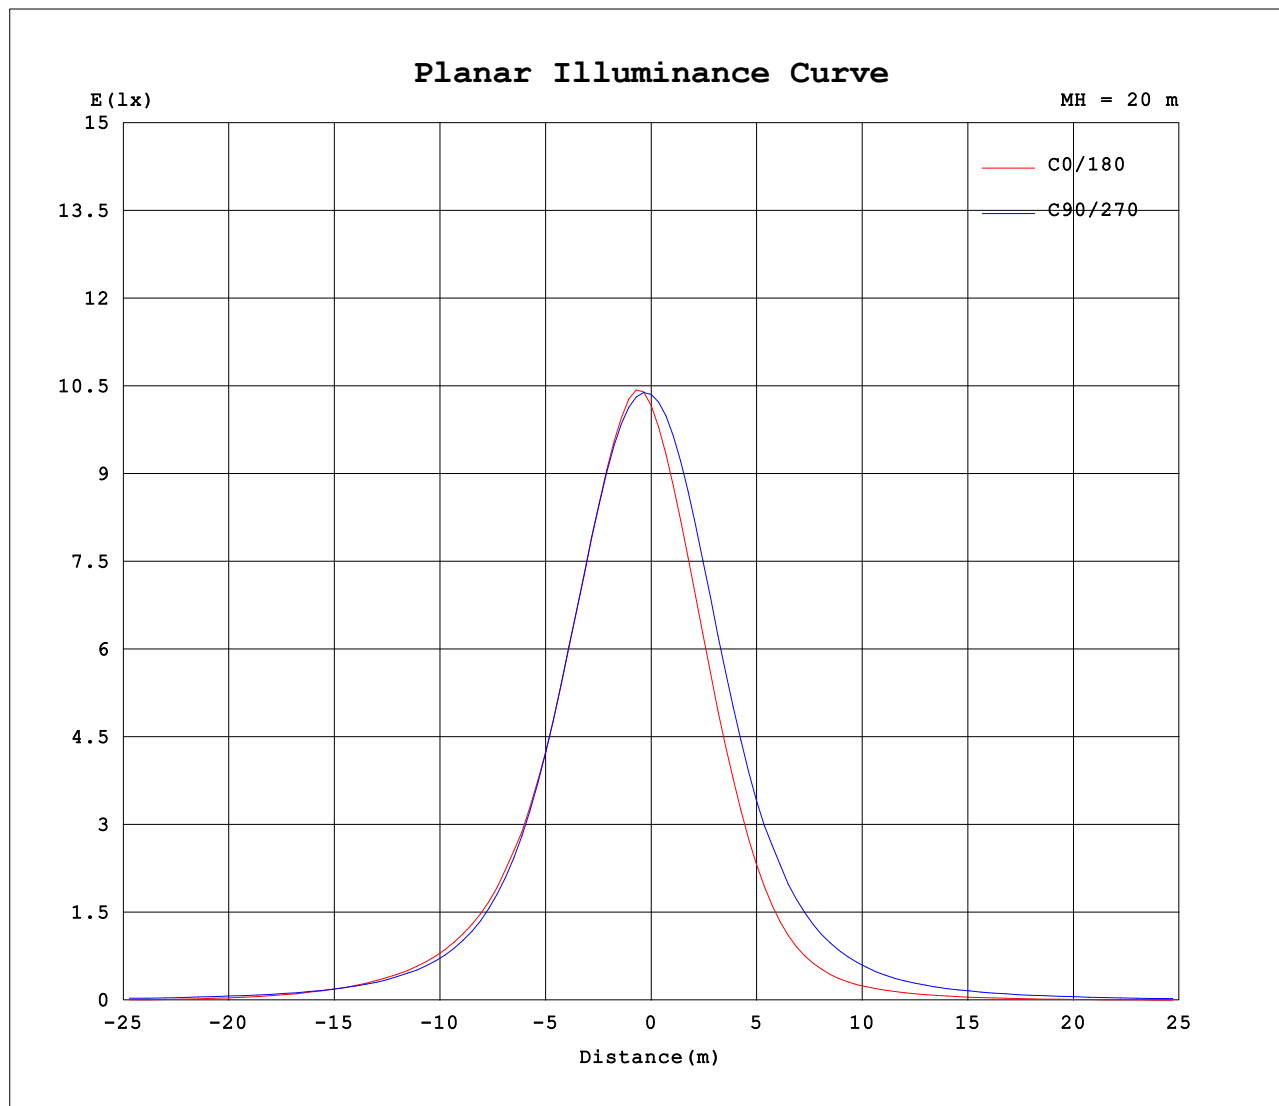


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.99V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:83.6603x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

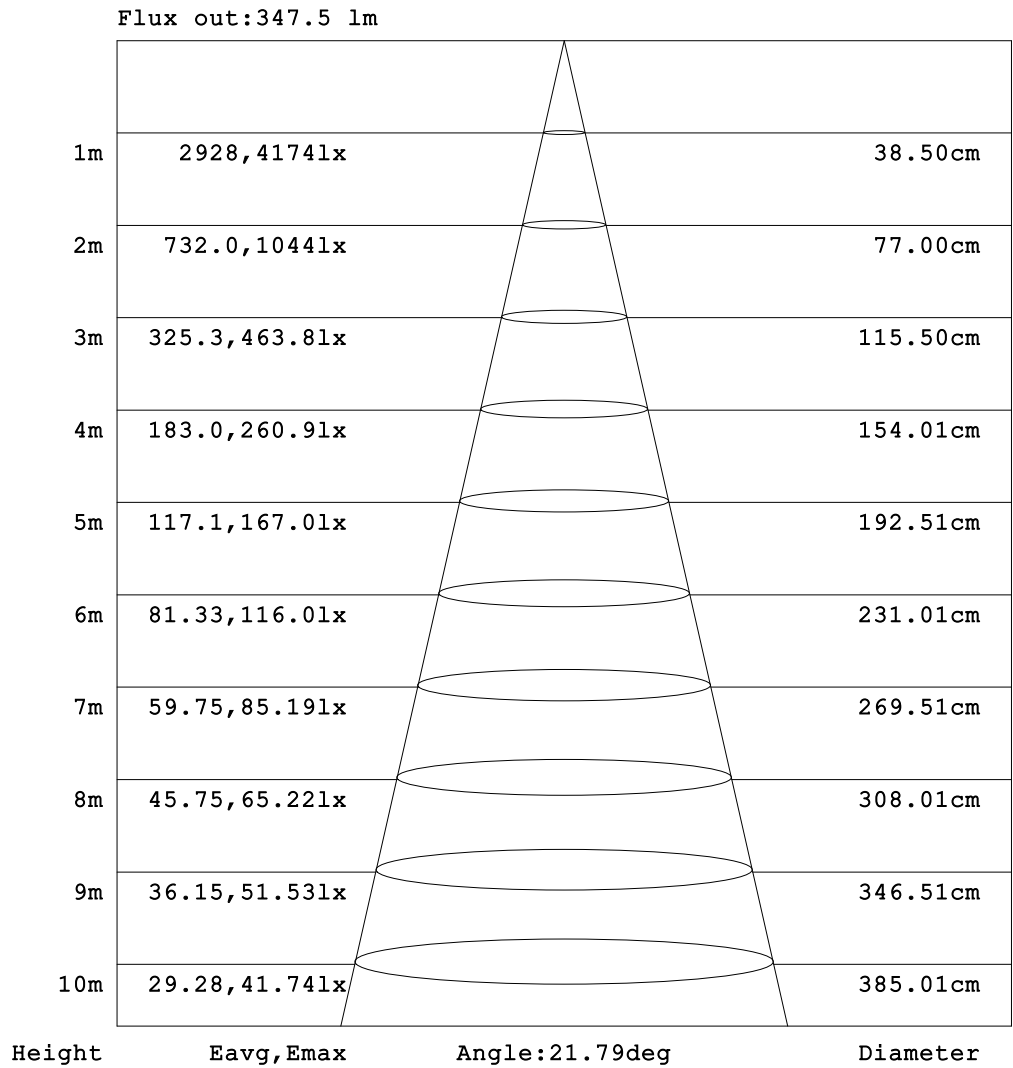

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.99V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:83.6603x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:25 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.05	0.05	0.05	0.06	0.07	0.09	0.14	0.23	0.38	0.62	1.01	1.66	2.71	4.12	5.51	6.26	6.07	5.73	5.75
-170	0.05	0.05	0.06	0.06	0.08	0.10	0.15	0.24	0.39	0.60	0.97	1.55	2.46	3.72	5.05	6.01	6.27	6.15	6.04
-160	0.05	0.06	0.06	0.07	0.09	0.11	0.15	0.23	0.35	0.52	0.77	1.16	1.75	2.59	3.58	4.44	4.99	5.31	5.36
-150	0.05	0.06	0.06	0.08	0.09	0.11	0.15	0.20	0.29	0.41	0.56	0.79	1.04	1.43	1.91	2.44	2.81	3.09	3.20
-140	0.05	0.06	0.07	0.08	0.10	0.11	0.14	0.18	0.23	0.33	0.46	0.59	0.72	0.87	0.96	1.07	1.21	1.28	1.31
-130	0.05	0.06	0.07	0.08	0.10	0.11	0.13	0.15	0.20	0.26	0.33	0.44	0.61	0.71	0.77	0.83	0.89	0.93	0.98
-120	0.05	0.06	0.07	0.08	0.09	0.11	0.13	0.15	0.18	0.21	0.25	0.31	0.36	0.41	0.45	0.50	0.53	0.56	0.58
-110	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.13	0.16	0.18	0.21	0.23	0.26	0.30	0.33	0.35	0.38	0.40	0.42
-100	0.05	0.06	0.07	0.08	0.09	0.11	0.12	0.13	0.14	0.16	0.17	0.19	0.20	0.22	0.23	0.25	0.27	0.29	0.31
-90	0.05	0.06	0.07	0.09	0.10	0.11	0.13	0.15	0.17	0.19	0.21	0.24	0.26	0.26	0.25	0.25	0.25	0.25	0.24
-80	0.05	0.06	0.08	0.11	0.14	0.17	0.20	0.23	0.27	0.30	0.33	0.36	0.39	0.42	0.46	0.51	0.55	0.60	0.64
-70	0.05	0.07	0.11	0.15	0.19	0.23	0.26	0.31	0.36	0.44	0.59	0.87	1.32	2.37	3.83	5.39	6.98	8.49	9.85
-60	0.05	0.07	0.13	0.19	0.24	0.29	0.33	0.41	0.78	1.48	2.59	4.18	6.25	9.09	13.2	17.4	21.7	25.8	29.5
-50	0.05	0.09	0.15	0.22	0.28	0.35	0.43	0.55	1.18	2.75	5.42	9.09	13.0	17.1	23.8	32.0	40.6	49.1	56.8
-40	0.05	0.10	0.17	0.25	0.32	0.42	0.56	0.80	1.62	5.34	10.6	16.5	23.2	30.6	39.8	58.5	78.8	99.1	117
-30	0.05	0.10	0.18	0.27	0.36	0.50	0.73	1.49	4.53	9.99	17.4	27.2	40.4	59.6	87.1	128	185	241	283
-20	0.05	0.10	0.19	0.29	0.39	0.56	0.89	2.55	6.96	14.6	25.0	40.7	66.1	112	198	338	526	737	877
-10	0.05	0.10	0.20	0.30	0.41	0.60	1.03	2.60	8.21	17.1	30.4	52.5	92.6	180	383	842	1539	2283	2791
0	0.05	0.10	0.20	0.30	0.42	0.60	0.93	1.76	7.43	16.2	29.6	52.0	91.6	169	365	867	1822	3063	4067
10	0.05	0.10	0.20	0.29	0.41	0.58	0.89	1.90	7.13	15.5	27.8	47.2	80.0	138	271	561	1139	1860	2354
20	0.05	0.10	0.19	0.28	0.38	0.53	0.79	1.43	5.05	11.8	21.0	34.0	53.5	88.4	151	259	411	589	722
30	0.05	0.10	0.18	0.27	0.35	0.46	0.65	0.92	2.33	6.72	13.0	22.1	33.6	49.2	70.8	101	149	195	232
40	0.05	0.09	0.17	0.24	0.31	0.39	0.50	0.67	0.91	2.79	7.47	13.2	19.6	26.6	34.7	49.9	66.9	84.0	98.8
50	0.05	0.09	0.14	0.21	0.27	0.33	0.40	0.48	0.91	2.09	4.10	6.93	10.6	14.7	20.7	27.6	34.8	41.8	48.1
60	0.05	0.07	0.12	0.18	0.23	0.28	0.31	0.37	0.56	1.00	1.74	2.86	4.48	6.81	10.4	14.2	17.9	21.6	24.8
70	0.05	0.06	0.11	0.14	0.18	0.22	0.25	0.28	0.31	0.34	0.39	0.50	0.70	1.36	2.34	3.46	4.63	5.76	6.76
80	0.05	0.06	0.08	0.11	0.14	0.16	0.19	0.20	0.22	0.23	0.24	0.25	0.26	0.30	0.33	0.37	0.40	0.44	0.47
90	0.05	0.06	0.07	0.08	0.09	0.10	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.20	0.21
100	0.05	0.06	0.06	0.07	0.08	0.08	0.09	0.11	0.12	0.14	0.16	0.18	0.20	0.20	0.21	0.22	0.23	0.23	0.24
110	0.05	0.06	0.06	0.07	0.08	0.08	0.09	0.11	0.13	0.15	0.18	0.21	0.24	0.26	0.27	0.29	0.30	0.31	0.31
120	0.05	0.06	0.06	0.07	0.08	0.08	0.09	0.10	0.13	0.16	0.20	0.25	0.31	0.37	0.43	0.44	0.46	0.47	0.47
130	0.05	0.06	0.06	0.07	0.08	0.08	0.09	0.09	0.12	0.18	0.28	0.28	0.47	0.59	0.64	0.69	0.72	0.75	0.79
140	0.05	0.06	0.06	0.07	0.07	0.08	0.09	0.10	0.14	0.22	0.34	0.46	0.53	0.71	0.80	0.94	1.05	1.11	1.13
150	0.05	0.06	0.06	0.07	0.07	0.08	0.10	0.14	0.21	0.30	0.44	0.64	0.91	1.27	1.69	2.13	2.43	2.71	2.90
160	0.05	0.05	0.06	0.06	0.08	0.08	0.12	0.18	0.28	0.44	0.68	1.05	1.59	2.37	3.29	4.11	4.68	4.95	4.95
170	0.05	0.05	0.05	0.06	0.07	0.09	0.13	0.22	0.35	0.56	0.92	1.49	2.37	3.61	4.91	5.81	6.05	5.91	5.78
180	0.05	0.05	0.05	0.06	0.07	0.09	0.14	0.23	0.38	0.62	1.01	1.66	2.71	4.12	5.51	6.26	6.07	5.73	5.77

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.99V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:83.6603x12 lm																		
NAME:LuminoFlex Ground-500mm-3000K-25D-REV2										TYPE:3000K					WEIGHT:00			
SPEC.:25 DEG										DIM.:500mm					SERIAL No.:01			
MFR.: 001										SUR.:0.8					Shielding Angle:			

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.09	6.41	6.08	4.95	3.36	1.94	1.02	0.51	0.27	0.17	0.11	0.07	0.05	0.05	0.05	0.05	0.05	0.07	
-170	6.14	6.09	5.49	4.28	2.87	1.68	0.91	0.49	0.29	0.19	0.13	0.09	0.07	0.06	0.06	0.06	0.05	0.07	
-160	5.15	4.59	3.76	2.78	1.82	1.08	0.63	0.39	0.26	0.18	0.13	0.10	0.08	0.07	0.06	0.06	0.06	0.07	
-150	2.88	2.43	1.97	1.49	1.00	0.65	0.43	0.30	0.23	0.17	0.14	0.10	0.09	0.08	0.07	0.06	0.06	0.07	
-140	1.21	1.08	0.88	0.66	0.58	0.48	0.38	0.30	0.22	0.17	0.13	0.11	0.09	0.08	0.07	0.06	0.06	0.07	
-130	0.89	0.79	0.70	0.61	0.54	0.47	0.39	0.28	0.20	0.16	0.13	0.11	0.09	0.08	0.07	0.07	0.06	0.07	
-120	0.56	0.52	0.47	0.40	0.35	0.30	0.26	0.22	0.18	0.15	0.12	0.11	0.09	0.08	0.08	0.07	0.06	0.07	
-110	0.39	0.36	0.33	0.30	0.26	0.24	0.21	0.18	0.16	0.14	0.12	0.10	0.09	0.09	0.08	0.07	0.06	0.07	
-100	0.29	0.27	0.25	0.23	0.21	0.19	0.17	0.16	0.15	0.13	0.12	0.11	0.09	0.08	0.08	0.07	0.07	0.07	
-90	0.24	0.24	0.23	0.23	0.23	0.22	0.20	0.18	0.16	0.14	0.12	0.10	0.10	0.09	0.09	0.08	0.08	0.07	
-80	0.60	0.55	0.50	0.46	0.42	0.39	0.35	0.31	0.28	0.24	0.20	0.17	0.16	0.14	0.13	0.11	0.09	0.07	
-70	8.28	6.58	4.87	3.23	1.80	0.92	0.71	0.55	0.43	0.34	0.28	0.23	0.21	0.19	0.16	0.13	0.11	0.07	
-60	27.4	24.7	21.5	17.7	13.2	8.50	4.73	2.29	1.10	0.67	0.43	0.34	0.28	0.23	0.19	0.16	0.12	0.07	
-50	55.3	52.5	48.2	42.6	35.0	24.4	15.6	9.01	4.35	1.61	0.75	0.53	0.39	0.29	0.23	0.18	0.13	0.07	
-40	114	106	96.3	84.1	67.7	49.8	31.8	16.3	5.85	2.13	1.37	0.85	0.55	0.38	0.27	0.19	0.13	0.07	
-30	270	239	199	165	133	97.8	64.7	34.8	14.3	4.55	2.18	1.29	0.75	0.46	0.30	0.21	0.14	0.07	
-20	804	645	488	355	256	180	116	66.0	30.4	10.2	3.23	1.72	0.95	0.55	0.34	0.23	0.15	0.07	
-10	2436	1805	1152	691	424	267	164	93.4	44.4	15.4	4.22	2.06	1.11	0.61	0.37	0.24	0.15	0.07	
0	3867	2794	1670	932	533	313	185	102	47.6	15.5	4.04	2.17	1.17	0.64	0.38	0.24	0.15	0.07	
10	2145	1493	921	580	374	240	150	85.4	40.3	13.7	3.76	1.98	1.07	0.60	0.37	0.24	0.15	0.07	
20	682	566	423	301	212	146	95.6	54.7	25.0	8.08	2.80	1.58	0.89	0.53	0.34	0.23	0.15	0.07	
30	228	207	176	144	113	80.8	51.5	26.2	10.4	3.33	1.89	1.13	0.68	0.44	0.30	0.21	0.14	0.07	
40	97.2	92.0	83.9	73.8	58.6	42.0	26.0	13.0	4.66	1.72	1.12	0.73	0.50	0.36	0.26	0.19	0.13	0.07	
50	47.3	45.2	41.8	37.3	31.0	21.7	14.1	8.31	4.03	1.39	0.61	0.46	0.36	0.28	0.23	0.18	0.13	0.07	
60	23.4	21.4	19.0	16.0	12.7	8.42	4.64	2.26	0.99	0.56	0.37	0.31	0.27	0.23	0.19	0.16	0.12	0.07	
70	5.72	4.56	3.37	2.27	1.34	0.76	0.58	0.45	0.36	0.30	0.26	0.22	0.21	0.18	0.16	0.13	0.10	0.07	
80	0.44	0.41	0.38	0.35	0.31	0.28	0.26	0.24	0.22	0.20	0.19	0.16	0.15	0.14	0.12	0.11	0.09	0.07	
90	0.21	0.20	0.20	0.19	0.19	0.18	0.17	0.15	0.14	0.13	0.11	0.10	0.10	0.09	0.09	0.08	0.08	0.07	
100	0.24	0.24	0.23	0.23	0.23	0.23	0.20	0.17	0.15	0.13	0.11	0.09	0.08	0.08	0.07	0.07	0.07	0.07	
110	0.31	0.30	0.29	0.29	0.28	0.26	0.23	0.19	0.16	0.13	0.10	0.09	0.08	0.07	0.07	0.06	0.06	0.07	
120	0.47	0.46	0.44	0.41	0.36	0.29	0.24	0.20	0.16	0.13	0.09	0.08	0.08	0.07	0.07	0.06	0.06	0.07	
130	0.73	0.62	0.51	0.50	0.46	0.39	0.32	0.25	0.15	0.11	0.09	0.08	0.08	0.07	0.07	0.06	0.06	0.07	
140	1.09	1.01	0.87	0.72	0.59	0.44	0.25	0.22	0.15	0.09	0.08	0.08	0.07	0.07	0.06	0.06	0.06	0.07	
150	2.65	2.34	2.05	1.50	1.02	0.63	0.38	0.22	0.15	0.12	0.08	0.07	0.07	0.06	0.06	0.06	0.06	0.07	
160	4.77	4.32	3.68	2.76	1.83	1.05	0.59	0.33	0.20	0.14	0.10	0.07	0.06	0.06	0.06	0.06	0.05	0.07	
170	5.83	5.73	5.22	4.19	2.85	1.68	0.90	0.47	0.26	0.16	0.11	0.07	0.06	0.06	0.06	0.05	0.05	0.07	
180	6.09	6.41	6.08	4.95	3.36	1.94	1.02	0.51	0.27	0.17	0.11	0.07	0.05	0.05	0.05	0.05	0.05	0.07	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: