

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2205.9 cd per klm.
(Luminaire orientation as tested.)	1.0 degrees vertical
	0.5 degrees horizontal

Beam Spread	At 10% of Imax	73.2V x 64.0H
	At 50% of Imax	40.0V x 31.8H
	At 90% of Imax	16.0V x 10.8H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	870.0 lumens per klm.
	To 50% of Imax	465.9 lumens per klm.
	To 90% of Imax	85.1 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.94V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:95.9558x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-30x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:30x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

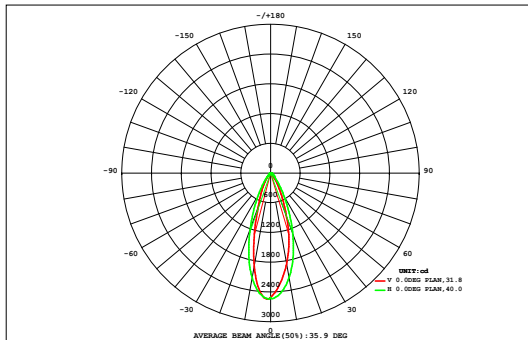

DATA OF LAMP		Eff:64.69lm/W	
MODEL		Imax(cd)	2540
NOMINAL POWER(W)	18	AVAILABILITY(%)	86.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1001
NOMINAL FLUX(lm)	95.9558	LOR(%)	100.0
LAMPS INSIDE	12	TOTAL FLUX(lm)	1151
TEST VOLTAGE(V)	220	θ @50%(H,V)	32,40DEG

72 64 56 48 40 32 24 -24 -32 -40 -48 -56 -64 -72	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.02	0.05	0.09	0.13	0.13	0.10	0.06	0.02	0.01	0.01	0.00	0.00	0.00	0.66	0.00
	0.00	0.00	0.01	0.01	0.03	0.07	0.15	0.26	0.37	0.39	0.32	0.23	0.13	0.06	0.02	0.01	0.00	0.00	2.09	0.00
	0.00	0.00	0.01	0.03	0.07	0.17	0.33	0.55	0.76	0.81	0.69	0.53	0.32	0.15	0.05	0.01	0.00	0.00	4.50	0.00
	0.00	0.01	0.01	0.04	0.14	0.36	0.72	1.23	1.69	1.77	1.44	1.03	0.61	0.26	0.08	0.02	0.01	0.00	9.41	0.00
	0.00	0.01	0.01	0.07	0.30	0.85	1.78	3.11	4.37	4.44	3.33	2.14	1.16	0.49	0.11	0.03	0.01	0.00	22.2	4.52
	0.00	0.01	0.02	0.14	0.63	1.92	4.24	7.62	10.8	10.6	7.42	4.26	2.13	0.88	0.25	0.04	0.01	0.00	51.0	39.5
	0.00	0.01	0.04	0.27	1.22	3.62	8.41	15.7	22.1	21.6	14.3	7.31	3.39	1.45	0.47	0.07	0.02	0.01	100.0	91.1
	0.00	0.01	0.05	0.41	1.90	5.61	13.3	25.2	35.5	35.1	21.9	10.1	4.83	2.10	0.69	0.11	0.02	0.01	157	149
	0.00	0.01	0.06	0.50	2.37	7.09	17.2	31.3	43.5	44.2	28.4	13.3	6.05	2.57	0.84	0.14	0.02	0.01	198	191
	0.00	0.01	0.07	0.55	2.53	7.58	18.4	32.9	44.4	45.1	30.4	14.1	6.30	2.67	0.88	0.14	0.03	0.01	206	199
	0.00	0.01	0.07	0.52	2.30	6.74	16.1	27.8	36.4	35.7	23.9	11.6	5.45	2.37	0.78	0.13	0.02	0.01	170	163
	0.00	0.01	0.06	0.39	1.68	4.72	10.4	18.0	24.0	23.1	15.5	8.29	4.07	1.78	0.58	0.10	0.02	0.01	113	104
	0.00	0.01	0.04	0.23	0.96	2.61	5.42	9.31	12.6	12.2	8.42	4.94	2.60	1.15	0.35	0.06	0.02	0.01	61.0	49.7
	0.00	0.01	0.02	0.12	0.46	1.19	2.36	4.02	5.56	5.53	4.05	2.56	1.45	0.65	0.17	0.03	0.01	0.00	28.2	10.3
	0.00	0.01	0.01	0.06	0.21	0.50	0.98	1.64	2.26	2.32	1.83	1.27	0.76	0.33	0.09	0.02	0.01	0.00	12.3	0.00
	0.00	0.00	0.01	0.04	0.10	0.23	0.43	0.70	0.97	1.02	0.85	0.63	0.38	0.17	0.06	0.01	0.01	0.00	5.61	0.00
	0.00	0.00	0.01	0.02	0.05	0.10	0.21	0.33	0.46	0.48	0.39	0.27	0.15	0.06	0.02	0.01	0.00	0.00	2.56	0.00
	0.00	0.00	0.00	0.01	0.02	0.04	0.08	0.13	0.18	0.18	0.13	0.07	0.03	0.01	0.01	0.00	0.00	0.00	0.92	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72
Φ t	0.06	0.13	0.52	3.41	15.0	43.4	101	180	246	245	163	82.7	39.8	17.2	5.45	0.94	0.23	0.07	1143	---
Φ a	0.00	0.00	0.00	0.00	0.00	30.2	89.5	169	235	234	151	69.5	22.5	0.00	0.00	0.00	0.00	0.00	---	1001


one-half-peak spread: U:21.2,D:19.1 , L:18.9,R:13.9
NEMA Beam Type: Type 4 x 5 (H x V)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.94V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:95.9558x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-30x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:30x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

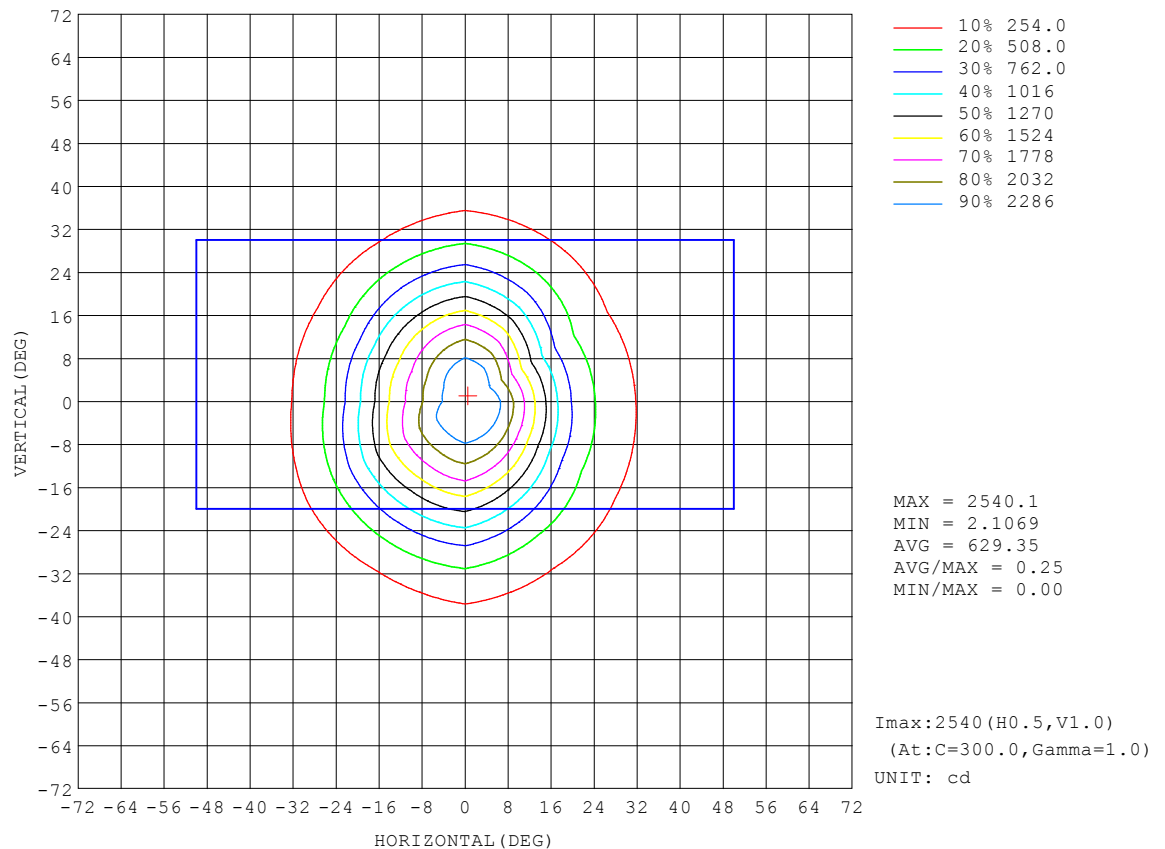


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.94V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:95.9558x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-30x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:30x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

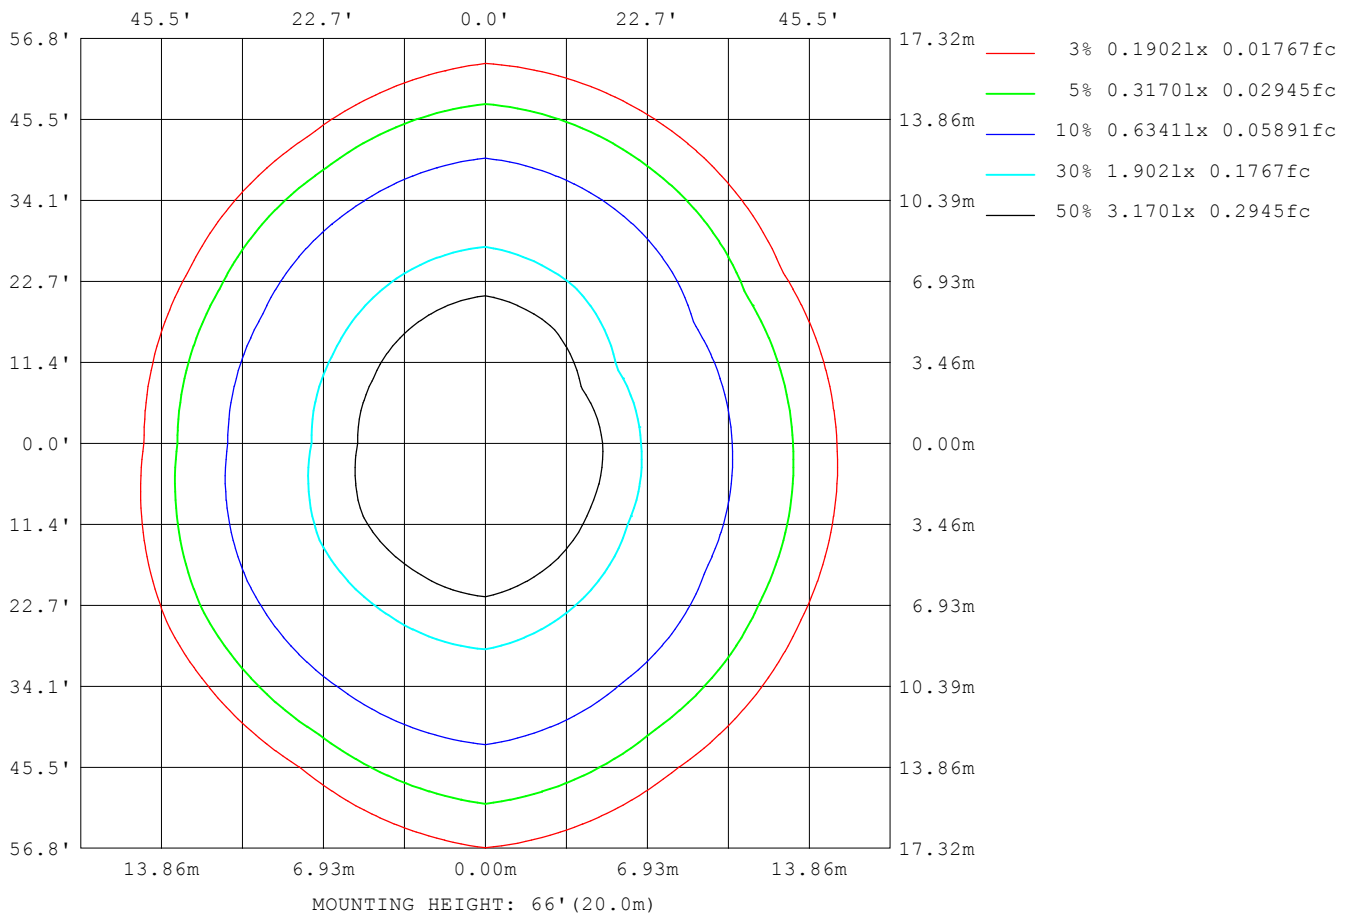

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

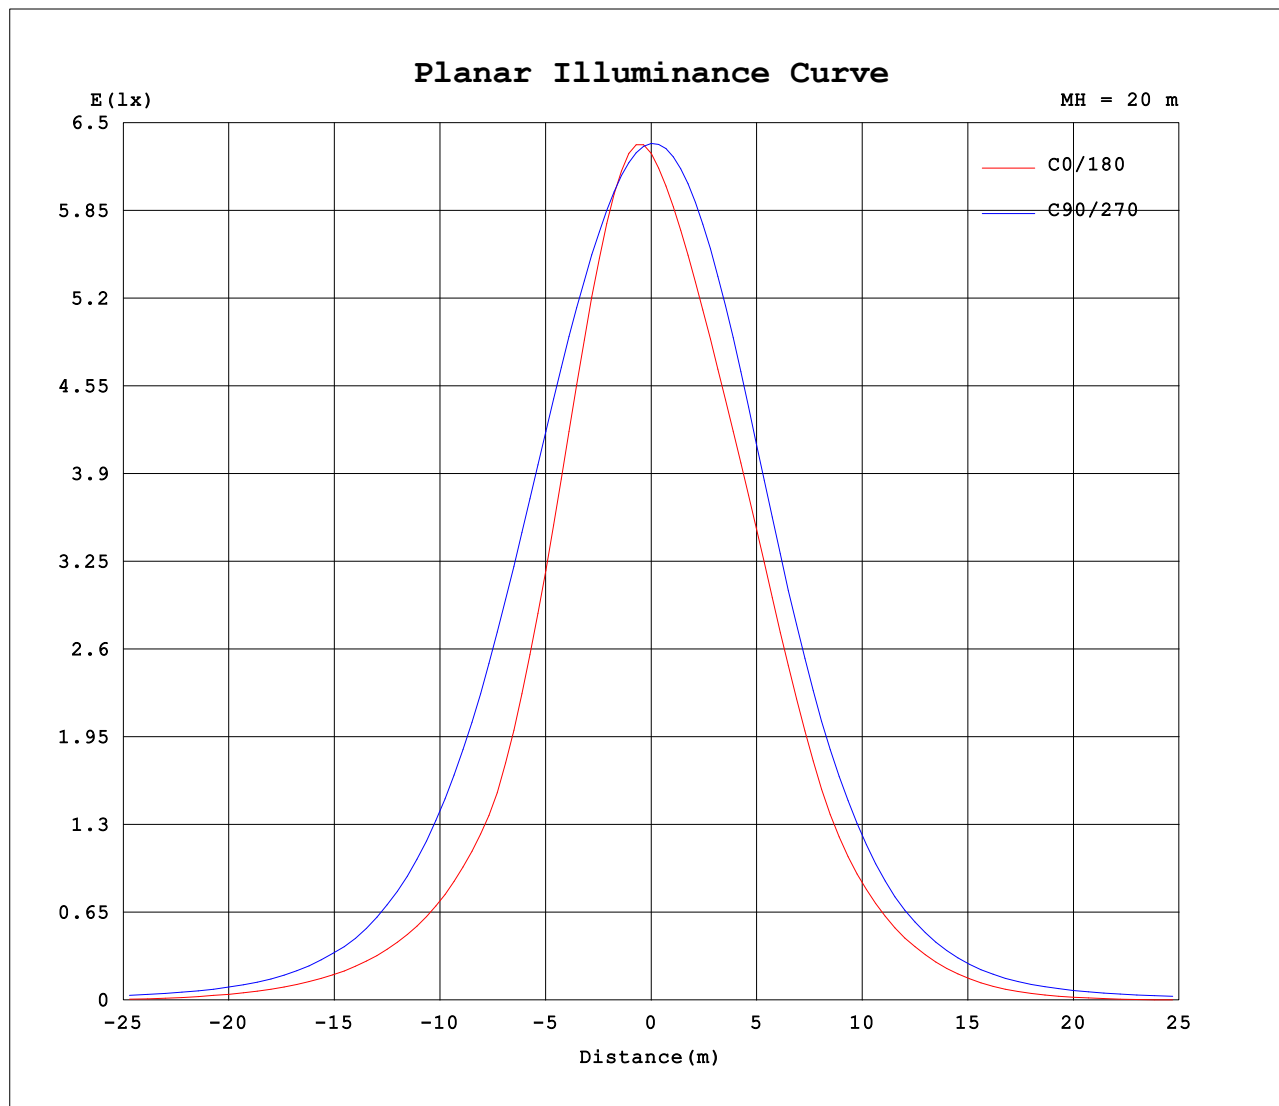


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.94V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:95.9558x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-30x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:30x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

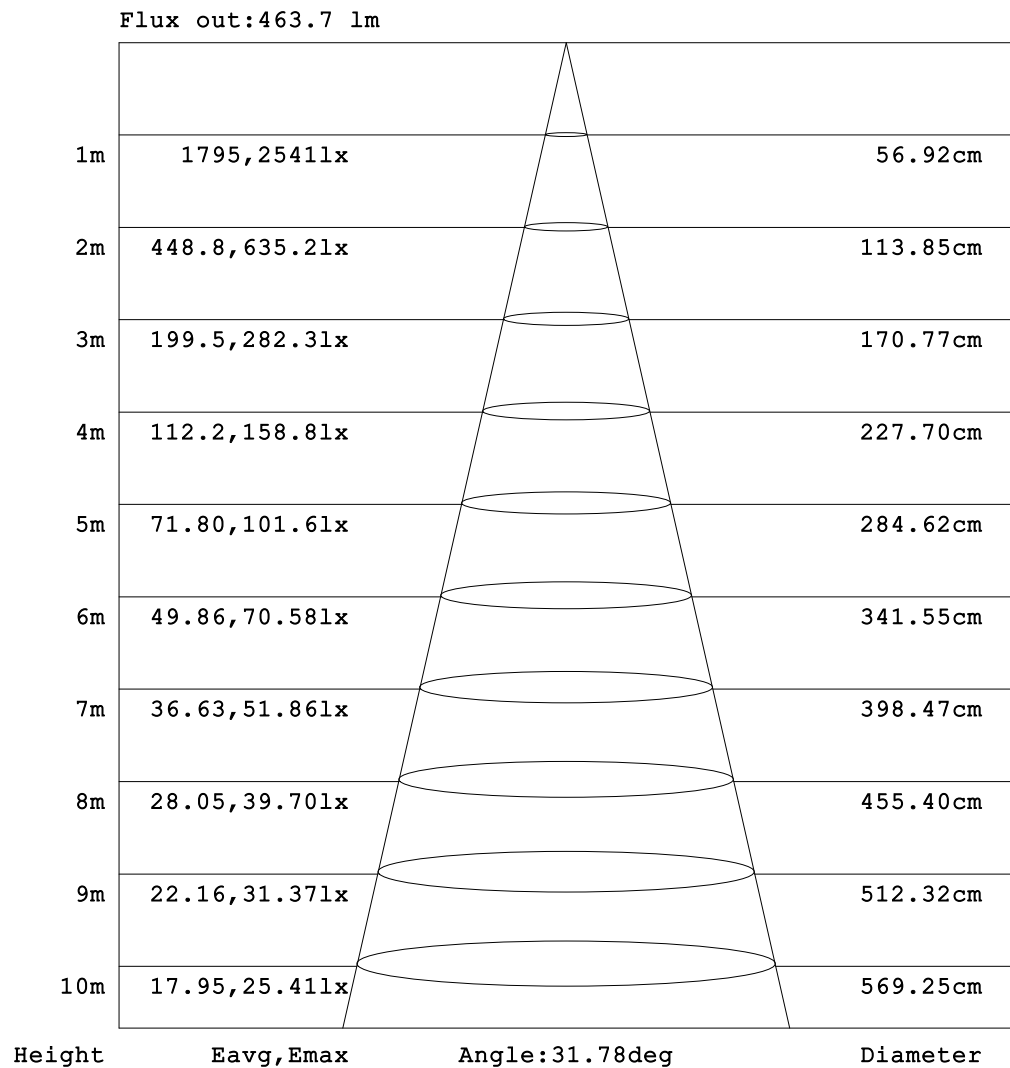

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2025-09-01

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.94V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:95.9558x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-30x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:30x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.05	0.06	0.06	0.06	0.07	0.10	0.14	0.24	0.39	0.63	0.99	1.57	2.42	3.55	4.70	5.57	5.98	6.27	6.54
-170	0.05	0.06	0.06	0.07	0.08	0.11	0.16	0.25	0.40	0.63	0.99	1.55	2.36	3.40	4.46	5.32	5.80	6.02	6.15
-160	0.05	0.06	0.07	0.07	0.09	0.12	0.15	0.24	0.36	0.55	0.83	1.24	1.84	2.65	3.48	4.17	4.67	5.00	5.14
-150	0.05	0.06	0.07	0.08	0.09	0.11	0.15	0.21	0.30	0.42	0.61	0.89	1.28	1.84	2.41	3.01	3.45	3.86	4.18
-140	0.05	0.06	0.07	0.08	0.09	0.11	0.14	0.18	0.24	0.33	0.47	0.63	0.82	1.07	1.29	1.56	1.80	1.97	2.07
-130	0.05	0.06	0.07	0.08	0.09	0.10	0.13	0.15	0.20	0.28	0.40	0.50	0.61	0.71	0.81	0.90	0.99	1.07	1.13
-120	0.05	0.07	0.07	0.08	0.10	0.11	0.12	0.14	0.19	0.24	0.31	0.37	0.44	0.54	0.63	0.71	0.76	0.81	0.85
-110	0.05	0.07	0.07	0.08	0.09	0.11	0.12	0.14	0.18	0.21	0.26	0.31	0.36	0.40	0.43	0.47	0.50	0.53	0.56
-100	0.05	0.06	0.08	0.09	0.09	0.10	0.11	0.13	0.15	0.18	0.20	0.22	0.25	0.28	0.30	0.32	0.35	0.37	0.39
-90	0.05	0.06	0.08	0.09	0.10	0.11	0.12	0.15	0.17	0.19	0.22	0.24	0.26	0.26	0.26	0.26	0.26	0.26	0.25
-80	0.05	0.07	0.09	0.12	0.16	0.19	0.22	0.25	0.28	0.31	0.33	0.36	0.39	0.42	0.45	0.48	0.51	0.55	0.57
-70	0.05	0.08	0.12	0.16	0.21	0.26	0.29	0.34	0.40	0.47	0.59	0.80	1.12	1.88	2.98	4.20	5.46	6.68	7.77
-60	0.05	0.09	0.14	0.20	0.26	0.33	0.39	0.48	0.76	1.29	2.16	3.40	5.04	7.38	11.0	14.9	18.8	22.5	25.8
-50	0.05	0.10	0.17	0.24	0.32	0.41	0.52	0.68	1.20	2.47	4.78	8.31	13.0	18.9	27.4	37.4	47.6	57.1	64.9
-40	0.05	0.11	0.19	0.28	0.37	0.50	0.69	0.94	1.58	4.54	10.7	20.8	35.8	55.2	78.9	111	145	174	194
-30	0.05	0.11	0.20	0.31	0.43	0.60	0.87	1.49	3.87	10.7	26.4	55.6	101	160	236	330	435	518	566
-20	0.05	0.12	0.22	0.33	0.47	0.68	1.04	2.30	6.86	20.5	53.6	117	219	358	559	801	1032	1217	1316
-10	0.05	0.12	0.22	0.34	0.49	0.73	1.17	2.50	8.23	28.0	76.0	169	320	562	938	1364	1717	1988	2148
0	0.05	0.11	0.22	0.34	0.49	0.73	1.11	1.84	6.28	25.6	73.7	172	331	572	962	1440	1863	2233	2509
10	0.05	0.11	0.22	0.34	0.48	0.71	1.07	1.89	6.19	22.6	63.5	145	276	474	784	1191	1604	1946	2154
20	0.05	0.11	0.21	0.32	0.45	0.65	0.95	1.51	4.17	13.5	37.4	85.2	162	280	450	675	917	1111	1222
30	0.05	0.11	0.20	0.30	0.41	0.55	0.78	1.09	2.11	5.71	15.4	36.2	70.6	120	183	262	350	426	473
40	0.05	0.11	0.18	0.27	0.36	0.46	0.61	0.81	1.06	2.54	6.61	13.8	24.8	39.7	58.2	82.7	108	129	144
50	0.05	0.09	0.16	0.23	0.30	0.38	0.46	0.57	0.93	1.81	3.41	5.91	9.56	14.1	21.0	28.9	36.8	44.1	50.2
60	0.05	0.08	0.14	0.19	0.25	0.31	0.36	0.42	0.56	0.88	1.42	2.24	3.36	5.16	8.18	11.5	15.0	18.2	21.2
70	0.05	0.07	0.11	0.15	0.19	0.23	0.27	0.30	0.34	0.38	0.43	0.52	0.65	1.08	1.77	2.59	3.48	4.33	5.07
80	0.05	0.06	0.08	0.11	0.14	0.17	0.20	0.21	0.22	0.24	0.25	0.26	0.27	0.30	0.34	0.38	0.41	0.45	0.48
90	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.16	0.17	0.18	0.19	0.20	0.21	0.22	0.22	0.23
100	0.05	0.06	0.07	0.08	0.08	0.09	0.10	0.12	0.14	0.16	0.19	0.21	0.24	0.24	0.25	0.26	0.26	0.27	0.27
110	0.05	0.07	0.07	0.08	0.08	0.09	0.09	0.11	0.14	0.18	0.21	0.25	0.30	0.32	0.33	0.35	0.36	0.36	0.37
120	0.05	0.06	0.07	0.07	0.08	0.09	0.09	0.10	0.14	0.18	0.24	0.32	0.42	0.48	0.48	0.51	0.54	0.58	0.62
130	0.05	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.13	0.21	0.28	0.30	0.48	0.62	0.69	0.77	0.84	0.91	0.95
140	0.05	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.15	0.23	0.37	0.52	0.71	0.90	1.04	1.28	1.47	1.62	1.68
150	0.05	0.06	0.07	0.07	0.08	0.09	0.10	0.15	0.23	0.33	0.49	0.74	1.07	1.58	2.08	2.56	2.97	3.38	3.67
160	0.05	0.06	0.07	0.07	0.08	0.09	0.12	0.19	0.31	0.47	0.73	1.10	1.63	2.37	3.15	3.84	4.34	4.64	4.75
170	0.05	0.06	0.06	0.06	0.08	0.10	0.14	0.23	0.37	0.59	0.93	1.46	2.23	3.22	4.25	5.09	5.62	5.93	6.03
180	0.05	0.06	0.06	0.06	0.07	0.10	0.14	0.24	0.39	0.63	0.99	1.57	2.42	3.55	4.70	5.57	5.98	6.27	6.57

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.94V I:0.0820A P:17.800W PF:0.9000 Freq:49.99Hz Lamp Flux:95.9558x12 lm		
NAME:LuminoFlex Ground-500mm-3000K-30x40D-REV2	TYPE:3000K	WEIGHT:00
SPEC.:30x40 DEG	DIM.:500mm	SERIAL No.:01
MFR.: 001	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.60	6.56	6.18	5.37	4.28	3.15	2.13	1.35	0.77	0.42	0.22	0.11	0.07	0.06	0.06	0.06	0.06	0.09	
-170	6.17	6.07	5.68	4.91	3.91	2.87	1.96	1.24	0.73	0.41	0.23	0.12	0.08	0.07	0.07	0.06	0.06	0.09	
-160	5.13	4.93	4.46	3.77	2.96	2.13	1.46	0.94	0.58	0.34	0.20	0.12	0.09	0.07	0.07	0.07	0.06	0.09	
-150	3.90	3.49	3.00	2.51	1.98	1.44	0.97	0.61	0.40	0.26	0.17	0.11	0.09	0.08	0.07	0.07	0.06	0.09	
-140	2.01	1.89	1.72	1.42	1.14	0.84	0.60	0.42	0.28	0.19	0.14	0.11	0.09	0.08	0.08	0.07	0.06	0.09	
-130	1.07	0.98	0.88	0.75	0.63	0.52	0.42	0.33	0.25	0.17	0.12	0.11	0.09	0.08	0.08	0.07	0.07	0.09	
-120	0.79	0.72	0.65	0.58	0.52	0.45	0.39	0.32	0.25	0.19	0.12	0.10	0.09	0.08	0.08	0.07	0.07	0.09	
-110	0.55	0.53	0.51	0.49	0.44	0.36	0.29	0.24	0.19	0.15	0.12	0.10	0.09	0.09	0.08	0.07	0.07	0.09	
-100	0.36	0.34	0.31	0.28	0.25	0.22	0.20	0.17	0.15	0.13	0.11	0.10	0.09	0.08	0.08	0.07	0.08	0.09	
-90	0.25	0.25	0.25	0.24	0.24	0.24	0.21	0.19	0.17	0.15	0.12	0.10	0.10	0.10	0.09	0.09	0.09	0.09	
-80	0.54	0.51	0.47	0.44	0.41	0.38	0.35	0.31	0.28	0.24	0.21	0.17	0.17	0.15	0.14	0.12	0.11	0.09	
-70	6.56	5.25	3.93	2.68	1.59	0.92	0.73	0.58	0.46	0.38	0.30	0.25	0.22	0.20	0.17	0.15	0.12	0.09	
-60	23.8	21.1	18.0	14.4	10.5	6.80	3.94	2.01	1.10	0.74	0.49	0.37	0.30	0.25	0.21	0.17	0.13	0.09	
-50	60.9	55.0	48.0	40.4	32.1	21.9	13.7	7.89	3.93	1.70	0.91	0.62	0.43	0.32	0.25	0.19	0.14	0.09	
-40	176	151	123	96.5	72.6	51.3	32.3	16.2	5.80	2.53	1.62	1.00	0.63	0.40	0.29	0.21	0.15	0.09	
-30	499	406	305	226	162	110	69.2	38.3	16.0	4.81	2.55	1.51	0.87	0.51	0.33	0.23	0.16	0.09	
-20	1152	911	655	446	298	196	122	69.4	33.5	10.9	3.56	2.00	1.11	0.61	0.36	0.24	0.16	0.09	
-10	1963	1564	1062	653	426	275	170	97.2	47.7	16.3	4.53	2.36	1.28	0.68	0.39	0.25	0.17	0.09	
0	2416	1909	1272	741	474	300	183	105	50.3	15.6	4.28	2.45	1.33	0.71	0.40	0.25	0.17	0.09	
10	1947	1452	915	571	384	249	154	88.2	42.9	14.0	3.98	2.24	1.22	0.66	0.39	0.25	0.17	0.09	
20	1074	850	595	393	253	158	99.7	56.6	26.6	8.09	3.09	1.81	1.02	0.58	0.36	0.24	0.16	0.09	
30	423	348	267	192	135	88.0	53.0	27.4	10.5	3.49	2.14	1.30	0.78	0.48	0.32	0.23	0.16	0.09	
40	135	119	98.9	78.8	58.2	40.3	24.5	11.8	4.50	1.95	1.29	0.84	0.55	0.38	0.29	0.21	0.15	0.09	
50	47.8	44.0	39.2	33.6	26.9	18.5	11.8	6.82	3.40	1.38	0.71	0.52	0.39	0.31	0.25	0.20	0.15	0.09	
60	19.7	17.7	15.2	12.5	9.62	6.45	3.70	1.90	0.94	0.60	0.42	0.34	0.30	0.26	0.21	0.17	0.13	0.09	
70	4.32	3.48	2.61	1.82	1.17	0.76	0.60	0.48	0.40	0.33	0.29	0.26	0.23	0.21	0.18	0.15	0.12	0.09	
80	0.45	0.42	0.39	0.36	0.32	0.29	0.28	0.26	0.24	0.23	0.21	0.20	0.18	0.16	0.14	0.13	0.12	0.09	
90	0.23	0.22	0.21	0.21	0.20	0.19	0.18	0.17	0.15	0.14	0.13	0.11	0.11	0.11	0.10	0.10	0.09	0.09	
100	0.27	0.26	0.26	0.25	0.24	0.24	0.21	0.19	0.16	0.14	0.12	0.10	0.09	0.09	0.08	0.08	0.08	0.09	
110	0.36	0.35	0.34	0.32	0.31	0.28	0.24	0.21	0.17	0.15	0.12	0.10	0.09	0.09	0.08	0.07	0.07	0.09	
120	0.59	0.56	0.53	0.49	0.43	0.34	0.28	0.23	0.18	0.14	0.11	0.10	0.09	0.08	0.08	0.07	0.07	0.09	
130	0.91	0.85	0.79	0.71	0.64	0.52	0.40	0.30	0.19	0.12	0.10	0.09	0.09	0.08	0.08	0.07	0.07	0.09	
140	1.69	1.63	1.44	1.21	1.00	0.69	0.56	0.37	0.23	0.13	0.10	0.09	0.08	0.08	0.07	0.07	0.07	0.09	
150	3.51	3.25	3.03	2.45	1.88	1.33	0.88	0.55	0.34	0.21	0.13	0.09	0.08	0.07	0.07	0.07	0.06	0.09	
160	4.76	4.57	4.17	3.59	2.86	2.05	1.42	0.90	0.54	0.31	0.18	0.10	0.07	0.07	0.07	0.07	0.06	0.09	
170	6.07	5.82	5.37	4.69	3.79	2.81	1.92	1.22	0.72	0.40	0.21	0.11	0.07	0.07	0.06	0.06	0.06	0.09	
180	6.60	6.56	6.18	5.37	4.28	3.15	2.13	1.35	0.77	0.42	0.22	0.11	0.07	0.06	0.06	0.06	0.06	0.09	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2025-09-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: