

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	215.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	288.8V x 159.0H
	At 50% of Imax	173.5V x 110.6H
	At 90% of Imax	73.7V x 47.6H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	972.7 lumens per klm.
	To 50% of Imax	677.3 lumens per klm.
	To 90% of Imax	155.9 lumens per klm.

Upward LOR	18.3 %
Downward LOR	81.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Maya-round acrylic-1200mm-RGBW 3000K-110 170-REV1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001182
MFR.:	SUR.:	Shielding Angle:

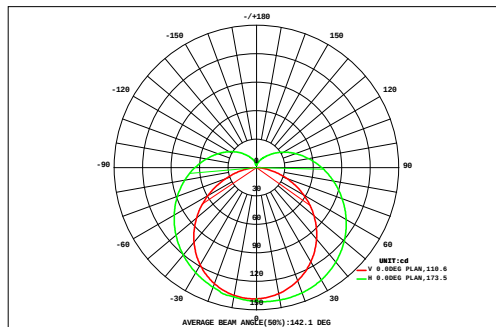

DATA OF LAMP		Eff: 37.40lm/W	
MODEL	MAYA.12.14(30)	Imax(cd)	141.7
NOMINAL POWER(W)	17.6	AVAILABILITY(%)	96.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	635.3
NOMINAL FLUX(lm)	658.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	658.3
TEST VOLTAGE(V)	220	q @50%(H,V)	111,174DEG

		AREA FLUX DIAGRAM														UNIT:lm				F t	F a
		0.03	0.15	0.38	0.70	1.08	1.41	1.71	1.99	2.21	2.22	2.00	1.73	1.43	1.10	0.70	0.37	0.14	0.02	19.4	19.3
VERTICAL (DEG)	90	0.03	0.16	0.43	0.81	1.26	1.67	2.05	2.37	2.62	2.63	2.38	2.07	1.70	1.29	0.82	0.43	0.16	0.02	22.9	22.8
	80	0.03	0.18	0.48	0.93	1.45	1.95	2.38	2.76	3.03	3.03	2.77	2.41	1.97	1.48	0.94	0.49	0.17	0.02	26.5	26.4
	70	0.03	0.19	0.54	1.04	1.63	2.21	2.71	3.12	3.41	3.41	3.13	2.73	2.24	1.65	1.05	0.55	0.19	0.02	29.9	29.8
	60	0.03	0.21	0.59	1.15	1.79	2.44	2.99	3.43	3.73	3.73	3.44	3.01	2.46	1.80	1.15	0.59	0.21	0.03	32.8	32.7
	50	0.03	0.22	0.63	1.23	1.92	2.62	3.22	3.68	3.98	3.98	3.69	3.23	2.62	1.92	1.22	0.63	0.21	0.03	35.1	35.0
	40	0.03	0.22	0.66	1.28	2.01	2.74	3.38	3.85	4.14	4.14	3.85	3.37	2.72	1.99	1.27	0.65	0.22	0.02	36.5	36.5
	30	0.03	0.22	0.66	1.30	2.06	2.81	3.46	3.94	4.22	4.21	3.92	3.42	2.76	2.01	1.27	0.64	0.21	0.02	37.2	37.1
	-30	0.02	0.20	0.64	1.28	2.04	2.80	3.47	3.96	4.22	4.19	3.90	3.39	2.72	1.97	1.24	0.62	0.20	0.02	36.9	36.8
		0.02	0.20	0.63	1.27	2.02	2.77	3.42	3.89	4.13	4.16	3.87	3.36	2.69	1.95	1.23	0.61	0.20	0.02	36.4	36.4
		0.03	0.21	0.65	1.27	2.00	2.71	3.31	3.75	4.06	4.09	3.81	3.32	2.68	1.95	1.24	0.63	0.21	0.02	35.9	35.9
		0.03	0.21	0.64	1.24	1.92	2.59	3.15	3.60	3.91	3.93	3.65	3.20	2.59	1.91	1.22	0.63	0.21	0.02	34.6	34.6
		0.03	0.21	0.61	1.17	1.81	2.43	2.97	3.41	3.70	3.71	3.44	3.02	2.46	1.81	1.17	0.61	0.21	0.02	32.8	32.7
		0.03	0.20	0.57	1.09	1.67	2.25	2.75	3.16	3.44	3.45	3.19	2.79	2.28	1.69	1.09	0.57	0.20	0.02	30.4	30.4
	-50	0.03	0.18	0.51	0.98	1.52	2.04	2.49	2.87	3.13	3.14	2.89	2.52	2.07	1.54	0.99	0.51	0.18	0.02	27.6	27.6
	-60	0.02	0.16	0.45	0.87	1.35	1.80	2.21	2.55	2.79	2.80	2.56	2.22	1.83	1.37	0.87	0.45	0.16	0.02	24.5	24.4
	-70	0.02	0.14	0.38	0.74	1.16	1.55	1.90	2.20	2.44	2.44	2.21	1.91	1.57	1.18	0.75	0.38	0.14	0.02	21.1	21.1
	-80	0.02	0.13	0.32	0.59	0.93	1.25	1.56	1.83	2.07	2.07	1.84	1.56	1.26	0.94	0.59	0.31	0.12	0.02	17.4	17.3
	-90	-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																			
F t	0.47	3.40	9.76	18.9	29.6	40.0	49.1	56.4	61.2	61.3	56.5	49.3	40.0	29.5	18.8	9.68	3.32	0.41	538	---	
F a	0.06	3.34	9.76	18.9	29.6	40.0	49.1	56.4	61.2	61.3	56.5	49.3	40.0	29.5	18.8	9.68	3.21	0.02	---	537	

one-half-peak spread: U:72.2,D:81.0 , L:55.2,R:56.0


NEMA Beam Type: Type 7

H(b) Range: -90 - 90DEG
 H(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Maya-round Acrylic-1200mm-RGBW 3000K-110 170-rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001182
MFR.:	SUR.:	Shielding Angle:

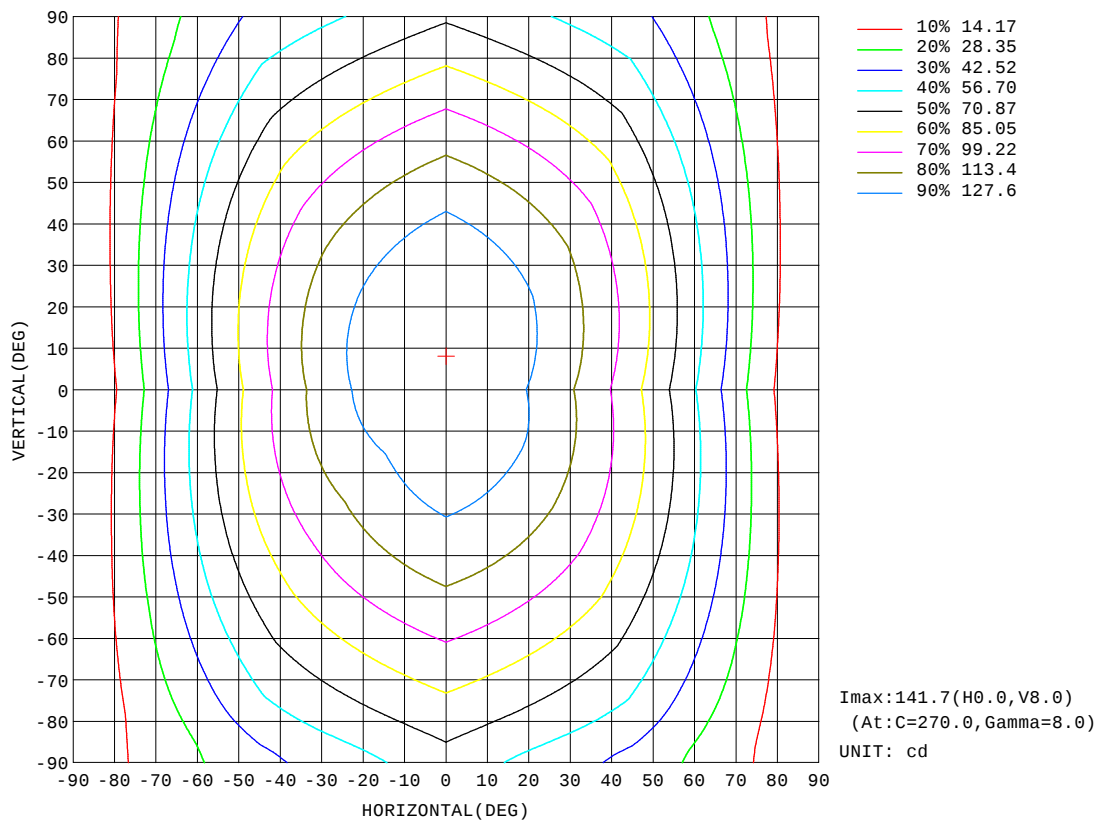


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Maya-round acrylic-1200mm-RGBW 3000K-110 170-REV1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001182
MFR.:	SUR.:	Shielding Angle:

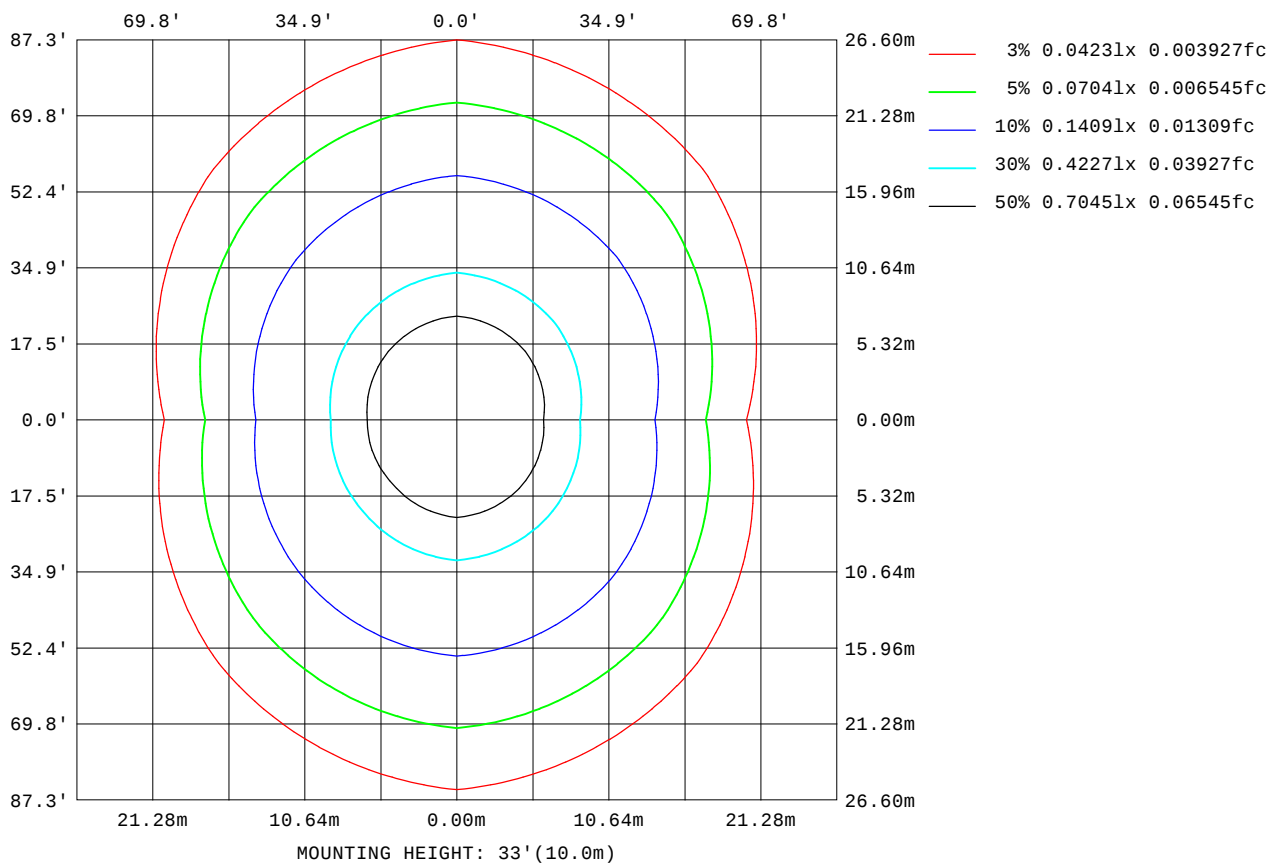

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

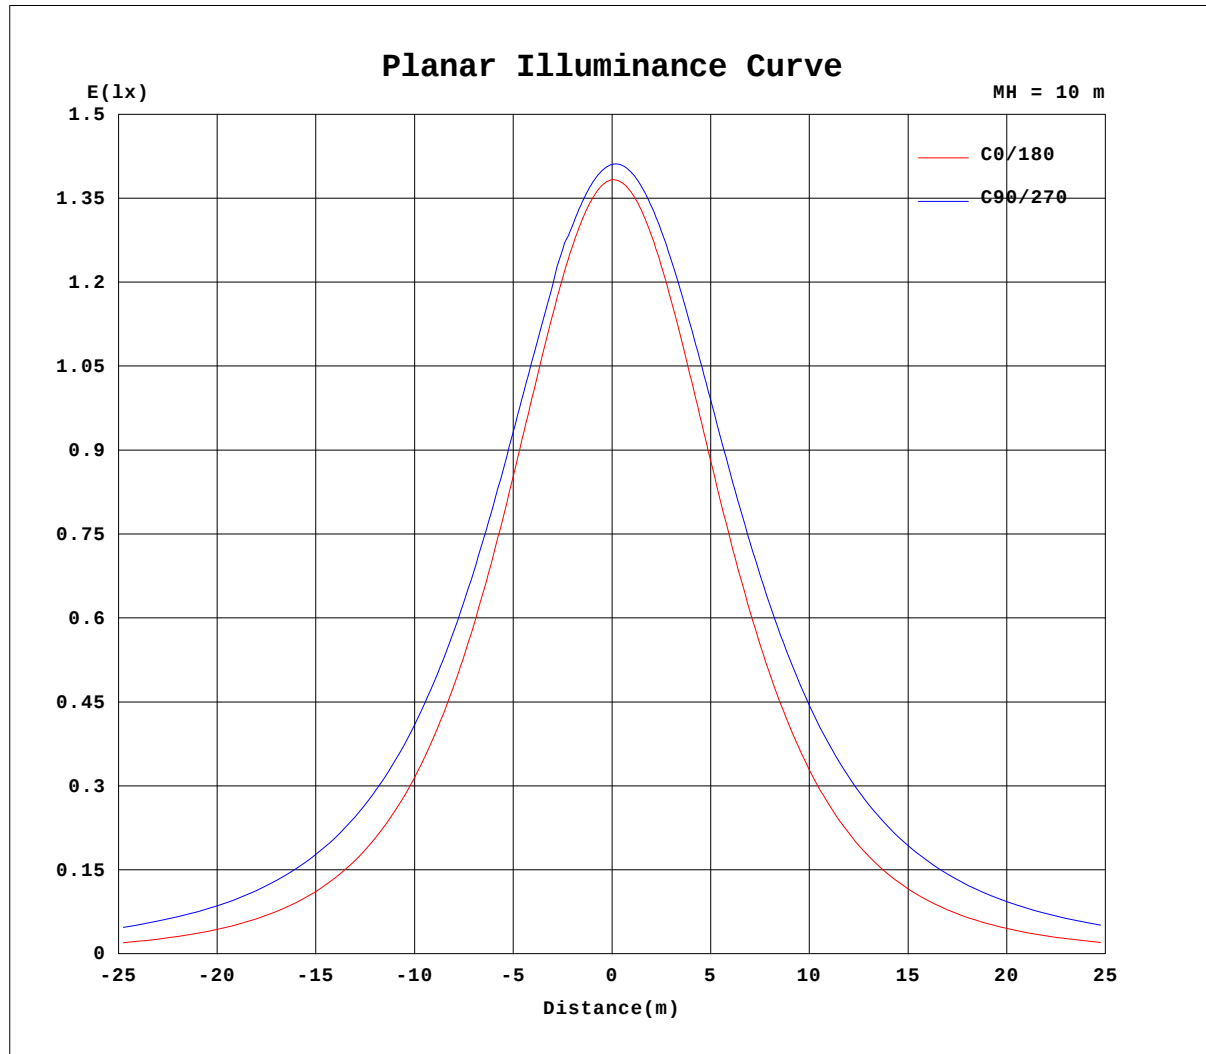


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Maya-round acrylic-1200mm-RGBW 3000K-110 170-REV1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001182
MFR.:	SUR.:	Shielding Angle:

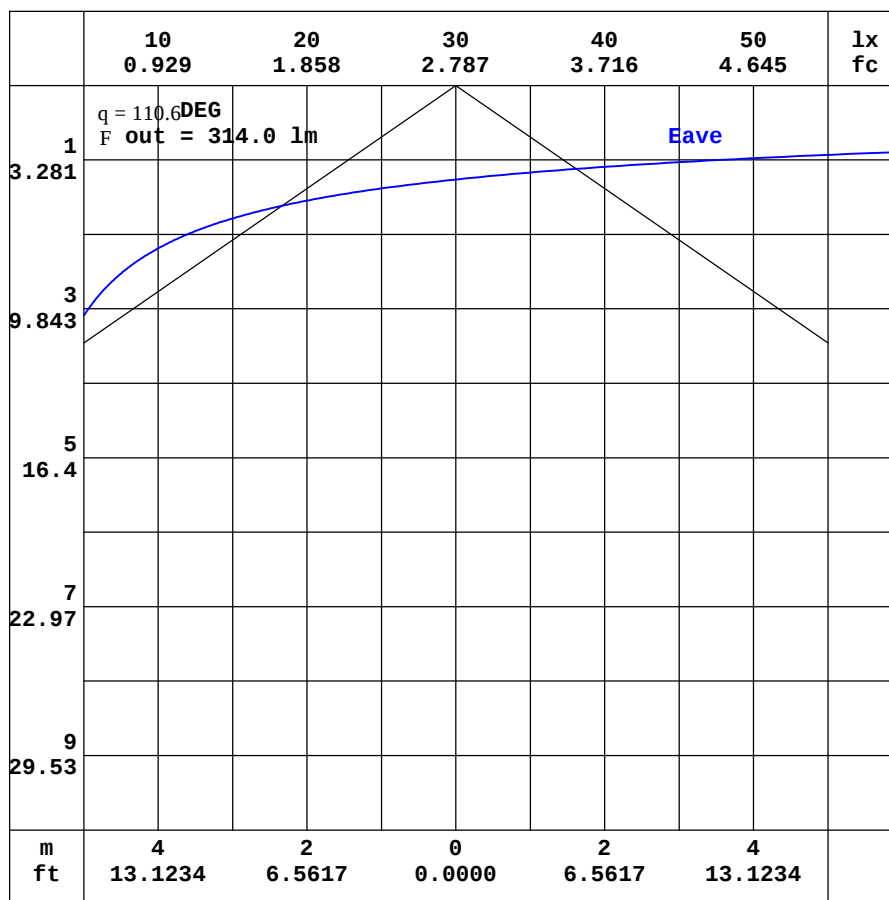

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

$H(b)$ Range: -90 - 90DEG
 $H(b)$ Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-26

$V(B)$ Range: -180 - 180DEG
 $V(B)$ Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-round acrylic-1200mm-RGBW 3000K-110 170-rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001182
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.87	3.97	3.70	3.68	3.60	3.56	3.44	3.22	3.15	3.14	3.13	3.15	3.24	3.24	3.23	3.18	3.12	3.06	3.20
-170	3.87	4.56	4.74	5.05	5.26	5.45	5.46	5.34	5.21	4.88	4.53	4.18	4.07	3.92	2.77	2.72	2.61	2.68	2.66
-160	3.87	5.15	5.77	6.44	6.93	7.37	7.60	7.69	7.64	7.15	6.50	5.84	5.28	5.05	4.86	4.44	4.95	6.53	8.21
-150	3.87	5.72	6.78	7.81	8.64	9.36	9.88	10.2	10.3	10.4	9.71	8.91	8.25	7.43	8.04	8.78	9.70	10.6	11.9
-140	3.87	6.26	7.78	9.18	10.3	11.4	12.3	13.0	13.4	13.8	14.1	14.0	13.5	13.4	13.6	14.2	15.0	16.2	17.8
-130	3.87	6.74	8.85	10.6	12.1	13.5	14.8	15.9	16.9	17.7	18.4	19.0	19.6	20.2	20.9	21.7	22.6	23.9	25.4
-120	3.87	7.19	9.81	12.0	14.0	15.8	17.4	19.0	20.5	21.9	23.2	24.3	25.4	26.5	27.7	29.0	30.4	32.0	33.8
-110	3.87	7.60	10.6	13.4	16.0	18.3	20.5	22.6	24.4	26.3	28.0	29.8	31.6	33.4	35.2	37.1	39.0	41.1	43.2
-100	3.87	7.72	11.4	14.6	17.9	20.9	23.9	26.7	29.5	32.2	34.5	36.7	39.0	41.3	43.7	46.1	48.6	51.1	53.8
-90	3.87	7.73	11.6	15.5	19.3	23.2	27.0	30.9	34.8	38.6	41.6	44.5	47.4	50.4	53.3	56.3	59.2	62.1	65.1
-80	3.87	7.73	11.8	16.3	21.4	26.7	32.3	37.9	43.7	49.4	53.2	56.6	59.9	63.0	66.0	68.9	71.7	74.3	76.9
-70	3.87	7.63	12.5	18.6	25.3	32.2	39.1	45.9	52.5	58.8	63.6	67.4	71.1	74.6	77.8	80.9	83.8	86.4	88.9
-60	3.87	7.46	13.7	21.1	29.0	37.2	45.1	52.8	60.1	66.8	72.7	77.2	81.4	85.4	89.0	92.3	95.2	97.9	100
-50	3.87	7.58	14.7	23.2	32.3	41.6	50.6	59.1	67.0	74.2	80.7	86.2	91.0	95.3	99.3	103	106	109	111
-40	3.87	7.64	15.3	24.8	35.0	45.4	55.3	64.7	73.3	81.1	88.0	94.0	99.3	104	108	112	115	118	120
-30	3.87	7.50	15.6	25.8	36.8	48.1	58.9	69.1	78.5	86.9	94.4	101	106	111	116	120	123	126	128
-20	3.87	7.19	15.4	25.9	37.6	49.5	61.0	71.9	82.1	91.3	99.5	107	113	118	121	125	129	132	134
-10	3.87	6.68	14.6	25.2	37.1	49.3	61.4	72.9	83.7	93.6	103	110	117	123	127	131	132	135	138
0	3.87	5.99	13.2	23.4	35.1	47.3	59.5	71.4	82.7	93.1	103	111	119	125	130	134	137	138	138
10	3.87	6.81	14.8	25.4	37.5	49.9	62.2	74.0	85.2	95.5	105	113	120	126	131	135	138	140	142
20	3.87	7.44	15.7	26.5	38.5	50.6	62.6	74.1	85.0	94.9	104	112	119	125	129	133	136	139	140
30	3.87	7.89	16.1	26.6	38.0	49.7	61.1	72.0	82.2	91.7	100	108	115	120	125	129	132	135	137
40	3.87	8.16	16.0	25.8	36.4	47.3	57.9	68.1	77.6	86.4	94.5	102	108	113	118	122	125	128	130
50	3.87	8.22	15.6	24.4	33.9	43.7	53.4	62.6	71.3	79.5	87.1	93.5	98.8	104	108	112	115	118	121
60	3.87	8.21	14.9	22.6	30.9	39.4	47.9	56.2	64.2	71.6	78.4	83.4	88.1	92.5	96.5	100	103	106	109
70	3.87	8.46	14.1	20.7	27.6	34.8	42.1	49.3	56.4	63.2	68.4	72.6	76.6	80.3	83.9	87.3	90.4	93.4	96.1
80	3.87	8.59	13.6	18.8	24.6	30.6	36.6	42.6	48.7	54.7	58.3	61.6	64.9	68.0	71.1	74.1	76.9	79.7	82.4
90	3.87	8.59	13.3	18.0	22.7	27.4	32.2	36.9	41.6	46.3	48.8	51.3	53.8	56.3	58.8	61.3	63.8	66.3	68.8
100	3.87	8.54	12.9	17.0	20.8	24.5	28.1	31.5	34.8	38.1	40.0	41.7	43.5	45.4	47.4	49.4	51.4	53.6	55.8
110	3.87	8.36	12.1	15.4	18.5	21.3	23.9	26.3	28.5	30.6	32.0	33.1	34.3	35.5	36.9	38.4	40.0	41.8	43.7
120	3.87	7.87	11.0	13.7	16.1	18.2	20.0	21.5	22.8	23.8	24.7	25.2	25.6	26.3	27.2	28.4	29.7	31.2	32.9
130	3.87	7.33	9.88	12.0	13.8	15.2	16.3	17.1	17.6	17.6	17.8	17.8	18.1	18.8	19.4	20.2	21.0	22.1	23.4
140	3.87	6.74	8.62	10.3	11.6	12.4	13.0	13.1	13.0	12.6	13.0	13.0	13.0	13.2	13.4	13.7	14.1	14.8	15.7
150	3.87	6.09	7.40	8.61	9.42	9.90	10.00	9.89	9.55	9.61	9.47	9.37	9.28	9.15	9.00	9.05	9.34	9.82	10.6
160	3.87	5.40	6.19	6.97	7.38	7.64	7.51	7.20	7.15	7.01	6.88	6.74	6.43	6.21	6.04	6.00	6.04	6.24	6.70
170	3.87	4.68	4.95	5.31	5.46	5.53	5.38	5.12	5.04	4.95	4.86	4.70	4.60	4.48	4.33	4.16	3.50	3.49	3.51
180	3.87	3.97	3.70	3.68	3.60	3.56	3.44	3.22	3.15	3.14	3.13	3.15	3.24	3.24	3.23	3.18	3.12	3.06	3.17

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V_(b) Range: -180 - 180DEG
V_(b) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-round acrylic-1200mm-RGBW 3000K-110 170-rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001182
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.88	2.76	2.65	2.50	2.37	2.29	2.02	1.91	1.80	1.71	1.75	1.73	1.66	1.57	1.49	1.43	1.39	1.10	
-170	2.65	2.60	2.53	2.45	4.29	4.36	4.22	4.10	4.09	3.99	4.04	3.90	3.73	3.39	2.95	2.54	2.02	1.10	
-160	6.52	4.99	3.55	7.16	6.96	6.79	6.60	6.69	6.54	6.42	6.41	6.20	5.81	5.21	4.39	3.64	2.64	1.10	
-150	11.2	10.8	10.6	10.2	9.94	9.77	9.84	9.60	9.35	9.41	8.99	8.68	7.95	7.01	5.86	4.73	3.25	1.10	
-140	16.6	15.7	15.1	14.8	14.4	14.0	13.5	13.3	13.0	12.5	12.1	11.2	10.1	8.77	7.36	5.76	3.82	1.10	
-130	23.9	22.6	21.4	20.5	19.8	19.3	18.5	17.8	17.3	16.4	15.2	13.9	12.3	10.6	8.84	6.73	4.31	1.10	
-120	31.9	30.3	28.8	27.6	26.5	25.4	24.3	23.2	21.8	20.1	18.3	16.4	14.5	12.5	10.2	7.66	4.63	1.10	
-110	41.1	39.0	37.1	35.2	33.4	31.6	29.8	27.9	26.0	23.9	21.8	19.5	17.1	14.4	11.6	8.49	4.87	1.10	
-100	51.1	48.5	46.0	43.6	41.2	38.8	36.5	34.2	31.9	28.9	25.9	22.8	19.6	16.2	12.7	8.94	5.08	1.10	
-90	62.1	59.1	56.2	53.2	50.2	47.2	44.3	41.3	38.3	34.2	30.1	25.9	21.8	17.6	13.5	9.37	5.23	1.10	
-80	74.4	71.9	69.2	66.4	63.5	60.5	57.3	53.9	50.2	44.3	38.3	32.3	26.5	20.8	15.3	10.1	5.30	1.10	
-70	86.5	84.0	81.2	78.3	75.1	71.8	68.2	64.4	59.6	53.2	46.4	39.4	32.3	25.0	18.0	11.5	5.62	1.10	
-60	98.1	95.6	92.8	89.6	86.1	82.3	78.2	73.8	67.6	60.7	53.3	45.4	37.3	28.9	20.6	12.8	5.98	1.10	
-50	109	106	104	100	96.4	92.2	87.6	81.9	75.0	67.5	59.4	50.8	41.6	32.2	22.8	13.9	6.25	1.10	
-40	118	116	113	110	106	101	95.4	88.8	81.5	73.4	64.6	55.1	45.2	34.8	24.5	14.7	6.33	1.10	
-30	126	124	121	117	113	108	102	94.5	86.6	77.9	68.4	58.3	47.6	36.6	25.4	15.0	6.24	1.10	
-20	133	131	127	123	119	113	106	98.5	90.0	80.7	70.6	59.9	48.6	37.1	25.5	14.7	5.95	1.10	
-10	137	134	131	127	122	115	108	100	91.1	81.3	70.8	59.7	48.1	36.3	24.6	13.9	5.44	1.10	
0	137	135	132	127	121	115	107	98.6	89.3	79.2	68.5	57.4	45.8	34.2	22.8	12.5	4.72	1.10	
10	139	137	134	129	124	118	110	102	92.7	82.6	71.9	60.5	48.8	36.8	24.9	14.1	5.57	1.10	
20	138	136	133	129	124	118	110	102	93.2	83.3	72.7	61.5	49.9	37.9	26.1	15.1	6.22	1.10	
30	135	132	129	125	121	115	108	99.7	91.0	81.5	71.4	60.6	49.3	37.8	26.3	15.5	6.65	1.10	
40	128	125	122	118	114	109	103	94.9	86.6	77.6	68.0	57.8	47.2	36.3	25.6	15.5	6.88	1.10	
50	118	116	112	109	104	99.8	94.7	88.2	80.4	72.0	63.1	53.7	43.9	34.0	24.1	14.9	6.93	1.10	
60	107	104	101	97.2	93.3	89.1	84.6	79.8	72.8	65.1	56.9	48.4	39.7	30.9	22.3	14.1	6.80	1.10	
70	93.5	90.8	87.8	84.6	81.1	77.5	73.7	69.6	64.5	57.4	50.1	42.6	35.1	27.5	20.2	13.1	6.56	1.10	
80	79.8	77.2	74.5	71.7	68.7	65.7	62.6	59.4	55.9	49.6	43.2	36.9	30.5	24.3	18.1	12.1	6.30	1.10	
90	66.5	64.1	61.7	59.3	56.9	54.5	52.1	49.8	47.4	42.2	37.1	31.9	26.8	21.7	16.5	11.4	6.24	1.10	
100	53.7	51.6	49.7	47.8	46.0	44.2	42.5	40.8	39.0	35.4	31.7	27.9	23.9	19.8	15.4	10.8	6.05	1.10	
110	41.9	40.2	38.6	37.2	35.9	34.8	33.7	32.7	31.3	28.9	26.4	23.6	20.7	17.5	14.0	10.2	5.78	1.10	
120	31.4	30.1	28.9	28.0	27.2	26.5	26.0	25.5	24.4	22.9	21.3	19.5	17.4	15.1	12.3	9.15	5.44	1.10	
130	22.3	21.3	20.7	20.2	19.8	19.6	19.5	19.2	18.5	17.8	16.8	15.7	14.3	12.6	10.5	7.99	5.01	1.10	
140	15.0	14.5	14.2	14.1	14.1	14.1	14.1	13.9	13.7	13.4	12.9	12.3	11.4	10.2	8.70	6.78	4.40	1.10	
150	10.1	9.88	9.85	9.97	10.2	10.1	9.95	9.83	9.77	9.74	9.58	9.26	8.73	7.96	6.85	5.49	3.69	1.10	
160	6.49	6.57	6.90	7.14	7.00	6.89	6.81	6.73	6.68	6.68	6.68	6.56	6.25	5.77	5.02	4.15	2.94	1.10	
170	3.61	4.09	4.52	4.47	4.50	4.38	4.28	4.20	4.13	4.09	4.13	4.08	3.92	3.65	3.25	2.79	2.17	1.10	
180	2.88	2.76	2.65	2.50	2.37	2.29	2.02	1.91	1.80	1.71	1.75	1.73	1.66	1.57	1.49	1.43	1.39	1.10	

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks: