

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	216.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	287.9V x 158.7H
	At 50% of Imax	173.2V x 110.5H
	At 90% of Imax	73.5V x 47.7H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	973.4 lumens per klm.
	To 50% of Imax	678.6 lumens per klm.
	To 90% of Imax	155.3 lumens per klm.

Upward LOR	18.1 %
Downward LOR	81.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Maya-round acrylic-1200mm-RGBW GREEN-110 170-REV1	TYPE: RGBW-Green	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001180
MFR.:	SUR.:	Shielding Angle:

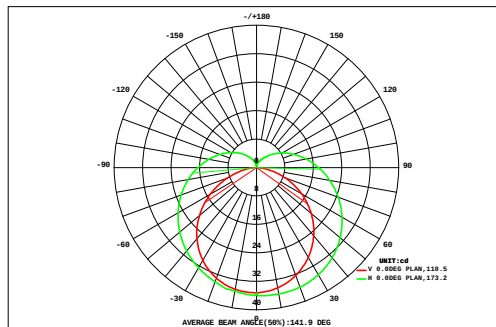

DATA OF LAMP		Eff: 20.38lm/W	
MODEL	MAYA.12.14(30)	Imax(cd)	36.08
NOMINAL POWER(W)	8.19	AVAILABILITY(%)	96.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	161.1
NOMINAL FLUX(lm)	166.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	166.9
TEST VOLTAGE(V)	220	q @50%(H,V)	110,173DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		F t	F a
	0.01	0.04	0.09	0.18	0.27	0.36	0.43	0.50	0.56	0.56	0.51	0.44	0.36	0.28	0.18	0.09	0.04	0.01	4.91	4.89
90	0.01	0.04	0.11	0.20	0.32	0.42	0.52	0.60	0.67	0.67	0.61	0.52	0.43	0.33	0.21	0.11	0.04	0.01	5.81	5.79
80	0.01	0.04	0.12	0.23	0.37	0.49	0.61	0.70	0.77	0.77	0.70	0.61	0.50	0.38	0.24	0.12	0.04	0.01	6.72	6.71
70	0.01	0.05	0.14	0.26	0.41	0.56	0.69	0.79	0.87	0.87	0.80	0.69	0.57	0.42	0.27	0.14	0.05	0.01	7.58	7.57
60	0.01	0.05	0.15	0.29	0.45	0.62	0.76	0.87	0.95	0.95	0.88	0.77	0.63	0.46	0.29	0.15	0.05	0.01	8.33	8.32
50	0.01	0.05	0.16	0.31	0.49	0.66	0.82	0.94	1.01	1.01	0.94	0.82	0.67	0.49	0.31	0.16	0.05	0.01	8.91	8.90
40	0.01	0.06	0.17	0.33	0.51	0.70	0.86	0.98	1.05	1.05	0.98	0.86	0.69	0.51	0.32	0.16	0.05	0.01	9.29	9.28
30	0.01	0.05	0.17	0.33	0.52	0.71	0.88	1.00	1.08	1.07	1.00	0.87	0.70	0.51	0.32	0.16	0.05	0.01	9.45	9.44
20	0.01	0.05	0.16	0.32	0.52	0.71	0.88	1.01	1.07	1.07	0.99	0.86	0.69	0.50	0.31	0.16	0.05	0.01	9.37	9.36
10	0.01	0.05	0.16	0.32	0.51	0.70	0.87	0.99	1.05	1.06	0.98	0.85	0.68	0.49	0.31	0.16	0.05	0.01	9.26	9.25
0	0.01	0.05	0.16	0.32	0.51	0.69	0.84	0.96	1.03	1.04	0.97	0.84	0.68	0.50	0.32	0.16	0.05	0.01	9.14	9.13
-10	0.01	0.05	0.16	0.31	0.49	0.66	0.80	0.92	0.99	1.00	0.93	0.81	0.66	0.48	0.31	0.16	0.05	0.01	8.81	8.80
-20	0.01	0.05	0.15	0.30	0.46	0.62	0.76	0.87	0.94	0.94	0.88	0.77	0.62	0.46	0.30	0.15	0.05	0.01	8.34	8.32
-30	0.01	0.05	0.14	0.28	0.43	0.57	0.70	0.80	0.87	0.88	0.81	0.71	0.58	0.43	0.28	0.14	0.05	0.01	7.73	7.72
-40	0.01	0.05	0.13	0.25	0.39	0.52	0.63	0.73	0.80	0.80	0.73	0.64	0.53	0.39	0.25	0.13	0.05	0.01	7.01	7.00
-50	0.01	0.04	0.11	0.22	0.34	0.46	0.56	0.65	0.71	0.71	0.65	0.57	0.46	0.35	0.22	0.11	0.04	0.01	6.22	6.21
-60	0.01	0.04	0.10	0.19	0.30	0.39	0.48	0.56	0.62	0.62	0.56	0.49	0.40	0.30	0.19	0.10	0.03	0.00	5.37	5.35
-70	0.01	0.03	0.08	0.15	0.24	0.32	0.40	0.47	0.52	0.53	0.47	0.40	0.32	0.24	0.15	0.08	0.03	0.00	4.42	4.39
-80	0.01	0.03	0.08	0.15	0.24	0.32	0.40	0.47	0.52	0.53	0.47	0.40	0.32	0.24	0.15	0.08	0.03	0.00	4.42	4.39
-90	0.01	0.03	0.08	0.15	0.24	0.32	0.40	0.47	0.52	0.53	0.47	0.40	0.32	0.24	0.15	0.08	0.03	0.00	4.42	4.39
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
F t	0.12	0.86	2.47	4.80	7.52	10.2	12.5	14.3	15.6	15.6	14.4	12.5	10.2	7.50	4.77	2.45	0.84	0.10	137	---
F a	0.01	0.84	2.47	4.80	7.52	10.2	12.5	14.3	15.6	15.6	14.4	12.5	10.2	7.50	4.77	2.45	0.81	0.00	---	136

one-half-peak spread: U:72.0,D:79.9 , L:54.7,R:54.5


NEMA Beam Type: Type 7

H(b) Range: -90 - 90DEG
 H(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Maya-Round Acrylic-1200mm-RGBW GREEN-110 170-Rev1	TYPE: RGBW-Green	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001180
MFR.:	SUR.:	Shielding Angle:

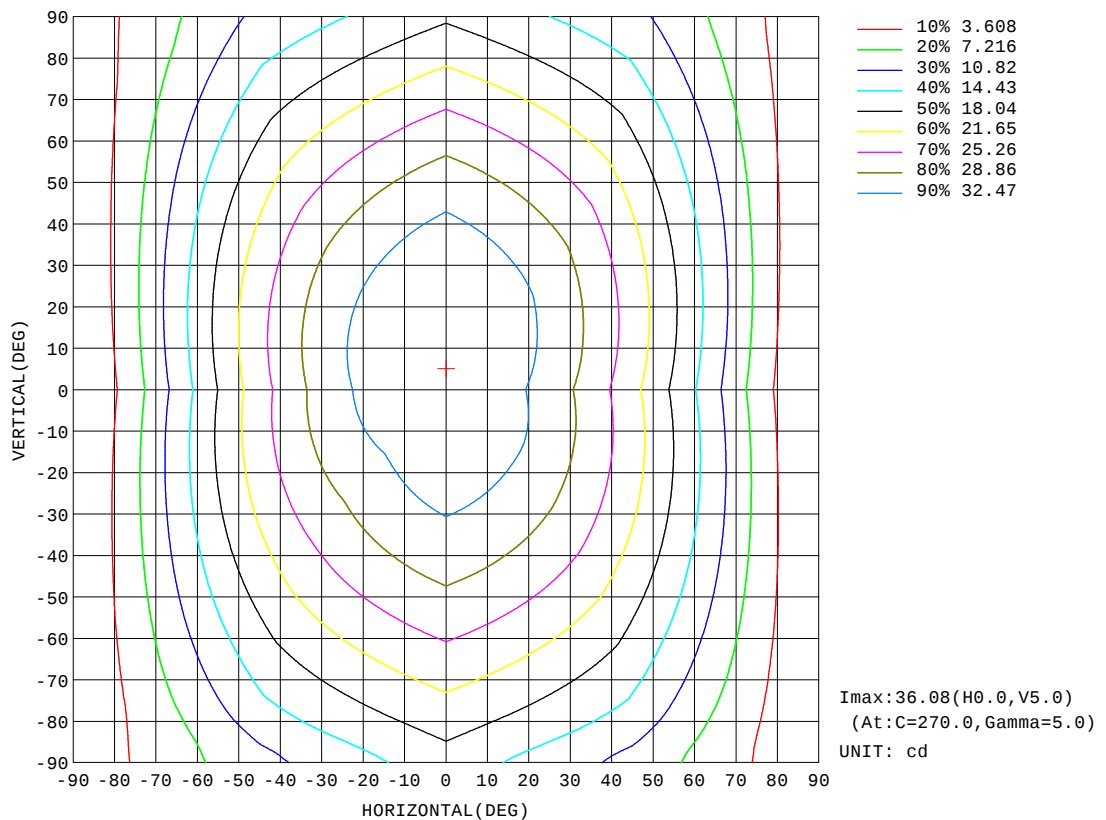


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Maya-round acrylic-1200mm-RGBW GREEN-110 170-REV1	TYPE: RGBW-Green	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001180
MFR.:	SUR.:	Shielding Angle:

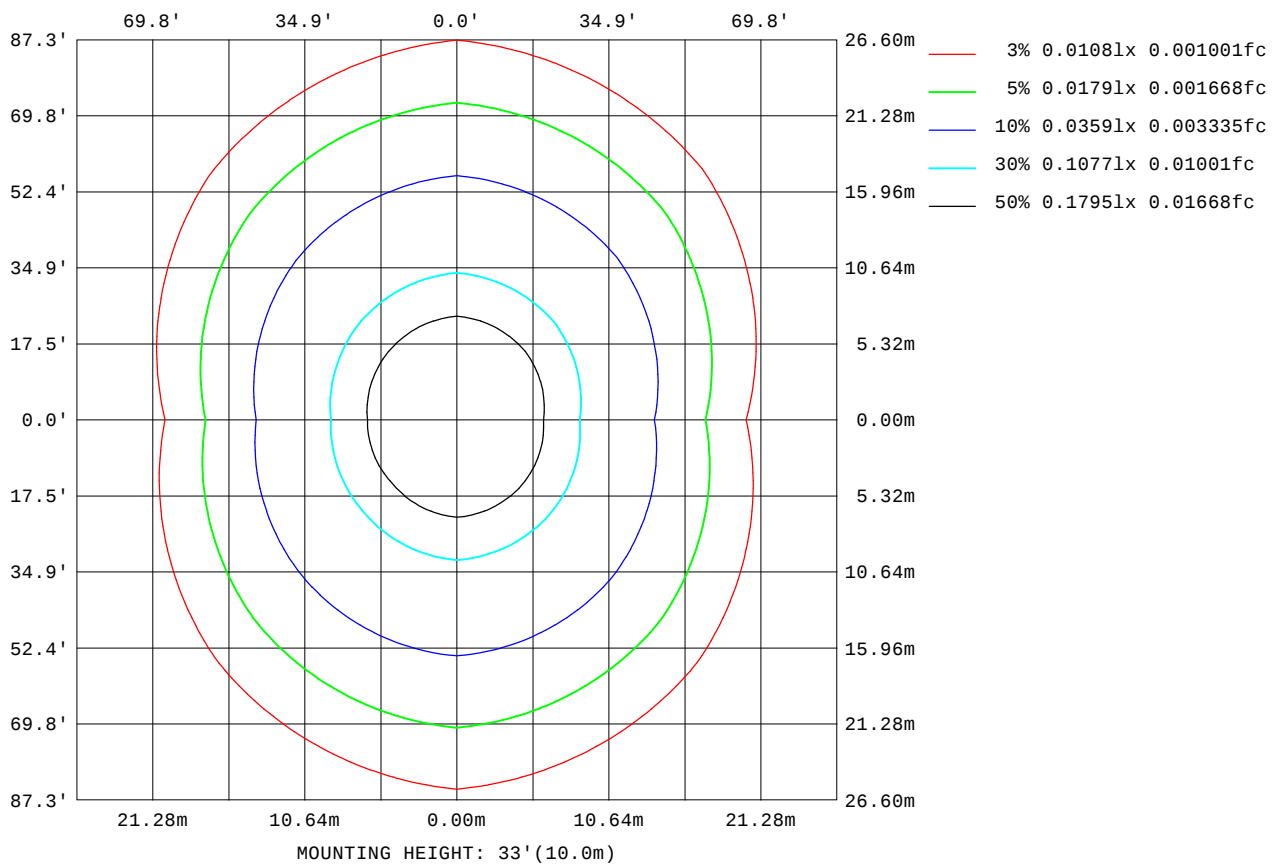

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

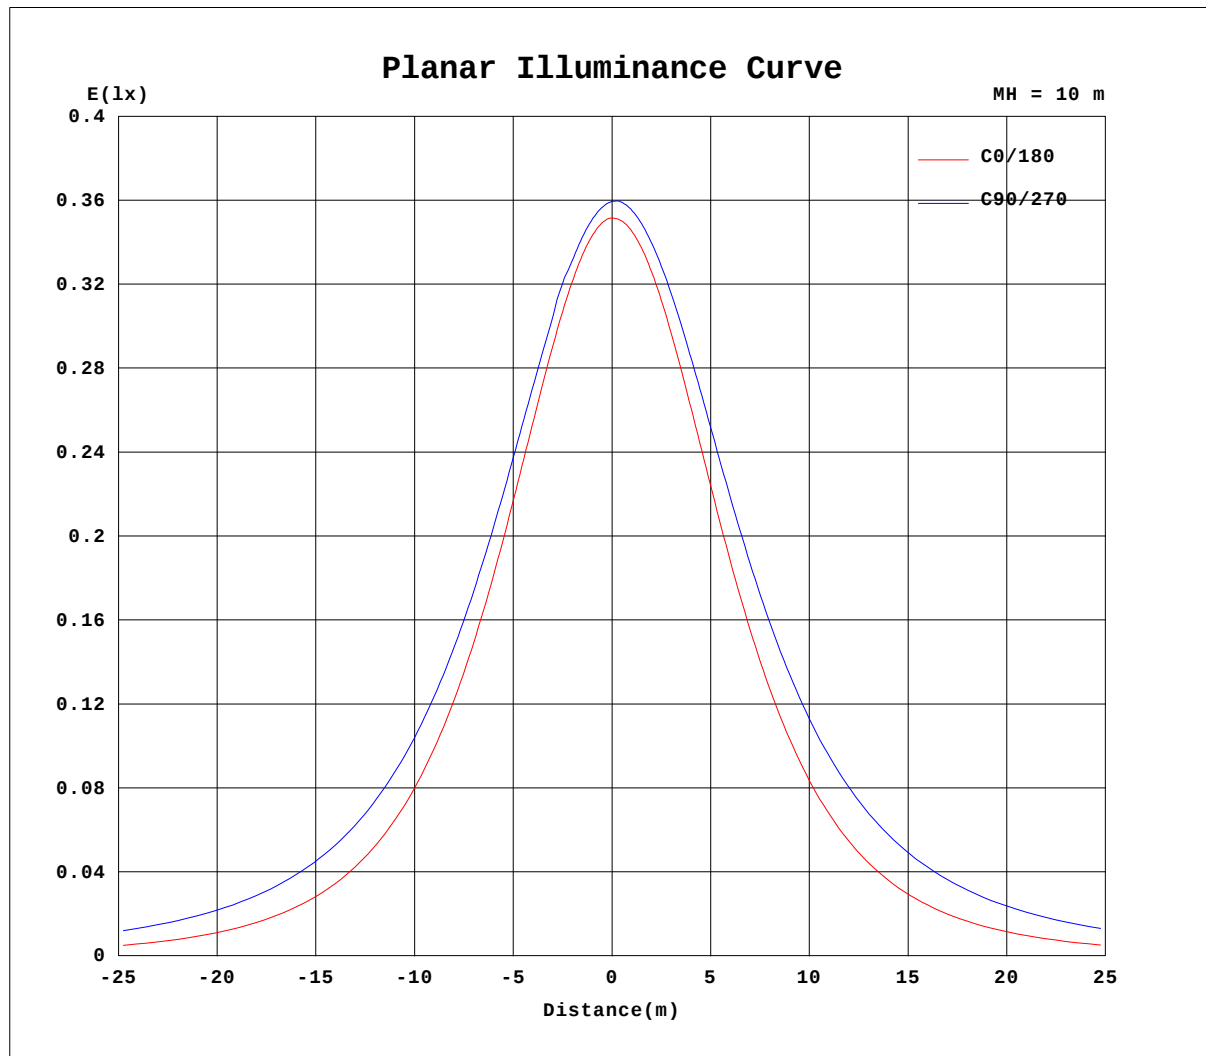


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Maya-round Acrylic-1200mm-RGBW GREEN-110 170-REV1	TYPE: RGBW-Green	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001180
MFR.:	SUR.:	Shielding Angle:

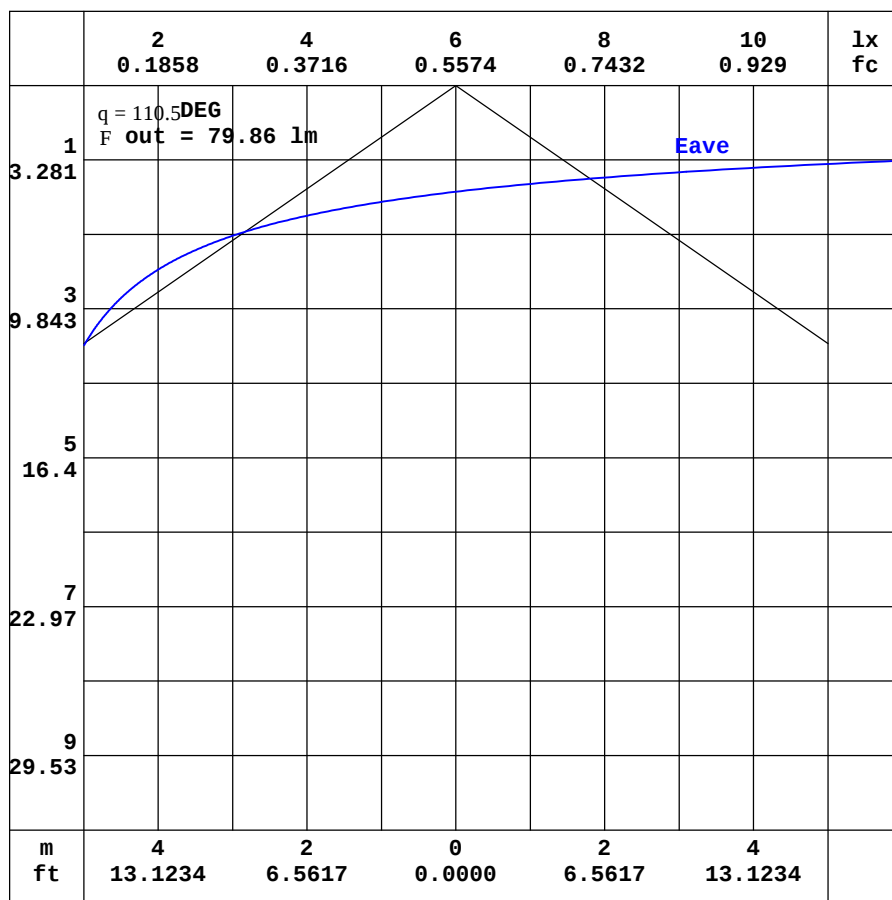

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90 DEG
H_(b) Interval: 0.5 DEG
Test Speed: LOW
Temperature: 25.3 DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180 DEG
V(B) Interval: 0.5 DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-round Acrylic-1200mm-RGBW GREEN-110 170-rev1	TYPE: RGBW-Green	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001180
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.93	0.91	0.85	0.84	0.82	0.81	0.78	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.72	0.72	0.71	0.72
-170	0.93	1.07	1.11	1.19	1.24	1.29	1.29	1.27	1.25	1.17	1.09	0.99	0.94	0.91	0.63	0.63	0.60	0.60	0.59
-160	0.93	1.21	1.38	1.54	1.67	1.78	1.84	1.86	1.87	1.75	1.58	1.42	1.28	1.20	1.13	1.04	1.21	1.61	2.04
-150	0.93	1.36	1.64	1.89	2.11	2.30	2.42	2.50	2.54	2.57	2.40	2.18	2.04	1.84	1.99	2.18	2.41	2.65	2.99
-140	0.93	1.50	1.89	2.26	2.54	2.82	3.04	3.21	3.33	3.43	3.50	3.50	3.37	3.34	3.40	3.56	3.78	4.09	4.48
-130	0.93	1.62	2.15	2.61	3.01	3.35	3.68	3.98	4.22	4.43	4.60	4.76	4.91	5.07	5.26	5.46	5.70	6.02	6.42
-120	0.93	1.73	2.41	2.96	3.49	3.94	4.35	4.74	5.14	5.50	5.83	6.12	6.40	6.69	6.99	7.32	7.68	8.09	8.55
-110	0.93	1.84	2.61	3.34	3.98	4.58	5.15	5.67	6.16	6.62	7.06	7.52	7.98	8.44	8.81	9.39	9.89	10.4	11.0
-100	0.93	1.89	2.80	3.64	4.46	5.25	6.01	6.73	7.44	8.14	8.71	9.29	9.87	10.5	11.1	11.7	12.3	13.0	13.6
-90	0.93	1.91	2.89	3.88	4.86	5.84	6.82	7.80	8.79	9.77	10.5	11.3	12.0	12.8	13.5	14.3	15.0	15.8	16.5
-80	0.93	1.91	2.95	4.08	5.38	6.75	8.16	9.63	11.1	12.6	13.5	14.4	15.2	16.0	16.8	17.5	18.2	18.9	19.5
-70	0.93	1.88	3.11	4.68	6.39	8.16	9.92	11.7	13.3	14.9	16.2	17.1	18.1	18.9	19.8	20.5	21.3	21.9	22.6
-60	0.93	1.83	3.40	5.30	7.34	9.42	11.5	13.4	15.3	17.0	18.5	19.6	20.7	21.7	22.6	23.5	24.2	24.9	25.5
-50	0.93	1.84	3.66	5.84	8.18	10.5	12.8	15.0	17.0	18.9	20.5	21.9	23.1	24.2	25.3	26.1	26.9	27.6	28.2
-40	0.93	1.85	3.83	6.25	8.87	11.5	14.0	16.4	18.6	20.6	22.4	23.9	25.3	26.5	27.6	28.5	29.3	30.0	30.6
-30	0.93	1.82	3.90	6.50	9.31	12.2	14.9	17.5	19.9	22.1	24.0	25.7	27.1	28.3	29.5	30.5	31.3	32.0	32.6
-20	0.93	1.74	3.84	6.55	9.49	12.5	15.5	18.3	20.9	23.2	25.3	27.1	28.7	29.9	30.9	31.9	32.8	33.6	34.2
-10	0.93	1.61	3.64	6.36	9.35	12.5	15.6	18.5	21.2	23.8	26.1	28.1	29.8	31.2	32.3	33.2	33.6	34.5	35.3
0	0.93	1.43	3.29	5.91	8.84	12.0	15.1	18.1	21.0	23.7	26.1	28.3	30.2	31.8	33.1	34.1	34.7	35.1	35.2
10	0.93	1.64	3.68	6.42	9.45	12.6	15.8	18.8	21.6	24.3	26.7	28.8	30.6	32.2	33.4	34.4	35.1	35.6	36.1
20	0.93	1.80	3.93	6.68	9.69	12.8	15.9	18.8	21.6	24.1	26.4	28.4	30.2	31.7	32.9	33.9	34.7	35.3	35.8
30	0.93	1.91	4.04	6.69	9.58	12.6	15.5	18.3	20.9	23.3	25.5	27.4	29.1	30.6	31.8	32.7	33.6	34.2	34.8
40	0.93	1.98	4.01	6.49	9.21	11.9	14.7	17.3	19.7	21.9	24.0	25.9	27.4	28.7	29.9	30.9	31.8	32.5	33.1
50	0.93	2.00	3.89	6.13	8.57	11.1	13.5	15.9	18.1	20.2	22.1	23.7	25.1	26.3	27.4	28.4	29.3	30.1	30.7
60	0.93	2.02	3.72	5.67	7.78	9.96	12.1	14.2	16.3	18.2	19.9	21.2	22.4	23.5	24.5	25.5	26.3	27.1	27.8
70	0.93	2.09	3.50	5.18	6.95	8.80	10.6	12.5	14.3	16.0	17.3	18.4	19.4	20.4	21.3	22.2	23.0	23.7	24.4
80	0.93	2.13	3.39	4.72	6.18	7.70	9.23	10.8	12.3	13.9	14.8	15.6	16.5	17.3	18.0	18.8	19.5	20.2	20.9
90	0.93	2.13	3.32	4.52	5.72	6.92	8.12	9.31	10.5	11.7	12.4	13.0	13.6	14.3	14.9	15.6	16.2	16.8	17.5
100	0.93	2.10	3.20	4.22	5.21	6.16	7.07	7.95	8.79	9.62	10.1	10.6	11.0	11.5	12.0	12.5	13.0	13.6	14.2
110	0.93	2.03	2.97	3.84	4.62	5.34	6.00	6.61	7.18	7.72	8.07	8.36	8.66	8.98	9.33	9.71	10.1	10.6	11.1
120	0.93	1.90	2.72	3.40	4.02	4.54	5.00	5.39	5.73	6.01	6.22	6.35	6.43	6.62	6.85	7.15	7.47	7.85	8.30
130	0.93	1.76	2.42	2.97	3.42	3.79	4.07	4.27	4.39	4.40	4.45	4.42	4.54	4.72	4.87	5.06	5.28	5.56	5.90
140	0.93	1.62	2.10	2.53	2.86	3.08	3.22	3.24	3.23	3.07	3.23	3.24	3.26	3.29	3.34	3.41	3.52	3.69	3.91
150	0.93	1.45	1.80	2.10	2.31	2.44	2.45	2.43	2.35	2.37	2.34	2.32	2.30	2.27	2.22	2.23	2.29	2.40	2.59
160	0.93	1.28	1.48	1.68	1.79	1.85	1.82	1.71	1.75	1.72	1.69	1.65	1.57	1.51	1.48	1.46	1.46	1.50	1.60
170	0.93	1.10	1.17	1.26	1.30	1.31	1.27	1.22	1.21	1.19	1.17	1.13	1.09	1.06	1.03	0.99	0.84	0.82	0.79
180	0.93	0.91	0.85	0.84	0.82	0.81	0.78	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.73	0.72	0.72	0.71	0.72

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-round Acrylic-1200mm-RGBW GREEN-110 170-rev1	TYPE: RGBW-Green	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001180
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.64	0.63	0.58	0.55	0.51	0.49	0.43	0.42	0.37	0.35	0.35	0.35	0.34	0.30	0.28	0.28	0.28	0.22
-170	0.60	0.60	0.58	0.55	1.00	1.02	0.98	0.97	0.95	0.93	0.94	0.91	0.87	0.77	0.66	0.56	0.44	0.22
-160	1.61	1.22	0.85	1.73	1.68	1.64	1.60	1.61	1.58	1.55	1.54	1.49	1.41	1.24	1.04	0.85	0.60	0.22
-150	2.80	2.69	2.62	2.53	2.44	2.39	2.42	2.36	2.30	2.31	2.20	2.13	1.94	1.70	1.42	1.12	0.75	0.22
-140	4.17	3.93	3.77	3.68	3.59	3.48	3.37	3.32	3.24	3.10	3.00	2.78	2.49	2.15	1.80	1.39	0.89	0.22
-130	6.02	5.68	5.39	5.14	4.98	4.84	4.62	4.46	4.35	4.10	3.80	3.45	3.04	2.62	2.17	1.65	1.01	0.22
-120	8.07	7.65	7.28	6.96	6.68	6.40	6.13	5.84	5.47	5.05	4.59	4.09	3.63	3.12	2.54	1.88	1.09	0.22
-110	10.4	9.89	9.39	8.91	8.44	7.99	7.52	7.05	6.55	6.02	5.48	4.90	4.28	3.61	2.88	2.08	1.17	0.22
-100	13.0	12.3	11.7	11.0	10.4	9.83	9.24	8.66	8.07	7.32	6.54	5.74	4.92	4.06	3.15	2.21	1.23	0.22
-90	15.8	15.0	14.2	13.5	12.7	12.0	11.2	10.5	9.72	8.66	7.61	6.55	5.50	4.44	3.39	2.33	1.28	0.22
-80	18.9	18.2	17.6	16.9	16.1	15.4	14.6	13.7	12.8	11.3	9.73	8.20	6.71	5.26	3.85	2.51	1.29	0.22
-70	22.0	21.3	20.6	19.9	19.1	18.2	17.3	16.4	15.2	13.5	11.8	9.99	8.17	6.34	4.53	2.87	1.37	0.22
-60	24.9	24.3	23.6	22.8	21.9	20.9	19.9	18.7	17.2	15.4	13.5	11.5	9.44	7.31	5.21	3.20	1.46	0.22
-50	27.7	27.1	26.3	25.5	24.5	23.4	22.2	20.8	19.1	17.1	15.1	12.9	10.6	8.16	5.74	3.48	1.53	0.22
-40	30.1	29.5	28.8	27.9	26.8	25.7	24.3	22.6	20.7	18.6	16.4	14.0	11.5	8.83	6.16	3.67	1.55	0.22
-30	32.2	31.6	30.8	29.9	28.8	27.4	25.8	24.0	22.0	19.8	17.4	14.8	12.1	9.26	6.41	3.73	1.52	0.22
-20	33.8	33.3	32.4	31.4	30.1	28.7	27.0	25.0	22.9	20.5	17.9	15.2	12.4	9.40	6.45	3.67	1.44	0.22
-10	34.8	34.1	33.3	32.4	30.9	29.3	27.5	25.4	23.1	20.6	18.0	15.2	12.2	9.20	6.23	3.47	1.31	0.22
0	34.9	34.3	33.4	32.3	30.8	29.1	27.2	25.0	22.7	20.1	17.4	14.6	11.6	8.65	5.76	3.12	1.13	0.22
10	35.4	34.8	34.0	32.9	31.6	29.9	28.0	25.9	23.5	21.0	18.2	15.4	12.4	9.31	6.31	3.52	1.34	0.22
20	35.2	34.6	33.8	32.9	31.5	29.9	28.1	26.0	23.7	21.2	18.5	15.6	12.7	9.62	6.59	3.76	1.51	0.22
30	34.2	33.6	32.8	31.8	30.7	29.2	27.4	25.4	23.1	20.7	18.1	15.4	12.5	9.57	6.62	3.87	1.62	0.22
40	32.5	31.8	31.0	30.0	28.9	27.7	26.1	24.1	22.0	19.7	17.3	14.7	12.0	9.21	6.43	3.87	1.68	0.22
50	30.1	29.4	28.6	27.6	26.5	25.4	24.1	22.4	20.4	18.3	16.0	13.6	11.1	8.58	6.07	3.73	1.70	0.22
60	27.1	26.4	25.6	24.7	23.7	22.7	21.5	20.3	18.5	16.5	14.4	12.3	10.0	7.80	5.60	3.52	1.67	0.22
70	23.8	23.1	22.3	21.5	20.6	19.7	18.7	17.7	16.4	14.6	12.7	10.8	8.86	6.94	5.06	3.28	1.61	0.22
80	20.3	19.6	18.9	18.2	17.4	16.7	15.9	15.1	14.2	12.5	10.9	9.32	7.70	6.11	4.54	3.01	1.54	0.22
90	16.9	16.3	15.7	15.0	14.4	13.8	13.2	12.6	12.0	10.7	9.37	8.06	6.76	5.45	4.14	2.84	1.53	0.22
100	13.6	13.1	12.6	12.1	11.6	11.2	10.7	10.3	9.87	8.95	8.00	7.03	6.02	4.96	3.84	2.68	1.48	0.22
110	10.6	10.2	9.77	9.41	9.09	8.79	8.51	8.26	7.90	7.28	6.64	5.94	5.19	4.38	3.49	2.51	1.39	0.22
120	7.91	7.57	7.29	7.05	6.85	6.69	6.55	6.43	6.14	5.77	5.36	4.89	4.36	3.76	3.06	2.26	1.29	0.22
130	5.60	5.37	5.20	5.06	4.98	4.92	4.89	4.81	4.64	4.45	4.21	3.92	3.57	3.13	2.60	1.96	1.19	0.22
140	3.73	3.61	3.55	3.52	3.52	3.54	3.53	3.47	3.40	3.33	3.22	3.05	2.82	2.52	2.14	1.65	1.04	0.22
150	2.47	2.43	2.43	2.46	2.52	2.50	2.46	2.43	2.42	2.40	2.36	2.28	2.14	1.94	1.67	1.32	0.86	0.22
160	1.57	1.60	1.69	1.75	1.71	1.68	1.66	1.64	1.62	1.62	1.61	1.58	1.52	1.38	1.20	0.97	0.67	0.22
170	0.85	0.98	1.08	1.07	1.07	1.03	1.01	1.00	0.97	0.96	0.96	0.95	0.92	0.84	0.74	0.63	0.48	0.22
180	0.64	0.63	0.58	0.55	0.51	0.49	0.43	0.42	0.37	0.35	0.35	0.35	0.34	0.30	0.28	0.28	0.28	0.22

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-06-26

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: