

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		217.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	286.9V x 158.3H
	At 50% of Imax	173.3V x 110.3H
	At 90% of Imax	74.2V x 47.6H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	974.7 lumens per klm.
	To 50% of Imax	679.9 lumens per klm.
	To 90% of Imax	154.5 lumens per klm.
Upward LOR		17.9 %
Downward LOR		82.1 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Maya-round acrylic-1200mm-RGBW RED-110 170-rev1	TYPE: RGBW-Red	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001179
MFR.:	SUR.:	Shielding Angle:

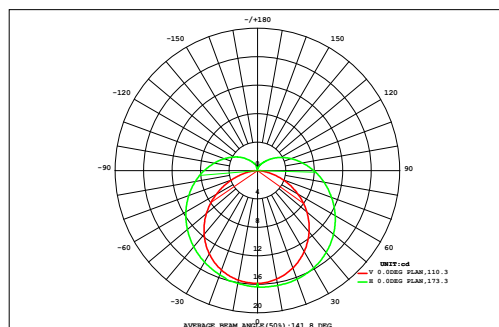

DATA OF LAMP		Eff: 9.18lm/W	
MODEL	MAYA.12.14 (30)	Imax (cd)	16.39
NOMINAL POWER (W)	8.22	AVAILABILITY (%)	96.6
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	72.92
NOMINAL FLUX (lm)	75.5	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	75.50
TEST VOLTAGE (V)	220	q @50% (H,V)	110,173DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		F t	F a
	0.00	0.02	0.04	0.08	0.12	0.16	0.20	0.23	0.25	0.26	0.23	0.20	0.16	0.13	0.08	0.04	0.02	0.00	2.23	2.22
90	0.00	0.02	0.05	0.09	0.15	0.19	0.24	0.27	0.30	0.30	0.28	0.24	0.20	0.15	0.09	0.05	0.02	0.00	2.63	2.63
80	0.00	0.02	0.05	0.11	0.17	0.22	0.27	0.32	0.35	0.35	0.32	0.28	0.23	0.17	0.11	0.06	0.02	0.00	3.05	3.04
70	0.00	0.02	0.06	0.12	0.19	0.25	0.31	0.36	0.39	0.39	0.36	0.32	0.26	0.19	0.12	0.06	0.02	0.00	3.44	3.44
60	0.00	0.02	0.07	0.13	0.21	0.28	0.34	0.40	0.43	0.43	0.40	0.35	0.29	0.21	0.13	0.07	0.02	0.00	3.78	3.78
50	0.00	0.02	0.07	0.14	0.22	0.30	0.37	0.42	0.46	0.46	0.43	0.38	0.30	0.22	0.14	0.07	0.02	0.00	4.05	4.04
40	0.00	0.02	0.07	0.15	0.23	0.32	0.39	0.44	0.48	0.48	0.45	0.39	0.31	0.23	0.15	0.07	0.02	0.00	4.22	4.21
30	0.00	0.02	0.07	0.15	0.24	0.32	0.40	0.46	0.49	0.49	0.46	0.40	0.32	0.23	0.15	0.07	0.02	0.00	4.28	4.28
20	0.00	0.02	0.07	0.15	0.23	0.32	0.40	0.45	0.49	0.48	0.45	0.39	0.31	0.23	0.14	0.07	0.02	0.00	4.23	4.23
10	0.00	0.02	0.07	0.14	0.23	0.32	0.39	0.45	0.48	0.48	0.44	0.39	0.31	0.22	0.14	0.07	0.02	0.00	4.18	4.18
0	0.00	0.02	0.07	0.15	0.23	0.31	0.38	0.44	0.47	0.47	0.44	0.38	0.31	0.22	0.14	0.07	0.02	0.00	4.14	4.13
-10	0.00	0.02	0.07	0.14	0.22	0.30	0.37	0.42	0.45	0.46	0.42	0.37	0.30	0.22	0.14	0.07	0.02	0.00	4.00	3.99
-20	0.00	0.02	0.07	0.13	0.21	0.28	0.34	0.40	0.43	0.43	0.40	0.35	0.28	0.21	0.13	0.07	0.02	0.00	3.79	3.78
-30	0.00	0.02	0.06	0.12	0.19	0.26	0.32	0.37	0.40	0.40	0.37	0.32	0.26	0.19	0.12	0.06	0.02	0.00	3.51	3.51
-40	0.00	0.02	0.06	0.11	0.18	0.24	0.29	0.33	0.36	0.36	0.33	0.29	0.24	0.18	0.11	0.06	0.02	0.00	3.19	3.18
-50	0.00	0.02	0.05	0.10	0.16	0.21	0.26	0.29	0.32	0.32	0.30	0.26	0.21	0.16	0.10	0.05	0.02	0.00	2.83	2.82
-60	0.00	0.02	0.04	0.08	0.13	0.18	0.22	0.25	0.28	0.28	0.26	0.22	0.18	0.14	0.09	0.04	0.02	0.00	2.44	2.43
-70	0.00	0.01	0.04	0.07	0.11	0.14	0.18	0.21	0.24	0.24	0.21	0.18	0.14	0.11	0.07	0.04	0.01	0.00	2.00	1.99
-80	0.00	0.01	0.04	0.07	0.11	0.14	0.18	0.21	0.24	0.24	0.21	0.18	0.14	0.11	0.07	0.04	0.01	0.00	2.00	1.99
-90	0.00	0.01	0.04	0.07	0.11	0.14	0.18	0.21	0.24	0.24	0.21	0.18	0.14	0.11	0.07	0.04	0.01	0.00	2.00	1.99
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
F t	0.05	0.38	1.11	2.17	3.40	4.61	5.67	6.51	7.09	7.10	6.53	5.69	4.61	3.40	2.16	1.10	0.38	0.04	62	---
F a	0.00	0.37	1.11	2.17	3.40	4.61	5.67	6.51	7.09	7.10	6.53	5.69	4.61	3.40	2.16	1.10	0.36	0.00	---	62

one-half-peak spread: U:71.7,D:79.7 , L:55.5,R:52.9


NEMA Beam Type: Type 7

H_b Range: -90 - 90DEG
 H_b Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Maya-round acrylic-1200mm-RGBW RED-110 170-R0V1	TYPE: RGBW-Red	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001179
MFR.:	SUR.:	Shielding Angle:

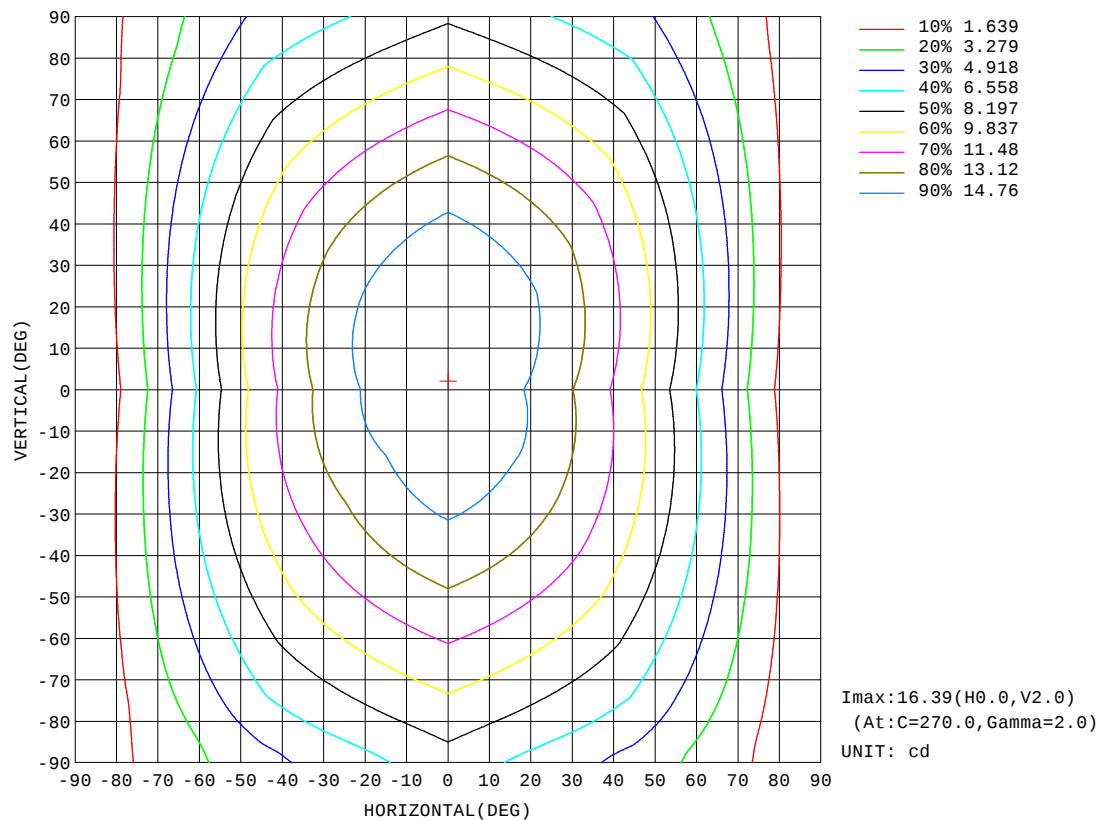


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Maya-round Acrylic-1200mm-RGBW RED-110 170-Rev1	TYPE: RGBW 3000K-Red	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001179
MFR.:	SUR.:	Shielding Angle:

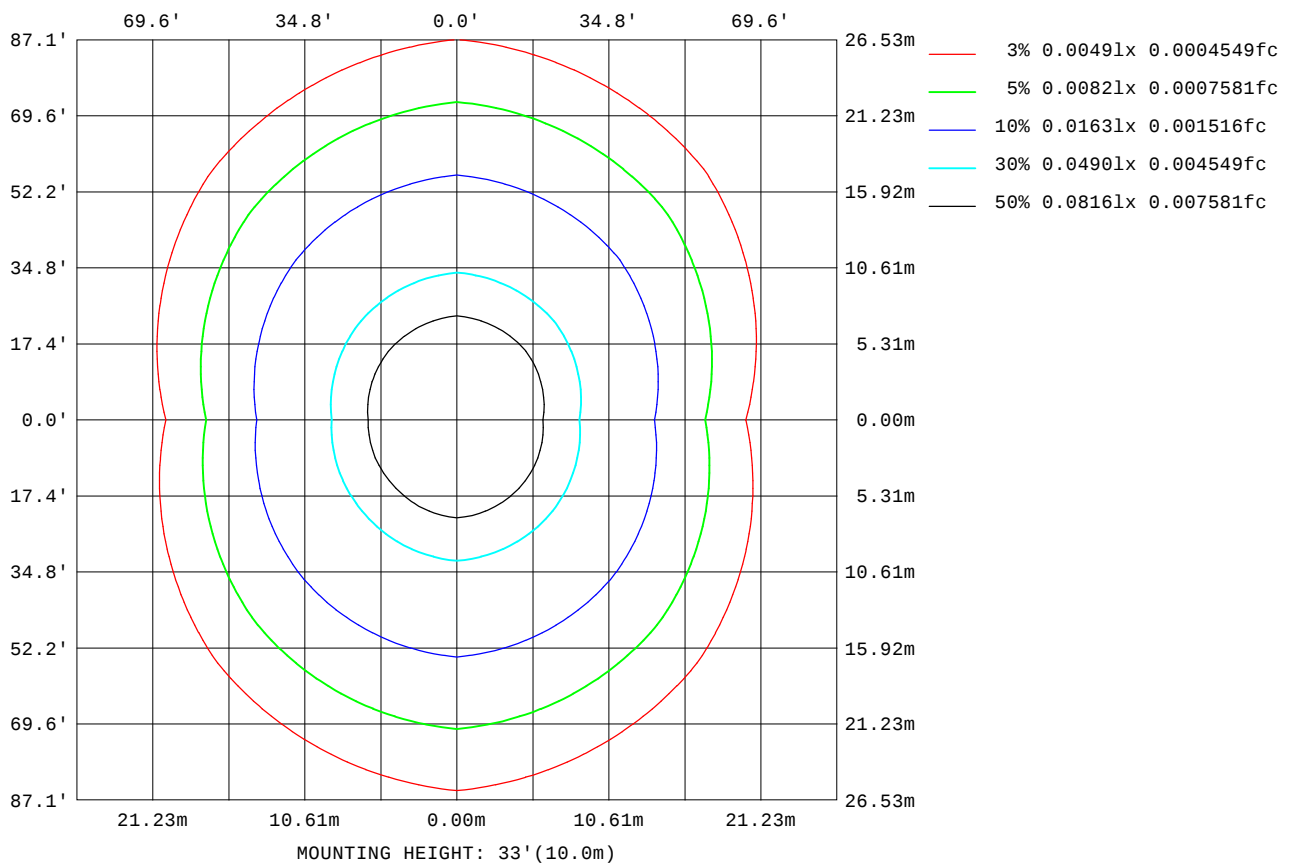

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

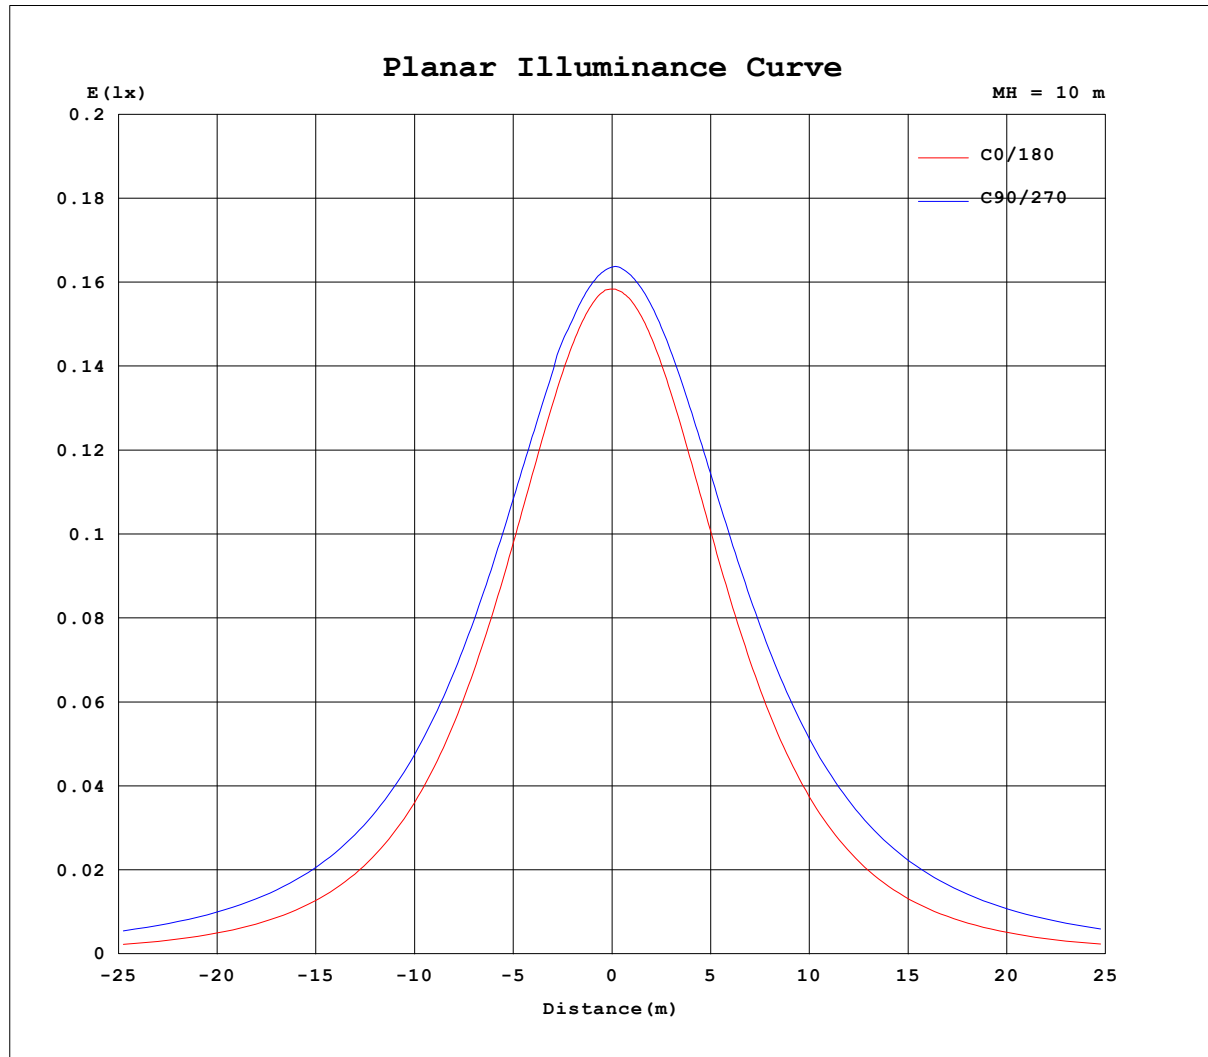


H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Maya-round Acrylic-1200mm-RGBW RED-110 170-R0V1	TYPE: RGBW-Red	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001179
MFR.:	SUR.:	Shielding Angle:

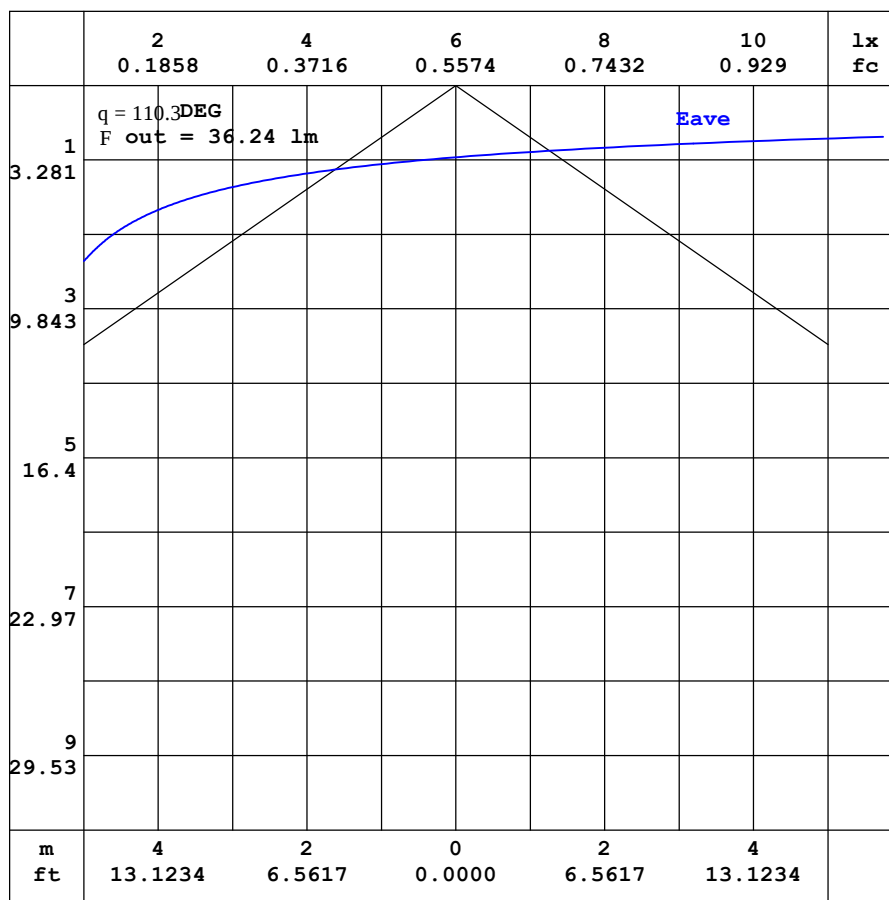

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90 DEG
H_(b) Interval: 0.5 DEG
Test Speed: LOW
Temperature: 25.3 DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180 DEG
V(B) Interval: 0.5 DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-round acrylic-1200mm-RGBW RED-110 170-R0V1	TYPE: RGBW-Red	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001179
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.37	0.35	0.33	0.32	0.31	0.31	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.27	0.28
-170	0.37	0.42	0.45	0.49	0.50	0.53	0.53	0.53	0.52	0.48	0.44	0.40	0.38	0.36	0.24	0.24	0.23	0.24	0.23
-160	0.37	0.49	0.58	0.65	0.70	0.75	0.77	0.79	0.80	0.74	0.66	0.60	0.53	0.50	0.48	0.43	0.52	0.70	0.90
-150	0.37	0.56	0.69	0.81	0.90	0.99	1.05	1.08	1.10	1.12	1.04	0.95	0.87	0.78	0.86	0.95	1.06	1.17	1.33
-140	0.37	0.62	0.81	0.98	1.10	1.23	1.33	1.41	1.47	1.51	1.54	1.54	1.48	1.47	1.50	1.58	1.68	1.83	2.01
-130	0.37	0.68	0.93	1.14	1.32	1.47	1.63	1.76	1.87	1.97	2.05	2.12	2.19	2.26	2.35	2.44	2.56	2.71	2.89
-120	0.37	0.73	1.04	1.30	1.54	1.75	1.93	2.11	2.30	2.46	2.62	2.74	2.87	3.01	3.15	3.29	3.46	3.65	3.86
-110	0.37	0.77	1.14	1.46	1.76	2.04	2.31	2.54	2.76	2.97	3.18	3.39	3.60	3.81	4.03	4.24	4.47	4.71	4.97
-100	0.37	0.81	1.22	1.61	1.98	2.34	2.69	3.03	3.35	3.67	3.93	4.20	4.47	4.74	5.01	5.30	5.59	5.88	6.19
-90	0.37	0.82	1.27	1.72	2.17	2.62	3.07	3.52	3.97	4.42	4.76	5.11	5.45	5.79	6.14	6.48	6.83	7.17	7.52
-80	0.37	0.83	1.30	1.82	2.40	3.03	3.67	4.35	5.02	5.69	6.13	6.53	6.91	7.27	7.63	7.96	8.29	8.60	8.90
-70	0.37	0.82	1.36	2.07	2.86	3.67	4.47	5.27	6.04	6.78	7.34	7.79	8.22	8.62	9.01	9.37	9.70	10.0	10.3
-60	0.37	0.80	1.49	2.36	3.29	4.23	5.17	6.07	6.91	7.71	8.40	8.93	9.43	9.89	10.3	10.7	11.0	11.4	11.6
-50	0.37	0.78	1.61	2.60	3.66	4.74	5.80	6.79	7.72	8.57	9.33	9.98	10.5	11.1	11.5	11.9	12.3	12.6	12.9
-40	0.37	0.78	1.68	2.78	3.97	5.17	6.33	7.42	8.43	9.35	10.2	10.9	11.5	12.1	12.6	13.0	13.4	13.7	14.0
-30	0.37	0.77	1.71	2.88	4.17	5.47	6.73	7.91	9.01	10.0	10.9	11.7	12.3	12.9	13.4	13.9	14.3	14.6	14.9
-20	0.37	0.73	1.68	2.90	4.25	5.62	6.95	8.22	9.40	10.5	11.4	12.3	13.0	13.6	14.1	14.5	15.0	15.3	15.6
-10	0.37	0.67	1.58	2.80	4.18	5.59	6.98	8.31	9.56	10.7	11.7	12.7	13.4	14.1	14.7	15.1	15.3	15.7	16.1
0	0.37	0.58	1.42	2.59	3.94	5.35	6.74	8.11	9.41	10.6	11.7	12.7	13.5	14.3	14.9	15.3	15.6	15.8	15.8
10	0.37	0.68	1.60	2.83	4.22	5.65	7.07	8.43	9.72	10.9	12.0	13.0	13.8	14.5	15.1	15.6	15.9	16.2	16.4
20	0.37	0.76	1.72	2.96	4.34	5.74	7.13	8.46	9.71	10.9	11.9	12.8	13.7	14.4	14.9	15.4	15.7	16.0	16.2
30	0.37	0.81	1.77	2.97	4.30	5.64	6.97	8.23	9.41	10.5	11.5	12.4	13.2	13.9	14.4	14.9	15.2	15.5	15.8
40	0.37	0.84	1.76	2.89	4.12	5.38	6.61	7.78	8.89	9.92	10.9	11.7	12.4	13.0	13.6	14.0	14.4	14.7	15.0
50	0.37	0.85	1.71	2.73	3.84	4.97	6.09	7.17	8.18	9.14	10.0	10.8	11.4	11.9	12.5	12.9	13.3	13.6	13.9
60	0.37	0.88	1.63	2.53	3.49	4.48	5.47	6.44	7.36	8.23	9.02	9.60	10.2	10.7	11.1	11.6	11.9	12.3	12.6
70	0.37	0.91	1.54	2.30	3.12	3.96	4.80	5.64	6.47	7.27	7.87	8.35	8.82	9.26	9.67	10.1	10.4	10.8	11.1
80	0.37	0.93	1.51	2.11	2.77	3.46	4.16	4.87	5.58	6.28	6.70	7.08	7.46	7.83	8.18	8.53	8.86	9.18	9.49
90	0.37	0.92	1.47	2.02	2.57	3.11	3.66	4.21	4.76	5.31	5.60	5.89	6.18	6.47	6.76	7.05	7.35	7.64	7.93
100	0.37	0.90	1.40	1.87	2.33	2.77	3.18	3.59	3.98	4.36	4.58	4.78	4.99	5.20	5.43	5.66	5.90	6.15	6.42
110	0.37	0.86	1.30	1.70	2.06	2.39	2.70	2.98	3.25	3.49	3.66	3.79	3.92	4.07	4.22	4.39	4.58	4.78	5.01
120	0.37	0.81	1.18	1.50	1.79	2.03	2.25	2.43	2.58	2.72	2.83	2.88	2.91	2.99	3.10	3.23	3.37	3.54	3.73
130	0.37	0.75	1.05	1.31	1.52	1.68	1.82	1.92	1.99	1.98	2.03	2.00	2.03	2.13	2.20	2.27	2.37	2.50	2.65
140	0.37	0.68	0.91	1.11	1.25	1.36	1.43	1.44	1.45	1.36	1.45	1.45	1.47	1.48	1.50	1.53	1.58	1.65	1.75
150	0.37	0.60	0.77	0.91	1.00	1.06	1.07	1.07	1.02	1.05	1.04	1.03	1.03	1.01	0.99	0.99	1.01	1.06	1.14
160	0.37	0.52	0.62	0.72	0.76	0.79	0.77	0.72	0.76	0.74	0.73	0.72	0.69	0.66	0.65	0.64	0.63	0.65	0.69
170	0.37	0.44	0.48	0.52	0.53	0.54	0.52	0.51	0.50	0.50	0.49	0.47	0.45	0.44	0.43	0.42	0.34	0.33	0.30
180	0.37	0.35	0.33	0.32	0.31	0.31	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.27	0.28

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-06-26

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-round acrylic-1200mm-RGBW RED-110 170-REV1	TYPE: RGBW-Red	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 1200MM	SERIAL No.: IES001179
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.23	0.21	0.20	0.20	0.18	0.16	0.13	0.12	0.11	0.11	0.11	0.09	0.09	0.09	0.07	0.07	0.06	0.06	
-170	0.24	0.24	0.22	0.21	0.40	0.40	0.38	0.38	0.38	0.37	0.37	0.35	0.33	0.29	0.24	0.20	0.14	0.06	
-160	0.70	0.52	0.35	0.72	0.71	0.68	0.67	0.68	0.66	0.65	0.65	0.62	0.57	0.50	0.41	0.33	0.21	0.06	
-150	1.24	1.18	1.15	1.10	1.05	1.03	1.04	1.01	0.99	1.00	0.94	0.90	0.82	0.71	0.58	0.45	0.28	0.06	
-140	1.86	1.75	1.67	1.63	1.58	1.52	1.46	1.45	1.41	1.34	1.30	1.20	1.08	0.92	0.76	0.57	0.34	0.06	
-130	2.70	2.55	2.40	2.29	2.21	2.15	2.04	1.96	1.91	1.80	1.66	1.51	1.32	1.13	0.93	0.69	0.40	0.06	
-120	3.64	3.44	3.27	3.12	2.99	2.86	2.73	2.60	2.42	2.23	2.03	1.80	1.59	1.36	1.10	0.79	0.45	0.06	
-110	4.71	4.47	4.24	4.02	3.80	3.59	3.37	3.15	2.92	2.68	2.43	2.17	1.89	1.58	1.25	0.89	0.49	0.06	
-100	5.88	5.57	5.28	4.99	4.71	4.43	4.16	3.89	3.61	3.26	2.91	2.55	2.18	1.79	1.38	0.96	0.52	0.06	
-90	7.17	6.82	6.46	6.11	5.76	5.41	5.06	4.71	4.36	3.88	3.40	2.92	2.45	1.97	1.49	1.01	0.54	0.06	
-80	8.60	8.30	7.98	7.65	7.31	6.95	6.58	6.19	5.75	5.07	4.38	3.68	3.00	2.34	1.71	1.10	0.55	0.06	
-70	10.0	9.72	9.39	9.03	8.66	8.26	7.84	7.39	6.83	6.09	5.30	4.49	3.67	2.84	2.02	1.26	0.59	0.06	
-60	11.4	11.1	10.7	10.4	9.94	9.49	8.99	8.47	7.76	6.95	6.10	5.19	4.24	3.28	2.33	1.41	0.63	0.06	
-50	12.6	12.3	12.0	11.6	11.1	10.6	10.1	9.40	8.60	7.74	6.80	5.80	4.75	3.66	2.57	1.54	0.66	0.06	
-40	13.7	13.4	13.1	12.7	12.2	11.6	11.0	10.2	9.35	8.41	7.39	6.30	5.15	3.96	2.76	1.63	0.67	0.06	
-30	14.7	14.4	14.0	13.6	13.0	12.4	11.7	10.9	9.94	8.93	7.83	6.66	5.42	4.15	2.87	1.66	0.66	0.06	
-20	15.4	15.1	14.7	14.2	13.6	13.0	12.2	11.3	10.3	9.25	8.09	6.84	5.54	4.21	2.87	1.63	0.63	0.06	
-10	15.8	15.5	15.1	14.6	14.0	13.3	12.4	11.5	10.4	9.31	8.10	6.81	5.48	4.12	2.77	1.54	0.56	0.06	
0	15.8	15.5	15.1	14.6	13.9	13.1	12.3	11.3	10.2	9.06	7.83	6.54	5.21	3.86	2.56	1.38	0.48	0.06	
10	16.1	15.9	15.5	15.0	14.3	13.6	12.7	11.7	10.7	9.48	8.24	6.92	5.56	4.18	2.81	1.56	0.58	0.06	
20	16.0	15.8	15.4	15.0	14.4	13.6	12.8	11.8	10.7	9.58	8.35	7.05	5.69	4.32	2.94	1.68	0.66	0.06	
30	15.6	15.3	14.9	14.5	14.0	13.3	12.5	11.5	10.5	9.39	8.20	6.95	5.64	4.30	2.98	1.73	0.71	0.06	
40	14.8	14.5	14.1	13.7	13.2	12.6	11.9	11.0	10.0	8.95	7.83	6.64	5.41	4.15	2.90	1.73	0.73	0.06	
50	13.7	13.4	13.0	12.6	12.1	11.6	11.0	10.2	9.29	8.30	7.26	6.17	5.03	3.88	2.74	1.66	0.74	0.06	
60	12.3	12.0	11.6	11.2	10.8	10.3	9.78	9.22	8.41	7.51	6.56	5.56	4.55	3.52	2.53	1.58	0.73	0.06	
70	10.8	10.5	10.1	9.77	9.37	8.95	8.51	8.05	7.45	6.62	5.77	4.89	4.02	3.14	2.28	1.46	0.70	0.06	
80	9.20	8.90	8.59	8.27	7.93	7.58	7.22	6.85	6.45	5.71	4.97	4.23	3.49	2.76	2.04	1.34	0.67	0.06	
90	7.65	7.38	7.10	6.83	6.55	6.28	6.00	5.73	5.45	4.85	4.26	3.66	3.06	2.46	1.86	1.26	0.66	0.06	
100	6.17	5.93	5.70	5.49	5.28	5.08	4.88	4.69	4.49	4.06	3.62	3.17	2.71	2.23	1.72	1.19	0.64	0.06	
110	4.79	4.60	4.42	4.26	4.12	3.99	3.87	3.76	3.59	3.30	3.00	2.68	2.33	1.96	1.54	1.10	0.60	0.06	
120	3.56	3.42	3.29	3.19	3.10	3.03	2.97	2.93	2.78	2.61	2.42	2.20	1.95	1.67	1.35	0.98	0.55	0.06	
130	2.52	2.42	2.34	2.28	2.25	2.23	2.22	2.18	2.10	2.00	1.89	1.76	1.59	1.38	1.14	0.84	0.49	0.06	
140	1.67	1.62	1.59	1.59	1.59	1.60	1.60	1.57	1.53	1.49	1.43	1.35	1.25	1.10	0.92	0.70	0.41	0.06	
150	1.09	1.08	1.09	1.10	1.14	1.13	1.10	1.09	1.07	1.06	1.03	0.99	0.93	0.83	0.71	0.55	0.33	0.06	
160	0.68	0.70	0.75	0.78	0.75	0.73	0.72	0.71	0.71	0.70	0.70	0.67	0.64	0.58	0.49	0.39	0.24	0.06	
170	0.34	0.40	0.46	0.46	0.45	0.42	0.41	0.40	0.40	0.39	0.39	0.38	0.36	0.33	0.28	0.23	0.15	0.06	
180	0.23	0.21	0.20	0.20	0.18	0.16	0.13	0.12	0.11	0.11	0.11	0.09	0.09	0.09	0.07	0.07	0.06	0.06	

H_(b) Range:-90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature:25.3DEG

Operators:Fan

Test Date:2023-06-26

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity:65.0%

Test Distance:8.630m [K=1.0000]

Remarks: