

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	227.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	275.2V x 155.5H
	At 50% of Imax	169.7V x 107.4H
	At 90% of Imax	72.0V x 46.2H

Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	978.2 lumens per klm.
	To 50% of Imax	689.9 lumens per klm.
	To 90% of Imax	173.8 lumens per klm.

Upward LOR	15.4 %
Downward LOR	84.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-06-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Maya-Round Acrylic-600mm-RGBW BLUE-110 170D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 600mm	SERIAL No.: IES001176
MFR.:	SUR.:	Shielding Angle:

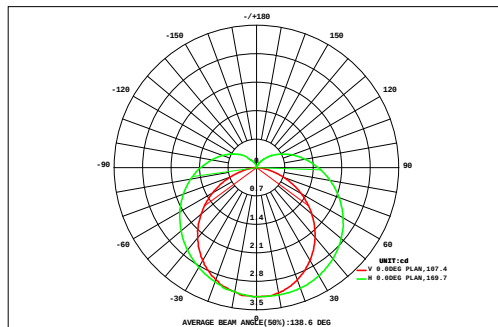

DATA OF LAMP		Eff: 2.64lm/W	
MODEL	MAYA.06.14(30)	Imax(cd)	3.182
NOMINAL POWER(W)	5.31	AVAILABILITY(%)	96.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	13.56
NOMINAL FLUX(lm)	14.01	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	14.01
TEST VOLTAGE(V)	220	q @50%(H,V)	107,170DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.00	0.00	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.05	0.04	0.04	0.03	0.02	0.02	0.01	0.00	0.00	0.43	0.43		
VERTICAL (DEG)	90	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.51	0.51		
	80	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.60	0.59		
	70	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.07	0.06	0.04	0.03	0.01	0.00	0.00	0.67	0.67		
	60	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.07	0.06	0.04	0.03	0.01	0.00	0.74	0.74		
	50	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.09	0.08	0.07	0.06	0.04	0.03	0.01	0.00	0.79	0.79		
	40	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.09	0.09	0.08	0.06	0.05	0.03	0.01	0.00	0.83	0.83		
	30	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.09	0.10	0.10	0.09	0.08	0.06	0.05	0.03	0.01	0.00	0.84	0.84		
	20	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.09	0.10	0.10	0.09	0.08	0.06	0.04	0.03	0.01	0.00	0.83	0.83		
	10	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.09	0.09	0.08	0.06	0.04	0.03	0.01	0.00	0.82	0.81		
	0	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.09	0.08	0.07	0.06	0.04	0.03	0.01	0.00	0.79	0.79		
	-10	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.09	0.08	0.07	0.06	0.04	0.03	0.01	0.00	0.76	0.76		
	-20	0.00	0.00	0.01	0.03	0.04	0.06	0.07	0.08	0.09	0.08	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.71	0.71		
	-30	0.00	0.00	0.01	0.02	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.02	0.01	0.00	0.65	0.65		
	-40	0.00	0.00	0.01	0.02	0.04	0.05	0.06	0.07	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.58	0.58		
	-50	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.51	0.51		
	-60	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.44	0.43		
	-70	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.35	0.34		
	-80	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.35	0.34		
-90	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.35	0.34			
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90		
F t	0.01	0.06	0.20	0.40	0.64	0.88	1.09	1.26	1.36	1.37	1.26	1.10	0.89	0.65	0.41	0.21	0.07	0.01	12	---			
F a	0.00	0.06	0.20	0.40	0.64	0.88	1.09	1.26	1.36	1.37	1.26	1.10	0.89	0.65	0.41	0.20	0.06	0.00	---	12			

one-half-peak spread: U:68.1,D:68.2 , L:48.2,R:48.5


NEMA Beam Type: Type 7

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Maya-Round Acrylic-600mm-RGBW BLUE-110 170D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 600mm	SERIAL No.: IES001176
MFR.:	SUR.:	Shielding Angle:

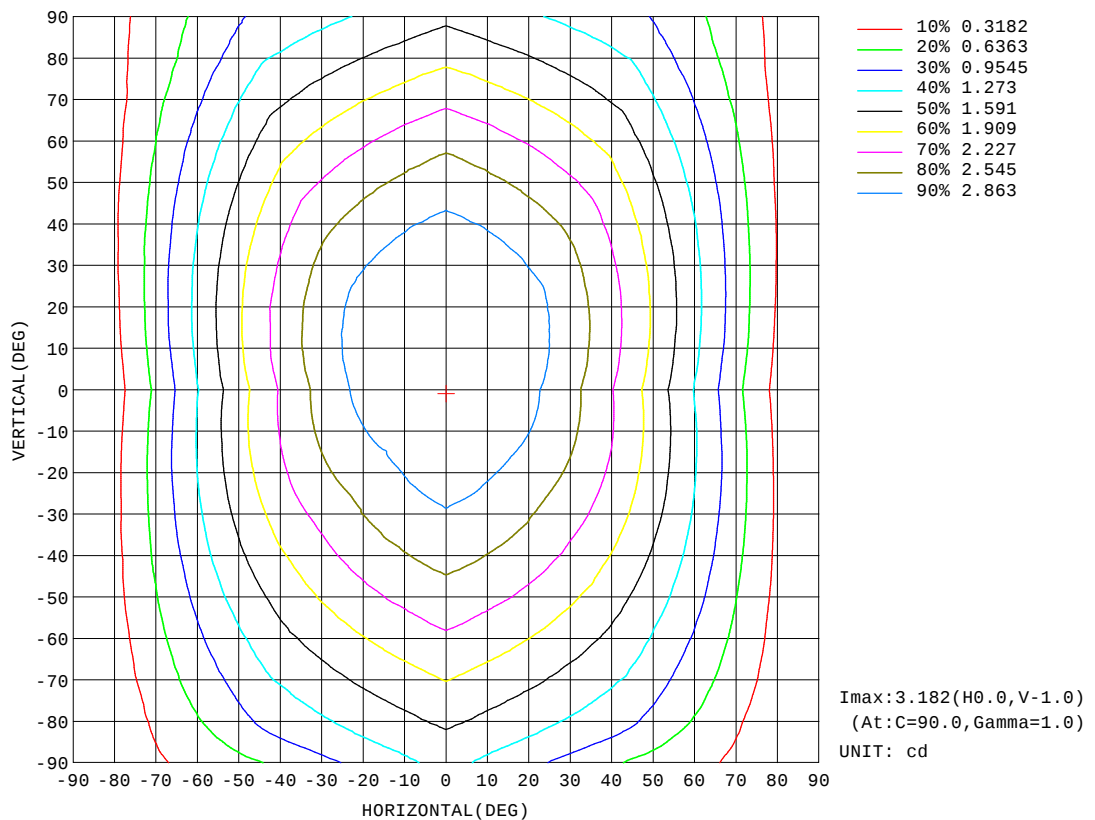


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Maya-Round Acrylic-600mm-RGBW BLUE-110 170D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 600mm	SERIAL No.: IES001176
MFR.:	SUR.:	Shielding Angle:

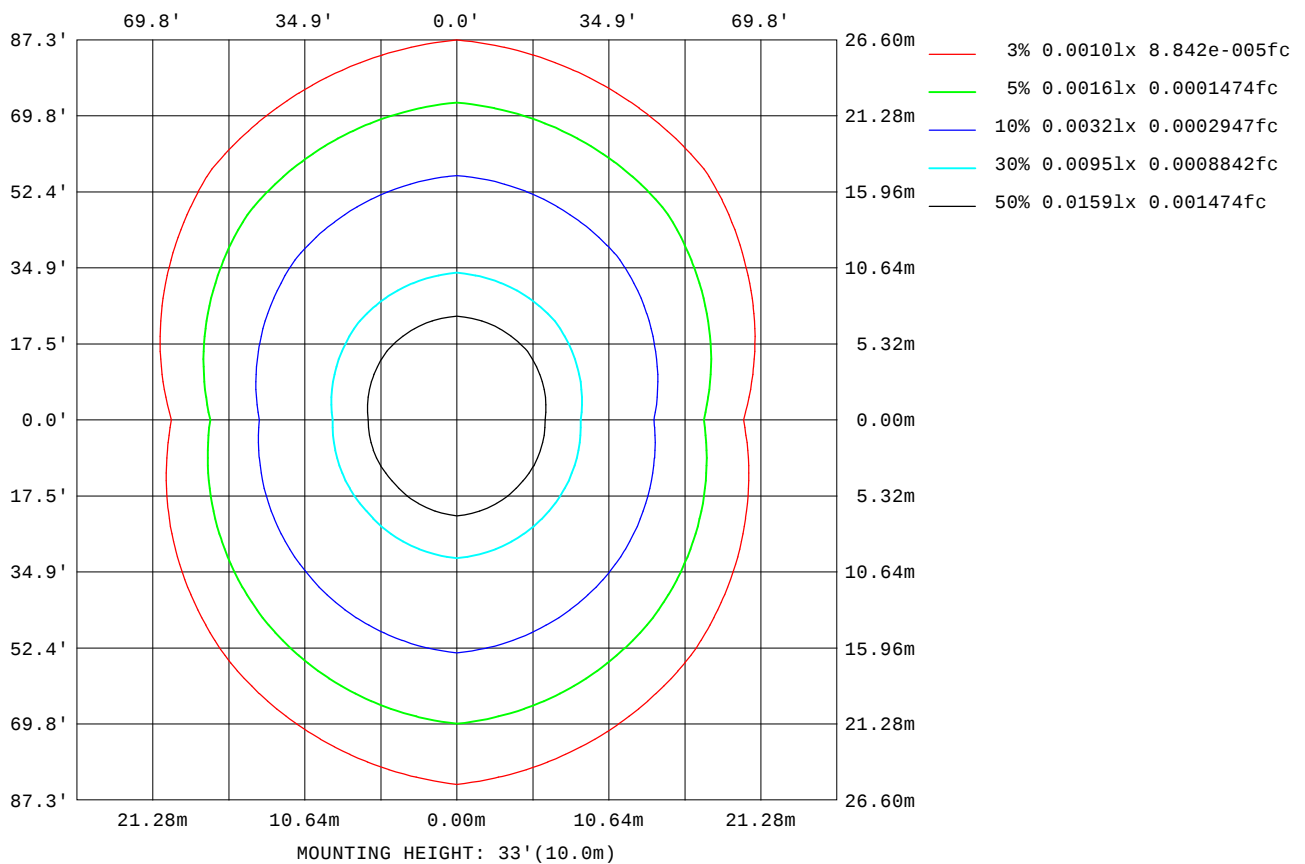

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

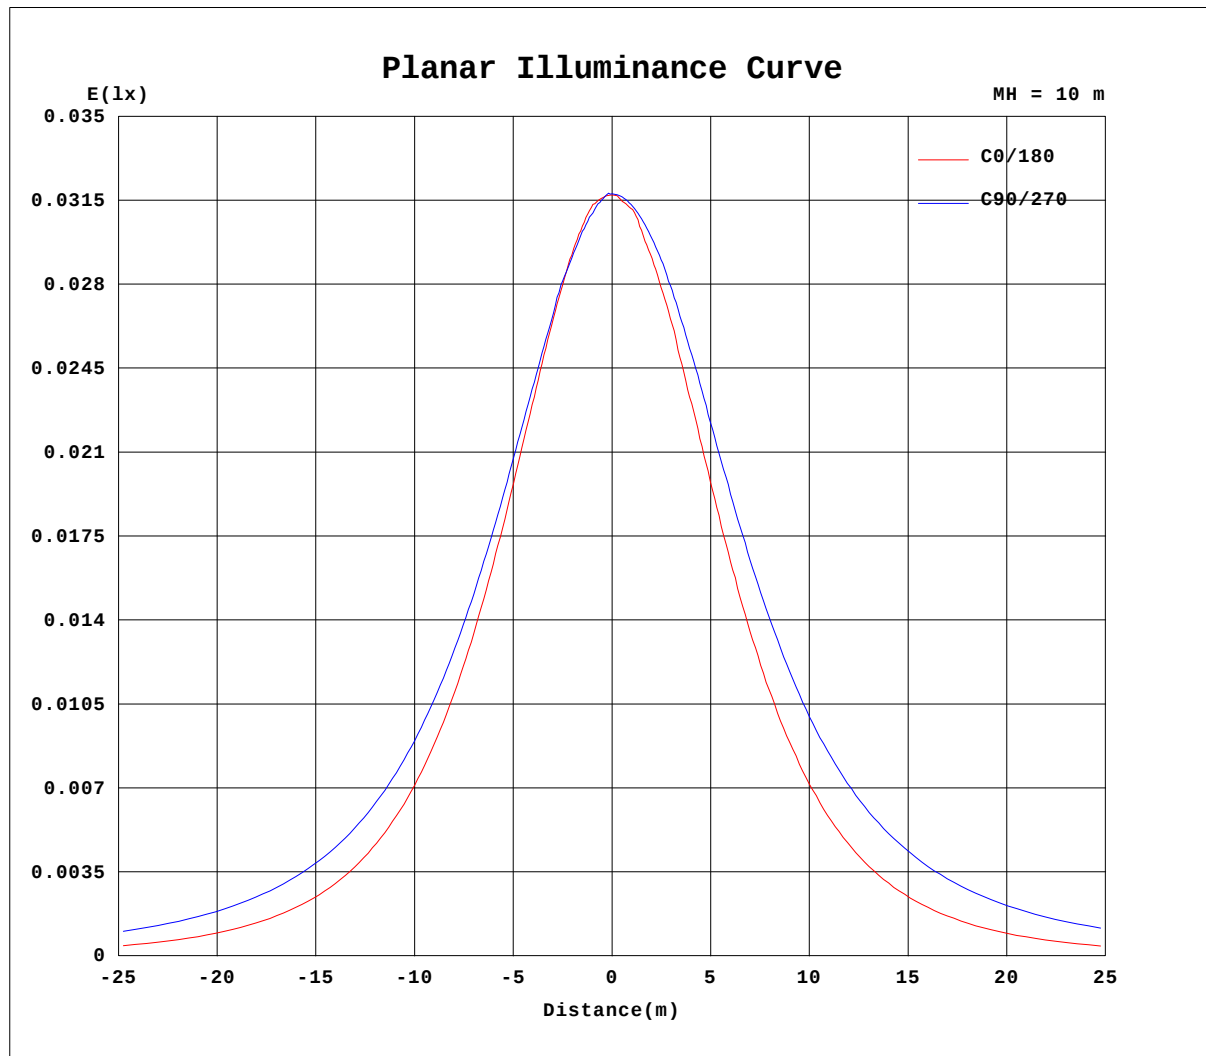


H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Maya-Round Acrylic-600mm-RGBW BLUE-110 170D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 600mm	SERIAL No.: IES001176
MFR.:	SUR.:	Shielding Angle:

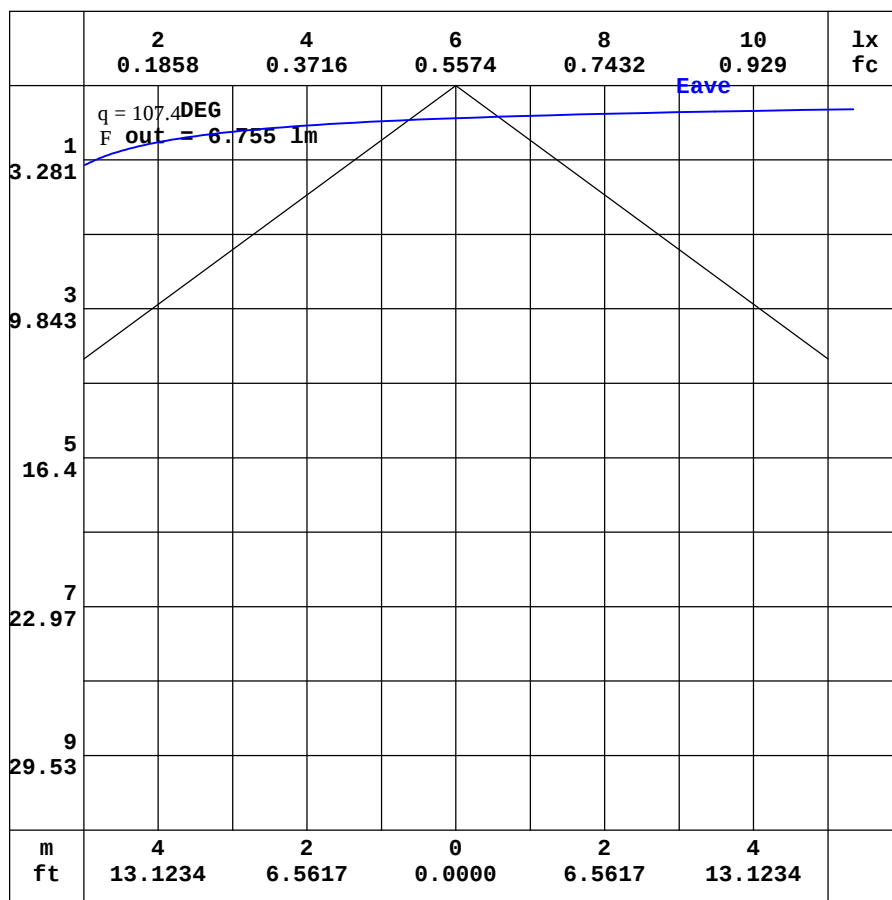

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-Round Acrylic-600mm-RGBW BLUE-110 170D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 600mm	SERIAL No.: IES001176
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.02	0.03	0.04	0.05	0.07	0.07	0.07	0.07	0.05	0.06	0.05	0.04	0.03	0.00	0.02	0.05	0.07	0.10
-150	0.00	0.03	0.05	0.07	0.08	0.10	0.11	0.11	0.10	0.11	0.09	0.09	0.09	0.08	0.09	0.11	0.12	0.14	0.17
-140	0.00	0.04	0.07	0.09	0.11	0.13	0.15	0.16	0.17	0.15	0.16	0.15	0.15	0.18	0.21	0.22	0.23	0.25	0.28
-130	0.00	0.05	0.08	0.11	0.14	0.16	0.18	0.21	0.23	0.24	0.25	0.25	0.28	0.30	0.34	0.37	0.41	0.45	0.49
-120	0.00	0.05	0.10	0.14	0.17	0.20	0.23	0.25	0.27	0.31	0.35	0.38	0.42	0.45	0.49	0.53	0.58	0.63	0.68
-110	0.00	0.06	0.11	0.16	0.20	0.24	0.28	0.31	0.35	0.37	0.41	0.47	0.53	0.58	0.64	0.70	0.76	0.82	0.89
-100	0.00	0.06	0.12	0.18	0.24	0.29	0.34	0.38	0.43	0.48	0.55	0.62	0.68	0.76	0.82	0.90	0.97	1.05	1.12
-90	0.00	0.07	0.14	0.21	0.28	0.35	0.41	0.48	0.55	0.62	0.71	0.79	0.88	0.96	1.04	1.13	1.21	1.30	1.38
-80	0.00	0.07	0.16	0.25	0.36	0.48	0.61	0.74	0.87	0.99	1.08	1.16	1.24	1.31	1.38	1.45	1.52	1.59	1.65
-70	0.00	0.08	0.18	0.31	0.46	0.62	0.76	0.91	1.06	1.19	1.30	1.39	1.48	1.56	1.64	1.72	1.79	1.86	1.92
-60	0.00	0.07	0.20	0.37	0.54	0.72	0.90	1.07	1.22	1.37	1.50	1.61	1.71	1.81	1.90	1.98	2.06	2.12	2.18
-50	0.00	0.07	0.22	0.42	0.62	0.83	1.02	1.21	1.39	1.54	1.69	1.81	1.93	2.04	2.14	2.22	2.30	2.37	2.43
-40	0.00	0.06	0.25	0.46	0.68	0.91	1.14	1.34	1.53	1.71	1.87	2.00	2.13	2.25	2.35	2.45	2.53	2.59	2.65
-30	0.00	0.05	0.25	0.48	0.73	0.97	1.22	1.45	1.66	1.86	2.03	2.18	2.31	2.44	2.55	2.65	2.72	2.78	2.83
-20	0.00	0.05	0.25	0.49	0.74	1.01	1.27	1.52	1.76	1.97	2.16	2.33	2.48	2.60	2.70	2.79	2.87	2.94	2.99
-10	0.00	0.04	0.23	0.47	0.74	1.02	1.28	1.55	1.80	2.04	2.24	2.44	2.60	2.74	2.85	2.94	2.97	3.05	3.11
0	0.00	0.03	0.20	0.43	0.70	0.98	1.26	1.52	1.78	2.03	2.25	2.46	2.65	2.80	2.93	3.04	3.10	3.16	3.17
10	0.00	0.05	0.24	0.49	0.76	1.04	1.32	1.60	1.86	2.11	2.32	2.54	2.71	2.86	2.99	3.09	3.15	3.16	3.18
20	0.00	0.06	0.27	0.52	0.79	1.07	1.35	1.61	1.87	2.10	2.32	2.52	2.69	2.84	2.97	3.05	3.10	3.14	3.16
30	0.00	0.07	0.28	0.52	0.79	1.05	1.32	1.58	1.82	2.05	2.25	2.44	2.61	2.75	2.84	2.93	2.99	3.04	3.07
40	0.00	0.08	0.28	0.51	0.75	1.01	1.26	1.50	1.72	1.94	2.13	2.31	2.45	2.57	2.67	2.75	2.82	2.88	2.93
50	0.00	0.10	0.26	0.48	0.71	0.94	1.16	1.38	1.59	1.79	1.97	2.13	2.24	2.35	2.44	2.53	2.60	2.66	2.71
60	0.00	0.11	0.25	0.44	0.64	0.84	1.05	1.24	1.43	1.62	1.78	1.89	2.00	2.09	2.18	2.27	2.33	2.40	2.46
70	0.00	0.11	0.24	0.39	0.56	0.74	0.91	1.09	1.26	1.43	1.55	1.64	1.73	1.82	1.89	1.97	2.04	2.10	2.16
80	0.00	0.12	0.24	0.36	0.50	0.63	0.78	0.93	1.08	1.23	1.31	1.38	1.45	1.52	1.59	1.66	1.72	1.78	1.84
90	0.00	0.11	0.23	0.34	0.46	0.57	0.69	0.80	0.92	1.03	1.09	1.14	1.19	1.25	1.30	1.36	1.41	1.46	1.52
100	0.00	0.11	0.22	0.31	0.41	0.50	0.59	0.68	0.76	0.84	0.88	0.92	0.95	0.99	1.03	1.07	1.12	1.16	1.21
110	0.00	0.10	0.20	0.28	0.36	0.43	0.49	0.55	0.61	0.66	0.69	0.72	0.74	0.77	0.79	0.82	0.85	0.89	0.93
120	0.00	0.09	0.17	0.24	0.30	0.36	0.40	0.44	0.48	0.51	0.54	0.54	0.55	0.56	0.57	0.59	0.62	0.64	0.68
130	0.00	0.08	0.15	0.20	0.25	0.29	0.32	0.34	0.36	0.38	0.39	0.38	0.38	0.38	0.38	0.39	0.41	0.43	0.45
140	0.00	0.07	0.12	0.16	0.19	0.22	0.24	0.26	0.26	0.26	0.25	0.24	0.25	0.25	0.25	0.24	0.24	0.25	0.27
150	0.00	0.05	0.09	0.12	0.14	0.16	0.17	0.17	0.17	0.16	0.16	0.16	0.16	0.15	0.14	0.13	0.12	0.12	0.13
160	0.00	0.03	0.06	0.08	0.09	0.10	0.11	0.11	0.10	0.10	0.10	0.09	0.09	0.08	0.07	0.06	0.05	0.03	0.02
170	0.00	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-06-26

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-Round Acrylic-600mm-RGBW BLUE-110 170D-Rev1	TYPE: RGBW-BLUE	WEIGHT:
SPEC.: 110X170 DEG	DIM.: 600mm	SERIAL No.: IES001176
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.00
-160	0.07	0.05	0.02	0.04	0.04	0.04	0.04	0.06	0.06	0.07	0.07	0.07	0.07	0.06	0.04	0.03	0.02	0.00
-150	0.15	0.13	0.11	0.09	0.07	0.08	0.10	0.10	0.11	0.11	0.11	0.11	0.10	0.08	0.07	0.05	0.03	0.00
-140	0.25	0.22	0.22	0.22	0.19	0.17	0.15	0.18	0.16	0.16	0.16	0.15	0.13	0.11	0.09	0.07	0.04	0.00
-130	0.45	0.41	0.37	0.35	0.32	0.29	0.25	0.25	0.25	0.24	0.21	0.19	0.16	0.14	0.11	0.08	0.04	0.00
-120	0.63	0.58	0.53	0.50	0.46	0.42	0.40	0.35	0.31	0.28	0.25	0.22	0.20	0.17	0.14	0.10	0.05	0.00
-110	0.82	0.76	0.71	0.65	0.59	0.54	0.47	0.41	0.36	0.33	0.31	0.27	0.24	0.20	0.16	0.11	0.06	0.00
-100	1.04	0.97	0.89	0.82	0.75	0.67	0.60	0.53	0.47	0.42	0.38	0.33	0.28	0.23	0.18	0.12	0.06	0.00
-90	1.30	1.21	1.12	1.03	0.95	0.86	0.77	0.69	0.60	0.53	0.47	0.40	0.33	0.27	0.20	0.13	0.07	0.00
-80	1.59	1.52	1.46	1.39	1.32	1.24	1.16	1.08	0.99	0.87	0.74	0.61	0.48	0.36	0.25	0.15	0.07	0.00
-70	1.86	1.80	1.73	1.65	1.58	1.50	1.41	1.32	1.21	1.07	0.93	0.78	0.63	0.47	0.32	0.17	0.07	0.00
-60	2.12	2.06	1.99	1.91	1.82	1.73	1.63	1.52	1.39	1.25	1.09	0.92	0.75	0.57	0.38	0.22	0.07	0.00
-50	2.37	2.31	2.24	2.16	2.06	1.96	1.85	1.72	1.57	1.41	1.24	1.05	0.85	0.64	0.44	0.24	0.07	0.00
-40	2.60	2.54	2.47	2.38	2.28	2.17	2.04	1.90	1.73	1.56	1.37	1.16	0.94	0.71	0.48	0.26	0.08	0.00
-30	2.79	2.74	2.67	2.57	2.46	2.34	2.21	2.05	1.87	1.68	1.46	1.24	1.00	0.76	0.51	0.28	0.08	0.00
-20	2.96	2.90	2.82	2.72	2.63	2.49	2.35	2.17	1.98	1.76	1.53	1.29	1.03	0.77	0.51	0.27	0.07	0.00
-10	3.06	3.00	2.95	2.87	2.75	2.61	2.43	2.24	2.03	1.80	1.55	1.30	1.03	0.76	0.50	0.26	0.06	0.00
0	3.17	3.13	3.05	2.94	2.80	2.64	2.45	2.24	2.01	1.77	1.52	1.25	0.99	0.72	0.46	0.23	0.05	0.00
10	3.17	3.16	3.08	2.99	2.86	2.71	2.52	2.32	2.10	1.86	1.60	1.34	1.06	0.78	0.52	0.27	0.07	0.00
20	3.13	3.10	3.05	2.97	2.85	2.69	2.52	2.33	2.11	1.87	1.63	1.36	1.09	0.82	0.55	0.29	0.08	0.00
30	3.04	3.00	2.94	2.86	2.77	2.63	2.45	2.27	2.06	1.83	1.59	1.34	1.08	0.82	0.55	0.31	0.09	0.00
40	2.89	2.83	2.76	2.68	2.59	2.48	2.34	2.16	1.96	1.75	1.52	1.29	1.04	0.79	0.54	0.30	0.10	0.00
50	2.67	2.61	2.54	2.46	2.37	2.27	2.15	2.01	1.81	1.62	1.41	1.19	0.96	0.73	0.51	0.29	0.10	0.00
60	2.41	2.34	2.28	2.20	2.11	2.02	1.92	1.81	1.65	1.46	1.27	1.07	0.87	0.67	0.46	0.27	0.11	0.00
70	2.10	2.04	1.98	1.91	1.83	1.75	1.66	1.57	1.46	1.29	1.12	0.94	0.77	0.58	0.41	0.25	0.11	0.00
80	1.79	1.73	1.67	1.60	1.54	1.48	1.41	1.33	1.25	1.10	0.96	0.81	0.66	0.51	0.37	0.24	0.12	0.00
90	1.47	1.41	1.36	1.31	1.26	1.21	1.15	1.10	1.05	0.93	0.82	0.70	0.58	0.47	0.35	0.23	0.12	0.00
100	1.16	1.12	1.08	1.04	1.00	0.96	0.93	0.89	0.85	0.77	0.69	0.60	0.51	0.42	0.32	0.22	0.11	0.00
110	0.89	0.85	0.82	0.80	0.77	0.75	0.73	0.70	0.68	0.62	0.57	0.50	0.44	0.36	0.29	0.20	0.10	0.00
120	0.64	0.62	0.59	0.58	0.57	0.56	0.55	0.54	0.52	0.49	0.45	0.41	0.36	0.31	0.25	0.18	0.09	0.00
130	0.43	0.42	0.40	0.39	0.39	0.39	0.40	0.39	0.38	0.36	0.35	0.32	0.29	0.25	0.21	0.15	0.08	0.00
140	0.25	0.24	0.24	0.24	0.25	0.25	0.27	0.27	0.26	0.26	0.26	0.24	0.23	0.20	0.17	0.12	0.07	0.00
150	0.12	0.12	0.12	0.12	0.14	0.15	0.16	0.16	0.17	0.18	0.18	0.17	0.16	0.15	0.12	0.09	0.05	0.00
160	0.03	0.05	0.06	0.06	0.07	0.07	0.08	0.09	0.10	0.11	0.11	0.11	0.10	0.10	0.08	0.06	0.04	0.00
170	0.00	0.01	0.02	0.03	0.03	0.03	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-06-26

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: