

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	268.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	284.5V x 161.2H
	At 50% of Imax	132.6V x 110.4H
	At 90% of Imax	60.3V x 46.3H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	969.2 lumens per klm.
	To 50% of Imax	635.8 lumens per klm.
	To 90% of Imax	152.8 lumens per klm.

Upward LOR	13.9 %
Downward LOR	86.1 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Maya-square acrylic-1200mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001491
MFR.:	SUR.:	Shielding Angle:

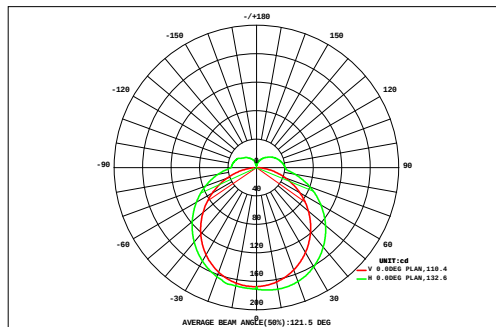

DATA OF LAMP		Eff: 32.15lm/W	
MODEL	MAYA.12.14(30)	Imax(cd)	173.5
NOMINAL POWER(W)	20.1	AVAILABILITY(%)	93.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	604.9
NOMINAL FLUX(lm)	646.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	646.2
TEST VOLTAGE(V)	221.3	q @50%(H,V)	110,133DEG

		AREA FLUX DIAGRAM														UNIT:lm				F t	F a	
		0.02	0.08	0.19	0.34	0.52	0.73	0.94	1.14	1.31	1.31	1.14	0.94	0.72	0.51	0.32	0.17	0.06	0.01	10.5	9.80	
VERTICAL (DEG)	90	0.02	0.09	0.26	0.50	0.81	1.15	1.48	1.77	1.98	1.98	1.76	1.48	1.15	0.81	0.51	0.26	0.09	0.01	16.1	15.8	
	80	0.02	0.13	0.37	0.73	1.17	1.64	2.09	2.47	2.73	2.73	2.46	2.08	1.64	1.17	0.73	0.37	0.13	0.02	22.7	22.5	
	70	0.02	0.16	0.48	0.95	1.52	2.11	2.67	3.13	3.43	3.43	3.11	2.65	2.10	1.50	0.94	0.48	0.16	0.02	28.9	28.8	
	60	0.02	0.20	0.58	1.15	1.83	2.53	3.19	3.72	4.06	4.05	3.70	3.16	2.50	1.80	1.13	0.58	0.20	0.02	34.4	34.4	
	50	0.03	0.23	0.67	1.31	2.08	2.88	3.62	4.21	4.58	4.57	4.18	3.58	2.84	2.04	1.29	0.66	0.23	0.03	39.0	38.9	
	40	0.03	0.25	0.73	1.43	2.27	3.14	3.94	4.56	4.95	4.94	4.52	3.88	3.08	2.22	1.40	0.72	0.25	0.03	42.3	42.3	
	30	0.03	0.26	0.76	1.50	2.38	3.29	4.12	4.76	5.14	5.13	4.71	4.04	3.21	2.32	1.46	0.75	0.26	0.03	44.1	44.1	
	-30	0.03	0.26	0.77	1.51	2.40	3.33	4.16	4.78	5.14	5.11	4.72	4.07	3.23	2.33	1.47	0.75	0.26	0.03	44.3	44.3	
		0.03	0.26	0.77	1.51	2.39	3.31	4.13	4.75	5.08	5.06	4.68	4.04	3.22	2.32	1.46	0.75	0.26	0.03	44.0	44.0	
		0.03	0.26	0.76	1.48	2.35	3.24	4.04	4.65	5.00	4.99	4.60	3.97	3.16	2.29	1.44	0.74	0.26	0.03	43.3	43.2	
		0.03	0.25	0.72	1.41	2.22	3.06	3.82	4.40	4.73	4.72	4.35	3.76	3.00	2.17	1.38	0.71	0.24	0.03	41.0	40.9	
		-40	0.03	0.23	0.66	1.28	2.02	2.79	3.48	4.01	4.33	4.32	3.98	3.43	2.74	1.99	1.26	0.65	0.23	0.03	37.4	37.4
		-50	0.02	0.20	0.58	1.12	1.77	2.44	3.04	3.52	3.81	3.80	3.50	3.01	2.40	1.74	1.11	0.57	0.20	0.02	32.9	32.8
		-60	0.02	0.16	0.48	0.93	1.47	2.03	2.55	2.95	3.22	3.21	2.94	2.53	2.01	1.46	0.92	0.48	0.16	0.02	27.6	27.4
		-70	0.02	0.13	0.37	0.72	1.15	1.59	2.01	2.35	2.58	2.58	2.34	2.00	1.58	1.14	0.72	0.37	0.13	0.01	21.8	21.6
	-80	0.02	0.09	0.26	0.51	0.81	1.14	1.45	1.72	1.93	1.93	1.72	1.45	1.14	0.81	0.51	0.26	0.09	0.01	15.8	15.5	
-90	0.02	0.08	0.18	0.33	0.51	0.72	0.93	1.12	1.29	1.29	1.12	0.92	0.71	0.50	0.31	0.16	0.06	0.01	10.2	9.50		
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																						
F t	0.43	3.30	9.57	18.7	29.7	41.1	51.6	60.0	65.3	65.1	59.5	51.0	40.4	29.1	18.4	9.42	3.25	0.38	556	---		
F a	0.00	2.72	9.11	18.6	29.7	41.1	51.6	60.0	65.3	65.1	59.5	51.0	40.4	29.1	18.1	8.99	2.72	0.02	---	553		

one-half-peak spread: U:52.2,D:56.2 , L:55.0,R:56.1


NEMA Beam Type: Type 7

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Maya-square acrylic-1200mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001491
MFR.:	SUR.:	Shielding Angle:

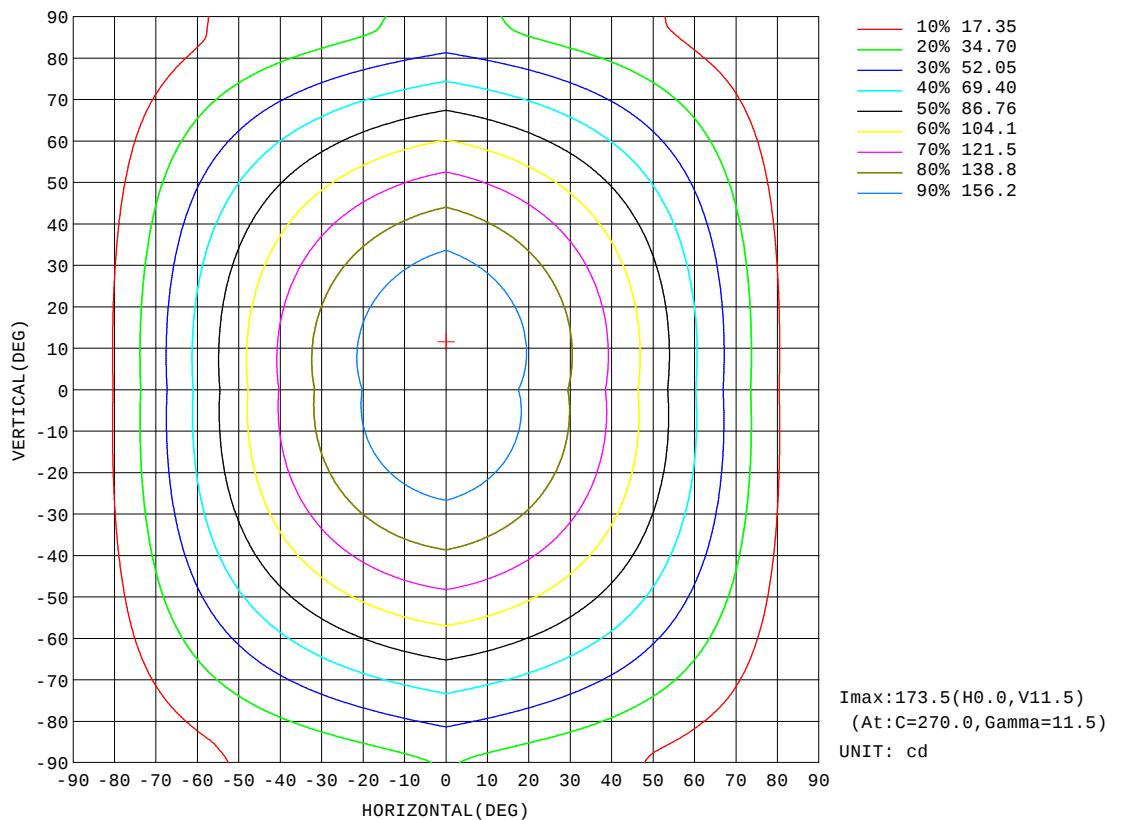


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Maya-square acrylic-1200mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001491
MFR.:	SUR.:	Shielding Angle:

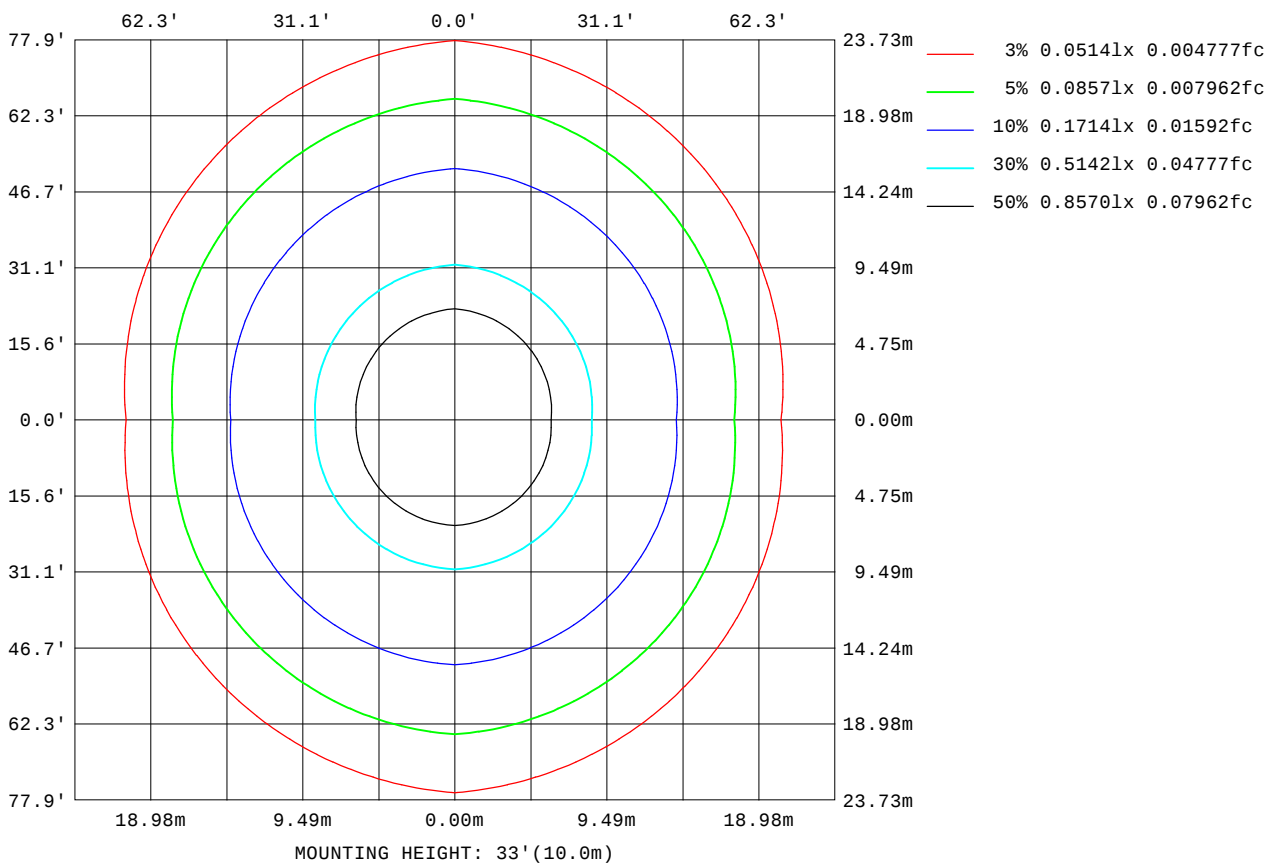

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

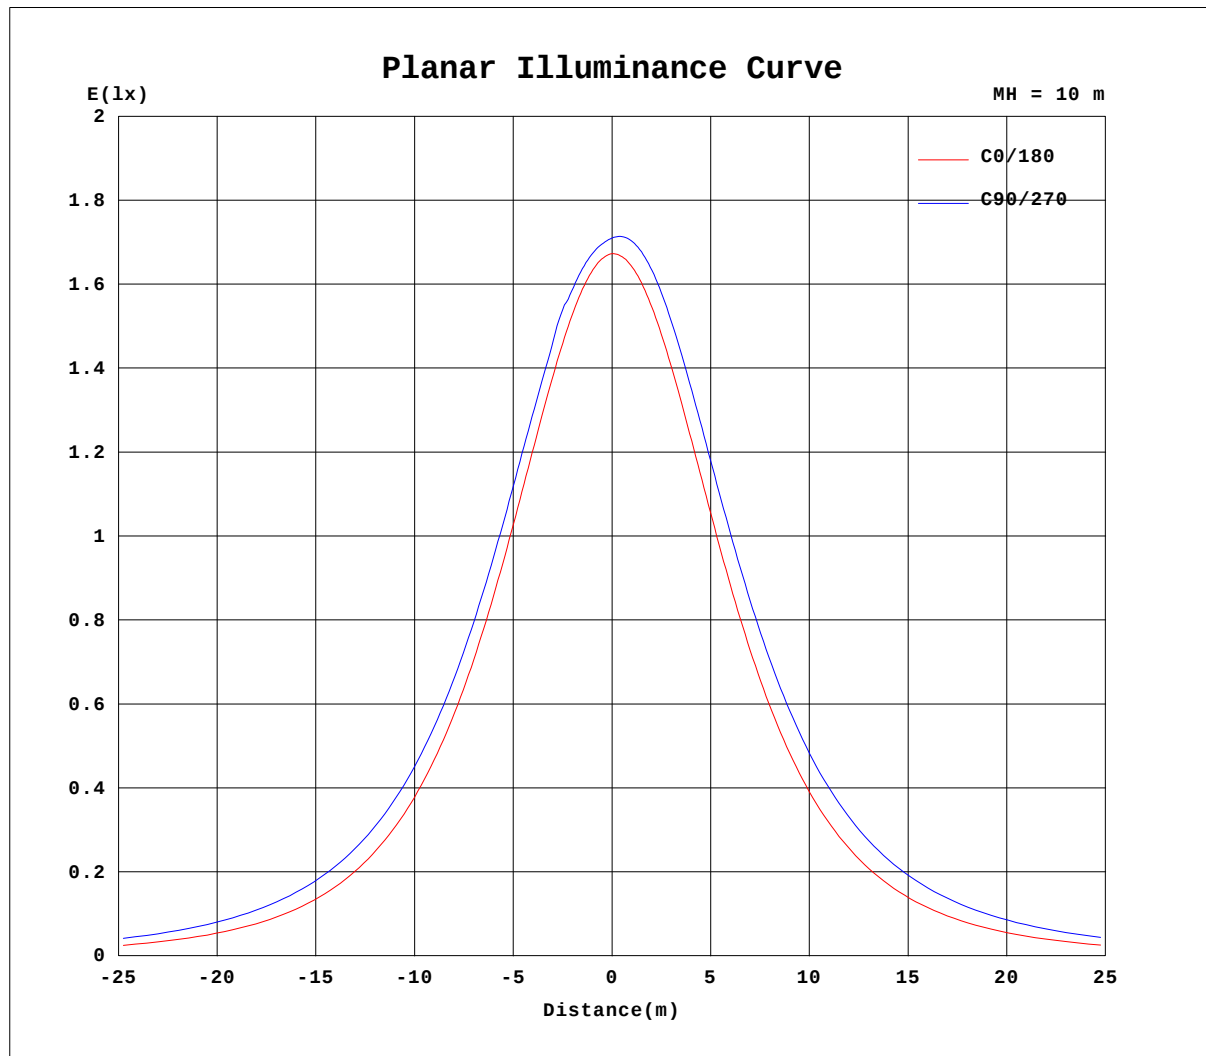


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Maya-square Acrylic-1200mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001491
MFR.:	SUR.:	Shielding Angle:

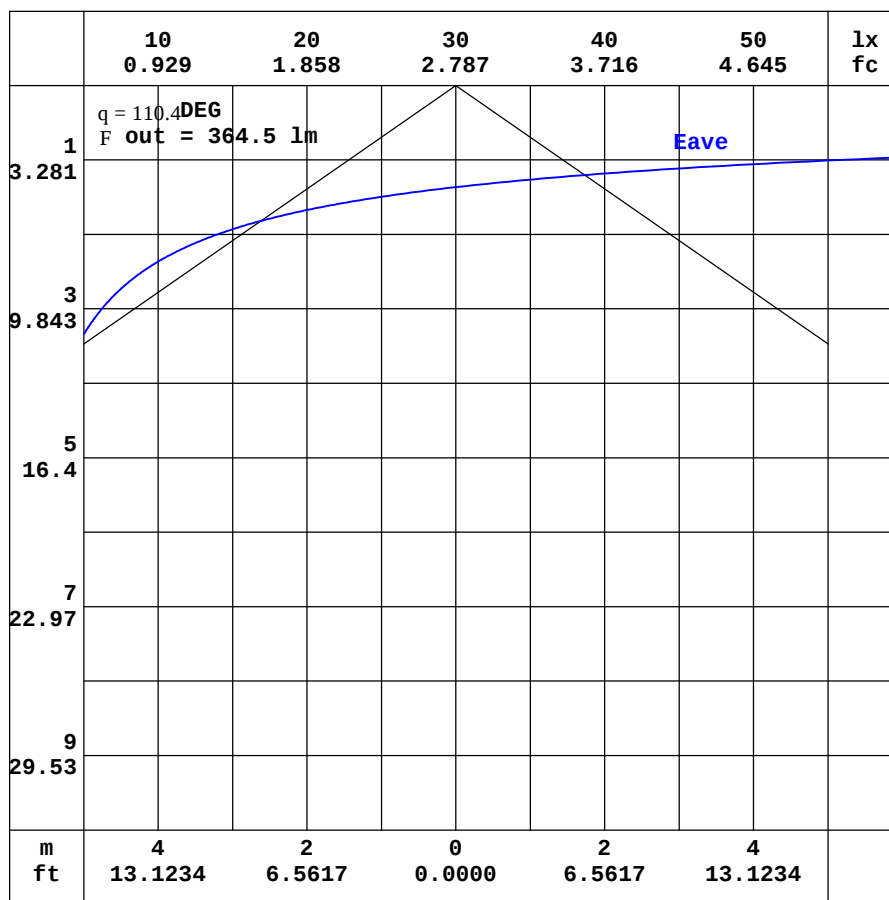

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-square Acrylic-1200mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001491
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	4.06	4.08	3.86	3.83	3.74	3.61	3.47	3.33	3.32	3.32	3.33	3.35	3.45	3.45	3.45	3.44	3.37	3.30	3.38
-170	4.06	4.39	4.46	4.70	4.86	4.98	4.96	4.96	5.06	5.26	5.29	5.39	5.57	5.63	5.75	3.21	3.15	3.09	3.00
-160	4.06	4.71	5.09	5.57	5.97	6.35	6.58	6.66	6.83	7.16	7.47	7.54	7.78	8.05	8.26	8.61	9.10	9.74	10.7
-150	4.06	5.02	5.70	6.37	7.05	7.69	8.25	8.43	8.73	9.06	9.60	10.2	10.3	10.7	11.2	11.7	12.4	13.2	14.2
-140	4.06	5.29	6.23	7.08	8.07	8.95	9.79	10.6	10.8	11.3	11.8	12.3	13.1	14.0	14.7	15.2	15.9	16.9	18.0
-130	4.06	5.51	6.69	7.81	8.97	10.1	11.2	12.2	13.2	14.1	14.5	15.0	15.9	16.6	17.5	18.4	19.5	20.8	22.1
-120	4.06	5.66	7.07	8.49	9.76	11.1	12.5	13.7	15.0	16.2	17.5	18.7	19.9	21.0	21.9	22.9	23.9	25.1	26.4
-110	4.06	5.75	7.44	8.94	10.5	12.0	13.5	14.9	16.4	17.9	19.4	20.8	22.2	23.7	25.2	26.7	28.3	29.8	31.5
-100	4.06	5.80	7.54	9.29	11.0	12.7	14.3	15.9	17.6	19.2	20.9	22.5	24.2	25.8	27.4	29.1	30.7	32.4	34.1
-90	4.06	5.84	7.61	9.38	11.2	12.9	14.7	16.5	18.2	20.0	21.8	23.6	25.3	27.1	28.9	30.7	32.4	34.2	36.0
-80	4.06	5.85	7.77	9.89	12.7	15.9	19.3	22.8	26.3	29.8	33.2	36.5	39.6	42.6	45.4	48.1	50.6	52.9	55.1
-70	4.06	5.83	8.58	13.1	18.4	23.9	29.5	35.0	40.3	45.4	50.2	54.7	58.9	62.7	66.2	69.4	72.1	74.5	76.6
-60	4.06	5.77	10.7	17.5	25.0	32.6	40.1	47.4	54.3	60.9	67.1	72.8	78.0	82.7	86.9	90.5	93.5	96.0	97.9
-50	4.06	6.11	13.0	21.9	31.3	40.7	49.9	58.8	67.4	75.5	83.1	89.9	96.2	102	107	111	114	116	118
-40	4.06	6.65	15.2	25.8	36.7	47.7	58.5	69.0	79.0	88.4	97.2	105	112	119	124	129	132	135	137
-30	4.06	7.07	17.0	28.8	40.9	53.2	65.3	77.1	88.3	98.9	109	118	126	133	139	144	148	150	152
-20	4.06	7.33	18.1	30.8	43.8	57.0	70.0	82.8	95.0	107	117	127	136	143	150	155	159	162	163
-10	4.06	7.35	18.5	31.5	45.1	58.8	72.4	85.7	98.5	111	122	132	141	149	156	161	165	167	169
0	4.06	7.12	18.2	31.1	44.6	58.4	72.1	85.6	98.5	111	122	133	142	150	156	161	165	167	167
10	4.06	7.35	18.5	31.6	45.2	59.0	72.9	86.3	99.3	112	123	134	143	151	158	163	168	171	174
20	4.06	7.32	18.1	30.9	44.1	57.4	70.8	83.9	96.4	108	119	130	139	147	154	160	164	168	171
30	4.06	7.07	17.0	28.9	41.3	53.8	66.3	78.5	90.2	101	112	121	130	138	145	150	155	158	161
40	4.06	6.66	15.2	25.8	37.0	48.3	59.5	70.5	81.0	91.1	101	109	117	124	130	136	140	143	146
50	4.06	6.16	13.0	21.9	31.4	41.1	50.7	60.1	69.2	77.9	86.1	93.7	101	107	112	117	121	124	127
60	4.06	5.87	10.6	17.4	25.0	32.8	40.6	48.2	55.6	62.6	69.4	75.6	81.4	86.7	91.4	95.6	99.1	102	104
70	4.06	6.00	8.67	13.0	18.2	23.8	29.5	35.2	40.7	46.2	51.2	56.1	60.6	64.8	68.7	72.1	75.2	77.9	80.2
80	4.06	6.07	8.12	10.2	12.9	15.9	19.1	22.5	25.9	29.4	32.8	36.1	39.3	42.4	45.3	48.0	50.6	53.0	55.1
90	4.06	6.09	8.12	10.2	12.2	14.2	16.2	18.3	20.3	22.3	24.4	26.4	28.4	30.4	32.5	34.5	36.5	38.6	40.6
100	4.06	6.06	8.04	10.0	11.9	13.8	15.6	17.4	19.2	21.0	22.8	24.6	26.4	28.1	29.9	31.7	33.5	35.4	37.3
110	4.06	5.98	7.88	9.56	11.3	12.9	14.5	16.0	17.6	19.2	20.7	22.2	23.6	25.1	26.7	28.2	29.8	31.5	33.2
120	4.06	5.88	7.45	9.00	10.4	11.8	13.2	14.5	15.7	17.0	18.1	19.3	20.5	21.7	22.9	24.2	25.5	27.0	28.5
130	4.06	5.70	7.01	8.22	9.44	10.6	11.7	12.7	13.7	14.5	15.4	16.3	17.1	18.0	18.9	19.8	20.9	22.0	23.4
140	4.06	5.44	6.48	7.39	8.42	9.30	10.1	10.8	11.4	12.0	12.6	13.1	13.6	14.1	14.8	15.5	16.4	17.4	18.6
150	4.06	5.13	5.89	6.59	7.30	7.91	8.43	8.87	9.25	9.62	9.89	10.2	10.6	10.9	11.2	11.7	12.2	12.9	13.9
160	4.06	4.78	5.21	5.72	6.12	6.47	6.75	6.99	7.17	7.34	7.52	7.71	7.82	7.97	8.03	8.10	8.25	8.61	9.32
170	4.06	4.43	4.53	4.77	4.93	5.04	5.08	5.12	5.20	5.28	5.37	5.42	5.53	5.49	5.40	5.27	5.08	4.49	4.19
180	4.06	4.08	3.86	3.83	3.74	3.61	3.47	3.33	3.32	3.32	3.33	3.35	3.45	3.45	3.45	3.44	3.37	3.30	3.38

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-square Acrylic-1200mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001491
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.07	3.01	2.89	2.76	2.62	2.47	2.17	2.03	1.90	1.77	1.73	1.70	1.64	1.51	1.38	1.31	1.23	1.01
-170	2.97	2.90	2.80	2.70	2.58	2.45	2.15	2.01	1.88	1.75	1.71	1.68	1.62	1.49	1.36	1.29	1.21	1.00
-160	2.87	2.79	2.70	2.60	2.48	2.35	2.05	1.91	1.78	1.65	1.61	1.58	1.52	1.39	1.26	1.19	1.11	0.99
-150	2.77	2.69	2.60	2.50	2.38	2.25	1.95	1.81	1.68	1.55	1.51	1.48	1.42	1.29	1.16	1.09	1.01	0.98
-140	2.67	2.59	2.50	2.40	2.28	2.15	1.85	1.71	1.58	1.45	1.41	1.38	1.32	1.19	1.06	0.99	0.91	0.88
-130	2.57	2.49	2.40	2.30	2.18	2.05	1.75	1.61	1.48	1.35	1.31	1.28	1.22	1.09	0.96	0.89	0.81	0.78
-120	2.47	2.39	2.30	2.20	2.08	1.95	1.65	1.51	1.38	1.25	1.21	1.18	1.12	0.99	0.86	0.79	0.71	0.68
-110	2.37	2.29	2.20	2.10	1.98	1.85	1.55	1.41	1.28	1.15	1.11	1.08	1.02	0.89	0.76	0.69	0.61	0.58
-100	2.27	2.19	2.10	2.00	1.88	1.75	1.45	1.31	1.18	1.05	1.01	0.98	0.92	0.79	0.66	0.59	0.51	0.48
-90	2.17	2.09	2.00	1.90	1.78	1.65	1.35	1.21	1.08	0.95	0.91	0.88	0.82	0.69	0.56	0.49	0.41	0.38
-80	2.07	1.99	1.90	1.80	1.68	1.55	1.25	1.11	0.98	0.85	0.81	0.78	0.72	0.59	0.46	0.39	0.31	0.28
-70	1.97	1.89	1.80	1.70	1.58	1.45	1.15	1.01	0.88	0.75	0.71	0.68	0.62	0.49	0.36	0.29	0.21	0.18
-60	1.87	1.79	1.70	1.60	1.48	1.35	1.05	0.91	0.78	0.65	0.61	0.58	0.52	0.39	0.26	0.19	0.11	0.08
-50	1.77	1.69	1.60	1.50	1.38	1.25	0.95	0.81	0.68	0.55	0.51	0.48	0.42	0.29	0.16	0.09	0.01	0.00
-40	1.67	1.59	1.50	1.40	1.28	1.15	0.85	0.71	0.58	0.45	0.41	0.38	0.32	0.19	0.06	0.00	0.00	0.00
-30	1.57	1.49	1.40	1.30	1.18	1.05	0.75	0.61	0.48	0.35	0.31	0.28	0.22	0.09	0.00	0.00	0.00	0.00
-20	1.47	1.39	1.30	1.20	1.08	0.95	0.65	0.51	0.38	0.25	0.21	0.18	0.12	0.00	0.00	0.00	0.00	0.00
-10	1.37	1.29	1.20	1.10	0.98	0.85	0.55	0.41	0.28	0.15	0.11	0.08	0.02	0.00	0.00	0.00	0.00	0.00
0	1.27	1.19	1.10	1.00	0.88	0.75	0.45	0.31	0.18	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	1.17	1.09	1.00	0.90	0.78	0.65	0.35	0.21	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	1.07	0.99	0.90	0.80	0.68	0.55	0.25	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	0.97	0.89	0.80	0.70	0.58	0.45	0.15	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.87	0.79	0.70	0.60	0.48	0.35	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.77	0.69	0.60	0.50	0.38	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.67	0.59	0.50	0.40	0.28	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.57	0.49	0.40	0.30	0.18	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.47	0.39	0.30	0.20	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.37	0.29	0.20	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.27	0.19	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.17	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks: