

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	269.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	282.9V x 161.1H
	At 50% of Imax	132.4V x 110.5H
	At 90% of Imax	60.4V x 46.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	970.1 lumens per klm.
	To 50% of Imax	637.2 lumens per klm.
	To 90% of Imax	153.9 lumens per klm.

Upward LOR	13.6 %
Downward LOR	86.4 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Maya-square Acrylic-1200mm-RGBW GREED-110 130D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001489
MFR.:	SUR.:	Shielding Angle:

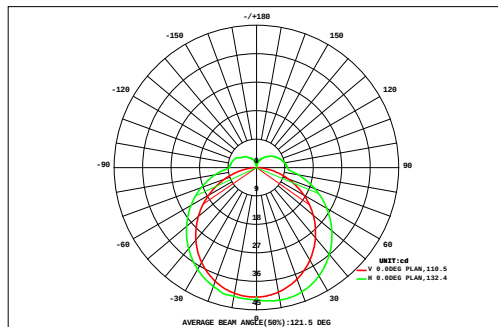

DATA OF LAMP		Eff: 17.26lm/W	
MODEL	MAYA.12.14(30)	Imax(cd)	42.54
NOMINAL POWER(W)	9.13	AVAILABILITY(%)	93.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	147.5
NOMINAL FLUX(lm)	157.6	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	157.6
TEST VOLTAGE(V)	221.3	q @50%(H,V)	110,132DEG

		AREA FLUX DIAGRAM																UNIT:lm				F t	F a
		0.00	0.02	0.05	0.08	0.13	0.18	0.23	0.28	0.32	0.32	0.28	0.23	0.17	0.12	0.08	0.04	0.02	0.00	2.53	2.37		
VERTICAL (DEG)	90	0.00	0.02	0.06	0.12	0.20	0.28	0.36	0.43	0.49	0.49	0.43	0.36	0.28	0.20	0.12	0.06	0.02	0.00	3.93	3.86		
	80	0.00	0.03	0.09	0.18	0.29	0.40	0.51	0.60	0.67	0.67	0.60	0.51	0.40	0.29	0.18	0.09	0.03	0.00	5.55	5.51		
	70	0.00	0.04	0.12	0.23	0.37	0.52	0.65	0.77	0.84	0.84	0.76	0.65	0.51	0.37	0.23	0.12	0.04	0.00	7.08	7.06		
	60	0.01	0.05	0.14	0.28	0.45	0.62	0.78	0.91	1.00	1.00	0.91	0.78	0.61	0.44	0.28	0.14	0.05	0.01	8.45	8.43		
	50	0.01	0.05	0.16	0.32	0.51	0.71	0.89	1.03	1.12	1.12	1.03	0.88	0.70	0.50	0.32	0.16	0.06	0.01	9.57	9.55		
	40	0.01	0.06	0.18	0.35	0.55	0.77	0.97	1.12	1.22	1.21	1.11	0.95	0.76	0.54	0.34	0.18	0.06	0.01	10.4	10.4		
	30	0.01	0.06	0.19	0.37	0.58	0.81	1.01	1.17	1.26	1.26	1.15	0.99	0.79	0.57	0.36	0.18	0.06	0.01	10.8	10.8		
		0.01	0.06	0.19	0.37	0.59	0.81	1.02	1.17	1.26	1.25	1.16	1.00	0.79	0.57	0.36	0.18	0.06	0.01	10.9	10.8		
		0.01	0.06	0.19	0.37	0.58	0.81	1.01	1.16	1.24	1.24	1.15	0.99	0.79	0.57	0.36	0.18	0.06	0.01	10.8	10.8		
		0.01	0.06	0.18	0.36	0.57	0.79	0.99	1.14	1.23	1.22	1.13	0.97	0.78	0.56	0.35	0.18	0.06	0.01	10.6	10.6		
	-30	0.01	0.06	0.18	0.34	0.54	0.75	0.93	1.08	1.16	1.16	1.07	0.92	0.74	0.53	0.34	0.17	0.06	0.01	10.0	10.0		
	-40	0.01	0.05	0.16	0.31	0.49	0.68	0.85	0.98	1.06	1.06	0.97	0.84	0.67	0.49	0.31	0.16	0.06	0.01	9.17	9.15		
	-50	0.01	0.05	0.14	0.27	0.43	0.60	0.74	0.86	0.93	0.93	0.86	0.74	0.59	0.43	0.27	0.14	0.05	0.01	8.04	8.02		
	-60	0.00	0.04	0.12	0.23	0.36	0.50	0.62	0.72	0.79	0.79	0.72	0.62	0.49	0.36	0.23	0.12	0.04	0.00	6.74	6.71		
	-70	0.00	0.03	0.09	0.18	0.28	0.39	0.49	0.57	0.63	0.63	0.57	0.49	0.39	0.28	0.18	0.09	0.03	0.00	5.32	5.28		
	-80	0.00	0.02	0.06	0.12	0.20	0.28	0.35	0.42	0.47	0.47	0.42	0.35	0.28	0.20	0.12	0.06	0.02	0.00	3.85	3.78		
-90	0.00	0.02	0.04	0.08	0.12	0.17	0.22	0.27	0.31	0.31	0.27	0.22	0.17	0.12	0.07	0.04	0.01	0.00	2.47	2.29			
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90		
F t		0.10	0.80	2.33	4.56	7.25	10.1	12.6	14.7	16.0	16.0	14.6	12.5	9.91	7.14	4.50	2.31	0.79	0.09	136	---		
F a		0.00	0.65	2.21	4.52	7.25	10.1	12.6	14.7	16.0	16.0	14.6	12.5	9.91	7.13	4.44	2.20	0.66	0.00	---	135		

one-half-peak spread: U:52.0,D:55.2 , L:53.9,R:54.2


NEMA Beam Type: Type 7

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Maya-square Acrylic-1200mm-RGBW GREED-110 130D-Rev1	TYPE: RGBW 3000K-GREEN	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200 mm	SERIAL No.: IES001489
MFR.:	SUR.:	Shielding Angle:

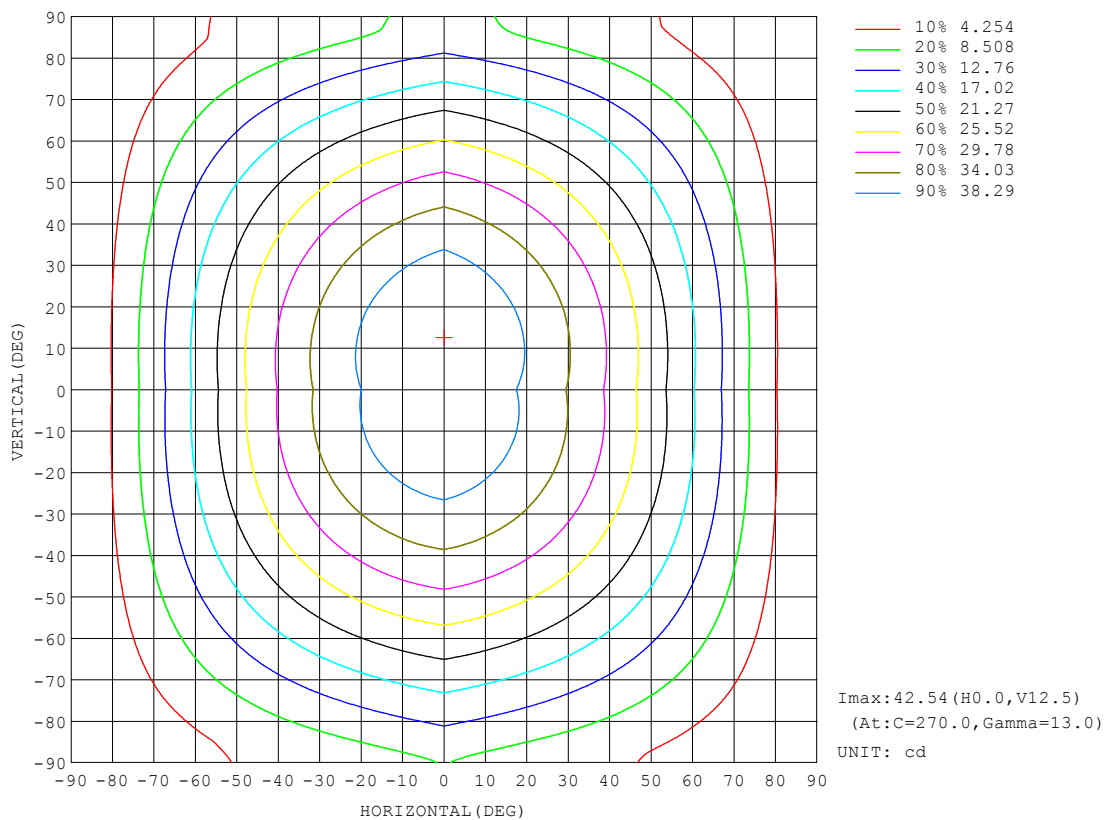


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Maya-square acrylic-1200mm-RGBW GREED-110 130D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001489
MFR.:	SUR.:	Shielding Angle:

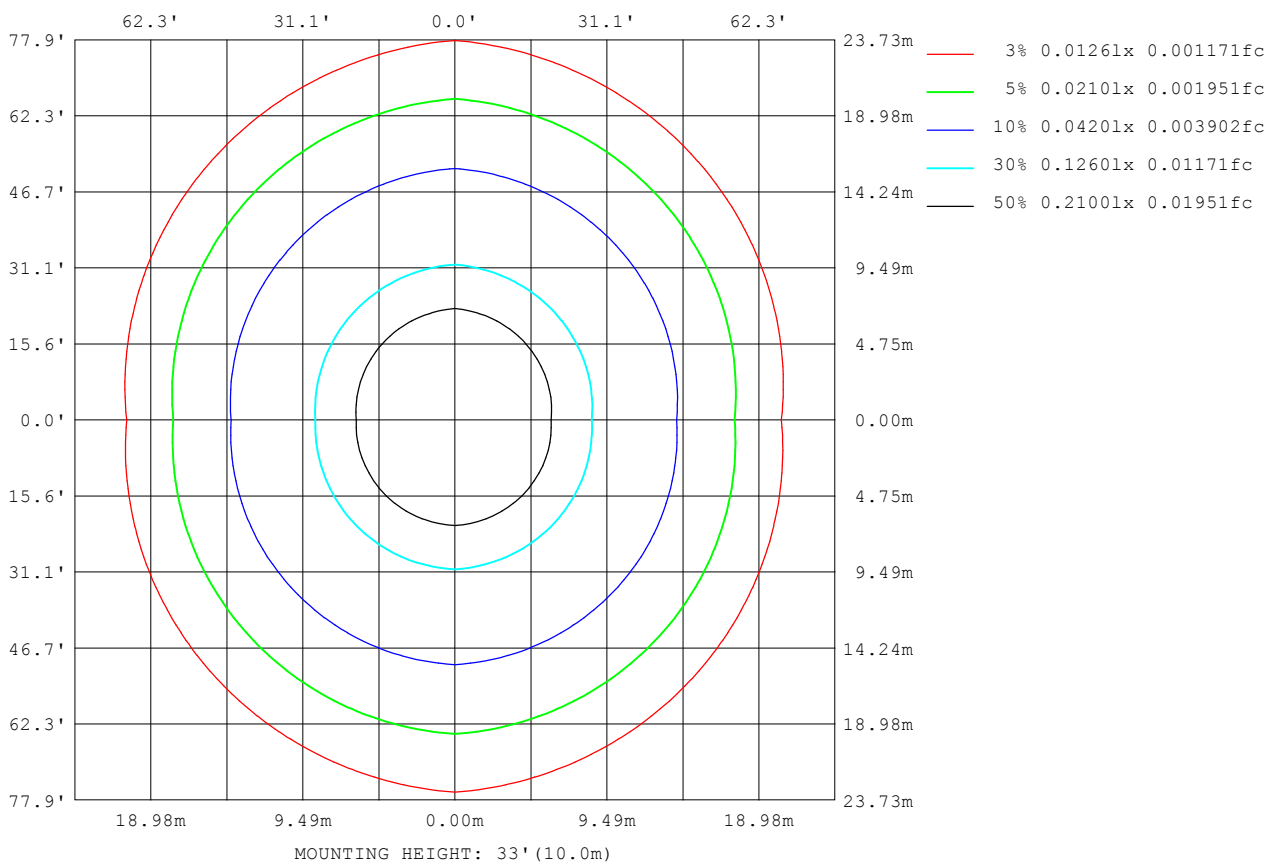

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

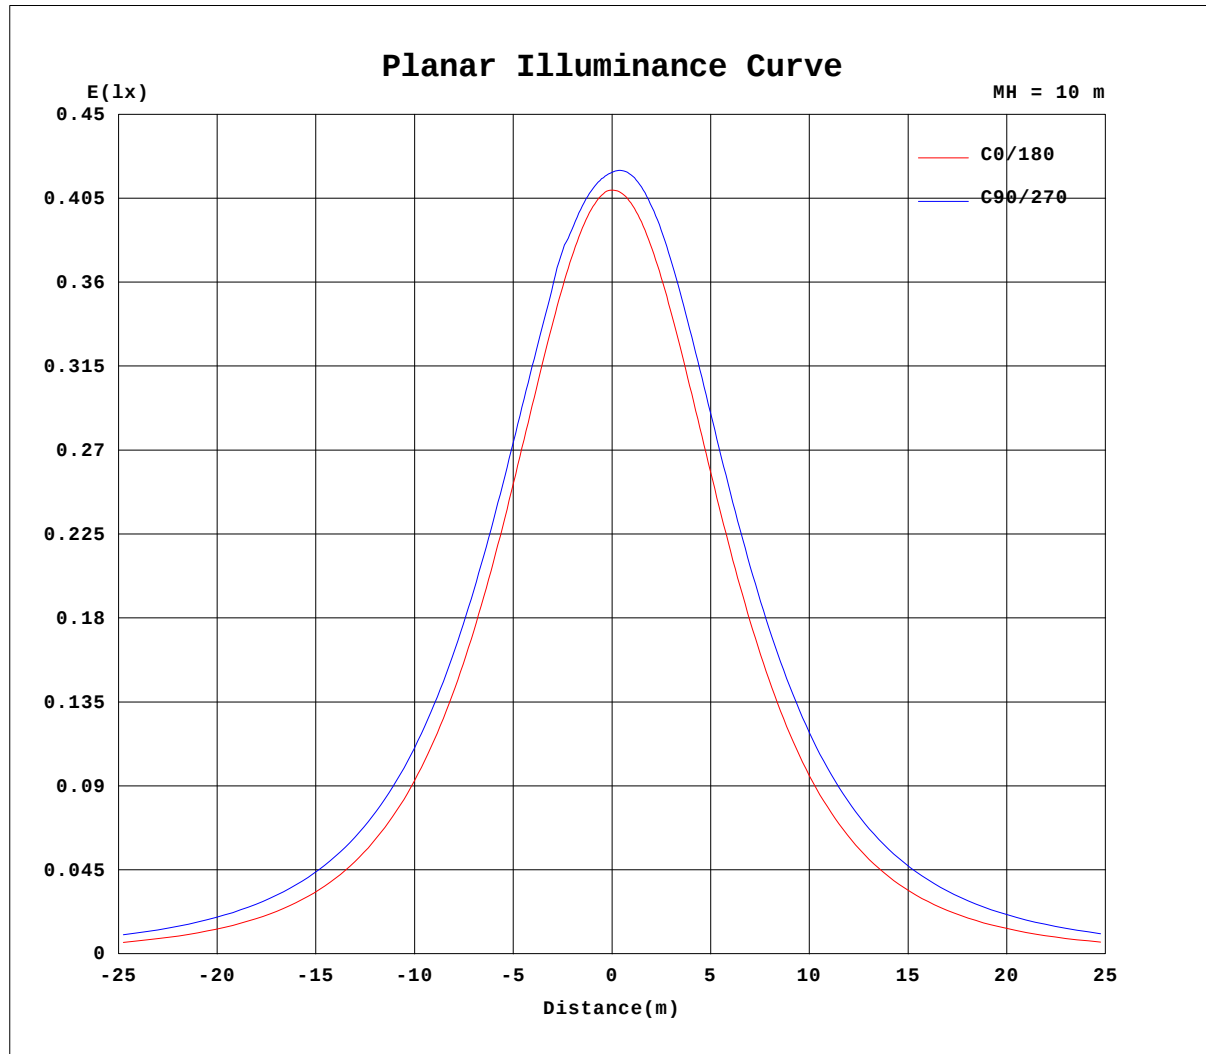


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Maya-square Acrylic-1200mm-RGBW GREED-110 130D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001489
MFR.:	SUR.:	Shielding Angle:

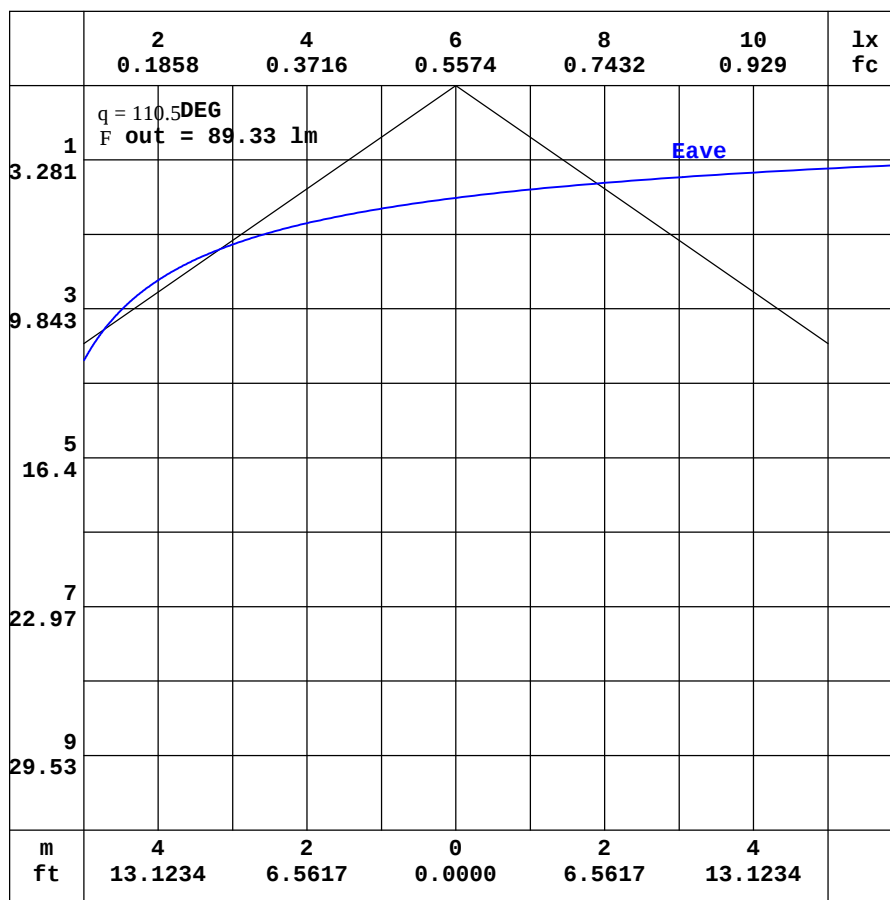

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90 DEG
H_(b) Interval: 0.5 DEG
Test Speed: LOW
Temperature: 25.3 DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180 DEG
V(B) Interval: 0.5 DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-square Acrylic-1200mm-RGBW GREED-110 130D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001489
MFR.:	SUR.:	Shielding Angle:

Table--1
UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.92	0.90	0.84	0.84	0.82	0.79	0.76	0.75	0.75	0.75	0.75	0.76	0.77	0.77	0.77	0.75	0.73	0.73	0.76
-170	0.92	0.98	0.99	1.05	1.09	1.12	1.13	1.14	1.17	1.22	1.23	1.26	1.28	1.30	1.32	0.71	0.70	0.69	0.68
-160	0.92	1.05	1.14	1.26	1.36	1.45	1.53	1.53	1.60	1.68	1.76	1.78	1.83	1.89	1.94	2.02	2.14	2.29	2.50
-150	0.92	1.13	1.29	1.45	1.63	1.78	1.92	1.98	2.05	2.14	2.27	2.42	2.44	2.53	2.65	2.78	2.94	3.14	3.40
-140	0.92	1.20	1.43	1.63	1.88	2.09	2.29	2.48	2.58	2.65	2.80	2.93	3.12	3.34	3.51	3.63	3.79	4.04	4.32
-130	0.92	1.25	1.53	1.81	2.09	2.38	2.63	2.89	3.14	3.36	3.48	3.57	3.78	3.98	4.18	4.40	4.68	4.98	5.29
-120	0.92	1.29	1.63	1.98	2.28	2.61	2.94	3.25	3.55	3.86	4.16	4.46	4.76	5.05	5.30	5.54	5.79	6.08	6.41
-110	0.92	1.32	1.72	2.08	2.46	2.83	3.18	3.55	3.91	4.27	4.63	4.98	5.33	5.68	6.05	6.42	6.80	7.18	7.57
-100	0.92	1.34	1.76	2.17	2.59	2.99	3.38	3.79	4.18	4.59	4.99	5.39	5.79	6.19	6.59	6.99	7.40	7.81	8.22
-90	0.92	1.35	1.78	2.21	2.64	3.07	3.50	3.93	4.36	4.79	5.22	5.65	6.08	6.51	6.94	7.37	7.80	8.23	8.66
-80	0.92	1.36	1.83	2.34	3.02	3.80	4.63	5.50	6.36	7.22	8.04	8.85	9.62	10.3	11.0	11.7	12.3	12.9	13.4
-70	0.92	1.35	2.01	3.12	4.43	5.79	7.13	8.49	9.78	11.0	12.2	13.3	14.3	15.3	16.1	16.9	17.6	18.2	18.7
-60	0.92	1.34	2.52	4.23	6.03	7.90	9.74	11.5	13.2	14.8	16.4	17.8	19.1	20.2	21.2	22.1	22.9	23.5	23.9
-50	0.92	1.40	3.13	5.28	7.57	9.87	12.1	14.3	16.4	18.4	20.3	22.0	23.5	24.9	26.1	27.1	27.9	28.5	28.9
-40	0.92	1.54	3.67	6.24	8.90	11.6	14.3	16.8	19.3	21.6	23.8	25.7	27.5	29.1	30.4	31.5	32.4	33.0	33.5
-30	0.92	1.64	4.09	6.96	9.95	13.0	15.9	18.8	21.6	24.2	26.6	28.8	30.8	32.6	34.0	35.2	36.2	36.8	37.2
-20	0.92	1.71	4.35	7.46	10.6	13.9	17.1	20.2	23.2	26.0	28.7	31.1	33.2	35.1	36.7	37.9	38.9	39.6	40.0
-10	0.92	1.71	4.45	7.65	11.0	14.3	17.7	20.9	24.1	27.0	29.8	32.3	34.6	36.5	38.1	39.4	40.5	41.0	41.4
0	0.92	1.66	4.36	7.54	10.9	14.2	17.6	20.9	24.1	27.1	29.9	32.5	34.7	36.7	38.3	39.5	40.4	40.8	40.9
10	0.92	1.71	4.45	7.66	11.0	14.4	17.8	21.1	24.3	27.3	30.1	32.7	35.0	37.0	38.7	40.0	41.1	41.8	42.5
20	0.92	1.71	4.35	7.48	10.7	14.0	17.3	20.5	23.6	26.5	29.2	31.8	34.1	36.0	37.7	39.1	40.3	41.2	41.9
30	0.92	1.64	4.09	6.99	10.0	13.1	16.2	19.2	22.1	24.8	27.4	29.7	31.9	33.8	35.5	36.9	38.0	38.9	39.5
40	0.92	1.54	3.66	6.26	8.98	11.8	14.5	17.2	19.8	22.3	24.6	26.7	28.7	30.4	32.0	33.3	34.4	35.2	35.8
50	0.92	1.41	3.11	5.28	7.63	10.0	12.4	14.7	16.9	19.1	21.1	22.9	24.6	26.2	27.5	28.7	29.7	30.5	31.1
60	0.92	1.36	2.51	4.21	6.04	7.96	9.88	11.8	13.6	15.3	17.0	18.5	19.9	21.2	22.4	23.4	24.3	25.1	25.6
70	0.92	1.40	2.03	3.10	4.40	5.77	7.15	8.56	9.92	11.3	12.5	13.7	14.8	15.8	16.8	17.7	18.4	19.1	19.7
80	0.92	1.41	1.91	2.42	3.06	3.80	4.59	5.43	6.29	7.15	7.99	8.80	9.59	10.3	11.0	11.7	12.3	12.9	13.5
90	0.92	1.42	1.91	2.41	2.90	3.40	3.89	4.38	4.88	5.37	5.87	6.36	6.85	7.35	7.84	8.34	8.83	9.33	9.82
100	0.92	1.41	1.88	2.35	2.82	3.27	3.71	4.16	4.60	5.04	5.48	5.92	6.35	6.79	7.22	7.66	8.11	8.56	9.02
110	0.92	1.38	1.83	2.24	2.66	3.06	3.44	3.83	4.21	4.59	4.96	5.33	5.70	6.07	6.44	6.82	7.21	7.62	8.04
120	0.92	1.34	1.73	2.11	2.44	2.79	3.13	3.46	3.76	4.06	4.35	4.64	4.93	5.22	5.53	5.84	6.18	6.53	6.91
130	0.92	1.30	1.61	1.91	2.21	2.51	2.77	3.02	3.25	3.47	3.69	3.89	4.11	4.32	4.55	4.80	5.04	5.33	5.67
140	0.92	1.23	1.49	1.72	1.97	2.18	2.38	2.56	2.72	2.87	3.02	3.15	3.26	3.40	3.55	3.74	3.96	4.20	4.50
150	0.92	1.16	1.34	1.51	1.69	1.84	1.97	2.08	2.19	2.29	2.36	2.44	2.53	2.61	2.69	2.80	2.93	3.11	3.36
160	0.92	1.07	1.17	1.30	1.40	1.49	1.57	1.62	1.69	1.73	1.78	1.83	1.85	1.88	1.90	1.92	1.96	2.06	2.24
170	0.92	0.99	1.01	1.07	1.11	1.14	1.16	1.18	1.21	1.23	1.25	1.27	1.28	1.27	1.25	1.22	1.18	1.05	0.98
180	0.92	0.90	0.84	0.84	0.82	0.79	0.76	0.75	0.75	0.75	0.75	0.76	0.77	0.77	0.77	0.75	0.73	0.73	0.76

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-square Acrylic-1200mm-RGBW GREED-110 130D-Rev1	TYPE: RGBW-GREEN	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 1200mm	SERIAL No.: IES001489
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.66	0.64	0.61	0.58	0.55	0.51	0.44	0.41	0.37	0.34	0.34	0.33	0.30	0.27	0.26	0.23	0.20	0.19
-170	0.66	0.64	0.60	1.18	1.12	1.05	0.98	0.93	0.88	0.80	0.77	0.72	0.65	0.57	0.48	0.38	0.28	0.19
-160	2.26	2.08	1.93	1.82	1.72	1.62	1.53	1.48	1.37	1.26	1.19	1.13	1.00	0.85	0.68	0.53	0.36	0.19
-150	3.11	2.88	2.68	2.52	2.37	2.25	2.18	2.01	1.85	1.75	1.64	1.53	1.33	1.13	0.89	0.68	0.43	0.19
-140	4.01	3.73	3.54	3.38	3.18	2.94	2.72	2.56	2.40	2.28	2.14	1.90	1.64	1.38	1.08	0.80	0.49	0.19
-130	4.95	4.62	4.32	4.06	3.84	3.61	3.38	3.24	3.10	2.82	2.53	2.23	1.92	1.58	1.26	0.92	0.54	0.19
-120	6.05	5.73	5.45	5.18	4.90	4.58	4.25	3.91	3.57	3.23	2.88	2.51	2.15	1.78	1.40	1.00	0.59	0.19
-110	7.15	6.73	6.32	5.92	5.52	5.13	4.75	4.36	3.95	3.56	3.16	2.76	2.35	1.93	1.49	1.06	0.62	0.19
-100	7.77	7.33	6.89	6.45	6.01	5.57	5.13	4.69	4.25	3.81	3.36	2.91	2.47	2.01	1.55	1.10	0.64	0.19
-90	8.19	7.72	7.24	6.77	6.30	5.83	5.36	4.89	4.42	3.95	3.48	3.01	2.54	2.07	1.60	1.13	0.66	0.19
-80	12.9	12.3	11.7	11.0	10.4	9.65	8.89	8.09	7.26	6.40	5.51	4.60	3.72	2.86	2.02	1.25	0.66	0.19
-70	18.2	17.6	16.9	16.1	15.3	14.3	13.3	12.2	11.1	9.83	8.55	7.21	5.87	4.49	3.09	1.83	0.74	0.19
-60	23.4	22.8	22.1	21.1	20.1	19.0	17.7	16.3	14.8	13.2	11.5	9.77	7.96	6.12	4.30	2.49	0.94	0.19
-50	28.4	27.8	26.9	25.9	24.7	23.3	21.8	20.1	18.3	16.3	14.3	12.1	9.89	7.64	5.37	3.19	1.19	0.19
-40	33.0	32.2	31.3	30.2	28.8	27.2	25.4	23.5	21.3	19.0	16.7	14.1	11.6	8.93	6.31	3.76	1.39	0.19
-30	36.7	36.0	34.9	33.7	32.1	30.4	28.4	26.2	23.8	21.2	18.5	15.7	12.9	9.94	7.03	4.19	1.54	0.19
-20	39.4	38.6	37.6	36.2	34.5	32.6	30.5	28.1	25.5	22.8	19.9	16.8	13.7	10.6	7.49	4.45	1.64	0.19
-10	40.8	40.2	39.0	37.5	35.8	33.8	31.5	29.0	26.4	23.5	20.5	17.3	14.1	10.9	7.68	4.56	1.67	0.19
0	40.7	40.0	38.9	37.5	35.8	33.8	31.5	29.0	26.3	23.5	20.4	17.2	14.0	10.8	7.57	4.48	1.62	0.19
10	41.7	40.8	39.6	38.1	36.3	34.2	31.9	29.4	26.6	23.7	20.6	17.5	14.2	10.9	7.70	4.56	1.67	0.19
20	41.1	40.0	38.8	37.3	35.5	33.4	31.1	28.6	26.0	23.1	20.1	17.0	13.9	10.7	7.52	4.46	1.64	0.19
30	38.8	37.8	36.6	35.1	33.4	31.4	29.3	26.9	24.4	21.7	18.9	16.0	13.0	10.0	7.06	4.19	1.54	0.19
40	35.1	34.2	33.1	31.7	30.1	28.4	26.4	24.3	22.0	19.6	17.0	14.4	11.7	9.01	6.34	3.75	1.39	0.19
50	30.5	29.6	28.6	27.4	26.0	24.5	22.7	20.9	18.9	16.8	14.6	12.3	10.0	7.70	5.38	3.17	1.20	0.19
60	25.0	24.3	23.4	22.3	21.1	19.9	18.4	16.9	15.3	13.5	11.8	9.91	8.03	6.13	4.29	2.48	0.97	0.19
70	19.1	18.4	17.7	16.8	15.8	14.8	13.7	12.5	11.3	9.97	8.62	7.23	5.85	4.45	3.07	1.85	0.78	0.19
80	12.9	12.4	11.7	11.1	10.4	9.62	8.84	8.03	7.19	6.33	5.44	4.56	3.71	2.90	2.10	1.33	0.72	0.19
90	9.29	8.75	8.22	7.68	7.14	6.61	6.07	5.54	5.00	4.47	3.93	3.40	2.86	2.33	1.79	1.26	0.72	0.19
100	8.53	8.04	7.55	7.08	6.60	6.13	5.66	5.18	4.70	4.22	3.73	3.24	2.75	2.24	1.74	1.23	0.71	0.19
110	7.58	7.15	6.72	6.31	5.90	5.50	5.09	4.69	4.27	3.85	3.44	3.01	2.58	2.13	1.65	1.17	0.68	0.19
120	6.50	6.12	5.76	5.41	5.08	4.75	4.43	4.10	3.77	3.43	3.08	2.71	2.32	1.94	1.53	1.09	0.64	0.19
130	5.30	4.98	4.71	4.44	4.18	3.94	3.70	3.45	3.21	2.94	2.66	2.36	2.06	1.70	1.36	1.00	0.59	0.19
140	4.17	3.90	3.65	3.43	3.24	3.08	2.94	2.78	2.61	2.42	2.21	1.98	1.73	1.47	1.17	0.87	0.53	0.19
150	3.08	2.87	2.70	2.56	2.45	2.34	2.20	2.10	2.01	1.89	1.74	1.58	1.39	1.19	0.95	0.72	0.46	0.19
160	2.03	1.90	1.83	1.78	1.72	1.64	1.58	1.49	1.42	1.36	1.27	1.17	1.03	0.89	0.72	0.56	0.38	0.19
170	1.02	1.12	1.11	1.11	1.10	1.05	0.99	0.95	0.89	0.84	0.81	0.75	0.67	0.59	0.49	0.40	0.29	0.19
180	0.66	0.64	0.61	0.58	0.55	0.51	0.44	0.41	0.37	0.34	0.34	0.33	0.30	0.27	0.26	0.23	0.20	0.19

H_(b) Range: -90 - 90DEGH_(b) Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-08-15

V(B) Range: -180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: