

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	273.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	281.2V x 161.1H
	At 50% of Imax	130.6V x 108.6H
	At 90% of Imax	58.4V x 44.9H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	967.9 lumens per klm.
	To 50% of Imax	627.0 lumens per klm.
	To 90% of Imax	149.2 lumens per klm.

Upward LOR	13.7 %
Downward LOR	86.3 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H_(b) Range:-90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Maya-square acrylic-900mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001496
MFR.:	SUR.:	Shielding Angle:

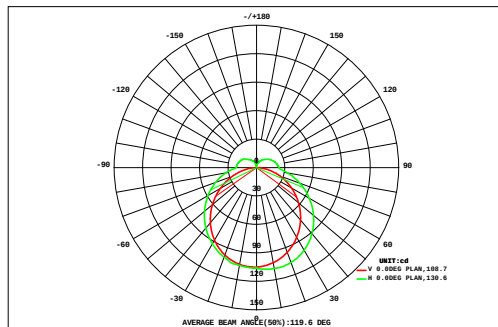

DATA OF LAMP		Eff: 29.56lm/W	
MODEL	MAYA.09.14(30)	Imax(cd)	108.2
NOMINAL POWER(W)	13.4	AVAILABILITY(%)	93.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	370.0
NOMINAL FLUX(lm)	396.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	396.1
TEST VOLTAGE(V)	221.3	q @50%(H,V)	109,131DEG

		AREA FLUX DIAGRAM															UNIT:lm				F t	F a	
		0.01	0.05	0.11	0.20	0.31	0.44	0.56	0.68	0.78	0.78	0.68	0.56	0.43	0.31	0.19	0.10	0.04	0.01	6.26	5.80		
VERTICAL (DEG)	90	0.01	0.06	0.15	0.31	0.50	0.70	0.90	1.07	1.21	1.20	1.07	0.90	0.70	0.50	0.31	0.16	0.05	0.01	9.79	9.59		
	80	0.01	0.08	0.23	0.45	0.72	1.00	1.28	1.51	1.67	1.67	1.50	1.27	1.00	0.71	0.44	0.23	0.08	0.01	13.8	13.7		
	70	0.01	0.10	0.30	0.58	0.93	1.30	1.64	1.93	2.12	2.11	1.91	1.62	1.28	0.91	0.57	0.29	0.10	0.01	17.7	17.7		
	60	0.01	0.12	0.36	0.70	1.12	1.56	1.98	2.31	2.52	2.52	2.29	1.95	1.53	1.10	0.69	0.35	0.12	0.01	21.2	21.2		
	50	0.02	0.14	0.41	0.80	1.28	1.79	2.25	2.62	2.86	2.85	2.59	2.21	1.74	1.25	0.78	0.40	0.14	0.02	24.1	24.1		
	40	0.02	0.15	0.45	0.88	1.40	1.95	2.45	2.85	3.09	3.08	2.81	2.40	1.89	1.35	0.85	0.43	0.15	0.02	26.2	26.2		
	30	0.02	0.16	0.47	0.92	1.47	2.05	2.57	2.98	3.21	3.20	2.93	2.51	1.98	1.41	0.89	0.45	0.16	0.02	27.4	27.3		
	-30	0.02	0.16	0.47	0.93	1.49	2.07	2.60	3.00	3.21	3.19	2.94	2.52	1.99	1.42	0.89	0.45	0.16	0.02	27.5	27.5		
		0.02	0.16	0.47	0.93	1.48	2.06	2.58	2.97	3.17	3.15	2.91	2.49	1.97	1.41	0.89	0.45	0.16	0.02	27.3	27.2		
		0.02	0.16	0.46	0.91	1.45	2.01	2.51	2.89	3.10	3.08	2.84	2.44	1.93	1.39	0.87	0.45	0.16	0.02	26.7	26.6		
		0.02	0.15	0.44	0.86	1.36	1.89	2.35	2.71	2.91	2.90	2.67	2.30	1.83	1.32	0.83	0.43	0.15	0.02	25.1	25.1		
		-40	0.02	0.14	0.40	0.78	1.24	1.71	2.13	2.46	2.65	2.64	2.43	2.09	1.67	1.20	0.76	0.39	0.14	0.02	22.9	22.8	
		-50	0.01	0.12	0.35	0.68	1.08	1.49	1.86	2.15	2.32	2.31	2.13	1.83	1.46	1.05	0.67	0.35	0.12	0.01	20.0	19.9	
		-60	0.01	0.10	0.29	0.57	0.90	1.24	1.55	1.80	1.95	1.95	1.78	1.53	1.22	0.88	0.56	0.29	0.10	0.01	16.7	16.6	
		-70	0.01	0.08	0.22	0.44	0.70	0.96	1.22	1.42	1.56	1.56	1.41	1.21	0.96	0.69	0.44	0.23	0.08	0.01	13.2	13.1	
	-80	0.01	0.06	0.16	0.31	0.49	0.69	0.88	1.04	1.16	1.16	1.04	0.87	0.69	0.49	0.31	0.16	0.05	0.01	9.56	9.35		
-90	0.01	0.05	0.11	0.20	0.31	0.43	0.55	0.67	0.77	0.77	0.67	0.55	0.42	0.30	0.19	0.10	0.04	0.01	6.13	5.64			
		-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)				20	30	40	50	60	70	80	90		
F t	0.26	2.02	5.84	11.4	18.2	25.3	31.9	37.0	40.3	40.1	36.6	31.2	24.7	17.7	11.1	5.70	1.98	0.24	342	---			
F a	0.00	1.65	5.54	11.3	18.2	25.3	31.9	37.0	40.3	40.1	36.6	31.2	24.7	17.7	10.9	5.44	1.65	0.00	---	340			

one-half-peak spread: U:50.9,D:54.5 , L:53.4,R:55.9


NEMA Beam Type: Type 7

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Maya-Square Acrylic-900mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001496
MFR.:	SUR.:	Shielding Angle:

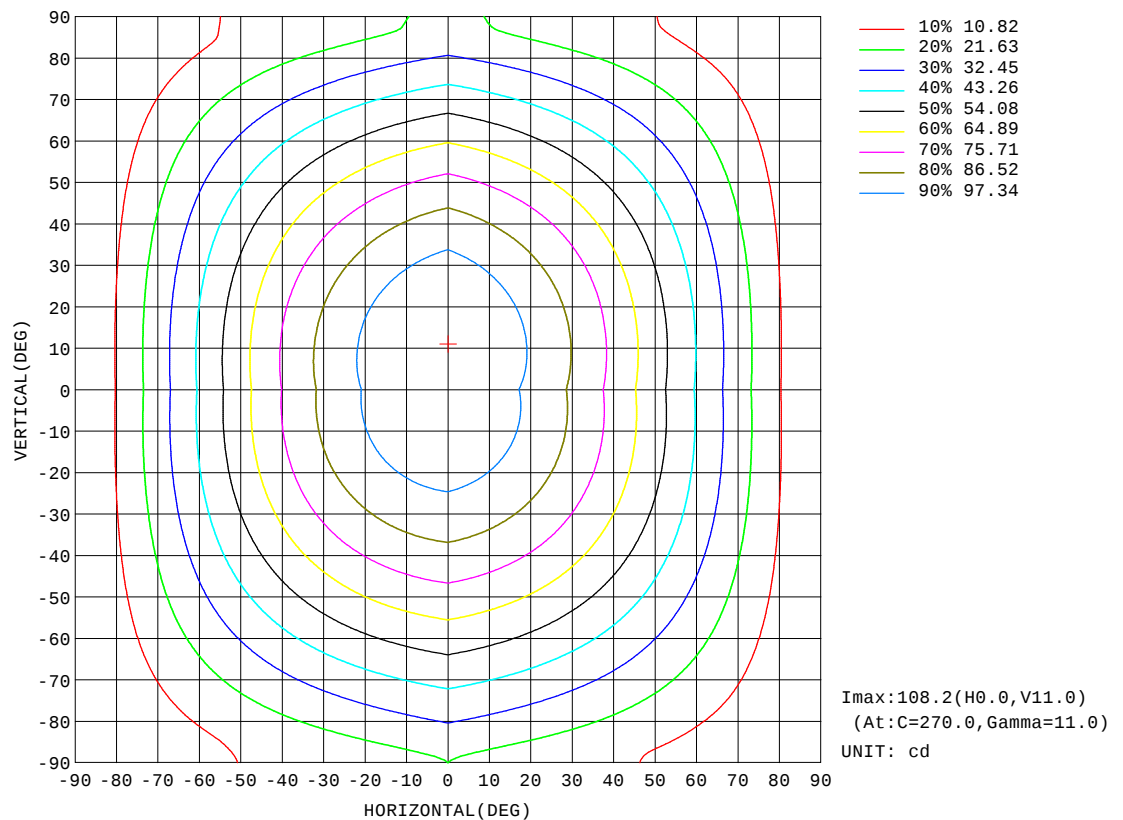


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Maya-Square Acrylic-900mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001496
MFR.:	SUR.:	Shielding Angle:

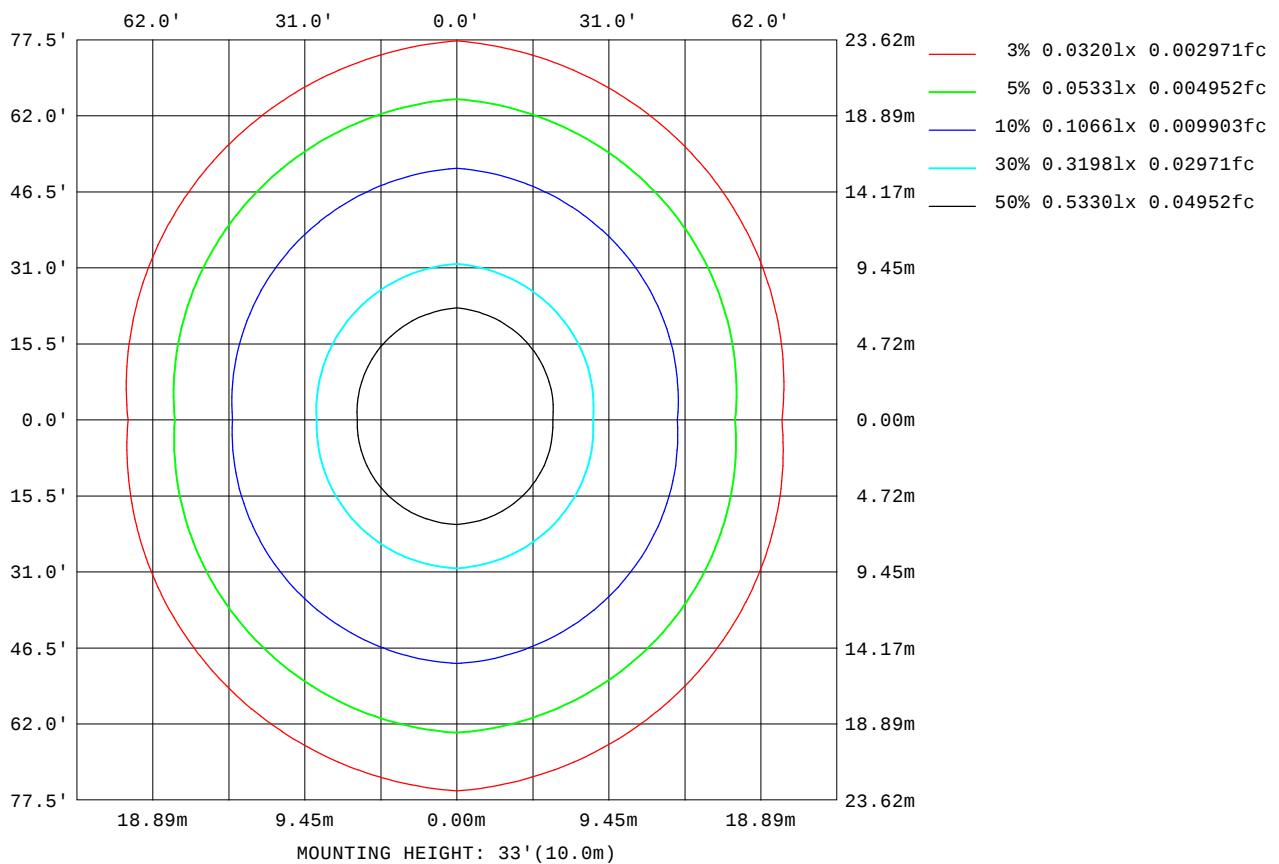

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

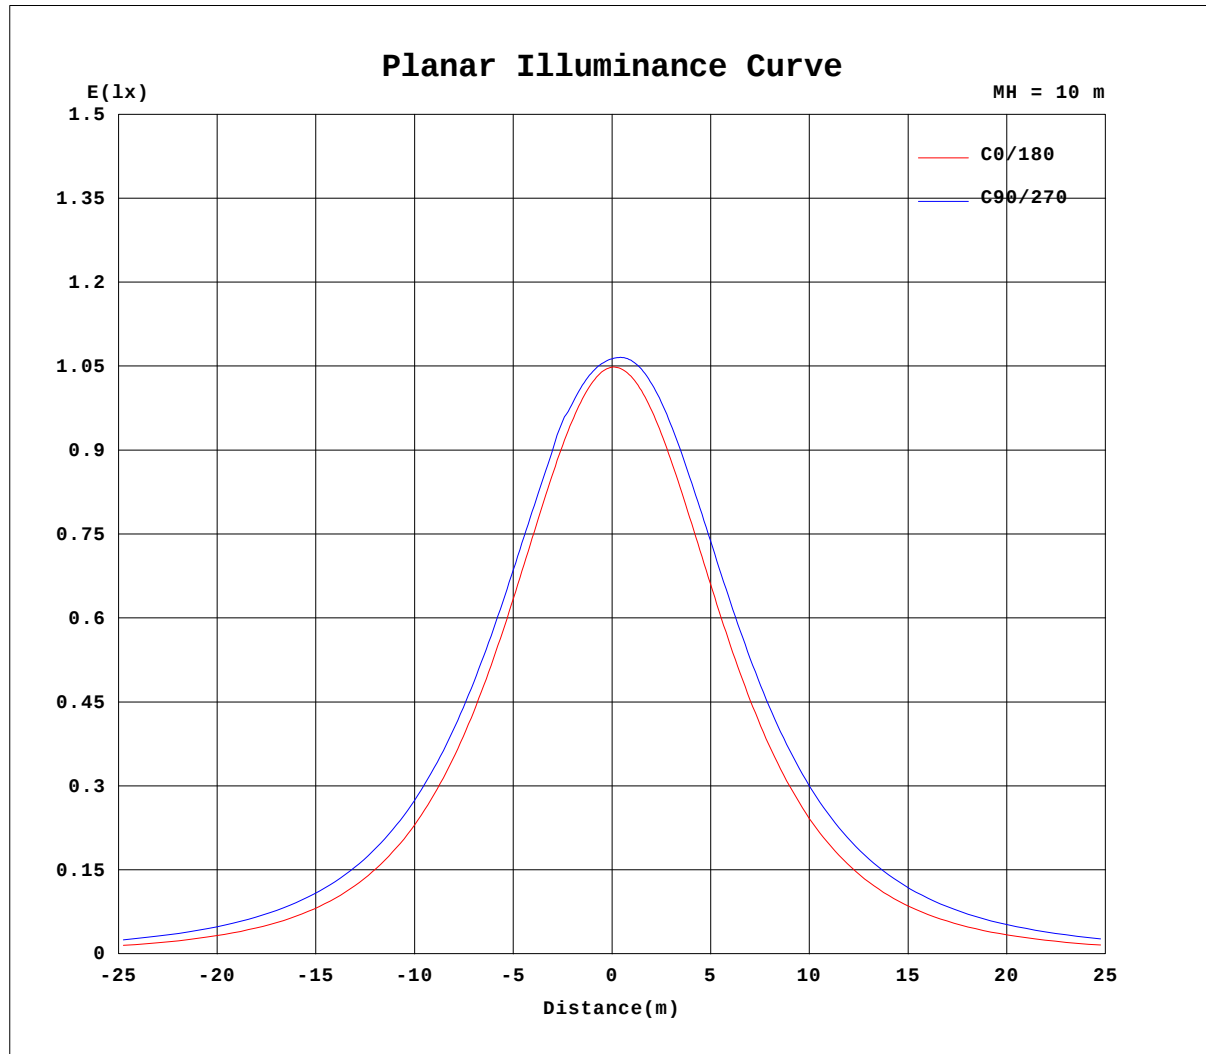


H(b) Range: -90 - 90DEG
H(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Maya-Square Acrylic-900mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001496
MFR.:	SUR.:	Shielding Angle:

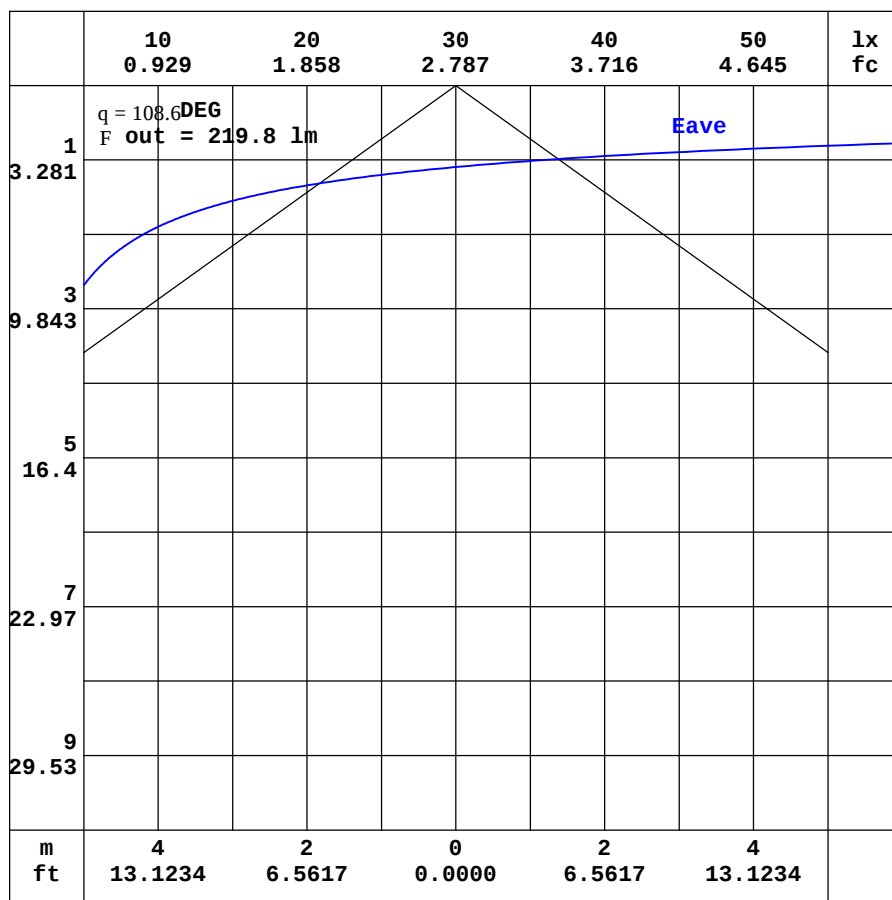

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-Square Acrylic-900mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001496
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	2.45	2.50	2.46	2.28	2.30	2.25	2.23	2.18	2.11	2.02	2.02	2.02	2.03	2.06	2.09	2.09	2.07	2.00	2.04
-170	2.45	2.68	2.81	2.81	2.99	3.09	3.20	3.28	3.24	3.18	3.21	3.24	3.31	3.39	3.52	1.95	1.93	1.89	1.84
-160	2.45	2.86	3.16	3.34	3.67	3.93	4.17	4.40	4.48	4.44	4.49	4.55	4.66	4.82	5.00	5.26	5.60	5.98	6.55
-150	2.45	3.03	3.49	3.86	4.28	4.72	5.12	5.49	5.83	5.93	5.94	6.07	6.22	6.39	6.66	7.01	7.44	7.96	8.62
-140	2.45	3.18	3.79	4.39	4.89	5.49	6.03	6.54	7.04	7.51	7.86	7.95	8.11	8.40	8.75	9.13	9.59	10.2	10.9
-130	2.45	3.30	4.05	4.83	5.47	6.15	6.86	7.52	8.17	8.80	9.43	10.0	10.6	11.2	11.6	12.0	12.5	13.1	13.9
-120	2.45	3.39	4.31	5.16	6.03	6.80	7.57	8.37	9.18	9.95	10.7	11.5	12.3	13.1	13.9	14.7	15.6	16.5	17.4
-110	2.45	3.46	4.47	5.44	6.36	7.33	8.27	9.17	10.0	10.9	11.8	12.7	13.6	14.5	15.4	16.4	17.3	18.3	19.3
-100	2.45	3.49	4.55	5.59	6.63	7.65	8.66	9.66	10.7	11.7	12.7	13.7	14.7	15.7	16.7	17.7	18.8	19.8	20.8
-90	2.45	3.51	4.58	5.65	6.71	7.78	8.84	9.91	11.0	12.0	13.1	14.2	15.2	16.3	17.4	18.4	19.5	20.6	21.6
-80	2.45	3.51	4.65	5.91	7.48	9.43	11.5	13.7	15.8	17.9	20.0	22.0	23.9	25.6	27.3	28.9	30.4	31.8	33.1
-70	2.45	3.49	5.00	7.81	11.1	14.6	17.9	21.3	24.4	27.5	30.4	33.1	35.6	37.9	40.0	41.9	43.5	45.0	46.2
-60	2.45	3.46	6.35	10.7	15.3	19.9	24.4	28.8	33.0	37.0	40.7	44.2	47.4	50.2	52.7	54.9	56.7	58.1	59.3
-50	2.45	3.56	7.88	13.4	19.1	24.8	30.4	35.8	41.0	46.0	50.6	54.8	58.6	62.0	64.9	67.3	69.3	70.7	71.8
-40	2.45	3.84	9.36	15.8	22.4	29.1	35.7	42.0	48.2	54.0	59.4	64.4	68.8	72.7	76.0	78.8	80.8	82.3	83.3
-30	2.45	4.13	10.5	17.7	25.0	32.5	39.9	47.1	54.1	60.7	66.8	72.4	77.5	81.8	85.5	88.5	90.7	92.2	93.1
-20	2.45	4.31	11.2	18.9	26.8	34.8	42.9	50.7	58.4	65.6	72.3	78.5	84.0	88.7	92.7	95.8	98.2	99.7	100
-10	2.45	4.36	11.4	19.4	27.6	36.0	44.4	52.7	60.7	68.4	75.4	82.0	87.8	92.9	97.0	100	103	104	105
0	2.45	4.23	11.2	19.1	27.4	35.8	44.2	52.7	60.9	68.6	75.9	82.6	88.6	93.8	98.1	101	104	105	105
10	2.45	4.36	11.4	19.4	27.7	36.2	44.7	53.1	61.3	69.1	76.4	83.2	89.2	94.5	98.9	102	105	107	108
20	2.45	4.31	11.2	18.9	27.0	35.2	43.4	51.6	59.5	67.0	74.2	80.7	86.6	91.8	96.2	99.8	103	105	106
30	2.45	4.12	10.5	17.7	25.3	32.9	40.6	48.2	55.6	62.6	69.2	75.3	80.9	85.9	90.1	93.7	96.6	98.9	101
40	2.45	3.85	9.35	15.9	22.7	29.6	36.4	43.2	49.7	56.0	62.0	67.5	72.5	77.1	81.0	84.4	87.2	89.3	90.9
50	2.45	3.57	7.86	13.5	19.3	25.2	31.0	36.8	42.4	47.7	52.8	57.6	62.0	65.9	69.4	72.4	75.0	77.0	78.5
60	2.45	3.50	6.33	10.7	15.3	20.1	24.8	29.4	34.0	38.3	42.4	46.3	49.9	53.1	56.1	58.6	60.9	62.7	64.2
70	2.45	3.58	5.03	7.77	11.0	14.6	18.0	21.5	24.9	28.1	31.2	34.2	36.9	39.5	41.8	44.0	45.9	47.5	48.9
80	2.45	3.62	4.82	6.06	7.55	9.42	11.4	13.6	15.7	17.8	19.9	22.0	23.9	25.7	27.5	29.2	30.7	32.1	33.4
90	2.45	3.64	4.83	6.02	7.21	8.40	9.59	10.8	12.0	13.2	14.4	15.5	16.7	17.9	19.1	20.3	21.5	22.7	23.9
100	2.45	3.61	4.78	5.92	7.06	8.16	9.25	10.3	11.4	12.4	13.5	14.5	15.6	16.6	17.7	18.8	19.8	20.9	22.0
110	2.45	3.57	4.68	5.72	6.70	7.69	8.66	9.57	10.5	11.3	12.2	13.1	14.0	14.9	15.8	16.7	17.7	18.6	19.7
120	2.45	3.49	4.48	5.37	6.26	7.05	7.81	8.60	9.38	10.1	10.8	11.5	12.2	12.9	13.7	14.4	15.2	16.1	17.0
130	2.45	3.39	4.19	4.99	5.64	6.31	7.00	7.59	8.17	8.71	9.24	9.75	10.3	10.8	11.3	11.9	12.5	13.2	14.1
140	2.45	3.24	3.90	4.51	5.00	5.59	6.06	6.50	6.92	7.29	7.61	7.93	8.23	8.54	8.90	9.32	9.82	10.4	11.1
150	2.45	3.08	3.57	3.94	4.35	4.76	5.10	5.40	5.66	5.85	6.02	6.16	6.34	6.52	6.72	6.98	7.30	7.74	8.35
160	2.45	2.90	3.21	3.39	3.71	3.93	4.14	4.31	4.41	4.49	4.55	4.63	4.69	4.75	4.80	4.89	5.03	5.29	5.71
170	2.45	2.70	2.84	2.84	3.00	3.09	3.18	3.23	3.24	3.21	3.24	3.27	3.28	3.27	3.29	3.23	3.06	2.98	3.13
180	2.45	2.50	2.46	2.28	2.30	2.25	2.23	2.18	2.11	2.02	2.02	2.02	2.03	2.06	2.09	2.09	2.07	2.00	2.03

H_(b) Range: -90 - 90DEG
 H_(b) Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-Square Acrylic-900mm-RGBW 3000K-110 130D-Rev1	TYPE: RGBW-3000K	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001496
MFR.:	SUR.:	Shielding Angle:

Table--2
UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.86	1.80	1.74	1.65	1.54	1.39	1.30	1.21	1.13	1.10	1.08	1.01	0.94	0.87	0.83	0.83	0.69	0.59
-170	1.81	1.76	1.69	1.61	1.50	1.35	1.26	1.17	1.09	1.06	1.04	0.97	0.90	0.83	0.79	0.79	0.65	0.55
-160	5.91	5.46	5.05	4.69	4.42	4.17	3.98	3.83	3.67	3.61	3.41	3.08	2.70	2.31	1.96	1.59	1.07	0.59
-150	7.89	7.29	6.79	6.37	6.02	5.76	5.53	5.30	5.19	4.98	4.54	4.05	3.53	3.01	2.49	1.92	1.23	0.59
-140	10.1	9.45	8.91	8.46	8.04	7.66	7.40	7.23	6.77	6.21	5.60	4.97	4.30	3.65	2.98	2.23	1.37	0.59
-130	13.1	12.3	11.8	11.3	10.8	10.2	9.49	8.78	8.06	7.32	6.57	5.78	5.02	4.23	3.40	2.50	1.49	0.59
-120	16.4	15.4	14.5	13.5	12.7	11.8	10.9	10.1	9.18	8.29	7.43	6.55	5.64	4.72	3.71	2.67	1.60	0.59
-110	18.2	17.1	16.1	15.1	14.1	13.1	12.1	11.2	10.2	9.17	8.17	7.16	6.10	5.03	3.92	2.78	1.68	0.59
-100	19.7	18.6	17.5	16.4	15.3	14.1	13.0	11.9	10.8	9.71	8.59	7.45	6.30	5.16	4.01	2.88	1.74	0.59
-90	20.5	19.3	18.1	17.0	15.8	14.6	13.5	12.3	11.1	9.95	8.78	7.61	6.44	5.27	4.10	2.93	1.76	0.59
-80	31.8	30.4	28.9	27.4	25.7	23.9	22.1	20.1	18.1	16.0	13.9	11.6	9.44	7.30	5.16	3.22	1.77	0.59
-70	44.9	43.5	41.8	39.9	37.7	35.4	32.9	30.2	27.4	24.4	21.3	18.0	14.7	11.3	7.97	4.79	1.96	0.59
-60	58.0	56.4	54.5	52.3	49.7	46.8	43.7	40.2	36.5	32.6	28.5	24.2	19.8	15.3	10.9	6.51	2.54	0.59
-50	70.5	68.8	66.7	64.1	61.1	57.6	53.8	49.6	45.0	40.2	35.2	29.9	24.5	19.0	13.5	8.19	3.22	0.59
-40	82.0	80.2	77.9	74.9	71.4	67.4	62.9	57.9	52.6	46.9	41.0	34.8	28.5	22.1	15.8	9.58	3.76	0.59
-30	91.8	89.9	87.3	84.0	80.1	75.5	70.4	64.8	58.8	52.4	45.6	38.7	31.7	24.6	17.5	10.7	4.17	0.59
-20	99.2	97.2	94.4	90.8	86.5	81.5	75.9	69.8	63.2	56.2	48.9	41.4	33.8	26.2	18.6	11.3	4.43	0.59
-10	103	102	98.5	94.7	90.1	84.8	78.8	72.3	65.4	58.1	50.5	42.6	34.7	26.8	19.1	11.5	4.52	0.59
0	104	102	98.9	95.0	90.3	84.9	78.9	72.3	65.3	57.9	50.2	42.4	34.4	26.6	18.8	11.3	4.40	0.59
10	106	104	101	96.5	91.7	86.2	80.0	73.3	66.2	58.7	50.9	42.9	34.9	26.9	19.1	11.5	4.52	0.59
20	104	102	98.3	94.3	89.6	84.1	78.1	71.6	64.6	57.3	49.7	42.0	34.1	26.4	18.7	11.3	4.43	0.59
30	98.5	95.8	92.6	88.6	84.1	79.0	73.3	67.2	60.7	53.8	46.7	39.4	32.1	24.8	17.6	10.7	4.17	0.59
40	89.0	86.6	83.5	79.9	75.8	71.1	66.0	60.5	54.6	48.4	42.1	35.5	29.0	22.4	15.9	9.58	3.77	0.59
50	76.8	74.6	71.8	68.7	65.0	61.0	56.6	51.9	46.8	41.6	36.1	30.5	24.8	19.2	13.6	8.17	3.24	0.59
60	62.6	60.6	58.3	55.6	52.6	49.3	45.7	41.9	37.8	33.5	29.1	24.6	20.0	15.4	10.9	6.48	2.59	0.59
70	47.4	45.8	43.8	41.7	39.3	36.8	34.0	31.1	28.0	24.8	21.5	18.1	14.7	11.3	7.94	4.82	2.05	0.59
80	32.1	30.7	29.2	27.5	25.8	24.0	22.1	20.1	18.0	15.9	13.7	11.6	9.43	7.36	5.32	3.40	1.88	0.59
90	22.6	21.3	20.0	18.7	17.4	16.1	14.8	13.5	12.2	10.9	9.65	8.36	7.06	5.77	4.48	3.18	1.89	0.59
100	20.8	19.7	18.5	17.3	16.2	15.0	13.9	12.7	11.6	10.4	9.24	8.04	6.82	5.58	4.35	3.11	1.86	0.59
110	18.6	17.5	16.5	15.5	14.5	13.5	12.5	11.6	10.6	9.59	8.58	7.54	6.46	5.36	4.20	2.98	1.79	0.59
120	16.0	15.1	14.2	13.3	12.5	11.7	10.9	10.1	9.33	8.50	7.66	6.79	5.89	4.95	3.93	2.84	1.70	0.59
130	13.2	12.4	11.7	11.0	10.4	9.78	9.20	8.60	7.97	7.32	6.64	5.92	5.17	4.40	3.57	2.64	1.57	0.59
140	10.3	9.68	9.10	8.61	8.18	7.77	7.38	6.98	6.55	6.08	5.56	5.00	4.39	3.76	3.10	2.33	1.44	0.59
150	7.67	7.16	6.76	6.43	6.15	5.88	5.62	5.38	5.11	4.81	4.45	4.03	3.57	3.08	2.57	2.00	1.28	0.59
160	5.21	4.89	4.67	4.49	4.36	4.21	4.06	3.88	3.72	3.54	3.32	3.05	2.71	2.36	2.01	1.64	1.10	0.59
170	2.90	2.89	2.98	2.95	2.83	2.74	2.64	2.53	2.41	2.31	2.20	2.04	1.83	1.62	1.43	1.24	0.90	0.59
180	1.86	1.80	1.74	1.65	1.54	1.39	1.30	1.21	1.13	1.10	1.08	1.01	0.94	0.87	0.83	0.83	0.69	0.59

H_b Range: -90 - 90DEG
H_b Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks: