

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		277.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	277.5V x 160.2H
	At 50% of Imax	130.2V x 108.0H
	At 90% of Imax	58.5V x 44.8H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	972.5 lumens per klm.
	To 50% of Imax	630.0 lumens per klm.
	To 90% of Imax	149.0 lumens per klm.
Upward LOR		13.0 %
Downward LOR		87.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(θ) Range:-90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature:25.3DEG
Operators:Fan
Test Date:2023-08-15

V(β) Range:-180 - 180DEG
V(β) Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity:65.0%
Test Distance:8.630m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: Maya-square acrylic-900mm-RGBW RED-110 130D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001493
MFR.:	SUR.:	Shielding Angle:

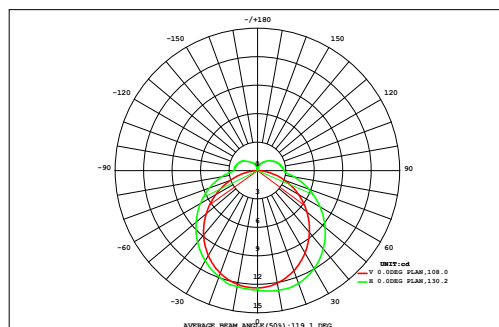

DATA OF LAMP		Eff: 6.85lm/W	
MODEL	MAYA.09.14 (30)	Imax (cd)	12.82
NOMINAL POWER (W)	6.74	AVAILABILITY (%)	93.6
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	43.20
NOMINAL FLUX (lm)	46.17	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	46.17
TEST VOLTAGE (V)	221.3	q @50% (H,V)	108,130DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm		F t	F a
	0.00	0.01	0.01	0.02	0.04	0.05	0.07	0.08	0.09	0.09	0.08	0.07	0.05	0.04	0.02	0.01	0.00	0.00	0.73	0.67
90	0.00	0.01	0.02	0.04	0.06	0.08	0.11	0.13	0.14	0.14	0.13	0.11	0.08	0.06	0.04	0.02	0.01	0.00	1.15	1.12
80	0.00	0.01	0.03	0.05	0.08	0.12	0.15	0.18	0.20	0.20	0.18	0.15	0.12	0.08	0.05	0.03	0.01	0.00	1.63	1.61
70	0.00	0.01	0.03	0.07	0.11	0.15	0.19	0.23	0.25	0.25	0.23	0.19	0.15	0.11	0.07	0.03	0.01	0.00	2.09	2.08
60	0.00	0.01	0.04	0.08	0.13	0.18	0.23	0.27	0.30	0.30	0.27	0.23	0.18	0.13	0.08	0.04	0.01	0.00	2.50	2.50
50	0.00	0.02	0.05	0.09	0.15	0.21	0.27	0.31	0.34	0.34	0.31	0.26	0.21	0.15	0.09	0.05	0.02	0.00	2.85	2.84
40	0.00	0.02	0.05	0.10	0.16	0.23	0.29	0.34	0.37	0.37	0.33	0.28	0.22	0.16	0.10	0.05	0.02	0.00	3.09	3.09
30	0.00	0.02	0.05	0.11	0.17	0.24	0.30	0.35	0.38	0.38	0.35	0.30	0.23	0.17	0.10	0.05	0.02	0.00	3.23	3.22
20	0.00	0.02	0.05	0.11	0.17	0.24	0.31	0.35	0.38	0.38	0.35	0.30	0.23	0.17	0.10	0.05	0.02	0.00	3.24	3.23
10	0.00	0.02	0.05	0.11	0.17	0.24	0.30	0.35	0.37	0.37	0.34	0.29	0.23	0.17	0.10	0.05	0.02	0.00	3.21	3.21
0	0.00	0.02	0.05	0.11	0.17	0.23	0.29	0.34	0.37	0.37	0.34	0.29	0.23	0.16	0.10	0.05	0.02	0.00	3.14	3.14
-10	0.00	0.02	0.05	0.10	0.16	0.22	0.28	0.32	0.34	0.34	0.32	0.27	0.22	0.16	0.10	0.05	0.02	0.00	2.96	2.96
-20	0.00	0.02	0.05	0.09	0.14	0.20	0.25	0.29	0.31	0.31	0.29	0.25	0.20	0.14	0.09	0.05	0.02	0.00	2.69	2.68
-30	0.00	0.01	0.04	0.08	0.13	0.17	0.22	0.25	0.27	0.27	0.25	0.22	0.17	0.12	0.08	0.04	0.01	0.00	2.35	2.34
-40	0.00	0.01	0.03	0.07	0.10	0.14	0.18	0.21	0.23	0.23	0.21	0.18	0.14	0.10	0.07	0.03	0.01	0.00	1.96	1.95
-50	0.00	0.01	0.03	0.05	0.08	0.11	0.14	0.17	0.18	0.18	0.17	0.14	0.11	0.08	0.05	0.03	0.01	0.00	1.54	1.52
-60	0.00	0.01	0.02	0.03	0.06	0.08	0.10	0.12	0.14	0.14	0.12	0.10	0.08	0.06	0.04	0.02	0.01	0.00	1.11	1.08
-70	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.09	0.08	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.70	0.64
-80	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.09	0.08	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.70	0.64
-90	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.09	0.08	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.70	0.64
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
F t	0.03	0.22	0.67	1.33	2.12	2.96	3.74	4.36	4.76	4.75	4.32	3.69	2.91	2.08	1.30	0.66	0.23	0.02	40	---
F a	0.00	0.18	0.63	1.30	2.12	2.96	3.74	4.36	4.76	4.75	4.32	3.69	2.91	2.07	1.28	0.63	0.19	0.00	---	40

one-half-peak spread: U:50.5,D:52.4 , L:52.4,R:51.7


NEMA Beam Type: Type 7

H_b Range: -90 - 90DEG
 H_b Interval: 0.5DEG
 Test Speed: LOW
 Temperature: 25.3DEG
 Operators: Fan
 Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
 Humidity: 65.0%
 Test Distance: 8.630m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Maya-square acrylic-900mm-RGBW RED-110 130D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001493
MFR.:	SUR.:	Shielding Angle:

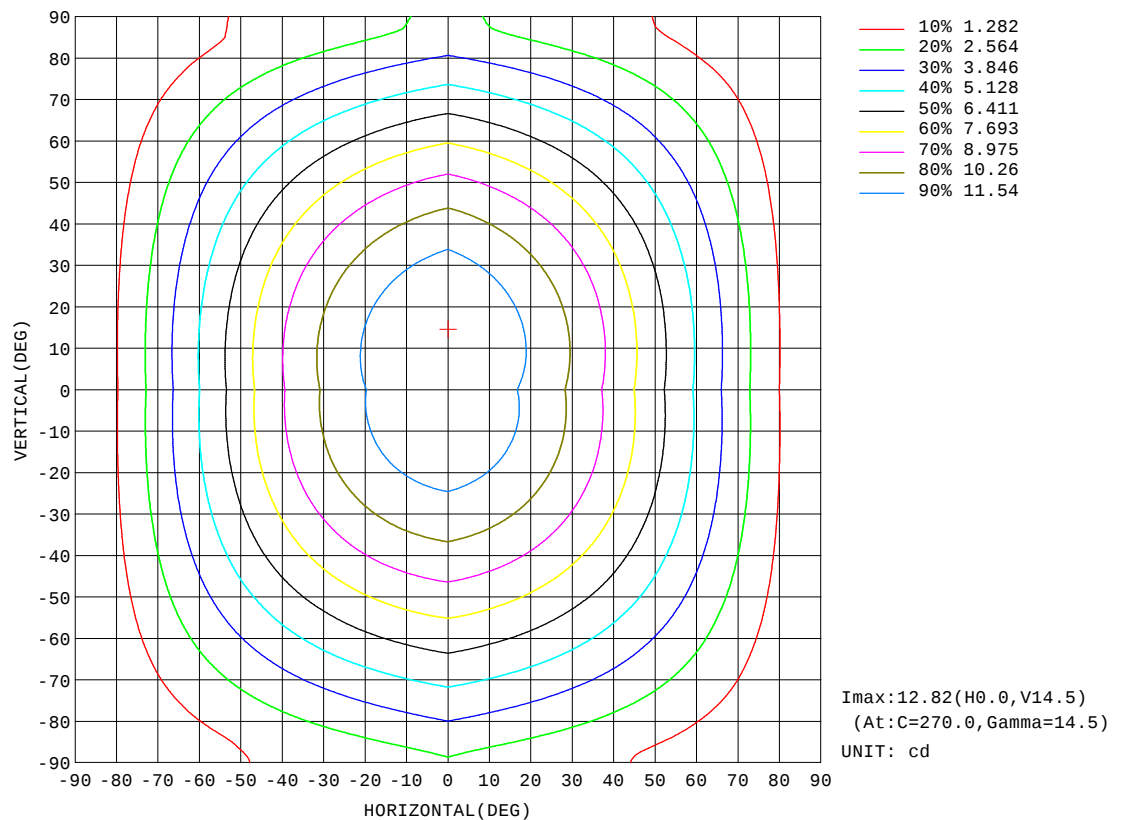


H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: Maya-square acrylic-900mm-RGBW RED-110 130D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001493
MFR.:	SUR.:	Shielding Angle:

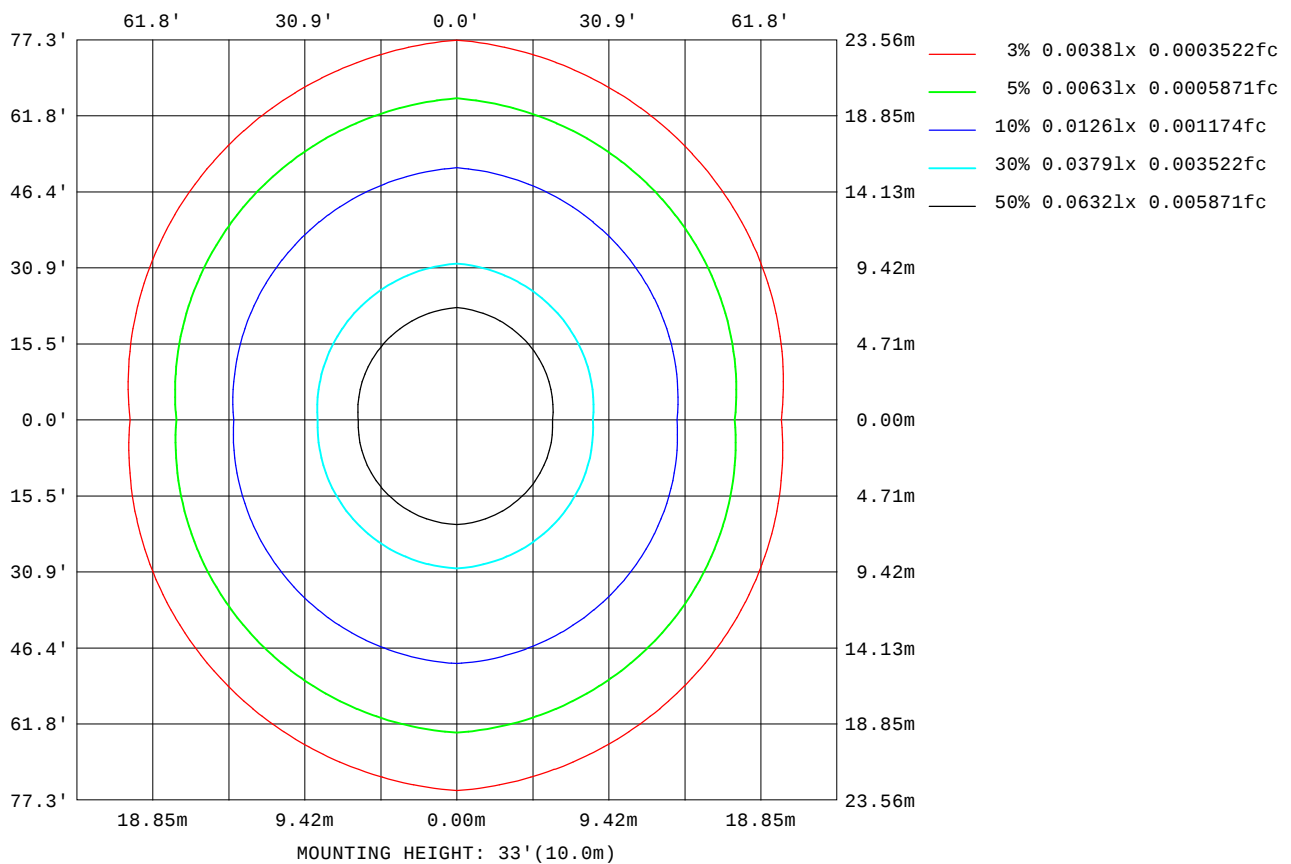

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

Planar Illuminance Curve

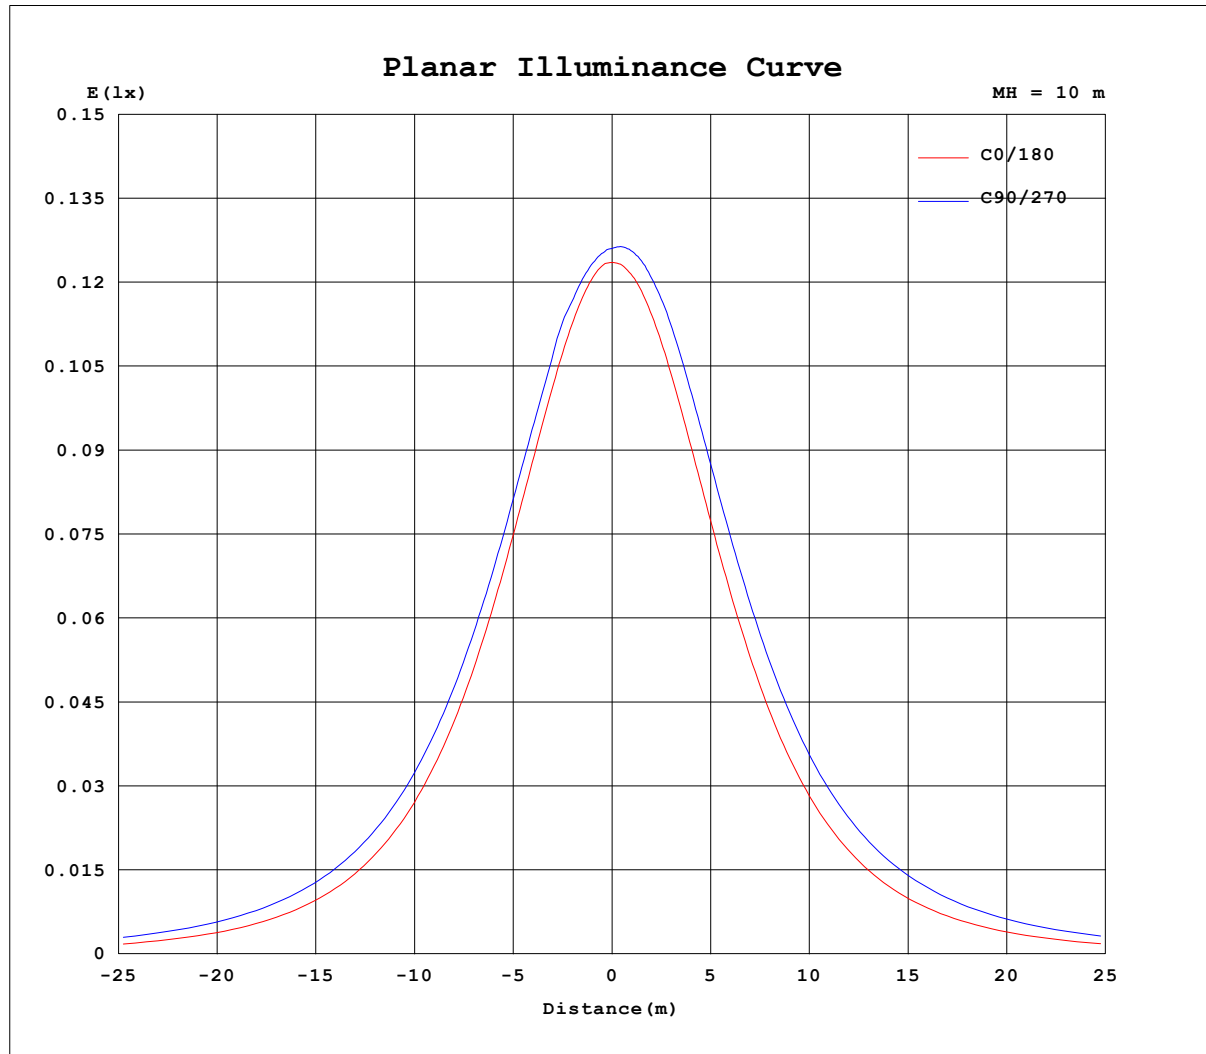


H(θ) Range: -90 - 90DEG
H(θ) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

AAI CURVES

NAME: Maya-square acrylic-900mm-RGBW RED-110 130D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001493
MFR.:	SUR.:	Shielding Angle:

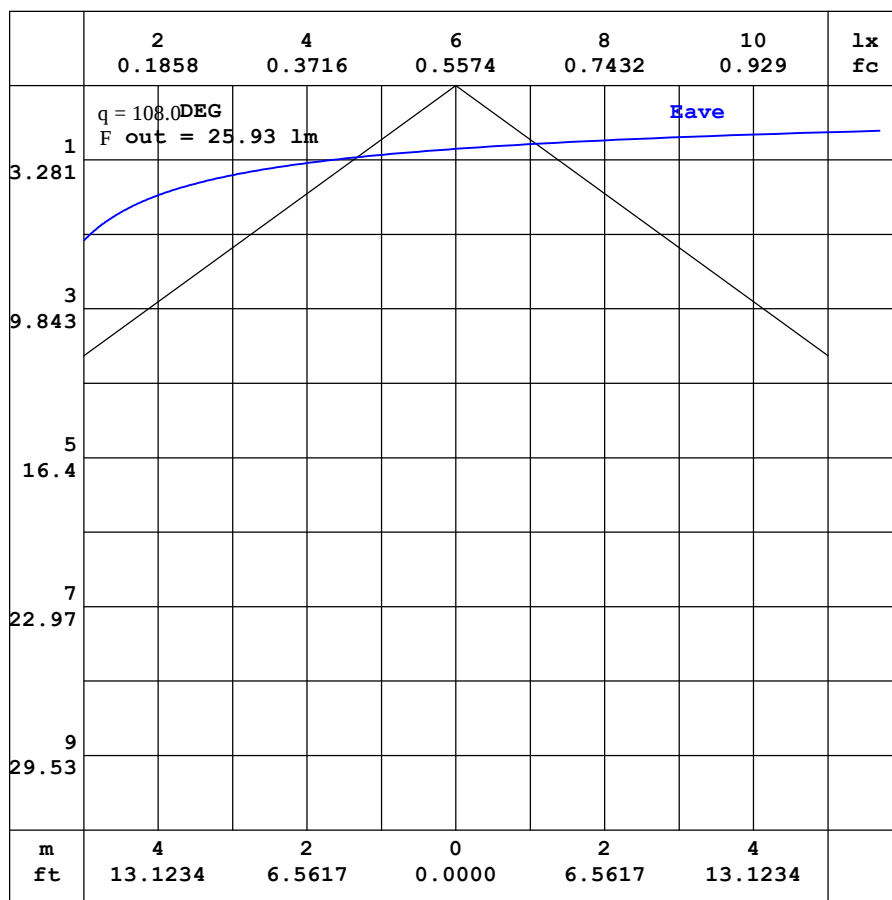

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H_(b) Range: -90 - 90DEG
H_(b) Interval: 0.5DEG
Test Speed: LOW
Temperature: 25.3DEG
Operators: Fan
Test Date: 2023-08-15

V(B) Range: -180 - 180DEG
V(B) Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351
Humidity: 65.0%
Test Distance: 8.630m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-square acrylic-900mm-RGBW RED-110 130D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001493
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.20	0.20	0.20	0.19	0.19	0.19	0.19	0.19	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.14
-170	0.20	0.22	0.24	0.25	0.27	0.29	0.30	0.32	0.30	0.30	0.30	0.30	0.31	0.32	0.33	0.15	0.15	0.15	0.14
-160	0.20	0.25	0.28	0.31	0.35	0.39	0.42	0.45	0.46	0.44	0.45	0.46	0.47	0.49	0.50	0.53	0.56	0.61	0.67
-150	0.20	0.27	0.32	0.37	0.43	0.48	0.53	0.58	0.61	0.63	0.62	0.64	0.65	0.67	0.70	0.74	0.79	0.84	0.92
-140	0.20	0.28	0.37	0.44	0.50	0.57	0.63	0.70	0.76	0.81	0.85	0.86	0.87	0.91	0.95	1.00	1.04	1.11	1.19
-130	0.20	0.30	0.39	0.48	0.57	0.65	0.73	0.81	0.89	0.97	1.04	1.11	1.18	1.24	1.29	1.34	1.39	1.47	1.56
-120	0.20	0.31	0.42	0.53	0.63	0.72	0.82	0.92	1.01	1.11	1.19	1.29	1.38	1.47	1.56	1.66	1.77	1.87	1.98
-110	0.20	0.32	0.44	0.56	0.67	0.79	0.90	1.01	1.11	1.22	1.33	1.43	1.54	1.65	1.75	1.87	1.98	2.10	2.21
-100	0.20	0.33	0.45	0.58	0.70	0.82	0.94	1.07	1.19	1.31	1.43	1.55	1.68	1.80	1.91	2.04	2.16	2.28	2.41
-90	0.20	0.33	0.46	0.59	0.71	0.84	0.97	1.10	1.23	1.35	1.48	1.61	1.74	1.87	1.99	2.12	2.25	2.38	2.51
-80	0.20	0.33	0.47	0.62	0.79	1.02	1.27	1.53	1.78	2.04	2.28	2.52	2.74	2.96	3.16	3.35	3.53	3.69	3.85
-70	0.20	0.33	0.50	0.83	1.22	1.63	2.03	2.42	2.80	3.17	3.51	3.84	4.14	4.41	4.67	4.89	5.09	5.27	5.42
-60	0.20	0.33	0.65	1.16	1.70	2.25	2.79	3.31	3.82	4.29	4.74	5.15	5.53	5.87	6.17	6.44	6.65	6.83	6.97
-50	0.20	0.32	0.83	1.49	2.16	2.83	3.50	4.15	4.76	5.35	5.90	6.41	6.86	7.27	7.62	7.92	8.16	8.34	8.47
-40	0.20	0.35	1.00	1.76	2.55	3.34	4.12	4.87	5.61	6.30	6.95	7.54	8.07	8.55	8.95	9.28	9.54	9.72	9.84
-30	0.20	0.38	1.13	1.98	2.86	3.74	4.61	5.47	6.30	7.08	7.82	8.49	9.09	9.62	10.1	10.4	10.7	10.9	11.0
-20	0.20	0.40	1.22	2.12	3.07	4.01	4.96	5.90	6.80	7.66	8.47	9.20	9.86	10.4	10.9	11.3	11.6	11.8	11.9
-10	0.20	0.41	1.24	2.18	3.16	4.14	5.14	6.11	7.07	7.97	8.82	9.60	10.3	10.9	11.4	11.8	12.2	12.3	12.4
0	0.20	0.39	1.22	2.15	3.13	4.12	5.12	6.10	7.07	8.00	8.86	9.66	10.4	11.0	11.5	11.9	12.2	12.3	12.4
10	0.20	0.41	1.25	2.19	3.17	4.17	5.18	6.17	7.14	8.07	8.94	9.75	10.5	11.1	11.6	12.1	12.4	12.6	12.8
20	0.20	0.41	1.22	2.14	3.09	4.06	5.03	6.00	6.94	7.84	8.69	9.47	10.2	10.8	11.3	11.8	12.2	12.4	12.7
30	0.20	0.38	1.14	2.00	2.89	3.80	4.70	5.61	6.48	7.32	8.11	8.85	9.52	10.1	10.6	11.1	11.4	11.7	11.9
40	0.20	0.36	1.00	1.78	2.58	3.41	4.22	5.02	5.80	6.55	7.26	7.93	8.53	9.08	9.56	9.97	10.3	10.6	10.8
50	0.20	0.33	0.83	1.50	2.19	2.89	3.59	4.28	4.94	5.58	6.19	6.76	7.29	7.76	8.18	8.55	8.86	9.11	9.30
60	0.20	0.34	0.65	1.17	1.72	2.29	2.86	3.41	3.95	4.47	4.96	5.43	5.86	6.25	6.61	6.92	7.19	7.42	7.60
70	0.20	0.34	0.51	0.83	1.22	1.64	2.06	2.47	2.88	3.27	3.64	4.00	4.34	4.65	4.93	5.19	5.42	5.62	5.79
80	0.20	0.35	0.49	0.65	0.82	1.04	1.28	1.54	1.80	2.06	2.31	2.56	2.79	3.02	3.23	3.43	3.62	3.80	3.96
90	0.20	0.35	0.49	0.64	0.79	0.93	1.08	1.22	1.37	1.51	1.66	1.81	1.95	2.10	2.24	2.39	2.53	2.68	2.83
100	0.20	0.35	0.49	0.62	0.76	0.90	1.03	1.16	1.30	1.43	1.55	1.68	1.81	1.94	2.07	2.20	2.33	2.47	2.60
110	0.20	0.34	0.47	0.60	0.72	0.84	0.96	1.08	1.18	1.30	1.40	1.51	1.62	1.73	1.84	1.95	2.07	2.19	2.31
120	0.20	0.33	0.45	0.56	0.67	0.77	0.86	0.96	1.05	1.14	1.23	1.32	1.40	1.49	1.58	1.68	1.77	1.88	1.99
130	0.20	0.31	0.42	0.51	0.59	0.68	0.76	0.84	0.91	0.98	1.04	1.11	1.17	1.24	1.30	1.38	1.45	1.54	1.64
140	0.20	0.29	0.38	0.46	0.52	0.59	0.65	0.71	0.76	0.81	0.85	0.89	0.92	0.96	1.01	1.06	1.12	1.20	1.28
150	0.20	0.27	0.33	0.39	0.44	0.49	0.54	0.58	0.61	0.64	0.65	0.67	0.70	0.72	0.75	0.78	0.82	0.87	0.96
160	0.20	0.25	0.29	0.32	0.36	0.39	0.42	0.44	0.47	0.46	0.47	0.48	0.49	0.50	0.51	0.52	0.54	0.57	0.63
170	0.20	0.23	0.25	0.26	0.27	0.29	0.30	0.32	0.30	0.31	0.31	0.32	0.32	0.32	0.32	0.31	0.29	0.28	0.32
180	0.20	0.20	0.20	0.19	0.19	0.19	0.19	0.19	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.17

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-08-15

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Maya-square acrylic-900mm-RGBW RED-110 130D-Rev1	TYPE: RGBW-RED	WEIGHT:
SPEC.: 110X130 DEG	DIM.: 900mm	SERIAL No.: IES001493
MFR.:	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.13	0.13	0.12	0.09	0.08	0.06	0.05	0.05	0.04	0.03	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.01	
-170	0.14	0.13	0.12	0.28	0.24	0.22	0.21	0.20	0.19	0.17	0.17	0.15	0.11	0.09	0.07	0.05	0.03	0.01	
-160	0.60	0.54	0.49	0.45	0.42	0.39	0.38	0.36	0.34	0.33	0.30	0.26	0.22	0.18	0.14	0.10	0.05	0.01	
-150	0.83	0.77	0.71	0.65	0.62	0.59	0.57	0.53	0.51	0.49	0.44	0.38	0.32	0.26	0.20	0.14	0.07	0.01	
-140	1.10	1.02	0.97	0.91	0.86	0.81	0.78	0.76	0.70	0.64	0.57	0.49	0.42	0.34	0.26	0.18	0.09	0.01	
-130	1.46	1.37	1.30	1.24	1.18	1.11	1.03	0.95	0.86	0.77	0.69	0.60	0.51	0.41	0.31	0.21	0.11	0.01	
-120	1.86	1.74	1.63	1.52	1.42	1.31	1.21	1.10	1.01	0.90	0.80	0.69	0.58	0.47	0.36	0.24	0.12	0.01	
-110	2.08	1.96	1.83	1.71	1.59	1.48	1.36	1.24	1.13	1.00	0.88	0.77	0.64	0.52	0.39	0.26	0.13	0.01	
-100	2.27	2.14	2.00	1.87	1.74	1.61	1.48	1.34	1.21	1.08	0.94	0.81	0.68	0.55	0.41	0.28	0.14	0.01	
-90	2.37	2.23	2.09	1.95	1.81	1.67	1.53	1.40	1.26	1.12	0.98	0.84	0.70	0.56	0.43	0.29	0.15	0.01	
-80	3.70	3.53	3.36	3.17	2.97	2.77	2.55	2.31	2.07	1.83	1.57	1.31	1.05	0.79	0.54	0.32	0.15	0.01	
-70	5.27	5.09	4.89	4.66	4.41	4.14	3.84	3.52	3.18	2.83	2.45	2.07	1.68	1.28	0.87	0.50	0.17	0.01	
-60	6.83	6.63	6.41	6.14	5.84	5.49	5.12	4.71	4.27	3.80	3.31	2.80	2.28	1.75	1.22	0.70	0.23	0.01	
-50	8.32	8.12	7.86	7.56	7.20	6.78	6.32	5.82	5.28	4.71	4.11	3.48	2.84	2.19	1.54	0.90	0.31	0.01	
-40	9.69	9.48	9.19	8.84	8.42	7.94	7.41	6.82	6.18	5.51	4.80	4.07	3.32	2.56	1.81	1.07	0.38	0.01	
-30	10.9	10.6	10.3	9.92	9.45	8.91	8.30	7.63	6.92	6.15	5.36	4.53	3.70	2.85	2.02	1.20	0.43	0.01	
-20	11.8	11.5	11.2	10.7	10.2	9.62	8.95	8.22	7.43	6.61	5.74	4.85	3.95	3.04	2.14	1.28	0.45	0.01	
-10	12.3	12.1	11.7	11.2	10.6	10.0	9.29	8.53	7.70	6.83	5.93	5.00	4.06	3.13	2.20	1.31	0.46	0.01	
0	12.3	12.0	11.7	11.2	10.7	10.0	9.29	8.51	7.68	6.81	5.90	4.97	4.02	3.09	2.17	1.28	0.45	0.01	
10	12.6	12.3	11.9	11.4	10.8	10.2	9.44	8.65	7.80	6.91	5.98	5.04	4.09	3.14	2.21	1.31	0.46	0.01	
20	12.4	12.1	11.7	11.2	10.6	9.94	9.22	8.45	7.61	6.75	5.84	4.92	4.00	3.07	2.16	1.28	0.46	0.01	
30	11.7	11.4	11.0	10.5	9.94	9.34	8.66	7.93	7.15	6.33	5.49	4.62	3.76	2.89	2.03	1.20	0.43	0.01	
40	10.6	10.3	9.89	9.45	8.96	8.40	7.79	7.13	6.44	5.70	4.94	4.17	3.38	2.60	1.83	1.07	0.38	0.01	
50	9.09	8.83	8.49	8.12	7.68	7.20	6.68	6.11	5.51	4.89	4.25	3.57	2.90	2.22	1.55	0.91	0.31	0.01	
60	7.41	7.17	6.90	6.57	6.21	5.82	5.39	4.93	4.45	3.94	3.41	2.87	2.33	1.78	1.23	0.70	0.24	0.01	
70	5.62	5.41	5.18	4.92	4.64	4.33	4.00	3.65	3.28	2.90	2.51	2.10	1.70	1.28	0.88	0.51	0.18	0.01	
80	3.80	3.63	3.44	3.24	3.03	2.82	2.59	2.35	2.09	1.84	1.58	1.32	1.07	0.82	0.57	0.35	0.17	0.01	
90	2.67	2.51	2.36	2.20	2.04	1.89	1.73	1.57	1.42	1.26	1.10	0.95	0.79	0.63	0.48	0.32	0.17	0.01	
100	2.46	2.31	2.17	2.03	1.89	1.75	1.60	1.46	1.32	1.18	1.04	0.90	0.75	0.61	0.46	0.31	0.16	0.01	
110	2.17	2.05	1.92	1.80	1.68	1.56	1.44	1.32	1.20	1.07	0.95	0.83	0.70	0.57	0.43	0.29	0.15	0.01	
120	1.87	1.75	1.64	1.54	1.44	1.34	1.24	1.14	1.04	0.94	0.84	0.73	0.62	0.51	0.39	0.27	0.14	0.01	
130	1.53	1.43	1.34	1.25	1.18	1.10	1.03	0.96	0.88	0.79	0.71	0.63	0.54	0.44	0.34	0.23	0.12	0.01	
140	1.19	1.10	1.04	0.97	0.91	0.86	0.81	0.76	0.70	0.65	0.58	0.51	0.44	0.36	0.28	0.19	0.10	0.01	
150	0.86	0.80	0.74	0.70	0.67	0.63	0.60	0.56	0.52	0.49	0.44	0.39	0.33	0.28	0.22	0.15	0.08	0.01	
160	0.56	0.52	0.49	0.46	0.44	0.42	0.40	0.38	0.36	0.33	0.30	0.26	0.23	0.19	0.15	0.10	0.06	0.01	
170	0.27	0.27	0.27	0.27	0.25	0.23	0.22	0.21	0.20	0.18	0.17	0.15	0.12	0.10	0.08	0.06	0.03	0.01	
180	0.13	0.13	0.12	0.09	0.08	0.06	0.05	0.05	0.04	0.03	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.01	

H_b Range:-90 - 90DEGH_b Interval: 0.5DEG

Test Speed: LOW

Temperature: 25.3DEG

Operators: Fan

Test Date: 2023-08-15

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.351

Humidity: 65.0%

Test Distance: 8.630m [K=1.0000]

Remarks: