

Test report

Light measurement results

Print date 10/7/2025

Laboratory and Equipment

Test lab
Spectrometer Manufacturer and Model
Measurement date 9/21/2023


Measurement Conditions

Tested c-planes
Tested gamma angles
Input Power 25.0 W

Tested Light Source
Luminaire Aurora-RGBW 6500K-23D-Rev1
Basic Luminous Shape NONE
Item No.
Manufacturer Luminoscape

Main Light Measurement Results
Output – Total Lumen (Up% / Down%) 1388 lm
Efficiency 56 lm/W
Peak Intensity 6840 cd
Correlated Color Temperature, CCT 6500 K
Color Rendering Index CRI 80.0

Polar light distribution diagram

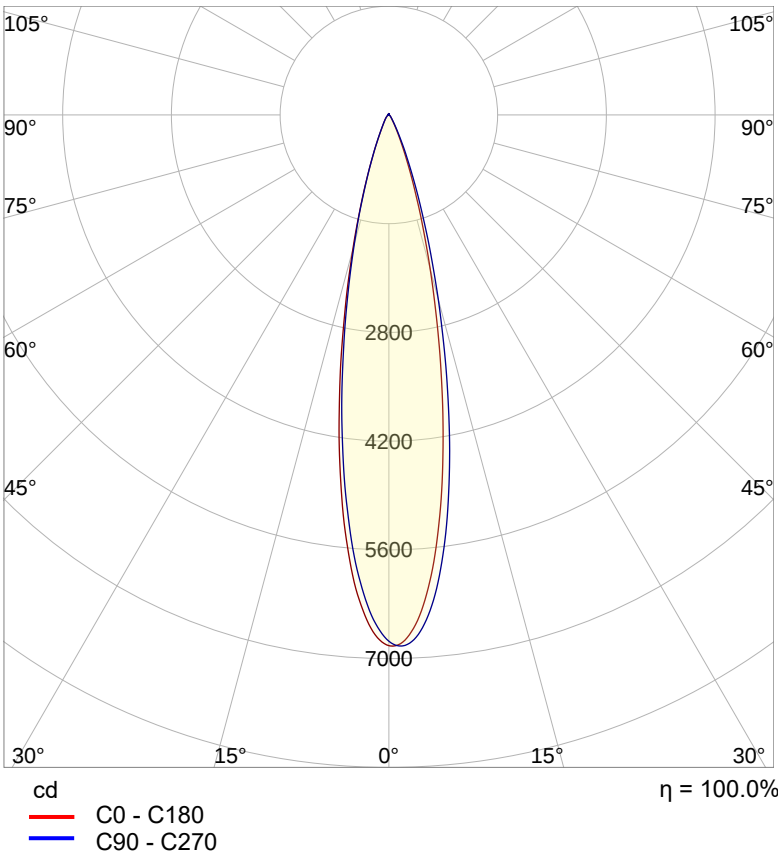


Test report

Light measurement results


Print date 10/7/2025

Beam details

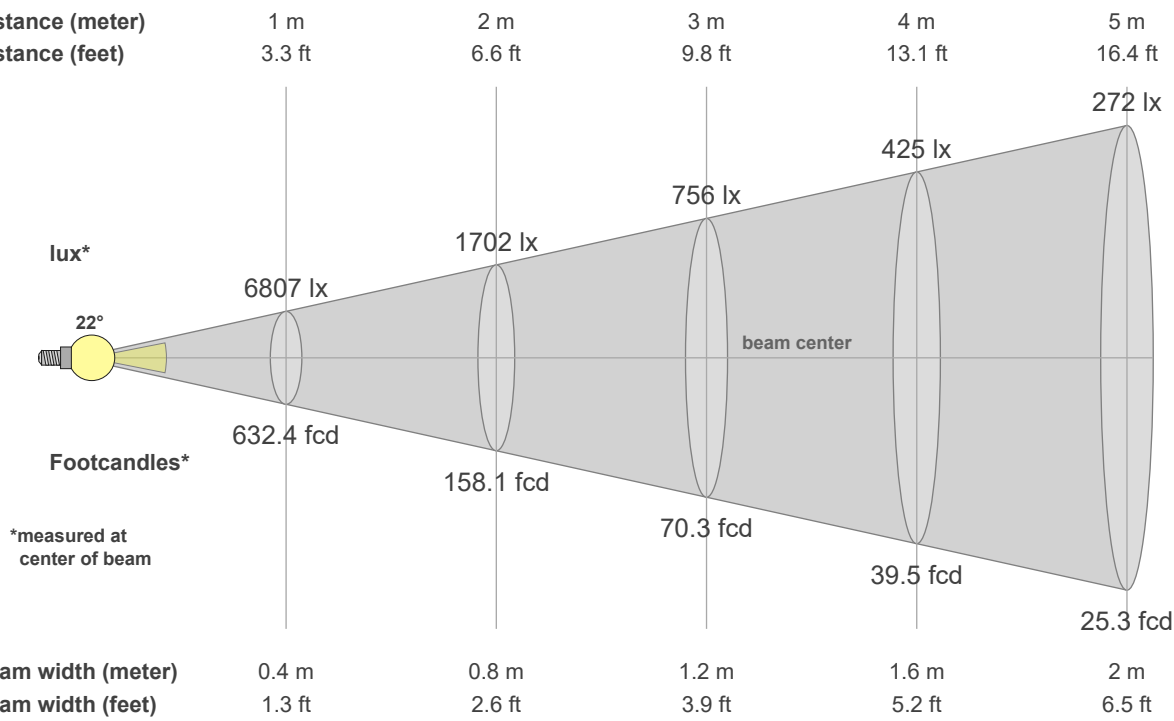

Luminaire budgetary diagram

LAMPS (number of lamps)

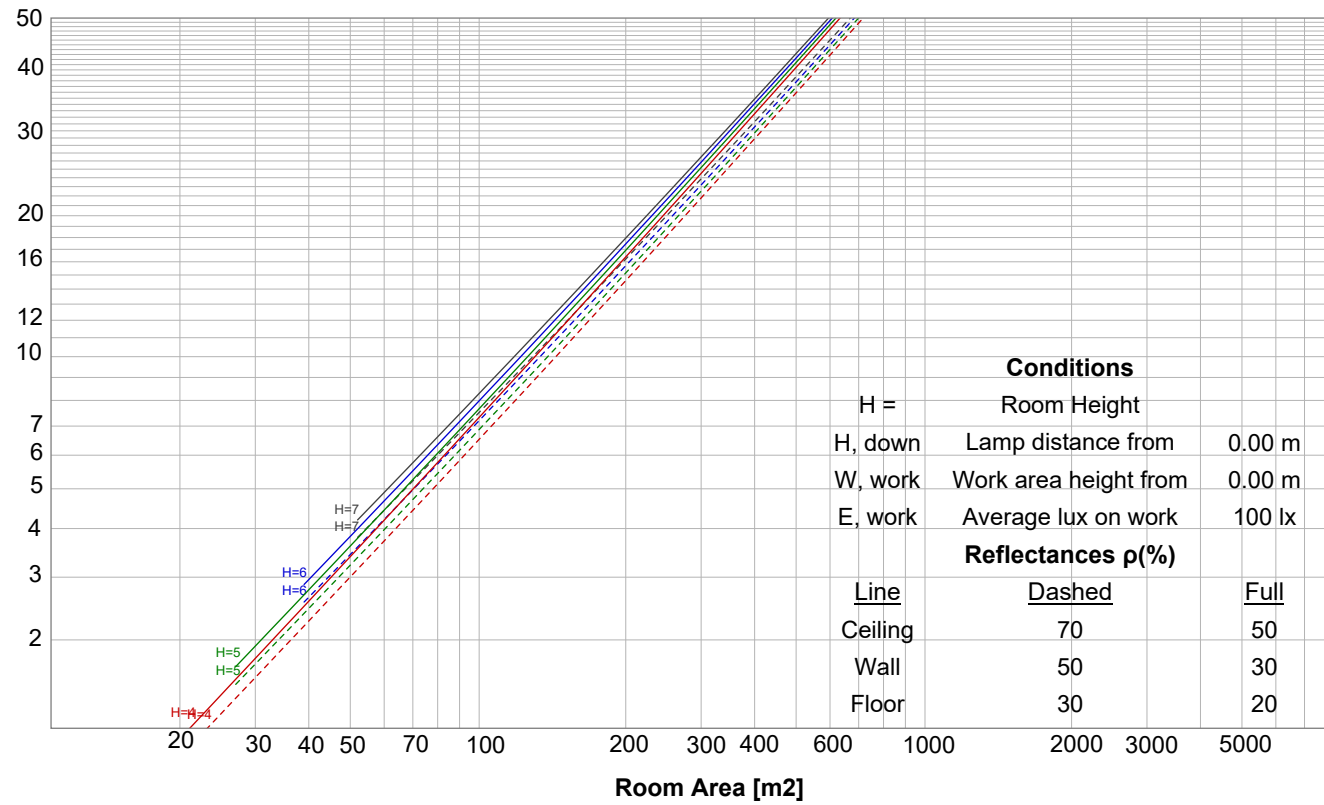


Test report


Light measurement results

Print date 10/7/2025

Iso-intensity Diagram (Iso-candela)

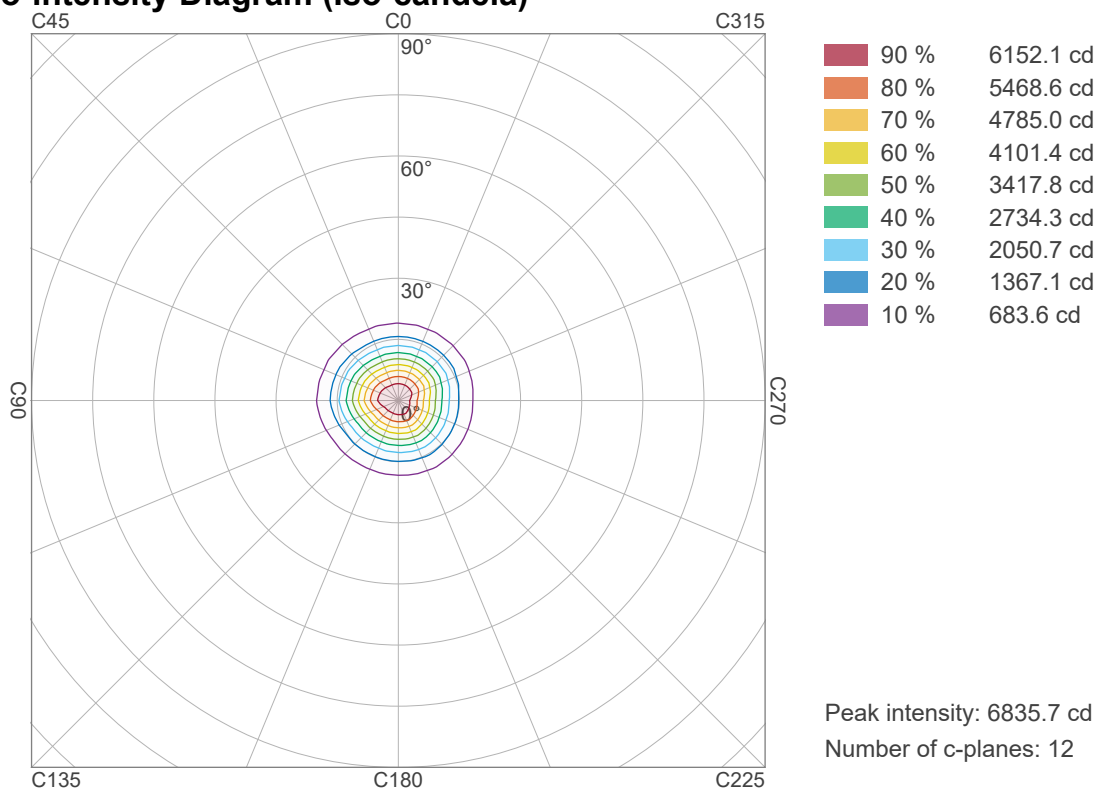

Iso-illuminance Diagram (Iso-lux)

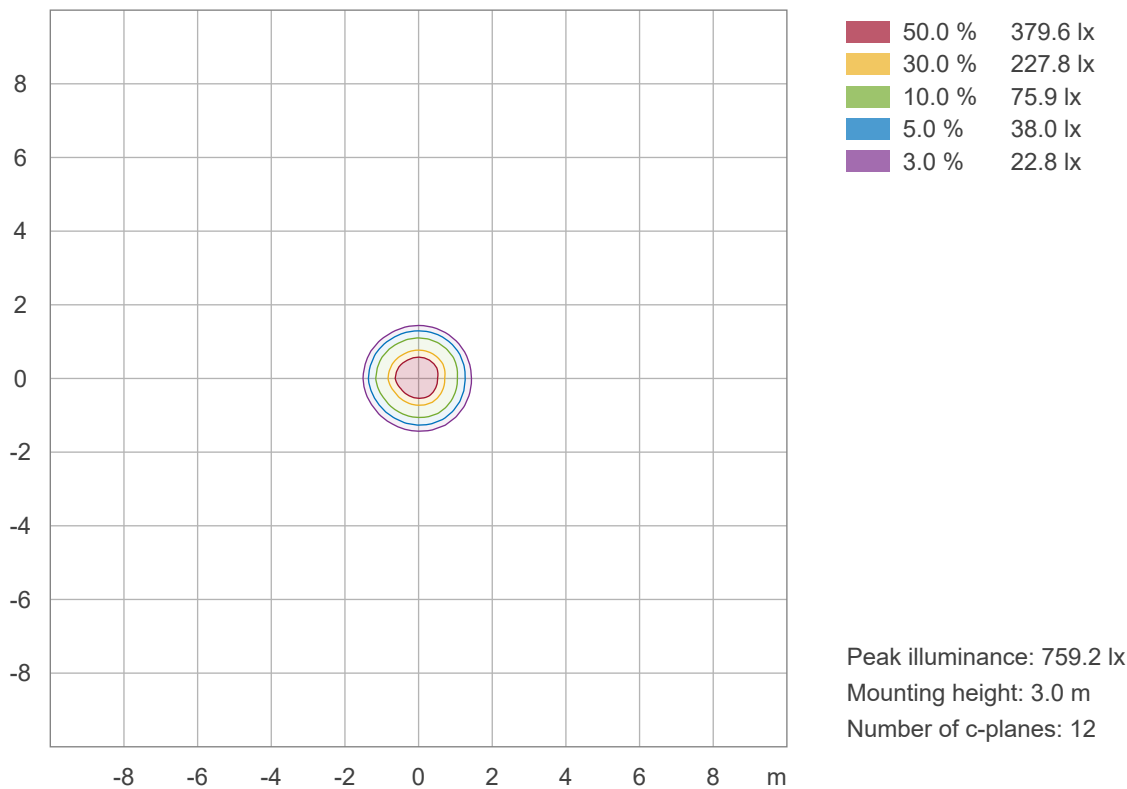


Test report

Light measurement results


Print date 10/7/2025

Linear intensity distribution

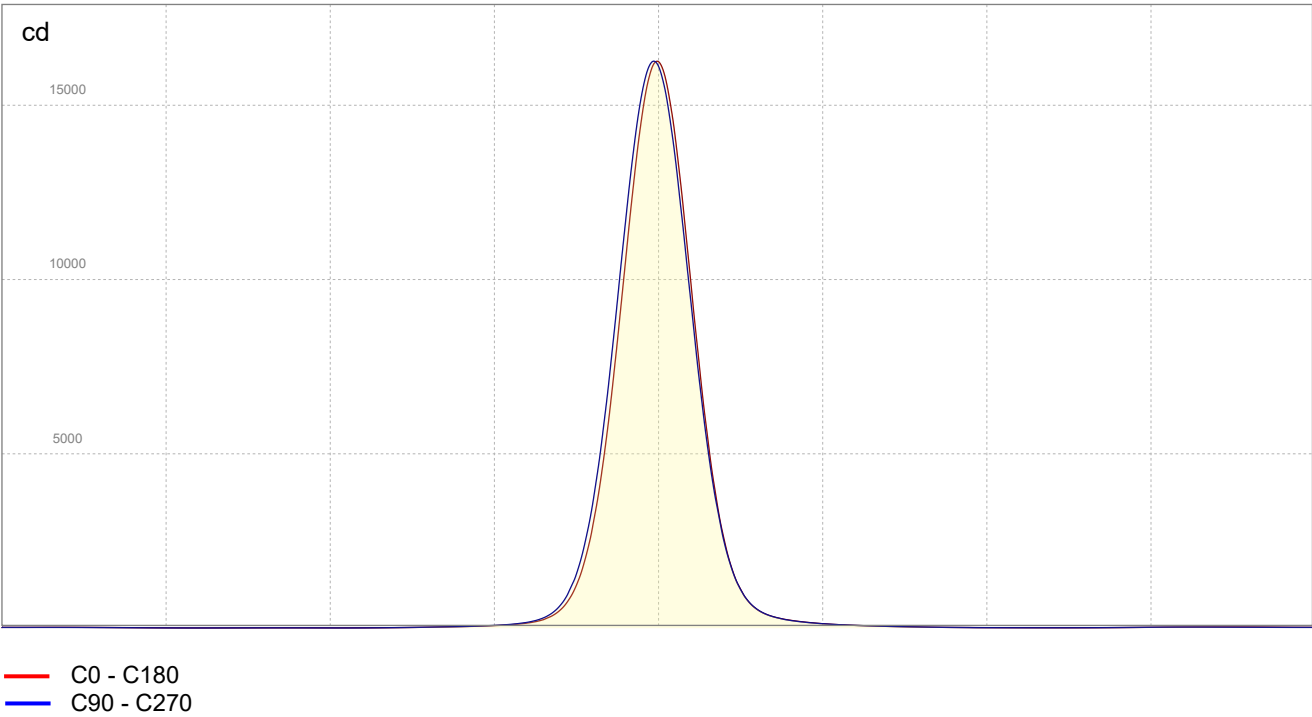

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B2 U2 G0

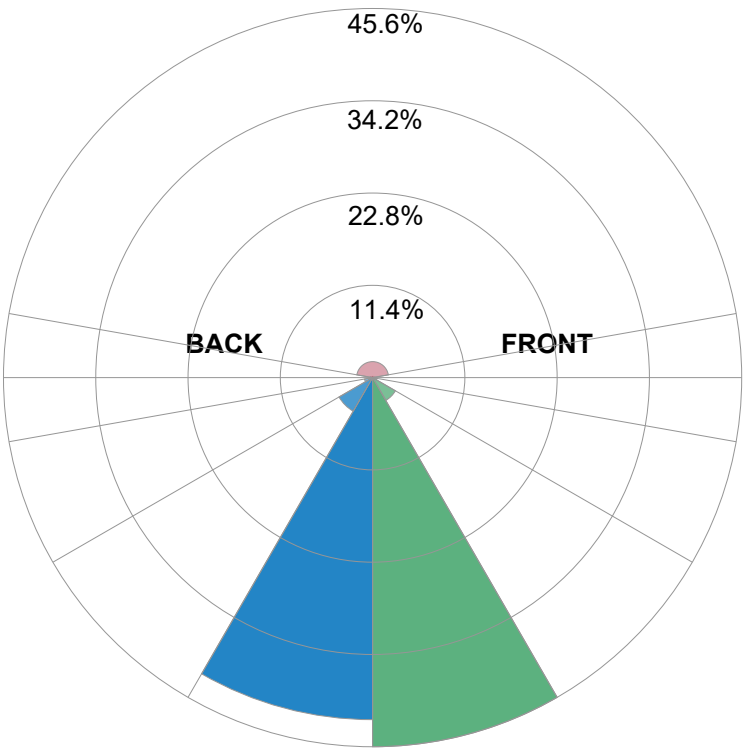

Forward Light

Low (0-30°)	632.7	lm	45.6%
Medium (30-60°)	45.1	lm	3.3%
High (60-80°)	7.6	lm	0.6%
Very High	1.4	lm	0.1%

Back Light

Low (0-30°)	586.2	lm	42.2%
Medium (30-60°)	66.5	lm	4.8%
High (60-80°)	14	lm	1%
Very High	3.2	lm	0.2%

Uplight

Low (90-100°)	3.8	lm	0.3%
High (100-180°)	27.4	lm	2%

Total

Sum	1388	lm	100%
-----	------	----	------