

Test report

Light measurement results

Print date 10/7/2025

Laboratory and Equipment

Test lab
Spectrometer Manufacturer and Model
Measurement date 9/21/2023


Measurement Conditions

Tested c-planes
Tested gamma angles
Input Power 100 W

Tested Light Source
Luminaire Aurora-RGBW ALL-23D-Rev1
Basic Luminous Shape NONE
Item No.
Manufacturer Luminoscape

Main Light Measurement Results
Output – Total Lumen (Up% / Down%) 377 lm – 2.25% / 97.75%
Efficiency 4 lm/W
Peak Intensity 1835 cd
Correlated Color Temperature, CCT
Color Rendering Index

Polar light distribution diagram

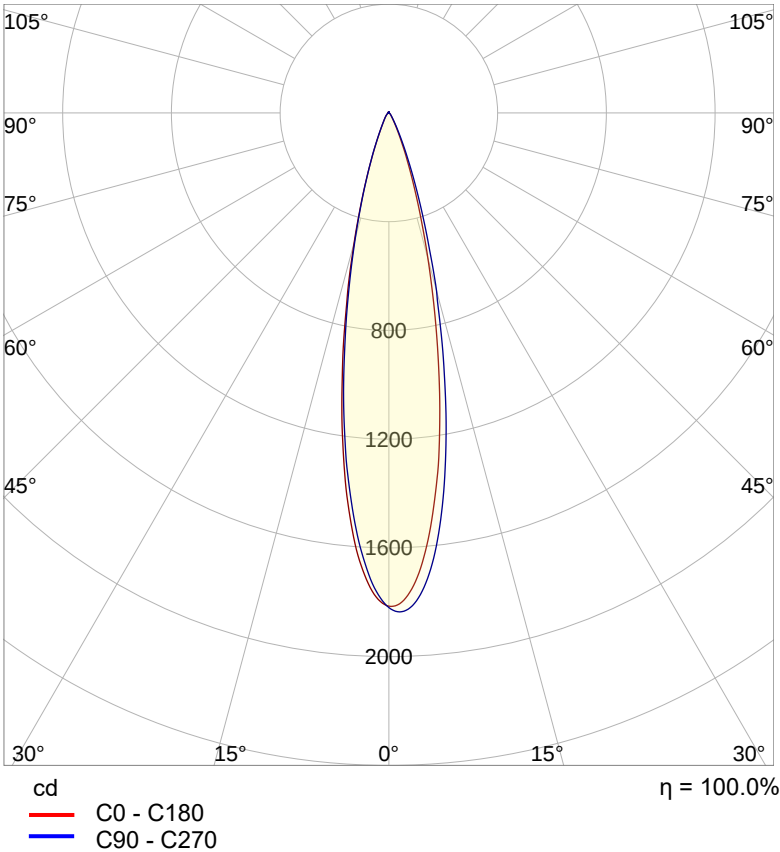


Test report

Light measurement results


Print date 10/7/2025

Beam details

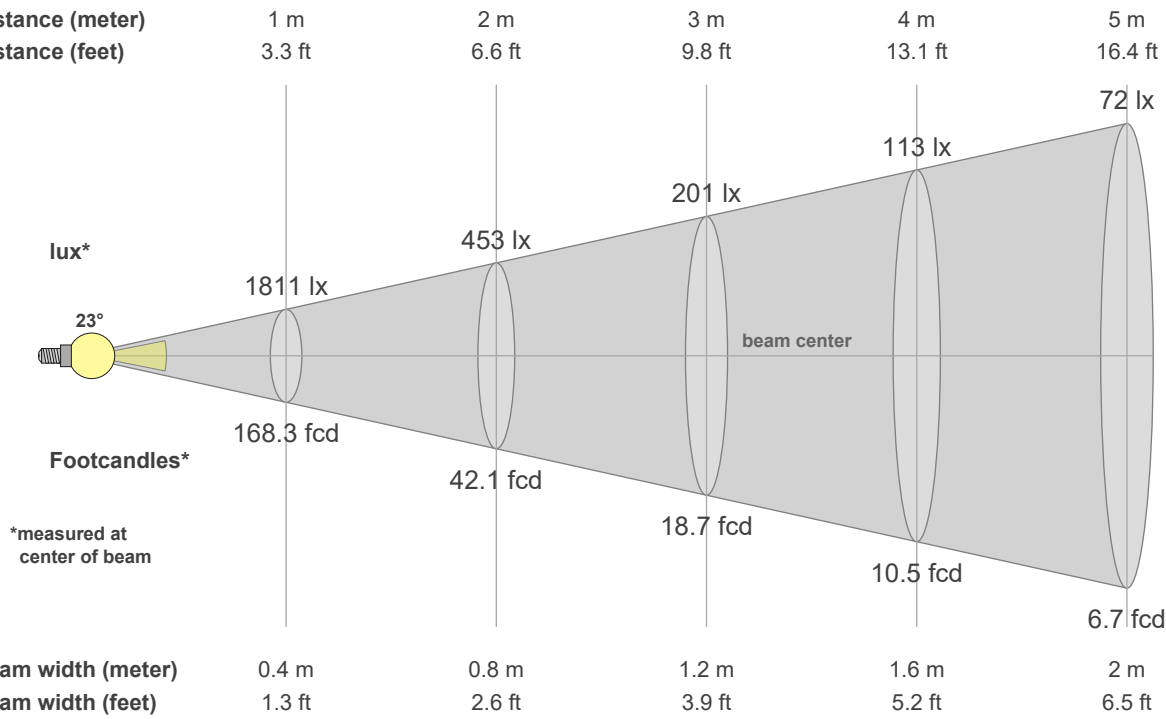

Luminaire budgetary diagram

LAMPS (number of lamps)

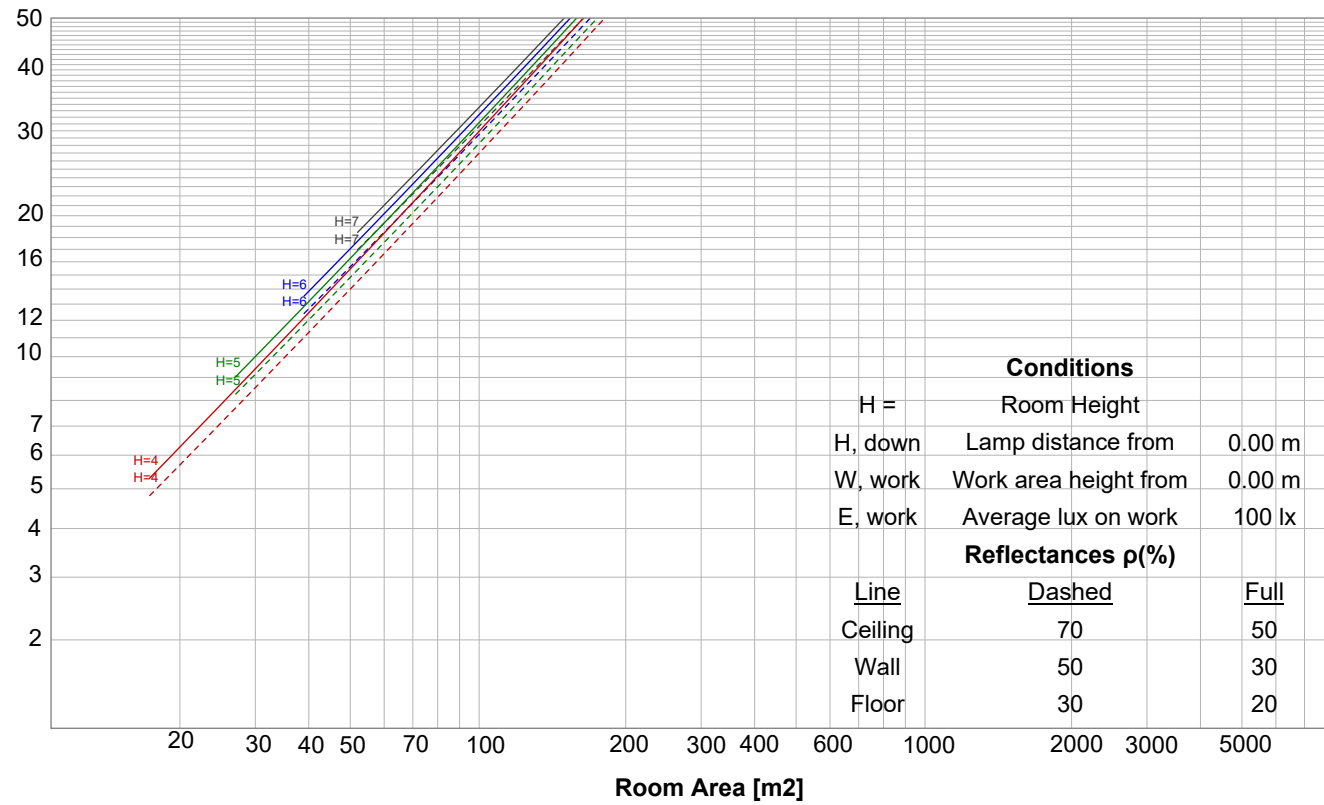


Test report


Light measurement results

Print date 10/7/2025

Iso-intensity Diagram (Iso-candela)

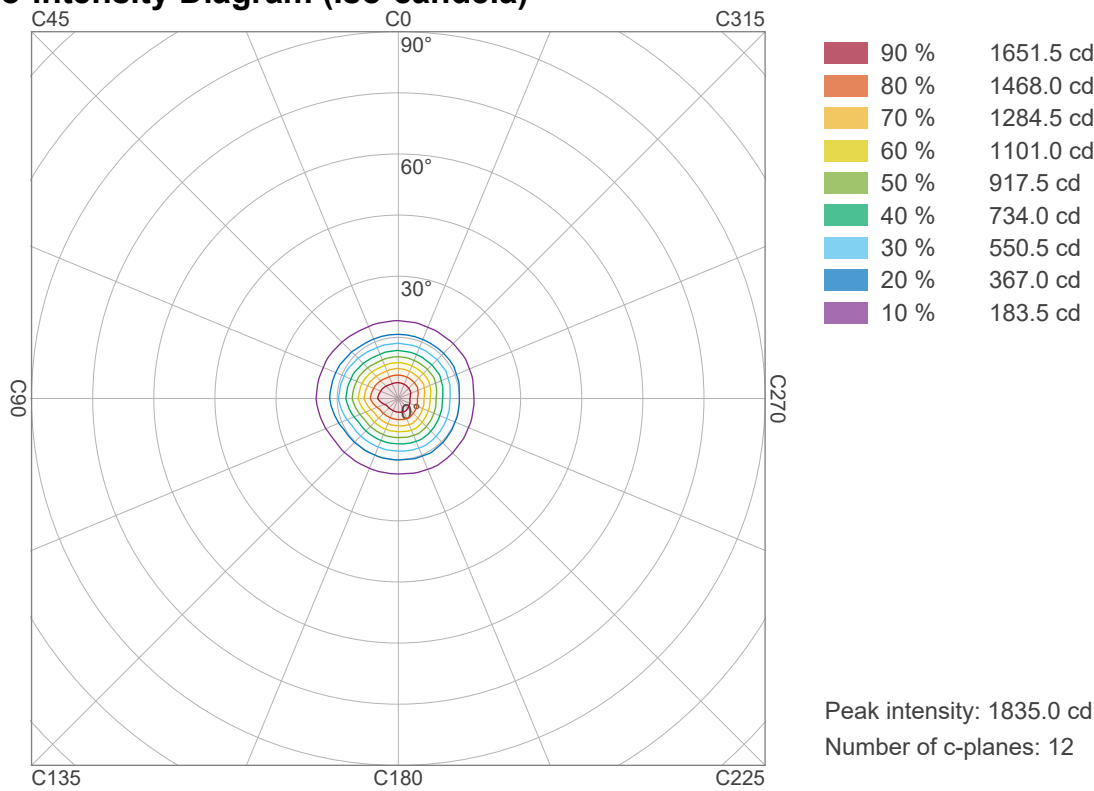

Iso-illuminance Diagram (Iso-lux)

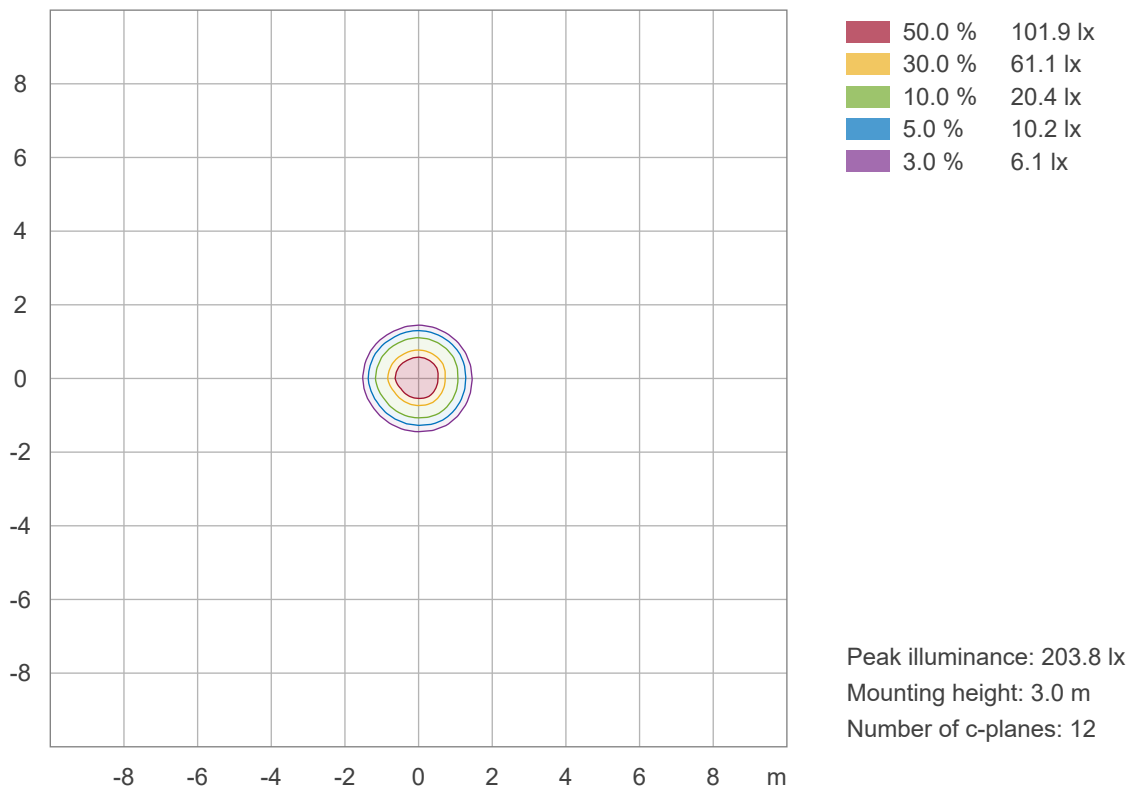


Test report

Light measurement results


Print date 10/7/2025

Linear intensity distribution

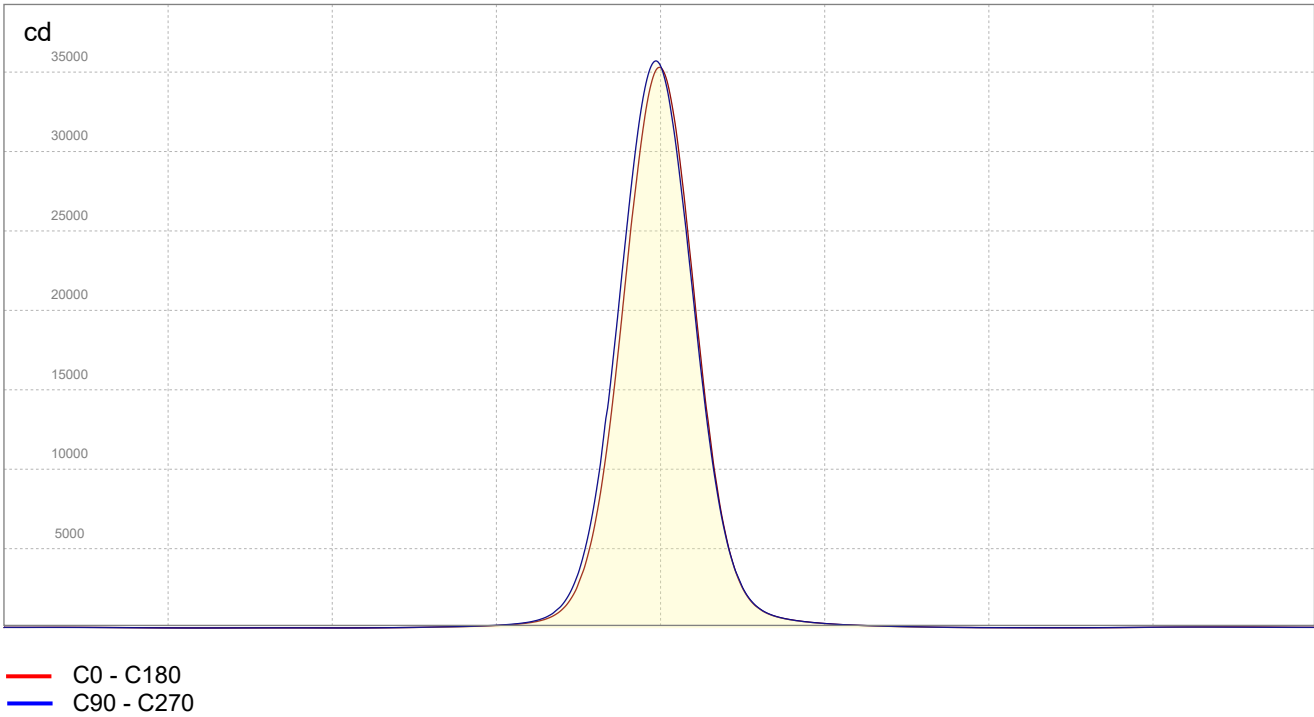

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B1 U1 G0

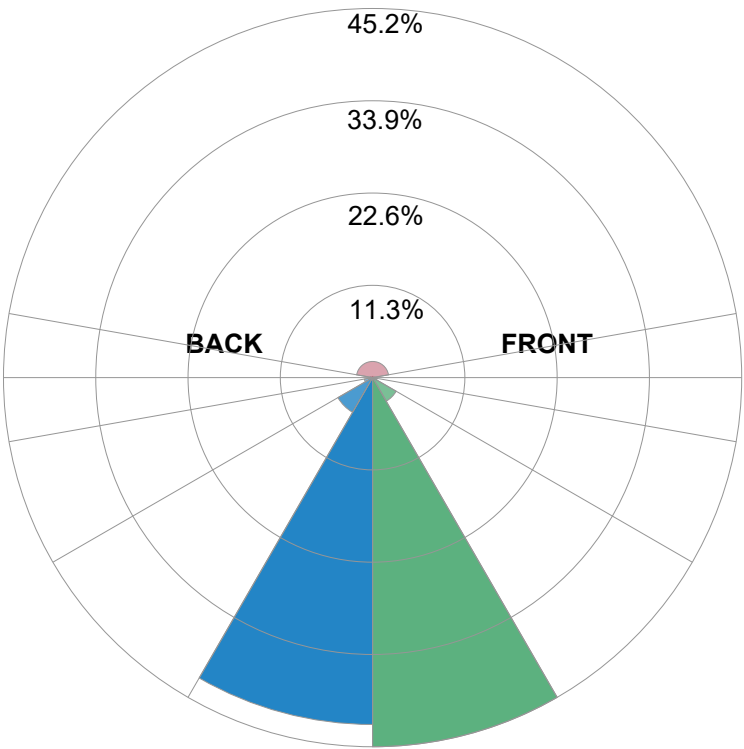

Forward Light

Low (0-30°)	170.3	lm	45.2%
Medium (30-60°)	12.6	lm	3.3%
High (60-80°)	2.1	lm	0.6%
Very High	0.4	lm	0.1%

Back Light

Low (0-30°)	160	lm	42.4%
Medium (30-60°)	18.5	lm	4.9%
High (60-80°)	3.8	lm	1%
Very High	0.9	lm	0.2%

Uplight

Low (90-100°)	1	lm	0.3%
High (100-180°)	7.5	lm	2%

Total

Sum	377	lm	100%
-----	-----	----	------