


Blazeline Slim Static White
Blazeline Slim Combined Source
Blazeline Slim Discrete Source
Blazeline Slim Tunable White

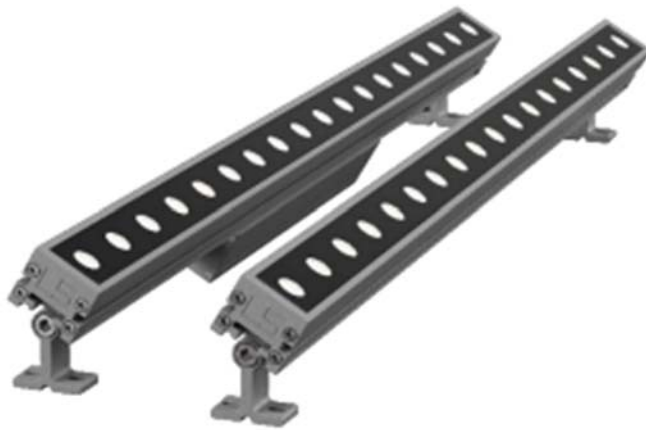

INSTALLATION GUIDE

Important Note:

This installation guide is intended for reference purposes only. All installations should comply with local laws, regulations, and site-specific conditions. The recommendations provided are general guidelines and may require adjustments based on the actual site situation. Always consult a qualified professional for final installation decisions.

INSTALLATION INSTRUCTIONS

Blazeline Slim



WARNING:

- This product must be installed according to national and local electrical codes by a qualified individual familiar with the construction, operation, and associated risks.
- Failure to follow the installation instructions may result in serious injury or death.
- Disconnect power before installation or maintenance to avoid electrical shock.
- Do not exceed the rated voltage of the fixture.
- Do not install if the fixture, parts, or connectors are damaged.
- The fixture is rated **IP66** and is suitable for use in outdoor, wet locations.
- Do not submerge in water or other liquids.
- Do not exceed the maximum number of fixtures in any single run. Refer to **Table 1** for details.

CAUTION: Unauthorized modifications or repairs will void the warranty.





MAXIMUM LOAD CAPACITY PER RUN (Table 1)						
Series	BlazeLine Slim Static White/ BlazeLine Slim Tunable White			BlazeLine Slim Discrete Source / BlazeLine Slim Combined Source		
Max Power	9W(300), 18W(600mm), 27W(900mm), 36W(1200mm)			12W(300), 24W(600mm), 36W(900mm), 48W(1200mm)		
Power Factor	≥0.9 (@100V)			≥0.9 (@100V)		
Input Voltage Range	100-277V, 50/60Hz		24V	100-277V, 50/60Hz		24V
Max. Power Linking	US (120V)	EU (220V)		US (100V)	EU (220V)	
	300mm (1ft)	N/A	N/A	13 nos.	85 nos.	150 nos.
	600mm (2ft)	55 nos.	105 nos.	6 nos.	45 nos.	80 nos.
	900mm (3ft)	40 nos.	72 nos.	4 nos.	30 nos.	55 nos.
	1200mm (4ft)	30 nos.	55 nos.	3 nos.	22 nos.	41 nos.
Max run length is for interlink and leading cables (Fixtures not included)	20 Meters @US, 30 Meters @EU		10 Meters	20 Meters @US, 30 Meters @EU		10 Meters

Remark:

- Please be aware that mounting screws and hex-head bolts are not included with your purchase. Installers will need to supply these items for installation.
- The actual maximum daisy chain limit may vary based on the gauge of the leading cable and the specific installation conditions. The values provided are recommended guidelines and should be considered as such. Please ensure that all installations comply with local electrical codes and safety standards.

INSTALLATION INSTRUCTIONS

Blazeline Slim

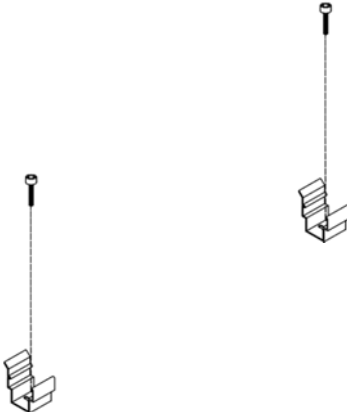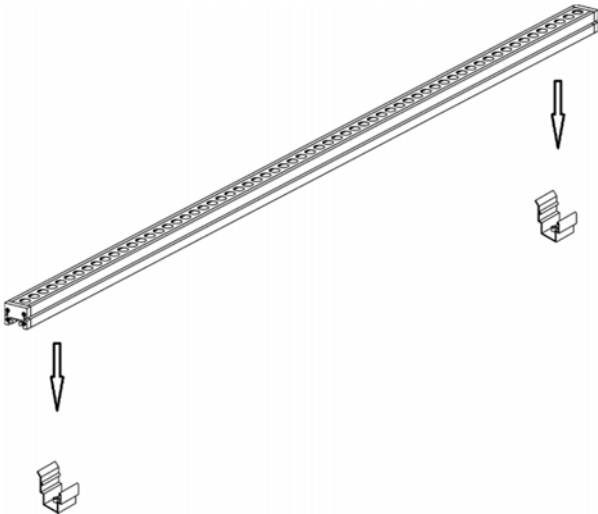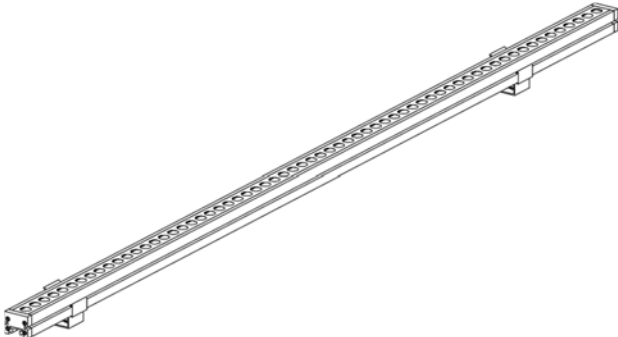HARDWARE INSTALLATION STEPS (FIXED MOUNTING CLIP) - Order with suffix FF	
STEP 1) Position Mounting Clip Position the mounting clip at the desired installation point. 	STEP 2) Secure Mounting Clip: Attach the mounting clip to a sturdy surface using the through-mounting hole and a suitable fastener. 
STEP 3) Tilt Fixture Top: Gently tilt the top of the fixture to one side. 	STEP 4) Secure Fixture Attachment: Press the fixture firmly onto the mounting clip until it securely locks into place. 


INSTALLATION INSTRUCTIONS

Blazeline Slim


HARDWARE INSTALLATION STEPS (ADJUSTABLE MOUNTING) - Order with suffix MB, MB73, MB84

STEP 1) Position the Fixture:

Place the fixture at the desired location for installation.

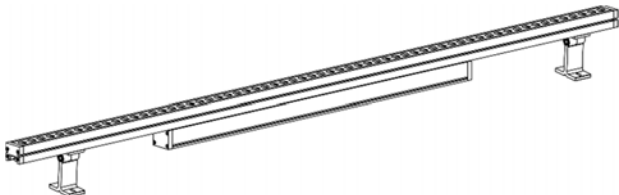


Mounting hole layout:

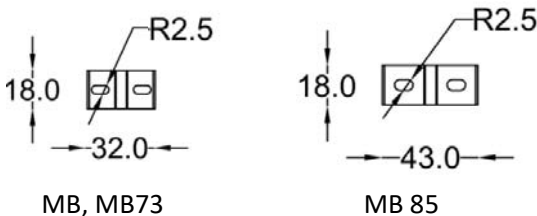

STEP 2)

Tilt and secure the Fixture in one side:

Gently tilt the top of the fixture to one side to expose the mounting brackets.

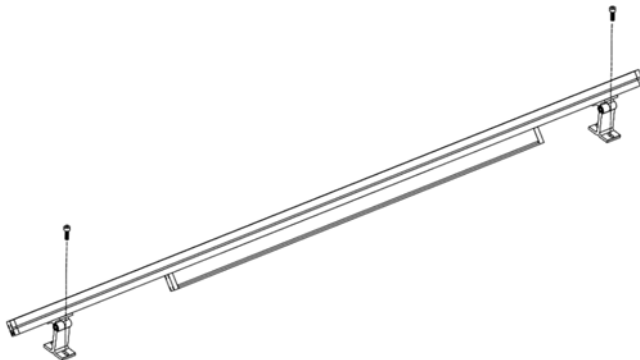


Use the through-mounting holes on the brackets to attach the fixture to a sturdy surface with suitable fasteners.

STEP 3)

Tilt and secure the Fixture in another side:


Repeat Step 2 on the other side.

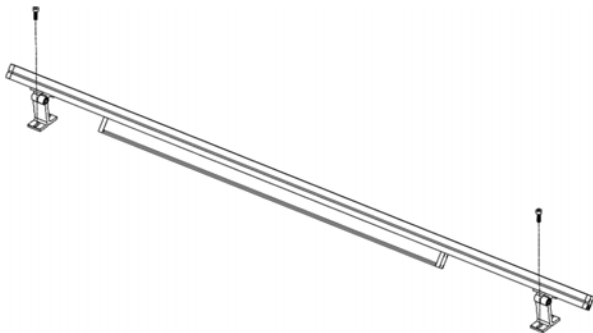

STEP 4)

Adjust the Fixture Angle:

Tilt the fixture back to the desired angle.

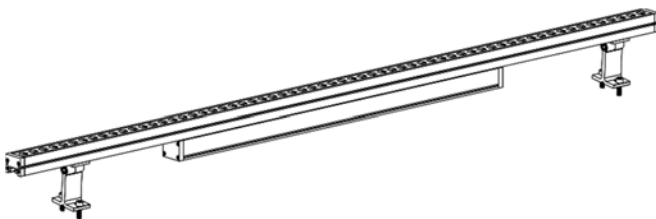

INSTALLATION INSTRUCTIONS

Blazeline Slim


LUMINOSCAPE®
Architectural Lighting Solutions

HARDWARE INSTALLATION STEPS (WALL MOUNTING ARM - DLWMB) - Order separately

STEP 1)

Secure Mounting Arm:

Use the through-mounting holes on the brackets to attach the mounting arm to a sturdy surface with suitable fasteners.

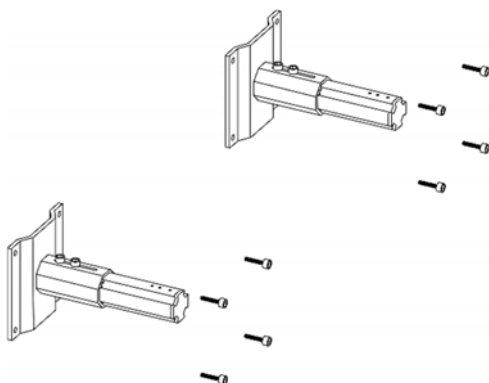


Remark:

Ensure that the distance between the two mounting arms aligns with the mounting slots on the fixtures.

STEP 2)

Attach the Fixture:


- Tilt and secure the fixture in one side.
- Gently tilt the top of the fixture to one side to expose the mounting brackets.
- Use the through-mounting holes on the brackets to attach the fixture to the mounting arm with suitable fasteners.

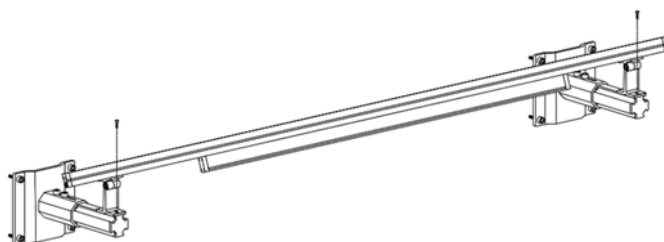

STEP 3)

Tilt and secure the Fixture in another side:


Repeat Step 2 on the other side.

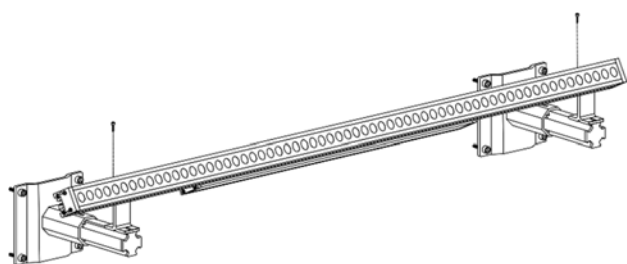

STEP 4)

Adjust the Fixture Angle:

Tilt the fixture back to the desired angle.

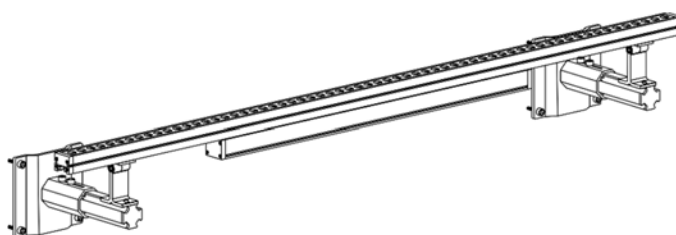

INSTALLATION INSTRUCTIONS

Blazeline Slim

LUMINOSCAPE®


Architectural Lighting Solutions

HARDWARE INSTALLATION STEPS (INGROUND SPIKE, DSMBA-SPIKE) - Order separately

STEP 1)

Secure the Spikes:

Firmly press the mounting inground spike downward into the grass area until it is securely anchored in the ground.

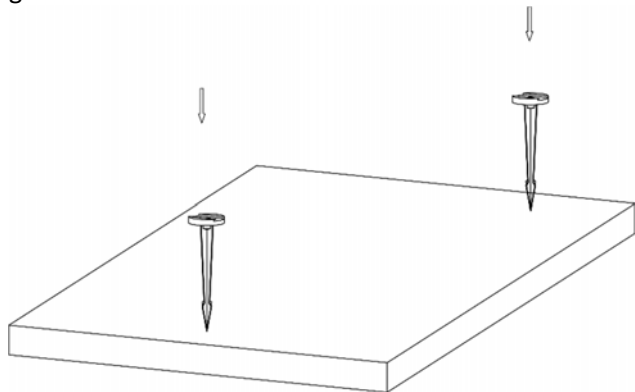


Remark: Ensure that the inground spikes are spaced appropriately to align with the mounting bracket locations of the wallwasher

STEP 2)

Tilt and secure the Fixture in one side:

Gently tilt the top of the fixture to one side to expose the mounting brackets.

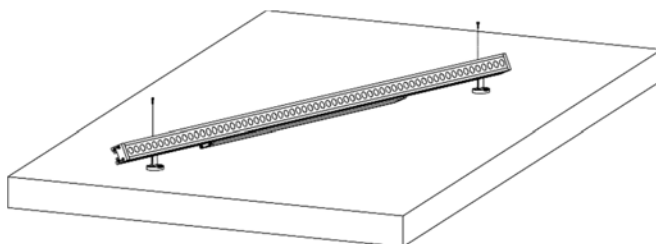


Use the through-mounting holes on the brackets to attach the fixture to a sturdy surface with suitable fasteners

STEP 3)

Tilt and secure the Fixture in another side:


Repeat Step 2 on the other side.

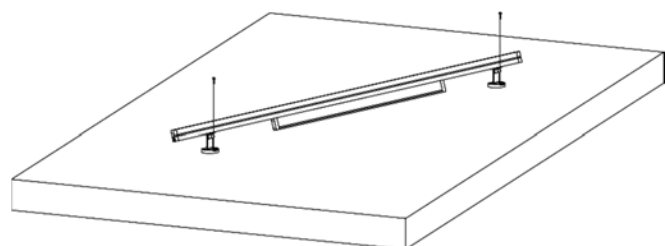

STEP 4)

Adjust the Fixture Angle:

Tilt the fixture back to the desired angle.

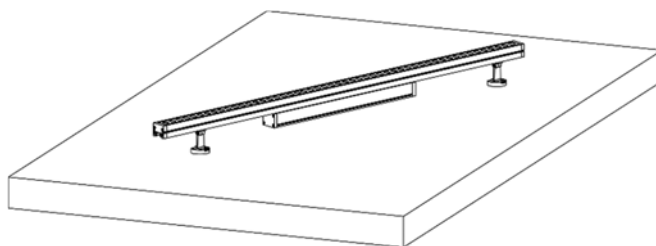

INSTALLATION INSTRUCTIONS

Blazeline Slim

LUMINOSCAPE®
Architectural Lighting Solutions



WARNING (Static White):

- Ensure the **BlazeLine Slim Line Voltage** is properly earthed, and the AC power supply is equipped with a circuit breaker or fuse, ground fault protection, and a device to disconnect power for servicing or when the fixture is not in use.
- Disconnect all cables and the fixture from the power source completely before performing any maintenance tasks.
- Confirm that the voltage and frequency specified on the product label match the local mains power supply before turning on the fixture.
- **Ensure the BlazeLine Slim Low Voltage** is properly grounded, and the DC power supply includes overcurrent protection (e.g., a fuse or circuit breaker) and a disconnect device for servicing or when not in use.
- Disconnect the DC power supply entirely before performing any maintenance or troubleshooting.
- Verify that the voltage and polarity settings match the product label and power supply specifications before powering on the fixture.

Wire Identification Schemes Table (Line Voltage Static White):

Cable	Function	Core(US)	Wire Size	Core(EU)	Wire Size
Power lead in/ Extension Cable	L (live)	Black	16AWG	Brown	1.3mm ²
	N (Neutral)	White	16AWG	Blue	1.3mm ²
	GND (Earth)	Green	16AWG	Yellow/Green	1.3mm ²
Data lead in	DIM+	Purple	20AWG	Purple	0.5mm ²
	DIM -	Pink	20AWG	Grey	0.5mm ²
	N/A	Yellow	20AWG	Yellow	0.5mm ²
Power and Data Combined Lead-in /Extension	L (live)	Black	16AWG	Brown	1.3mm ²
	N (Neutral)	White	16AWG	Blue	1.3mm ²
	GND (Earth)	Green	16AWG	Yellow/Green	1.3mm ²
	DIM+	Purple	22AWG	Purple	0.3mm ²
	DIM -	Pink	22AWG	Grey	0.3mm ²
	DMX GND	Yellow	22AWG	Yellow	0.3mm ²

INSTALLATION INSTRUCTIONS

Blazeline Slim

LUMINOSCAPE®
Architectural Lighting Solutions

CABLE AND CONNECTIONS (Static White)

Typical Wiring Schematic (Static White):

Leading wiring (ON/OFF, and TRIAC):




Leading wiring (0-10V, and DALI):



Option one: 6 pin lead in cable:



Option two: Leading T-joint (AC-LEADIN-T336) with power and data leading cables.



Power Injection:



Interlink Cable:



End Cap:



INSTALLATION INSTRUCTIONS

Blazeline Slim

LUMINOSCAPE®
Architectural Lighting Solutions



WARNING (RGBW Combined/ RGBW Discrete/ Tunable White):

- Ensure the BlazeLine Slim fixture is earthed, and the AC power supply includes a circuit breaker, ground fault protection, and a disconnect device for servicing or when not in use.
- Before connecting DMX cables, ensure all wiring meets DMX standards to prevent communication issues or damage.
- Disconnect the power supply and DMX signal entirely before any maintenance or troubleshooting.
- Verify that voltage, frequency, and DMX settings match the product label and local mains supply before powering on the fixture.
- Confirm DMX address and control settings are accurate to prevent unintended lighting behavior.
- For DMX networks, ensure proper termination to avoid signal interference or reflections. (DMX Terminator)

Wire Identification Schemes Table (Line Voltage RGBW):

Cable	Function	Core(US)	Wire Size	Core(EU)	Wire Size
Power lead in	L (live)	Black	16AWG	Brown	1.3mm ²
	N (Neutral)	White	16AWG	Blue	1.3mm ²
	GND (Earth)	Green	16AWG	Yellow/Green	1.3mm ²
Data lead in	DMX+	Purple	20AWG	Purple	0.5mm ²
	DMX-	Pink	20AWG	Grey	0.5mm ²
	DMX GND	Yellow	20AWG	Yellow	0.5mm ²
Power and Data Combined Lead-in /Extension	L (live)	Black	16AWG	Brown	1.3mm ²
	N (Neutral)	White	16AWG	Blue	1.3mm ²
	GND (Earth)	Green	16AWG	Yellow/Green	1.3mm ²
	DMX+	Purple	22AWG	Purple	0.3mm ²
	DMX-	Pink	22AWG	Grey	0.3mm ²
	DMX GND	Yellow	22AWG	Yellow	0.3mm ²

INSTALLATION INSTRUCTIONS

Blazeline Slim


LUMINOSCAPE®
Architectural Lighting Solutions

CABLE AND CONNECTIONS (RGBW Combined/ RGBW Discrete/Tunable)


Typical Wiring Schematic (Tunable, RGBW Discrete, RGBC Combined):

Leading wiring:


Option one: 6 pin lead in cable:



Option two: Leading T-joint (AC-LEADIN-T336) with power and data leading cables.

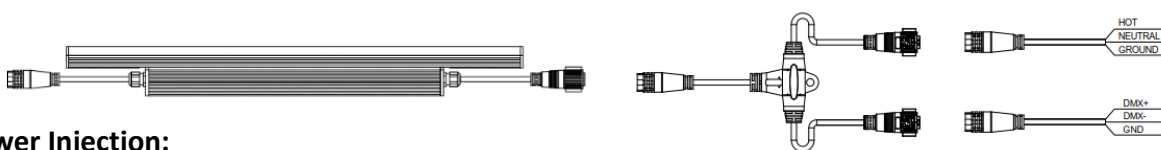

Power Injection:

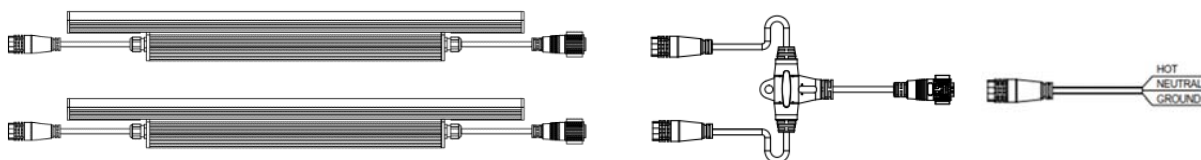

Interlink Cable:



DMX Terminator:



INSTALLATION INSTRUCTIONS

Blazeline Slim

Wire Identification Schemes Table (Low Voltage Static White):

Cable	Function	Core(US)	Wire Size	Core(EU)	Wire Size
Power lead in/ Power extension Cable	DC+	Red	16AWG	Brown	1.0mm ²
	DC-	Black	16AWG	Blue	1.0mm ²

Wire Identification Schemes Table (Low Voltage RGBW):


Cable	Function	Core(US)	Wire Size	Core(EU)	Wire Size
Power lead in	DC+	Red	16AWG	Brown	1.0mm ²
	DC-	Black	16AWG	Blue	1.0mm ²
Data lead in	DMX+	Purple	20AWG	Purple	0.5mm ²
	DMX-	Pink	20AWG	Grey	0.5mm ²
	DMX GND	Yellow	20AWG	Yellow	0.5mm ²

SET BACK DISTANCE

Correct setback distances ensure optimal lighting performance and effective wallwashing results

Recommended Setback Distances for Wallwasher

Set Back Distance	Purpose	Best Use
20mm-50mm	For narrow beams, smooth surfaces, glazing	Focused, intense lighting.
50mm-100mm	Balanced lighting for textured walls.	General wallwashing
100mm-200mm	Wide, even light for large areas.	Enhances textured surfaces

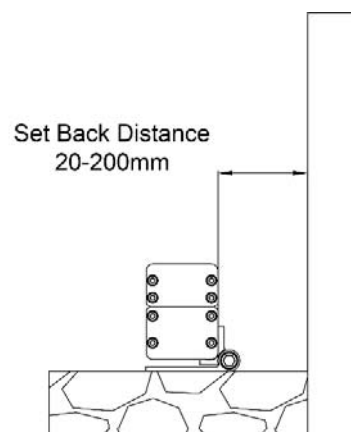

Noted:

- Our recommended setback distances are only guidelines. The actual distance may vary depending on the specific wall texture, height, and lighting effect required for your project. Always adjust based on real-world conditions to achieve the best outcome.

INSTALLATION INSTRUCTIONS

Blazeline Slim

LUMINOSCAPE®
Architectural Lighting Solutions

RECOMMENDED INSTALLATION TOOLS AND MATERIALS

Item	Description	Material	Recommended Length	Purpose
M6 Hex Key (Allen Wrench)	Tool for loosening hex head bolts to rotate the fixture	N/A	N/A	Loosen hex head bolt to adjust fixture angle.
Screws	Fasteners to secure the fixture.	Color-plated Zinc Carbon Steel 1215 or Stainless Steel 316/316L	10mm - 20mm	Secure fixture to surface; ensure suitable fastening strength.

- Remarks:
- The items listed above are **recommended** for installation and are not provided by Luminoscape.
 - Ensure the screws are made from durable materials such as **Color-plated Zinc Carbon Steel 1215** or **Stainless Steel 316/316L** to avoid corrosion and ensure longevity.
 - The **M6 Hex Key** should match the hex head bolt size for easy adjustment of the fixture rotation.
 - A **suitable fastener** should be chosen based on the mounting surface to ensure a secure installation.

INSTALLATION COMPLETION CHECKILIST

Checklist Category	Task	Completed (✓)
General Preparation	Verify all components are present and undamaged (fixtures, cables, connectors, etc.).	
	Confirm the AC power supply matches the voltage and frequency specified on the product label.	
	Ensure the circuit breaker or fuse, ground fault protection, and power disconnect device are installed.	
Mounting and Fixture Alignment	Check that all fixtures are securely mounted using appropriate screws and brackets.	
	Verify alignment and angles are adjusted to achieve the desired lighting effect.	
Electrical Connections	Confirm all power and data cables are securely connected and meet the recommended wiring standards.	
	Verify proper grounding of the fixture for safety and compliance.	
	Ensure DMX cables (if applicable) are terminated correctly to prevent signal interference.	
Safety and Testing	Confirm that power is disconnected before performing any adjustments or maintenance.	
	Test the installation for proper functionality, including DMX addressing and control settings (if applicable).	
	Inspect for any exposed wiring, loose connections, or mechanical stress on cables.	
Final Inspection	Ensure setback distances are applied correctly for optimal lighting performance.	
	Verify that the installation complies with all national and local electrical codes.	