

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3097.5 cd per klm.
(Luminaire orientation as tested.)	-0.5 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	53.2V x 53.3H
	At 50% of Imax	26.4V x 26.5H
	At 90% of Imax	10.3V x 10.3H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	670.2 lumens per klm.
	To 50% of Imax	322.6 lumens per klm.
	To 90% of Imax	40.6 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1150A P:24.400W PF:0.9700 Freq:50.00Hz Lamp Flux:2111.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-25D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

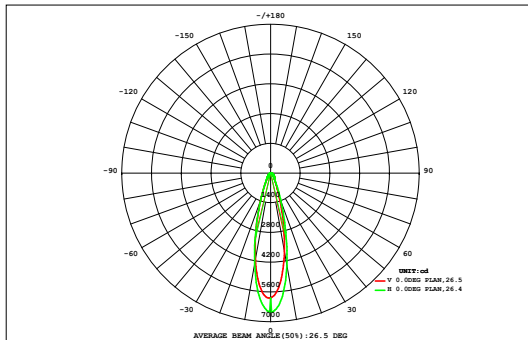

DATA OF LAMP		Eff:86.52lm/W	
MODEL		Imax (cd)	6539
NOMINAL POWER (W)	24	AVAILABILITY (%)	66.9
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	1413
NOMINAL FLUX (lm)	2111.06	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	2111
TEST VOLTAGE (V)	220	θ @50% (H,V)	27,26DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.67	0.84	1.02	1.20	1.40	1.53	1.62	1.66	1.65	1.59	1.47	1.32	1.16	1.01	0.87	0.73	0.59	0.46	20.8	0.00
45	0.76	0.96	1.18	1.42	1.69	1.93	2.08	2.16	2.15	2.04	1.85	1.63	1.40	1.20	1.03	0.86	0.70	0.54	25.6	0.00
40	0.85	1.08	1.36	1.69	2.07	2.52	2.85	3.04	3.02	2.79	2.42	2.03	1.68	1.43	1.20	0.99	0.80	0.62	32.4	0.00
35	0.93	1.21	1.56	2.01	2.63	3.50	4.41	4.89	4.82	4.23	3.40	2.59	2.06	1.70	1.39	1.12	0.89	0.71	44.0	6.65
30	1.00	1.33	1.78	2.43	3.46	5.20	7.61	8.97	8.77	7.26	5.19	3.47	2.61	2.02	1.59	1.26	1.01	0.81	65.8	39.3
25	1.07	1.44	1.99	2.91	4.61	7.73	12.7	16.8	16.5	13.0	8.23	5.01	3.38	2.41	1.83	1.46	1.15	0.90	103	80.5
20	1.11	1.52	2.17	3.37	5.84	10.6	18.5	27.5	28.6	21.9	12.6	7.26	4.34	3.04	2.28	1.71	1.30	0.99	155	134
15	1.13	1.56	2.26	3.66	6.69	12.8	22.9	35.2	41.2	30.9	17.0	10.0	6.99	4.60	2.94	1.99	1.44	1.07	204	186
10	1.13	1.55	2.24	3.64	6.73	13.1	23.6	36.1	45.4	34.7	25.8	19.5	12.0	6.59	3.64	2.24	1.55	1.13	241	225
5	1.13	1.57	2.28	3.74	6.96	13.4	23.3	33.2	41.5	40.9	32.8	22.6	13.2	7.00	3.78	2.29	1.57	1.14	252	236
0	1.15	1.60	2.37	3.94	7.33	13.8	23.3	34.4	41.4	32.9	23.4	16.0	9.80	5.63	3.29	2.12	1.49	1.10	225	208
-5	1.13	1.57	2.30	3.73	6.65	11.9	19.9	28.9	29.4	22.9	14.7	10.2	6.61	4.17	2.73	1.89	1.38	1.04	171	153
-10	1.09	1.49	2.12	3.23	5.21	8.67	13.9	18.0	17.2	13.6	8.98	6.02	4.35	3.08	2.22	1.65	1.26	0.96	113	91.0
-15	1.03	1.38	1.88	2.60	3.79	5.71	8.31	9.62	9.12	7.47	5.45	3.73	2.94	2.32	1.82	1.43	1.12	0.88	70.6	44.3
-20	0.96	1.25	1.61	2.09	2.76	3.71	4.69	5.13	4.93	4.27	3.45	2.64	2.15	1.82	1.51	1.23	0.99	0.79	46.0	8.97
-25	0.88	1.11	1.38	1.71	2.10	2.55	2.90	3.07	3.00	2.75	2.40	2.02	1.69	1.47	1.26	1.06	0.87	0.70	32.9	0.00
-30	0.79	0.97	1.18	1.42	1.67	1.90	2.05	2.12	2.09	1.97	1.80	1.60	1.38	1.21	1.06	0.91	0.76	0.61	25.5	0.00
-35	0.70	0.85	1.02	1.19	1.36	1.49	1.57	1.61	1.59	1.52	1.42	1.29	1.14	1.01	0.89	0.77	0.64	0.52	20.6	0.00
-40	0.67	0.84	1.02	1.20	1.40	1.53	1.62	1.66	1.65	1.59	1.47	1.32	1.16	1.01	0.87	0.73	0.59	0.46	20.8	0.00
-45	0.67	0.84	1.02	1.20	1.40	1.53	1.62	1.66	1.65	1.59	1.47	1.32	1.16	1.01	0.87	0.73	0.59	0.46	20.8	0.00
HORIZONTAL (DEG)																				
Φ t	17.5	23.3	31.7	46.0	73.0	122	196	272	303	247	172	119	78.8	51.7	35.3	25.7	19.5	15.0	1849	---
Φ a	0.00	0.00	0.00	3.40	46.8	101	177	254	284	227	151	94.2	50.9	21.9	1.33	0.00	0.00	0.00	---	1413

one-half-peak spread: U:12.9,D:13.7 , L:13.2,R:13.5


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1150A P:24.400W PF:0.9700 Freq:50.00Hz Lamp Flux:2111.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-25D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

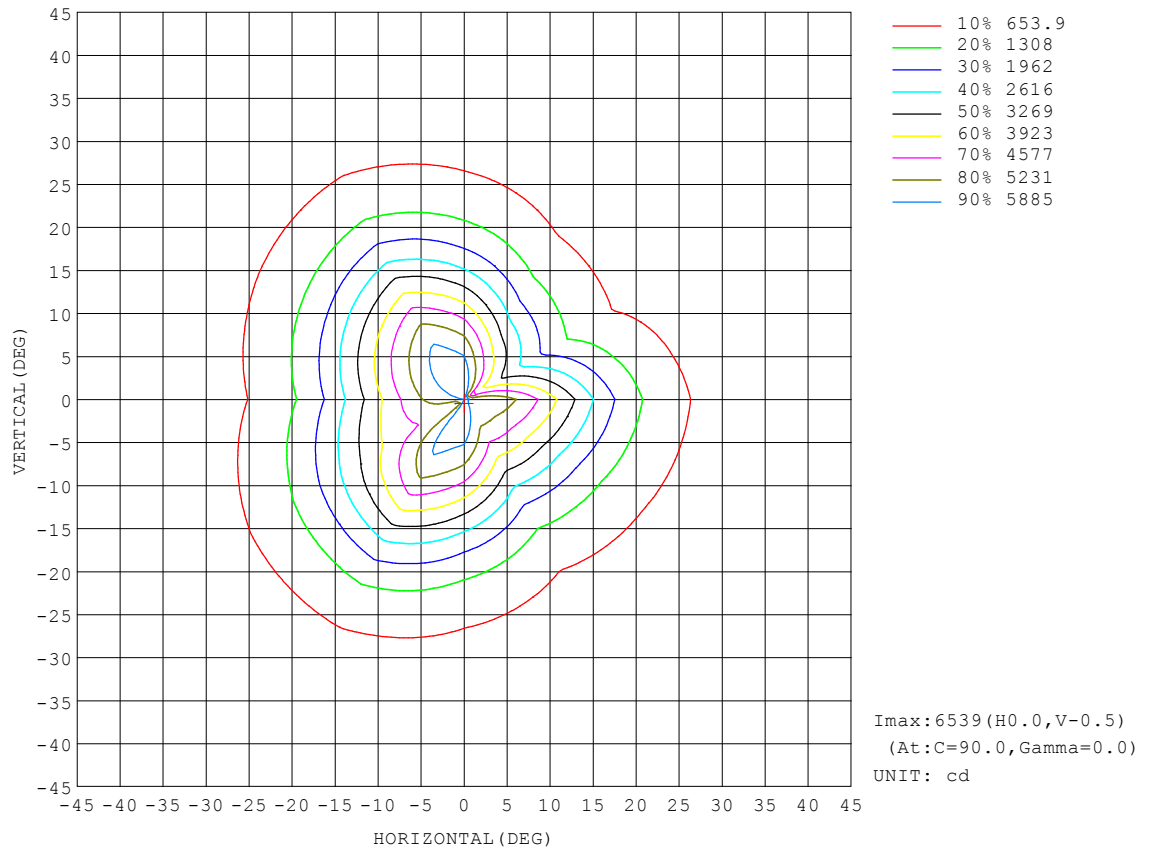


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1150A P:24.400W PF:0.9700 Freq:50.00Hz Lamp Flux:2111.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-25D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

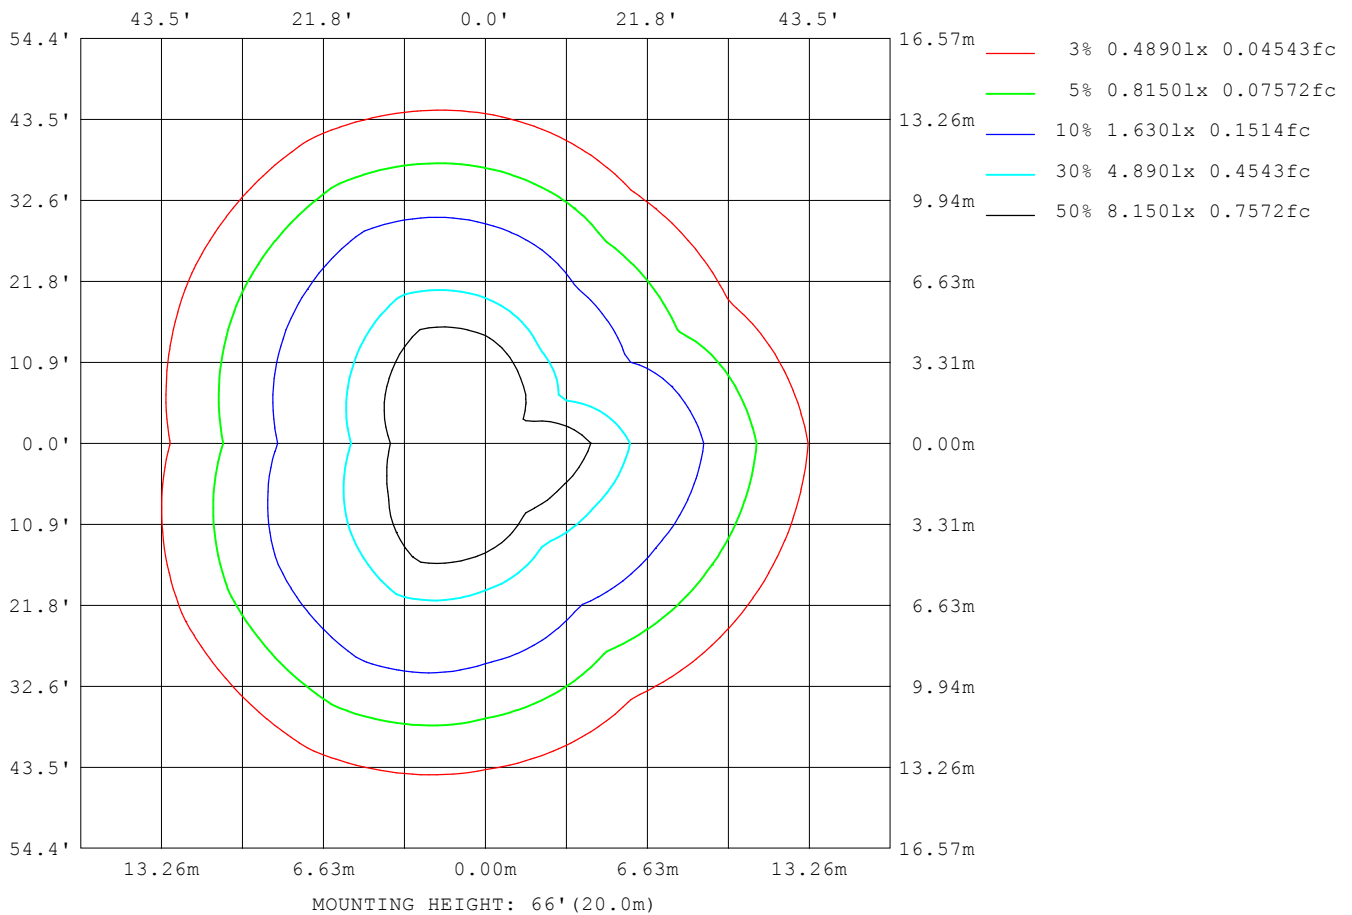

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

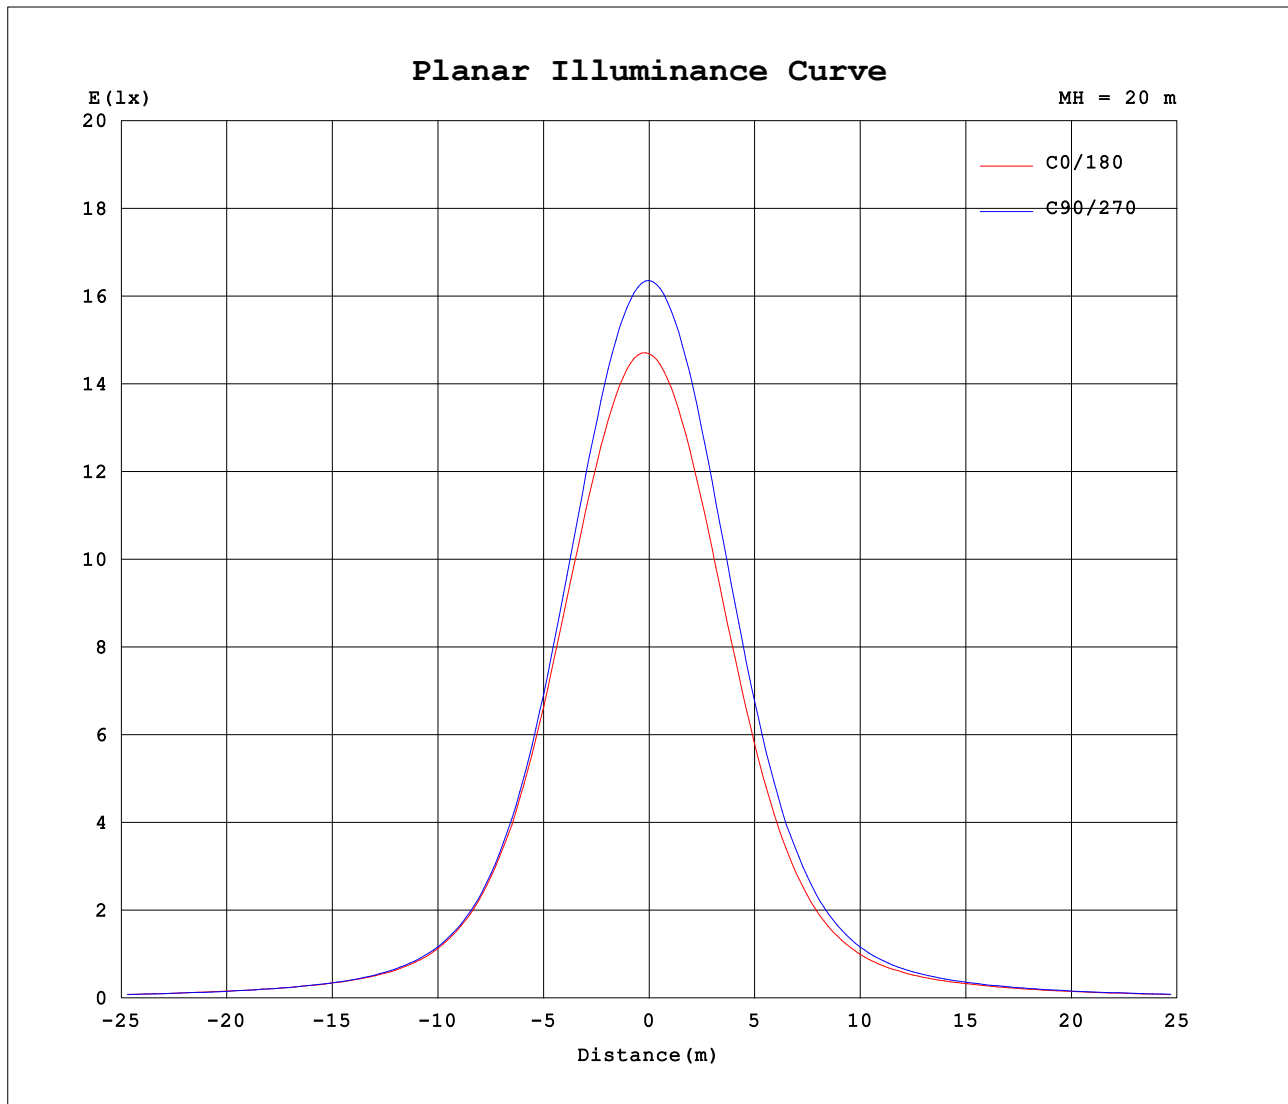


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1150A P:24.400W PF:0.9700 Freq:50.00Hz Lamp Flux:2111.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-25D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

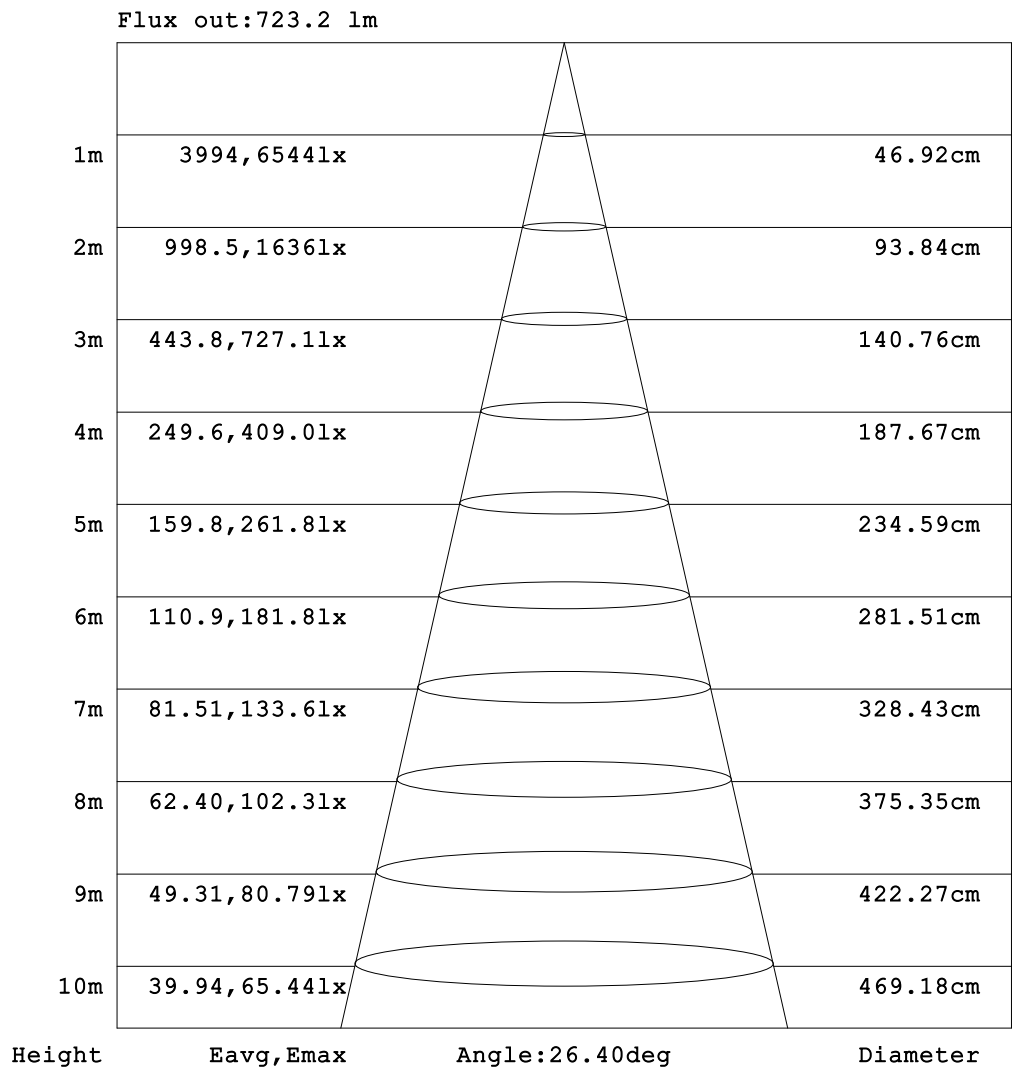

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1150A P:24.400W PF:0.9700 Freq:50.00Hz Lamp Flux:2111.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-25D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	5.67	5.38	5.32	5.51	6.09	7.11	8.31	9.19	9.41	9.25	9.24	9.71	10.6	11.6	12.3	12.4	12.2	12.3	12.6
-170	5.67	5.36	5.27	5.39	5.84	6.61	7.50	8.14	8.39	8.52	8.98	9.90	11.2	12.6	13.7	14.4	14.5	14.3	13.7
-160	5.67	5.34	5.22	5.25	5.53	6.02	6.58	6.99	7.21	7.41	8.00	9.09	10.6	11.9	13.0	13.8	14.3	14.5	14.7
-150	5.67	5.34	5.18	5.13	5.23	5.46	5.71	5.86	5.86	5.87	6.24	7.31	8.51	9.69	10.7	11.7	12.6	13.3	13.7
-140	5.67	5.35	5.14	5.02	4.99	5.02	5.04	4.94	4.71	4.75	5.13	5.66	6.31	7.02	7.76	8.73	9.60	10.3	10.9
-130	5.67	5.36	5.13	4.97	4.84	4.74	4.63	4.43	4.34	4.41	4.52	4.68	4.89	5.14	5.55	6.03	6.51	6.94	7.28
-120	5.67	5.39	5.16	4.96	4.79	4.62	4.45	4.31	4.32	4.34	4.36	4.38	4.40	4.45	4.58	4.71	4.85	4.99	5.11
-110	5.67	5.45	5.22	5.02	4.83	4.65	4.46	4.39	4.38	4.38	4.40	4.41	4.41	4.43	4.47	4.50	4.54	4.58	4.62
-100	5.67	5.52	5.33	5.14	4.96	4.79	4.63	4.61	4.60	4.59	4.60	4.61	4.61	4.61	4.61	4.62	4.63	4.64	4.65
-90	5.67	5.60	5.54	5.47	5.40	5.33	5.27	5.27	5.28	5.28	5.29	5.29	5.30	5.25	5.20	5.15	5.10	5.05	5.00
-80	5.67	5.72	5.91	6.37	7.14	8.16	9.55	10.8	12.0	13.4	14.8	16.1	17.4	17.1	16.4	15.3	14.0	12.5	10.8
-70	5.67	5.86	6.58	8.03	10.8	14.9	20.5	25.9	30.7	35.4	39.9	44.1	47.9	49.5	49.7	49.2	47.8	45.8	43.1
-60	5.67	6.03	7.38	10.7	16.8	25.5	35.9	46.2	54.7	63.3	71.7	79.5	86.6	91.9	93.8	94.5	94.0	92.1	88.9
-50	5.67	6.21	8.46	14.3	24.2	37.0	51.1	66.3	80.5	93.2	106	118	130	141	147	150	151	149	145
-40	5.67	6.38	9.54	18.0	31.4	47.3	65.4	84.6	104	123	141	160	181	203	225	235	241	240	232
-30	5.67	6.50	10.6	21.3	37.0	56.0	77.3	99.7	124	150	179	212	253	305	373	454	500	507	466
-20	5.67	6.56	11.3	23.6	41.0	62.1	85.4	110	138	170	211	270	361	512	775	1195	1685	1735	1475
-10	5.67	6.55	11.5	24.3	42.6	64.9	89.0	115	145	181	229	304	445	743	1348	2349	3675	4949	4424
0	5.67	6.48	11.2	23.7	41.6	63.8	87.5	114	143	177	223	289	408	664	1224	2271	3759	5194	5876
10	5.67	6.50	11.2	23.6	41.6	63.6	87.5	114	144	178	225	293	414	669	1198	2166	3570	4815	4353
20	5.67	6.47	10.7	22.2	39.0	59.5	82.5	107	135	166	205	258	336	463	694	1080	1542	1640	1445
30	5.67	6.38	9.72	19.3	34.2	52.2	72.9	94.8	119	144	173	207	248	298	363	439	482	495	466
40	5.67	6.25	8.66	15.7	27.8	42.7	59.5	78.0	97.2	117	138	159	182	206	230	241	248	248	242
50	5.67	6.11	7.75	12.1	20.3	31.7	44.5	58.2	72.8	87.6	102	117	131	145	152	156	157	156	152
60	5.67	5.98	6.87	9.04	13.4	20.1	28.8	38.4	48.0	57.8	67.8	77.4	86.4	93.5	95.8	97.2	97.2	95.7	92.8
70	5.67	5.89	6.28	7.18	8.82	11.2	14.9	19.6	24.9	30.5	36.1	41.5	46.6	49.1	49.7	49.6	48.8	47.2	44.9
80	5.67	5.80	5.96	6.19	6.52	7.01	7.82	8.88	9.99	11.3	12.9	14.6	16.4	16.5	16.0	15.3	14.3	13.0	11.6
90	5.67	5.72	5.77	5.81	5.86	5.91	5.96	5.99	6.03	6.06	6.10	6.13	6.17	6.10	6.04	5.98	5.92	5.86	5.80
100	5.67	5.65	5.63	5.61	5.59	5.57	5.56	5.53	5.50	5.46	5.44	5.41	5.39	5.38	5.36	5.35	5.34	5.33	5.33
110	5.67	5.59	5.52	5.46	5.42	5.38	5.35	5.33	5.32	5.33	5.33	5.36	5.39	5.46	5.54	5.64	5.74	5.83	5.90
120	5.67	5.53	5.43	5.37	5.34	5.34	5.34	5.39	5.53	5.73	5.93	6.15	6.36	6.61	6.99	7.33	7.63	7.87	8.05
130	5.67	5.49	5.36	5.34	5.35	5.43	5.62	5.95	6.38	6.88	7.39	7.86	8.26	8.60	8.95	9.21	9.36	9.45	9.50
140	5.67	5.45	5.34	5.34	5.44	5.73	6.22	6.87	7.60	8.29	8.84	9.22	9.45	9.50	9.52	9.47	9.43	9.44	9.45
150	5.67	5.42	5.33	5.38	5.62	6.15	6.95	7.86	8.66	9.19	9.41	9.44	9.37	9.36	9.44	9.65	10.1	10.5	10.8
160	5.67	5.40	5.32	5.43	5.83	6.59	7.61	8.59	9.23	9.40	9.37	9.31	9.41	9.91	10.6	11.3	11.9	12.6	13.0
170	5.67	5.38	5.32	5.48	6.00	6.93	8.08	9.00	9.38	9.32	9.27	9.45	10.1	11.0	11.9	12.5	12.9	13.1	13.2
180	5.67	5.38	5.32	5.51	6.09	7.11	8.31	9.19	9.41	9.25	9.24	9.71	10.6	11.6	12.3	12.4	12.2	12.3	12.7

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1150A P:24.400W PF:0.9700 Freq:50.00Hz Lamp Flux:2111.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-25D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	13.0	13.7	14.4	14.5	14.1	13.3	12.0	10.3	8.41	6.74	5.53	4.79	4.44	4.35	4.36	4.44	4.58	4.81	
-170	13.2	13.7	14.1	14.2	14.0	13.2	11.9	10.2	8.40	6.76	5.54	4.81	4.45	4.36	4.37	4.43	4.58	4.81	
-160	14.6	14.6	14.4	14.1	13.5	12.5	11.1	9.48	7.80	6.37	5.33	4.73	4.43	4.36	4.37	4.43	4.58	4.81	
-150	13.8	13.7	13.5	13.0	12.1	10.9	9.53	8.12	6.78	5.72	5.00	4.58	4.40	4.36	4.38	4.45	4.60	4.81	
-140	11.0	11.0	10.8	10.4	9.51	8.50	7.44	6.47	5.67	5.07	4.67	4.46	4.38	4.36	4.39	4.47	4.61	4.81	
-130	7.42	7.43	7.32	7.12	6.75	6.17	5.65	5.20	4.86	4.62	4.47	4.39	4.37	4.38	4.41	4.50	4.63	4.81	
-120	5.16	5.17	5.14	5.08	4.99	4.83	4.68	4.56	4.47	4.41	4.38	4.37	4.37	4.40	4.45	4.55	4.66	4.81	
-110	4.59	4.57	4.54	4.51	4.48	4.45	4.44	4.42	4.41	4.39	4.38	4.37	4.39	4.45	4.52	4.59	4.69	4.81	
-100	4.62	4.59	4.56	4.54	4.51	4.49	4.48	4.47	4.46	4.45	4.46	4.46	4.51	4.55	4.61	4.67	4.72	4.81	
-90	4.95	4.91	4.86	4.82	4.78	4.73	4.72	4.70	4.69	4.67	4.66	4.64	4.67	4.70	4.73	4.75	4.78	4.81	
-80	10.0	9.17	8.27	7.35	6.46	5.72	5.65	5.55	5.42	5.27	5.14	5.02	4.98	4.94	4.89	4.86	4.83	4.81	
-70	40.3	37.0	33.2	29.0	24.4	20.6	18.5	16.1	13.6	11.4	9.40	7.99	6.69	5.86	5.33	5.05	4.89	4.81	
-60	85.1	80.1	74.0	66.9	58.8	52.8	47.5	41.8	35.7	29.2	22.5	16.9	12.5	9.11	6.55	5.39	4.97	4.81	
-50	140	132	122	112	101	93.1	84.1	74.1	63.4	52.5	42.1	31.9	22.4	14.8	9.29	6.12	5.08	4.81	
-40	219	202	183	163	151	138	123	109	93.3	77.6	62.7	48.2	34.5	22.3	13.0	7.09	5.20	4.81	
-30	409	340	277	246	218	191	166	143	122	102	82.6	63.8	46.0	29.9	17.0	8.47	5.32	4.81	
-20	1120	726	546	425	332	264	216	179	149	124	99.6	77.1	55.8	36.6	20.8	9.75	5.43	4.81	
-10	2903	2098	1382	867	543	364	269	212	171	139	112	86.5	63.0	41.3	23.6	10.7	5.51	4.81	
0	5447	4161	2629	1441	765	445	304	231	183	148	118	91.2	66.6	43.6	25.0	11.2	5.55	4.81	
10	2634	1489	834	605	446	327	253	203	165	135	109	84.0	61.3	40.2	23.1	10.6	5.53	4.81	
20	1064	669	467	354	279	226	193	165	139	116	93.5	72.6	52.7	34.5	19.9	9.64	5.47	4.81	
30	407	338	276	237	206	177	151	128	110	91.8	74.3	57.8	41.5	27.3	16.2	8.42	5.38	4.81	
40	227	207	186	165	149	132	115	98.2	80.8	65.6	53.6	41.3	29.5	19.8	12.2	7.15	5.29	4.81	
50	145	136	125	113	101	90.1	78.7	66.6	54.5	42.8	32.5	24.8	18.3	13.2	8.87	6.26	5.18	4.81	
60	88.2	82.5	75.5	67.4	58.7	51.0	44.0	36.7	29.2	22.0	15.6	12.5	10.5	8.37	6.69	5.61	5.08	4.81	
70	41.7	38.0	33.7	29.1	24.2	19.7	16.6	13.6	11.0	9.09	7.48	6.78	6.63	6.17	5.68	5.30	5.01	4.81	
80	10.8	9.92	8.96	8.01	7.13	6.44	6.29	6.15	6.01	5.91	5.83	5.75	5.62	5.47	5.28	5.12	4.96	4.81	
90	5.74	5.68	5.62	5.56	5.50	5.44	5.44	5.43	5.43	5.42	5.42	5.42	5.31	5.21	5.11	5.01	4.91	4.81	
100	5.33	5.34	5.34	5.33	5.33	5.30	5.29	5.28	5.27	5.26	5.25	5.23	5.15	5.06	4.99	4.92	4.85	4.81	
110	6.00	6.08	6.13	6.14	6.12	6.05	5.90	5.75	5.61	5.47	5.35	5.22	5.07	4.98	4.89	4.84	4.81	4.81	
120	8.18	8.25	8.28	8.24	8.15	7.89	7.55	7.16	6.75	6.35	5.98	5.50	5.14	4.92	4.82	4.77	4.77	4.81	
130	9.50	9.49	9.49	9.49	9.52	9.38	9.12	8.75	8.26	7.65	6.83	5.95	5.32	4.94	4.75	4.71	4.73	4.81	
140	9.48	9.47	9.44	9.39	9.36	9.39	9.45	9.41	9.20	8.52	7.36	6.29	5.49	4.97	4.71	4.65	4.69	4.81	
150	11.0	11.0	10.8	10.3	9.74	9.37	9.29	9.35	9.02	8.32	7.36	6.33	5.49	4.95	4.66	4.59	4.66	4.81	
160	13.0	12.9	12.5	11.8	11.0	10.1	9.59	9.14	8.57	7.81	6.94	6.06	5.30	4.83	4.59	4.53	4.63	4.81	
170	12.6	12.5	12.5	12.7	12.5	11.8	10.8	9.67	8.49	7.33	6.32	5.50	4.93	4.62	4.49	4.48	4.60	4.81	
180	13.0	13.7	14.4	14.5	14.1	13.3	12.0	10.3	8.41	6.74	5.53	4.79	4.44	4.35	4.36	4.44	4.58	4.81	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: