

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3132.5 cd per klm.
(Luminaire orientation as tested.)	-0.5 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	52.8V x 53.2H
	At 50% of Imax	26.4V x 26.6H
	At 90% of Imax	10.3V x 10.4H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	673.2 lumens per klm.
	To 50% of Imax	329.3 lumens per klm.
	To 90% of Imax	41.3 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:1499.15x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-25D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

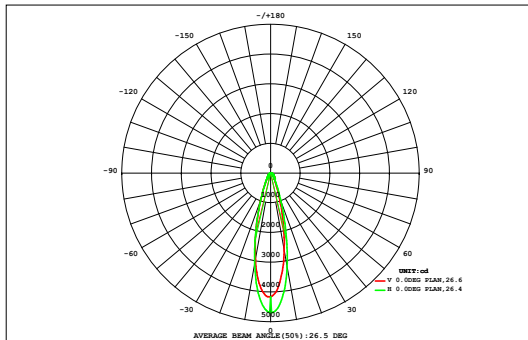

DATA OF LAMP		Eff:62.21lm/W	
MODEL		Imax(cd)	4696
NOMINAL POWER(W)	24	AVAILABILITY(%)	67.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1008
NOMINAL FLUX(lm)	1499.15	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1499
TEST VOLTAGE(V)	220	θ @50% (H,V)	27,26DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.47	0.58	0.71	0.84	0.98	1.07	1.13	1.16	1.14	1.09	1.01	0.90	0.79	0.68	0.59	0.50	0.41	0.32	14.4	0.00
45	0.53	0.67	0.82	0.99	1.18	1.36	1.46	1.51	1.49	1.41	1.27	1.11	0.95	0.82	0.71	0.59	0.48	0.38	17.7	0.00
40	0.59	0.75	0.95	1.18	1.46	1.78	2.02	2.14	2.11	1.93	1.66	1.38	1.14	0.98	0.83	0.68	0.55	0.44	22.6	0.00
35	0.65	0.84	1.09	1.41	1.86	2.51	3.19	3.50	3.40	2.94	2.32	1.75	1.39	1.17	0.96	0.78	0.63	0.50	30.9	4.61
30	0.70	0.93	1.25	1.71	2.47	3.76	5.57	6.53	6.28	5.07	3.52	2.30	1.76	1.40	1.11	0.88	0.71	0.57	46.5	27.7
25	0.74	1.01	1.40	2.05	3.29	5.61	9.33	12.4	12.0	9.16	5.50	3.31	2.30	1.68	1.28	1.02	0.81	0.63	73.4	57.0
20	0.77	1.06	1.52	2.37	4.16	7.68	13.5	20.2	20.6	15.2	8.32	4.91	3.02	2.14	1.61	1.20	0.91	0.69	110	94.8
15	0.79	1.09	1.58	2.57	4.75	9.18	16.5	25.4	29.7	21.4	11.6	7.11	4.97	3.25	2.06	1.39	1.00	0.75	145	132
10	0.79	1.08	1.56	2.53	4.73	9.26	16.7	25.7	32.4	24.4	18.4	13.9	8.56	4.66	2.56	1.57	1.09	0.79	171	159
5	0.79	1.09	1.59	2.60	4.88	9.46	16.5	23.7	29.6	28.9	23.1	16.0	9.36	4.94	2.64	1.60	1.10	0.80	179	167
0	0.80	1.11	1.65	2.75	5.16	9.81	16.7	25.1	30.0	23.4	16.3	11.2	6.86	3.93	2.28	1.47	1.04	0.76	160	149
-5	0.79	1.10	1.60	2.60	4.68	8.61	14.7	21.6	21.6	16.4	10.2	7.05	4.56	2.88	1.88	1.31	0.96	0.72	123	110
-10	0.76	1.04	1.48	2.25	3.73	6.43	10.7	13.8	12.8	9.75	6.23	4.09	2.97	2.10	1.53	1.14	0.87	0.67	82.2	66.6
-15	0.72	0.97	1.31	1.84	2.74	4.29	6.42	7.33	6.73	5.33	3.79	2.54	2.00	1.59	1.25	0.98	0.77	0.61	51.2	32.5
-20	0.67	0.88	1.13	1.49	2.00	2.77	3.55	3.83	3.57	3.01	2.40	1.81	1.47	1.25	1.04	0.85	0.69	0.55	32.9	7.40
-25	0.62	0.78	0.98	1.22	1.52	1.88	2.13	2.23	2.13	1.91	1.66	1.39	1.15	1.01	0.87	0.73	0.60	0.48	23.3	0.00
-30	0.55	0.69	0.84	1.01	1.20	1.38	1.48	1.51	1.47	1.37	1.25	1.10	0.95	0.83	0.73	0.63	0.52	0.42	17.9	0.00
-35	0.49	0.60	0.72	0.85	0.98	1.07	1.12	1.14	1.11	1.06	0.99	0.89	0.79	0.69	0.61	0.53	0.44	0.36	14.5	0.00
-40	0.47	0.58	0.71	0.84	0.98	1.07	1.13	1.16	1.14	1.09	1.01	0.90	0.79	0.68	0.59	0.50	0.41	0.32	14.4	0.00
-45	0.47	0.58	0.71	0.84	0.98	1.07	1.13	1.16	1.14	1.09	1.01	0.90	0.79	0.68	0.59	0.50	0.41	0.32	14.4	0.00
Φ t	12.2	16.3	22.2	32.3	51.8	87.9	143	199	218	174	120	82.7	55.0	36.0	24.5	17.9	13.6	10.4	1316	---
Φ a	0.00	0.00	0.00	1.48	33.0	73.0	130	186	205	160	104	64.9	35.4	15.0	0.68	0.00	0.00	0.00	---	1008

one-half-peak spread: U:13.0,D:13.6 , L:14.2,R:12.6


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:1499.15x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-25D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

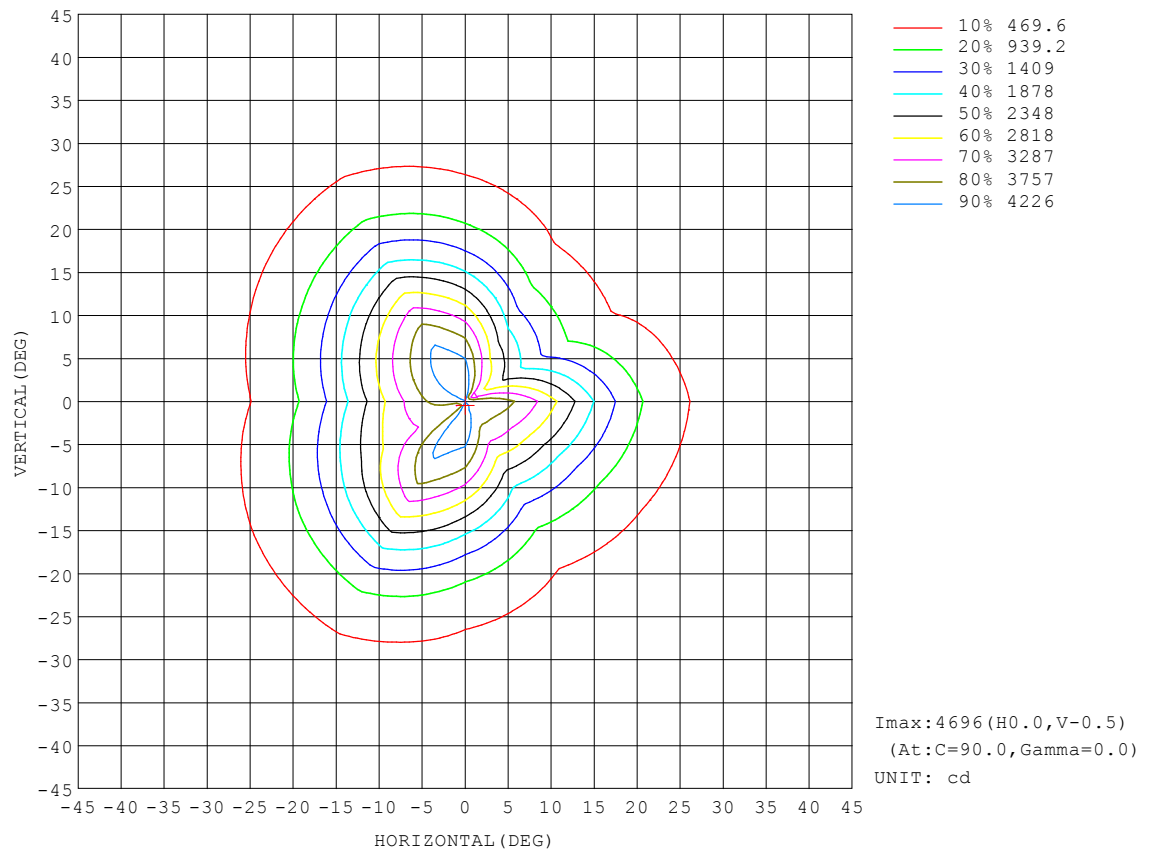


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:1499.15x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-25D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

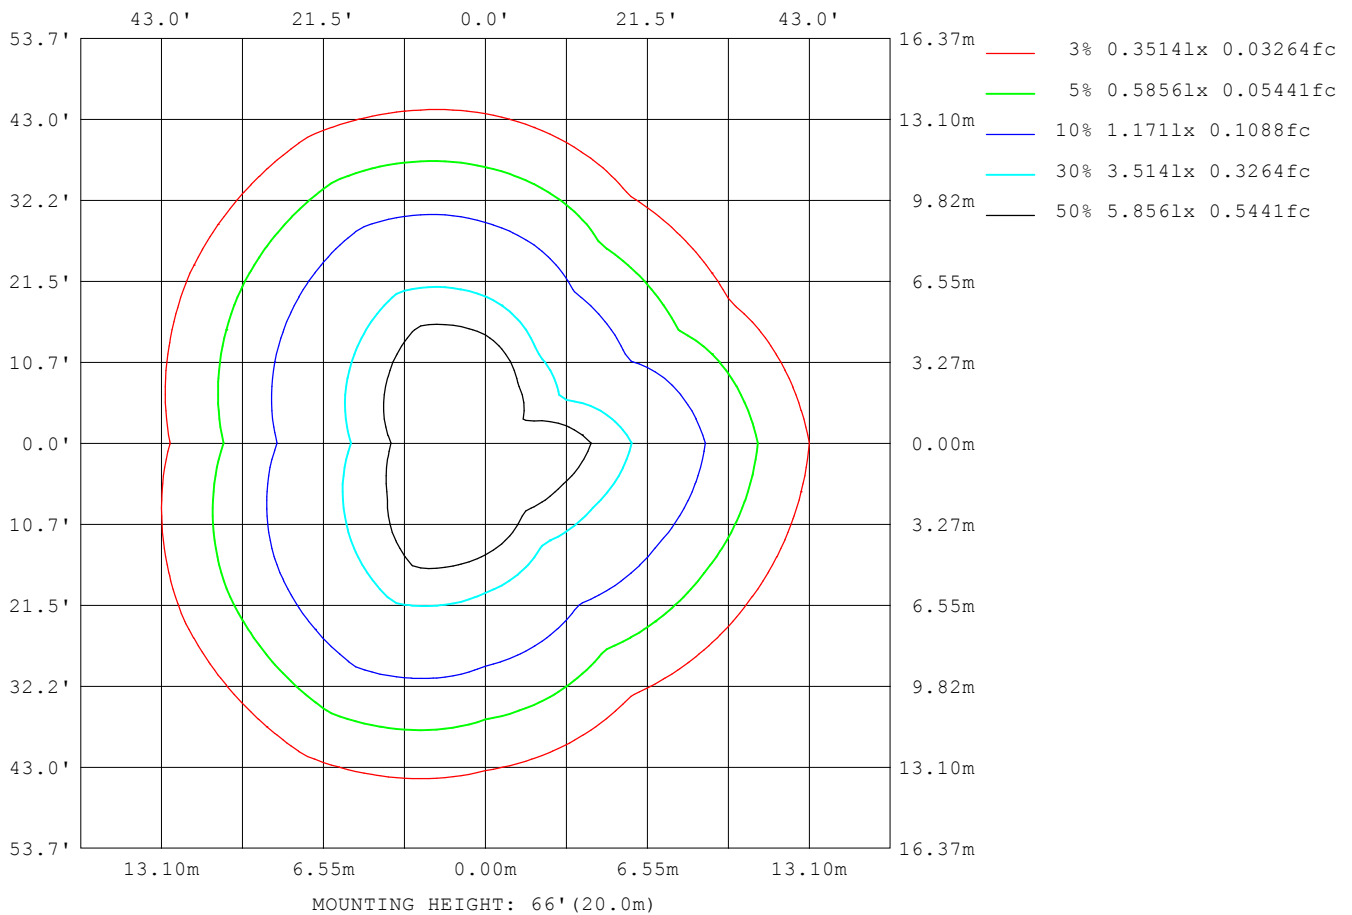

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

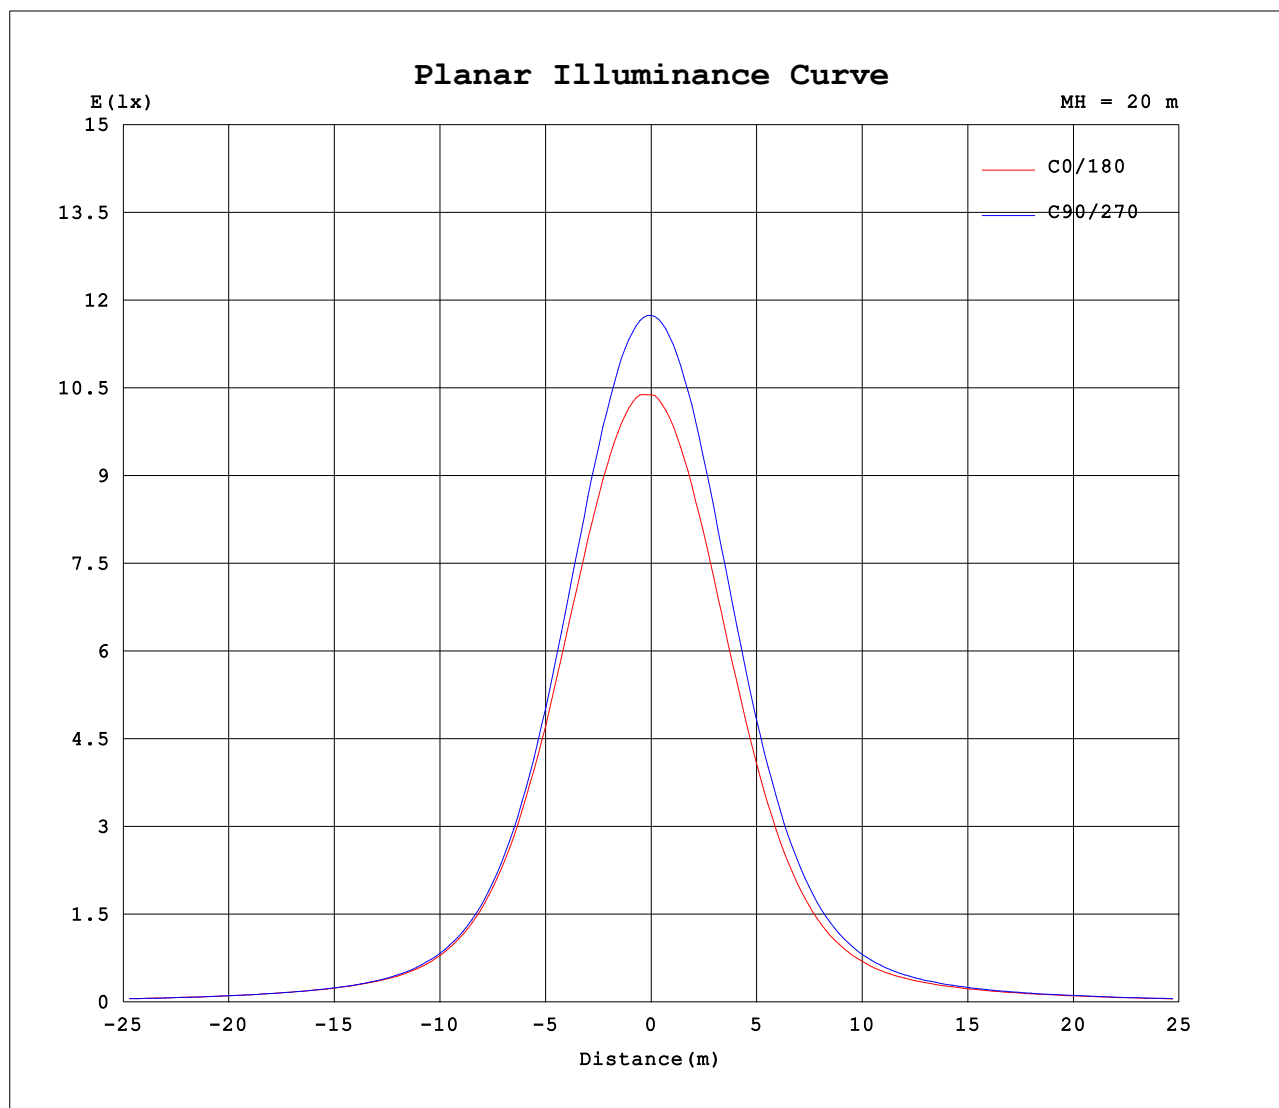


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:1499.15x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-25D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

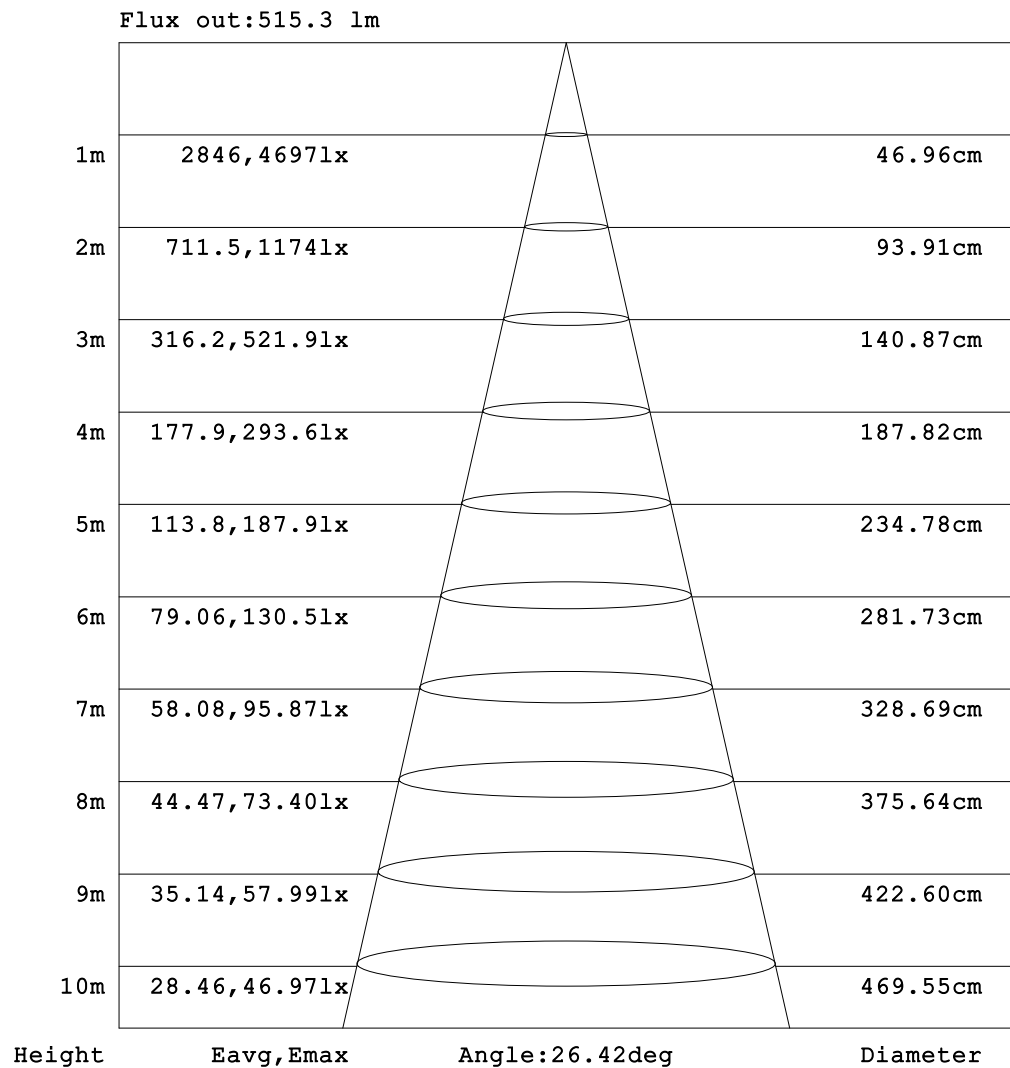

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:1499.15x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-25D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.96	3.73	3.74	3.86	4.30	5.03	5.88	6.51	6.64	6.51	6.53	6.87	7.54	8.24	8.69	8.74	8.64	8.67	8.91
-170	3.96	3.72	3.70	3.78	4.11	4.67	5.30	5.76	5.92	6.01	6.35	7.04	8.00	8.97	9.80	10.2	10.3	10.3	9.68
-160	3.96	3.72	3.66	3.68	3.89	4.25	4.64	4.94	5.10	5.24	5.67	6.48	7.55	8.49	9.21	9.72	10.1	10.3	10.4
-150	3.96	3.72	3.63	3.59	3.67	3.85	4.02	4.13	4.14	4.15	4.42	5.15	5.96	6.76	7.47	8.11	8.85	9.40	9.80
-140	3.96	3.73	3.60	3.52	3.50	3.53	3.55	3.48	3.30	3.33	3.59	3.94	4.36	4.81	5.27	6.02	6.71	7.29	7.74
-130	3.96	3.74	3.59	3.49	3.39	3.32	3.25	3.11	3.04	3.08	3.14	3.24	3.37	3.51	3.80	4.17	4.54	4.88	5.15
-120	3.96	3.76	3.59	3.47	3.36	3.23	3.11	3.02	3.03	3.04	3.05	3.07	3.08	3.10	3.18	3.29	3.40	3.51	3.61
-110	3.96	3.79	3.64	3.49	3.38	3.25	3.13	3.07	3.07	3.07	3.08	3.09	3.10	3.11	3.15	3.18	3.21	3.25	3.28
-100	3.96	3.85	3.71	3.59	3.46	3.34	3.23	3.23	3.23	3.23	3.24	3.25	3.26	3.26	3.27	3.27	3.28	3.30	3.31
-90	3.96	3.92	3.87	3.83	3.78	3.74	3.69	3.72	3.75	3.78	3.81	3.83	3.86	3.81	3.76	3.71	3.66	3.61	3.55
-80	3.96	3.99	4.14	4.49	5.05	5.79	6.73	7.74	8.86	10.0	11.2	12.4	13.6	13.2	12.5	11.5	10.4	9.13	7.72
-70	3.96	4.09	4.62	5.64	7.58	10.4	14.2	18.1	21.7	25.3	28.8	32.1	35.3	36.4	36.2	35.4	34.1	32.2	29.9
-60	3.96	4.22	5.17	7.53	11.7	17.6	24.7	32.0	38.4	44.9	51.3	57.2	62.7	66.6	67.5	67.6	66.6	64.8	62.0
-50	3.96	4.34	5.95	9.96	16.8	25.5	35.3	46.1	56.4	65.7	75.1	84.3	93.2	101	106	107	107	105	101
-40	3.96	4.47	6.71	12.5	21.6	32.7	45.4	59.0	73.0	86.5	99.7	114	129	145	162	169	172	170	161
-30	3.96	4.55	7.42	14.7	25.5	38.8	53.9	69.6	86.4	105	126	149	179	219	273	339	370	367	325
-20	3.96	4.59	7.93	16.3	28.2	43.1	59.5	77.1	96.4	119	148	188	252	362	568	910	1302	1316	1067
-10	3.96	4.58	8.09	16.8	29.3	45.0	62.0	80.5	101	126	160	212	309	520	953	1692	2705	3652	3208
0	3.96	4.53	7.86	16.3	28.6	44.2	60.9	79.3	99.9	124	155	202	282	462	859	1596	2654	3673	4153
10	3.96	4.55	7.87	16.3	28.6	44.2	61.0	79.4	100	124	157	205	290	473	858	1568	2594	3505	3112
20	3.96	4.53	7.53	15.4	26.9	41.4	57.6	74.9	94.0	116	143	180	236	328	499	789	1137	1191	1025
30	3.96	4.47	6.88	13.5	23.7	36.3	50.9	66.2	82.8	101	121	144	173	210	257	312	344	350	325
40	3.96	4.38	6.15	11.1	19.4	29.7	41.6	54.6	68.0	82.0	96.2	111	127	144	161	169	173	172	167
50	3.96	4.27	5.48	8.56	14.2	22.2	31.0	40.8	51.1	61.4	71.5	81.7	91.5	101	106	108	109	108	105
60	3.96	4.19	4.84	6.45	9.54	14.2	20.2	27.0	33.7	40.7	47.7	54.4	60.6	65.5	66.9	67.7	67.4	66.1	63.9
70	3.96	4.12	4.41	5.08	6.31	8.07	10.7	14.0	17.7	21.6	25.5	29.4	33.0	34.6	35.0	34.7	33.9	32.6	30.8
80	3.96	4.05	4.18	4.35	4.61	4.99	5.58	6.39	7.26	8.29	9.46	10.7	12.1	12.0	11.6	11.0	10.1	9.18	8.10
90	3.96	4.00	4.03	4.07	4.11	4.14	4.18	4.21	4.24	4.27	4.30	4.33	4.36	4.31	4.26	4.21	4.16	4.11	4.06
100	3.96	3.94	3.93	3.93	3.92	3.91	3.91	3.88	3.85	3.82	3.81	3.78	3.76	3.74	3.73	3.73	3.73	3.73	3.73
110	3.96	3.90	3.85	3.82	3.80	3.78	3.76	3.73	3.73	3.72	3.72	3.74	3.76	3.81	3.87	3.94	4.02	4.08	4.13
120	3.96	3.87	3.79	3.77	3.75	3.74	3.74	3.75	3.86	3.99	4.14	4.30	4.44	4.62	4.90	5.15	5.37	5.55	5.69
130	3.96	3.83	3.76	3.75	3.76	3.79	3.93	4.16	4.46	4.82	5.18	5.51	5.80	6.04	6.31	6.51	6.62	6.69	6.73
140	3.96	3.80	3.75	3.74	3.81	4.01	4.36	4.83	5.34	5.82	6.22	6.50	6.67	6.71	6.72	6.70	6.68	6.69	6.70
150	3.96	3.78	3.74	3.77	3.94	4.33	4.89	5.53	6.10	6.48	6.64	6.67	6.63	6.63	6.67	6.81	7.10	7.41	7.64
160	3.96	3.76	3.74	3.81	4.10	4.65	5.37	6.06	6.52	6.63	6.61	6.58	6.63	6.98	7.45	7.94	8.41	8.89	9.19
170	3.96	3.74	3.74	3.84	4.22	4.89	5.71	6.37	6.62	6.57	6.55	6.68	7.15	7.80	8.43	8.86	9.14	9.30	9.36
180	3.96	3.73	3.74	3.86	4.30	5.03	5.88	6.51	6.64	6.51	6.53	6.87	7.54	8.24	8.69	8.74	8.64	8.67	8.96

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:1499.15x1 lm																		
NAME: Auroring Micro-197mm-RGBW-ALL-25D									TYPE:RGBW ALL					WEIGHT:00				
SPEC.:25 DEGREE									DIM.: 197mm					SERIAL No.:01				
MFR.: EVERFINE									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	9.21	9.76	10.2	10.3	10.0	9.41	8.47	7.23	5.89	4.71	3.84	3.33	3.08	3.05	3.05	3.11	3.21	3.37	
-170	9.34	9.66	9.95	10.1	9.93	9.39	8.46	7.24	5.92	4.74	3.87	3.35	3.09	3.05	3.06	3.11	3.21	3.37	
-160	10.4	10.4	10.3	10.1	9.63	8.92	7.93	6.73	5.51	4.47	3.73	3.29	3.09	3.05	3.06	3.11	3.21	3.37	
-150	9.84	9.79	9.66	9.25	8.60	7.78	6.80	5.76	4.80	4.02	3.50	3.20	3.08	3.05	3.06	3.11	3.22	3.37	
-140	7.86	7.84	7.72	7.45	6.80	6.06	5.30	4.59	4.00	3.57	3.28	3.12	3.07	3.05	3.08	3.13	3.23	3.37	
-130	5.26	5.28	5.21	5.06	4.80	4.38	3.99	3.66	3.41	3.24	3.13	3.08	3.06	3.06	3.09	3.15	3.25	3.37	
-120	3.64	3.64	3.63	3.58	3.51	3.40	3.28	3.19	3.13	3.09	3.07	3.06	3.06	3.08	3.11	3.18	3.26	3.37	
-110	3.26	3.23	3.20	3.18	3.15	3.13	3.12	3.11	3.09	3.08	3.07	3.06	3.08	3.11	3.16	3.22	3.29	3.37	
-100	3.28	3.26	3.23	3.21	3.19	3.17	3.16	3.14	3.12	3.13	3.12	3.11	3.14	3.18	3.22	3.27	3.32	3.37	
-90	3.52	3.48	3.45	3.41	3.37	3.34	3.32	3.31	3.29	3.28	3.26	3.25	3.27	3.29	3.31	3.33	3.35	3.37	
-80	7.14	6.50	5.82	5.14	4.48	3.98	3.95	3.87	3.77	3.68	3.59	3.50	3.48	3.46	3.43	3.41	3.38	3.37	
-70	27.8	25.4	22.6	19.6	16.4	13.8	12.4	10.9	9.26	7.82	6.51	5.60	4.68	4.11	3.75	3.55	3.43	3.37	
-60	59.1	55.4	50.9	45.7	39.8	35.6	32.0	28.2	24.1	19.7	15.3	11.6	8.70	6.42	4.63	3.80	3.48	3.37	
-50	96.9	91.2	84.5	76.7	69.0	63.8	57.7	50.8	43.2	35.8	28.7	21.7	15.4	10.3	6.57	4.33	3.58	3.37	
-40	152	140	126	112	103	94.6	84.9	74.8	64.3	53.4	43.0	33.1	23.6	15.4	9.11	5.05	3.67	3.37	
-30	283	234	190	168	149	131	114	98.7	84.6	70.8	57.1	44.0	31.6	20.6	11.9	6.02	3.75	3.37	
-20	791	494	371	290	228	182	149	124	103	85.8	69.2	53.4	38.6	25.2	14.4	6.92	3.84	3.37	
-10	2026	1460	961	601	375	253	188	147	119	97.0	77.8	60.2	43.7	28.5	16.3	7.60	3.90	3.37	
0	3868	2954	1872	1024	539	312	213	161	128	103	82.3	63.6	46.3	30.1	17.3	7.92	3.93	3.37	
10	1754	1012	585	428	314	230	177	142	116	94.5	75.9	58.6	42.7	27.7	16.0	7.55	3.91	3.37	
20	732	443	312	243	195	159	136	116	97.6	81.1	65.3	50.6	36.7	23.9	13.9	6.86	3.87	3.37	
30	281	231	186	162	141	123	105	89.7	76.8	64.2	51.9	40.3	28.8	19.0	11.4	5.99	3.80	3.37	
40	156	142	127	112	101	90.7	79.5	68.0	56.4	45.8	37.3	28.7	20.5	13.8	8.63	5.10	3.73	3.37	
50	99.5	92.9	85.2	76.6	67.9	61.0	53.6	45.6	37.4	29.7	22.7	17.3	12.8	9.30	6.30	4.44	3.65	3.37	
60	60.5	56.2	51.1	45.1	38.7	33.6	29.2	24.5	19.8	15.1	11.0	8.82	7.43	5.93	4.75	3.96	3.57	3.37	
70	28.4	25.6	22.5	19.1	15.7	12.6	10.8	9.00	7.50	6.31	5.24	4.80	4.70	4.36	4.00	3.74	3.52	3.37	
80	7.49	6.83	6.15	5.48	4.89	4.40	4.33	4.25	4.18	4.14	4.09	4.04	3.97	3.85	3.72	3.60	3.48	3.37	
90	4.01	3.96	3.91	3.86	3.82	3.77	3.77	3.78	3.78	3.79	3.79	3.80	3.73	3.66	3.59	3.52	3.45	3.37	
100	3.74	3.74	3.74	3.74	3.74	3.73	3.71	3.70	3.69	3.68	3.67	3.67	3.61	3.55	3.50	3.45	3.41	3.37	
110	4.23	4.30	4.35	4.37	4.37	4.32	4.20	4.07	3.95	3.83	3.73	3.64	3.55	3.48	3.43	3.40	3.38	3.37	
120	5.80	5.87	5.90	5.90	5.86	5.66	5.40	5.09	4.78	4.47	4.18	3.84	3.58	3.43	3.37	3.34	3.34	3.37	
130	6.71	6.70	6.70	6.71	6.72	6.68	6.50	6.22	5.84	5.39	4.80	4.17	3.72	3.45	3.33	3.30	3.32	3.37	
140	6.73	6.74	6.70	6.65	6.63	6.65	6.68	6.67	6.52	6.02	5.17	4.41	3.84	3.47	3.29	3.26	3.29	3.37	
150	7.80	7.84	7.72	7.33	6.93	6.66	6.60	6.66	6.39	5.88	5.18	4.44	3.85	3.46	3.26	3.21	3.27	3.37	
160	9.18	9.20	8.91	8.41	7.77	7.14	6.78	6.48	6.07	5.50	4.88	4.23	3.70	3.38	3.21	3.18	3.25	3.37	
170	8.83	8.85	8.90	8.97	8.84	8.36	7.66	6.83	5.98	5.15	4.42	3.85	3.43	3.23	3.14	3.14	3.22	3.37	
180	9.21	9.76	10.2	10.3	10.0	9.41	8.47	7.23	5.89	4.71	3.84	3.33	3.08	3.05	3.05	3.11	3.21	3.37	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: