

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3106.2 cd per klm.
(Luminaire orientation as tested.)	-0.5 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	53.0V x 52.8H
	At 50% of Imax	26.5V x 26.5H
	At 90% of Imax	10.5V x 10.4H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	675.4 lumens per klm.
	To 50% of Imax	331.2 lumens per klm.
	To 90% of Imax	45.3 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1140A P:24.200W PF:0.9690 Freq:50.00Hz Lamp Flux:2176.44x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-25D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

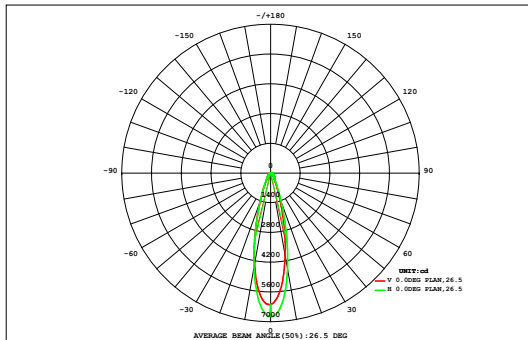

DATA OF LAMP		Eff:89.94lm/W	
MODEL		Imax (cd)	6760
NOMINAL POWER (W)	24	AVAILABILITY (%)	67.6
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	1470
NOMINAL FLUX (lm)	2176.44	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	2176
TEST VOLTAGE (V)	220	θ @50% (H,V)	27,27DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.66	0.83	1.00	1.18	1.36	1.50	1.59	1.64	1.64	1.58	1.46	1.32	1.16	1.01	0.87	0.73	0.60	0.47	20.6	0.00
45	0.76	0.95	1.16	1.40	1.65	1.89	2.05	2.14	2.14	2.04	1.85	1.63	1.40	1.21	1.03	0.87	0.70	0.55	25.4	0.00
40	0.84	1.07	1.34	1.66	2.04	2.47	2.82	3.02	3.03	2.81	2.43	2.03	1.69	1.44	1.21	1.00	0.80	0.63	32.3	0.00
35	0.93	1.20	1.55	1.99	2.61	3.46	4.37	4.88	4.88	4.31	3.44	2.61	2.07	1.72	1.41	1.14	0.91	0.72	44.2	6.29
30	1.00	1.33	1.78	2.42	3.46	5.17	7.56	9.02	8.99	7.49	5.31	3.52	2.64	2.05	1.62	1.28	1.03	0.82	66.5	39.8
25	1.07	1.44	2.00	2.93	4.65	7.79	12.8	17.0	17.0	13.6	8.48	5.12	3.44	2.46	1.87	1.48	1.17	0.91	105	81.6
20	1.12	1.53	2.18	3.41	5.95	10.9	18.9	28.0	29.4	22.7	13.0	7.51	4.46	3.11	2.33	1.74	1.32	1.00	159	137
15	1.15	1.58	2.29	3.71	6.87	13.3	23.7	36.4	42.6	32.1	17.7	10.5	7.27	4.74	2.99	2.02	1.46	1.08	211	193
10	1.15	1.58	2.28	3.70	6.95	13.6	24.7	37.8	47.4	36.2	27.1	20.5	12.6	6.82	3.71	2.28	1.58	1.15	251	234
5	1.15	1.59	2.32	3.82	7.19	14.0	24.4	34.9	43.3	43.1	34.7	23.9	13.9	7.28	3.86	2.33	1.60	1.16	264	248
0	1.17	1.62	2.40	4.01	7.54	14.3	24.3	35.9	43.1	34.8	25.1	17.2	10.4	5.86	3.36	2.15	1.51	1.11	236	219
-5	1.15	1.59	2.33	3.78	6.81	12.3	20.7	30.1	30.7	24.2	15.9	11.0	7.00	4.34	2.78	1.92	1.40	1.05	179	161
-10	1.11	1.51	2.14	3.27	5.31	8.96	14.5	18.9	18.0	14.3	9.55	6.37	4.54	3.17	2.26	1.67	1.27	0.97	118	95.7
-15	1.05	1.40	1.89	2.63	3.84	5.86	8.63	10.0	9.50	7.77	5.68	3.87	3.02	2.37	1.84	1.44	1.13	0.88	72.8	45.7
-20	0.98	1.27	1.63	2.11	2.79	3.76	4.79	5.25	5.04	4.36	3.53	2.70	2.19	1.85	1.53	1.24	1.00	0.80	46.8	9.02
-25	0.89	1.12	1.40	1.73	2.12	2.58	2.93	3.10	3.03	2.77	2.43	2.04	1.71	1.49	1.28	1.07	0.88	0.71	33.3	0.00
-30	0.80	0.99	1.20	1.43	1.69	1.92	2.07	2.13	2.10	1.98	1.82	1.61	1.40	1.23	1.08	0.92	0.77	0.62	25.7	0.00
-35	0.71	0.86	1.03	1.20	1.38	1.51	1.59	1.62	1.59	1.53	1.43	1.30	1.16	1.02	0.90	0.78	0.65	0.53	20.8	0.00
-40	0.66	0.83	1.00	1.18	1.36	1.50	1.59	1.64	1.64	1.58	1.46	1.32	1.16	1.01	0.87	0.73	0.60	0.47	20.6	0.00
-45	0.66	0.83	1.00	1.18	1.36	1.50	1.59	1.64	1.64	1.58	1.46	1.32	1.16	1.01	0.87	0.73	0.60	0.47	20.6	0.00
HORIZONTAL (DEG)																				
Φ t	17.7	23.5	31.9	46.4	74.2	125	202	282	314	258	181	125	82.0	53.2	35.9	26.1	19.8	15.1	1912	---
Φ a	0.00	0.00	0.00	3.10	47.5	104	183	264	295	238	159	99.4	54.0	22.8	1.18	0.00	0.00	0.00	---	1470

one-half-peak spread: U:13.0,D:13.7 , L:13.2,R:13.5


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1140A P:24.200W PF:0.9690 Freq:50.00Hz Lamp Flux:2176.44x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-25D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

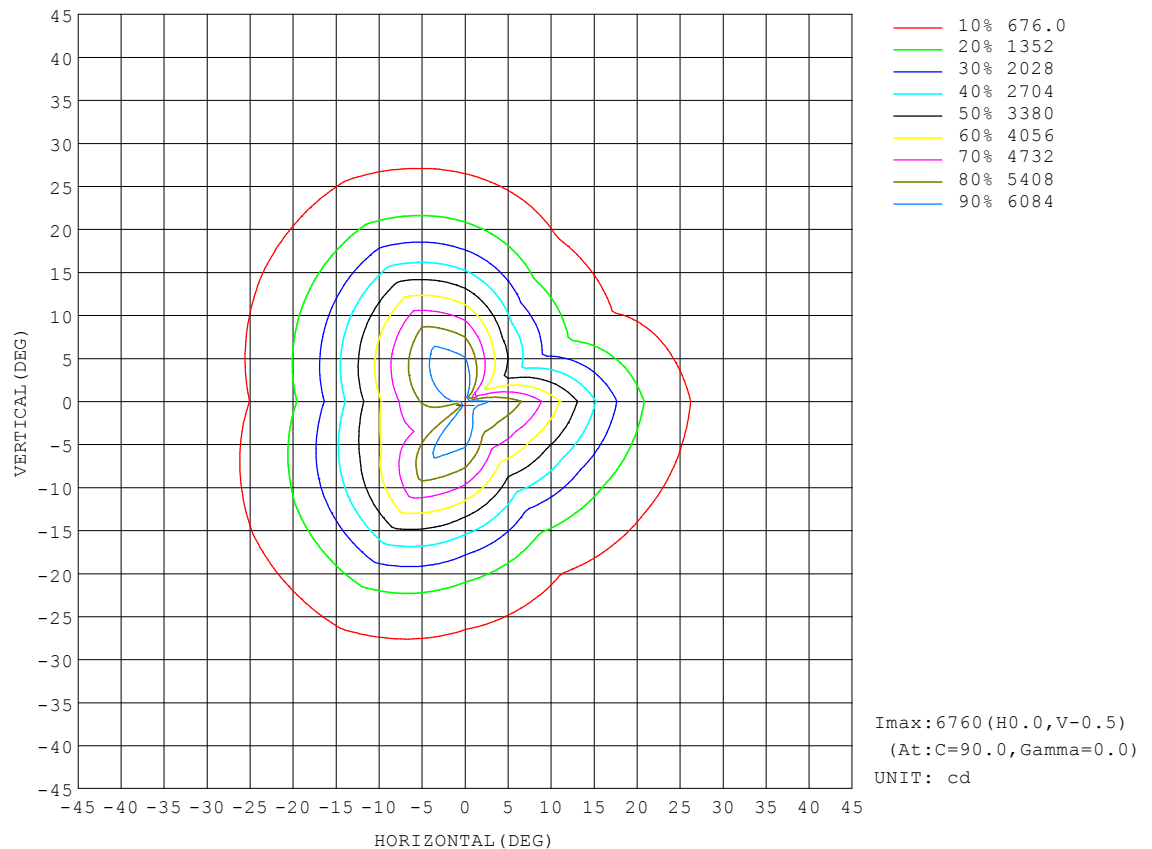


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1140A P:24.200W PF:0.9690 Freq:50.00Hz Lamp Flux:2176.44x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-25D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

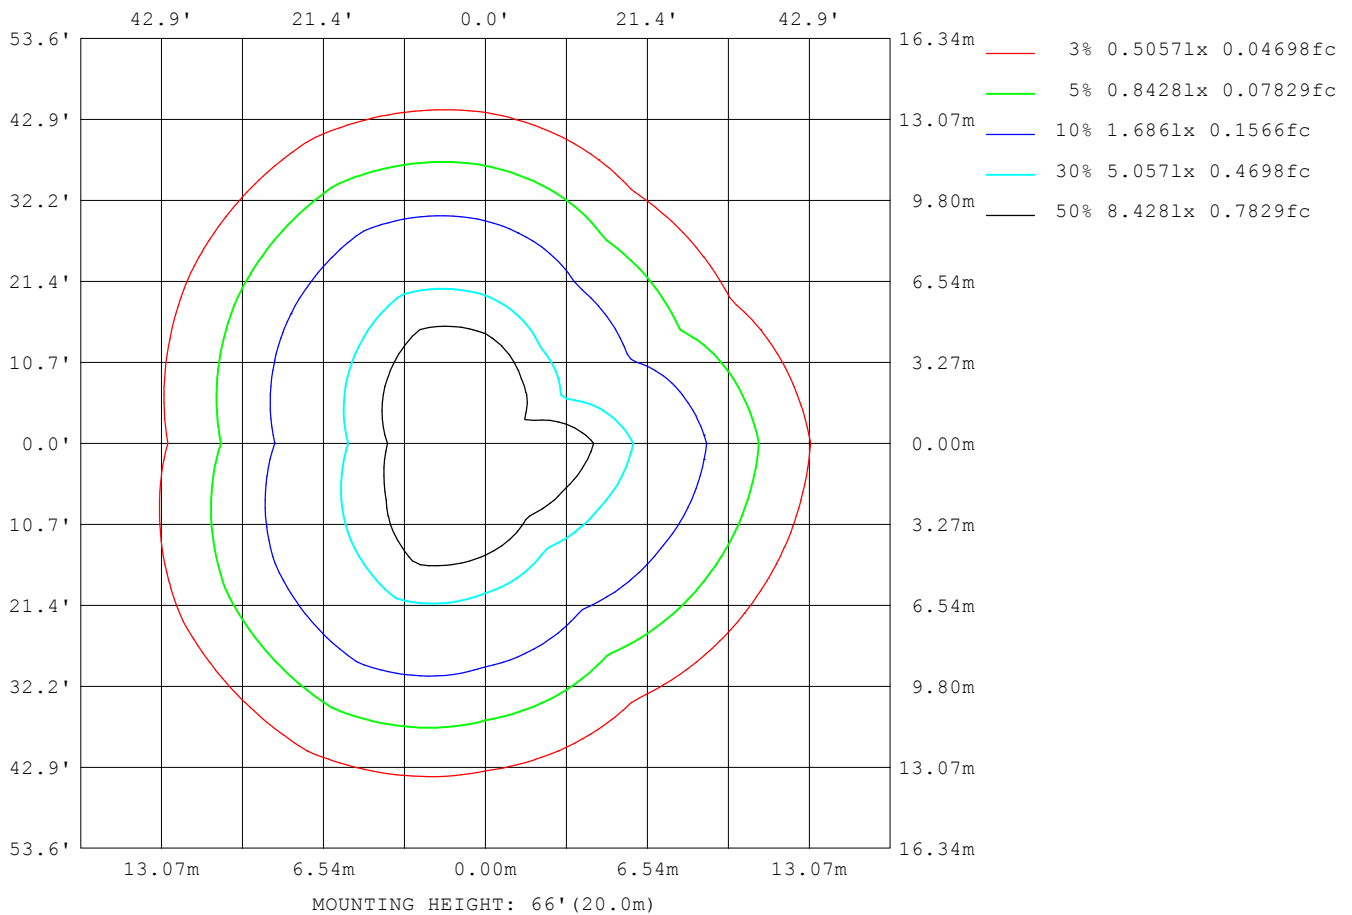

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

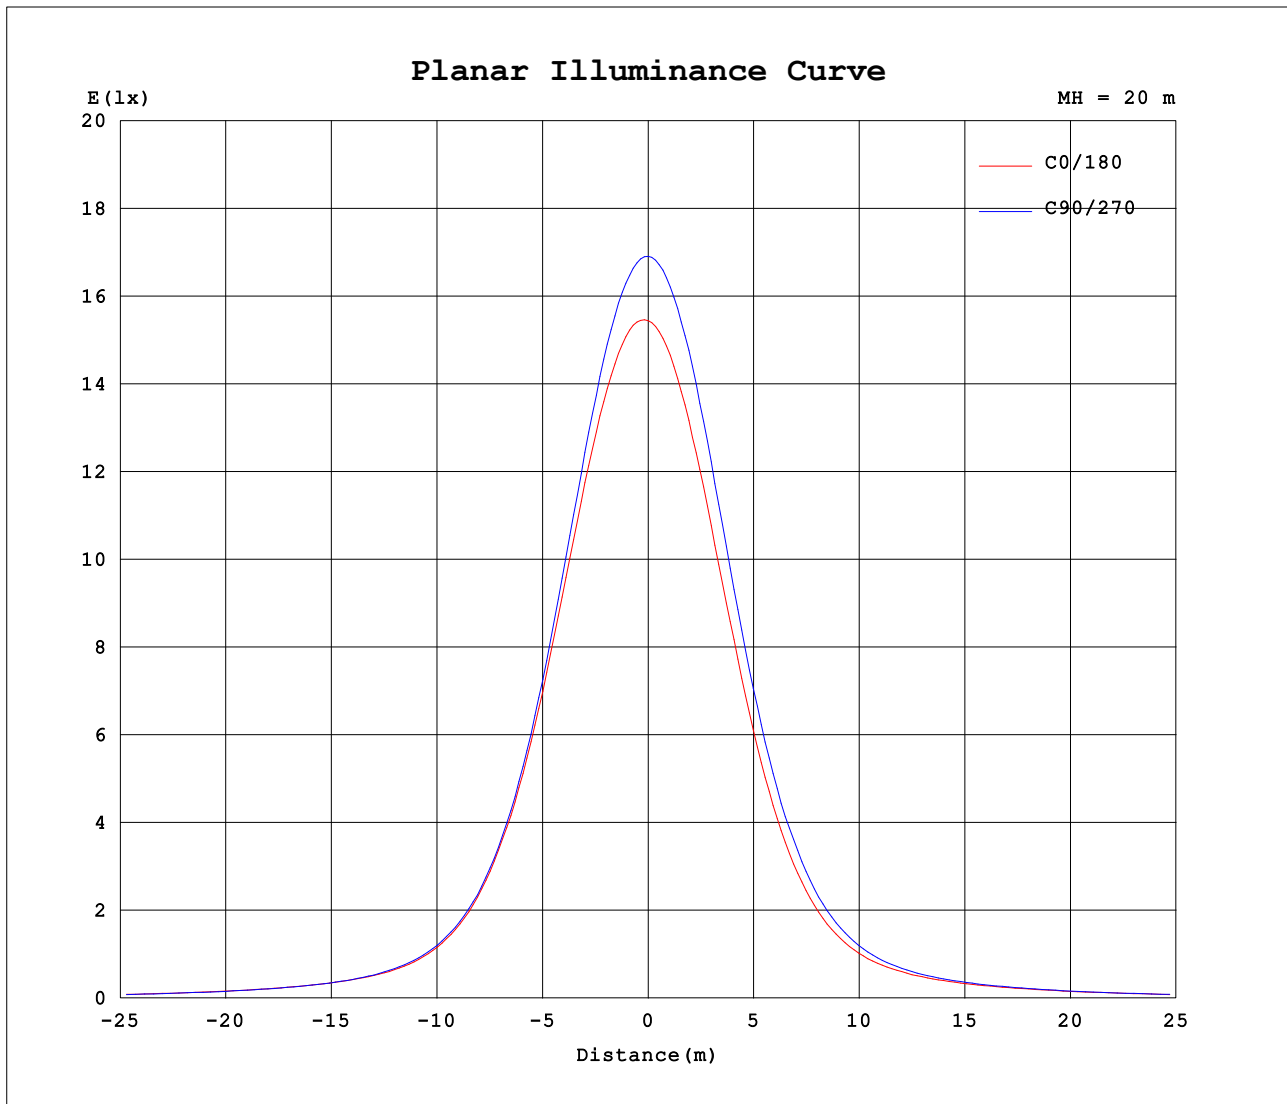


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1140A P:24.200W PF:0.9690 Freq:50.00Hz Lamp Flux:2176.44x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-25D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

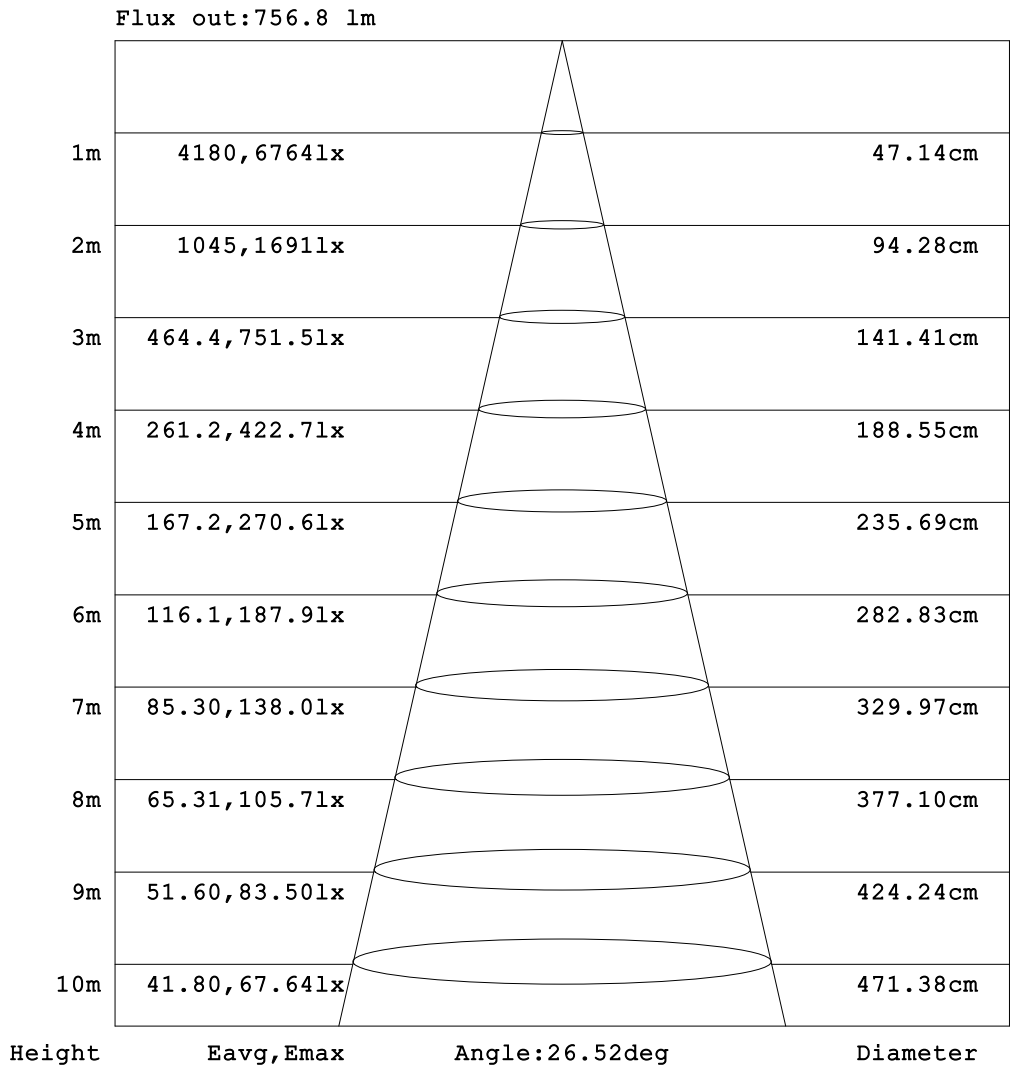

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1140A P:24.200W PF:0.9690 Freq:50.00Hz Lamp Flux:2176.44x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-25D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	5.86	5.56	5.50	5.69	6.31	7.35	8.58	9.49	9.74	9.57	9.56	10.0	10.9	11.9	12.6	12.7	12.6	12.6	13.0
-170	5.86	5.54	5.45	5.57	6.04	6.82	7.74	8.42	8.69	8.83	9.29	10.3	11.6	13.0	14.2	14.9	14.9	14.8	14.1
-160	5.86	5.53	5.40	5.42	5.71	6.22	6.79	7.22	7.47	7.69	8.30	9.43	11.0	12.4	13.5	14.2	14.7	15.0	15.1
-150	5.86	5.52	5.35	5.29	5.41	5.65	5.90	6.05	6.06	6.09	6.48	7.58	8.81	10.0	11.1	12.1	13.0	13.7	14.2
-140	5.86	5.52	5.32	5.19	5.16	5.19	5.21	5.12	4.87	4.92	5.31	5.85	6.52	7.25	8.00	9.02	9.91	10.7	11.2
-130	5.86	5.54	5.30	5.15	5.01	4.90	4.79	4.59	4.49	4.56	4.67	4.83	5.04	5.30	5.72	6.22	6.72	7.16	7.50
-120	5.86	5.58	5.33	5.13	4.96	4.78	4.59	4.45	4.47	4.49	4.50	4.52	4.54	4.58	4.72	4.86	5.00	5.14	5.26
-110	5.86	5.62	5.39	5.19	4.99	4.81	4.62	4.54	4.54	4.53	4.54	4.55	4.55	4.58	4.61	4.64	4.68	4.72	4.76
-100	5.86	5.70	5.50	5.31	5.12	4.95	4.78	4.76	4.76	4.75	4.75	4.75	4.76	4.76	4.76	4.77	4.77	4.78	4.79
-90	5.86	5.78	5.71	5.63	5.55	5.48	5.40	5.41	5.41	5.42	5.43	5.44	5.44	5.39	5.35	5.30	5.25	5.20	5.15
-80	5.86	5.90	6.08	6.54	7.33	8.37	9.76	10.9	12.2	13.5	14.9	16.3	17.5	17.2	16.5	15.5	14.2	12.7	11.0
-70	5.86	6.04	6.77	8.23	10.9	14.9	20.3	25.4	30.2	34.8	39.2	43.4	47.4	49.1	49.5	48.9	47.6	45.4	42.6
-60	5.86	6.22	7.57	10.9	16.8	25.2	35.3	45.4	54.2	63.3	72.0	80.0	87.3	92.7	94.6	95.2	94.6	92.5	89.1
-50	5.86	6.41	8.65	14.4	24.1	36.5	50.6	66.3	81.0	94.1	107	120	132	143	149	152	152	150	146
-40	5.86	6.58	9.74	18.1	31.0	46.9	65.6	85.4	106	125	143	163	183	205	227	238	243	241	232
-30	5.86	6.69	10.8	21.3	36.7	55.9	78.2	101	125	152	182	215	256	308	377	459	507	514	470
-20	5.86	6.74	11.6	23.5	40.7	62.6	86.6	112	140	173	214	273	365	518	792	1240	1756	1815	1539
-10	5.86	6.73	11.8	24.3	42.3	65.6	90.4	117	148	184	233	308	451	758	1388	2441	3835	5157	4620
0	5.86	6.66	11.5	23.7	41.4	64.6	88.9	116	146	181	227	294	416	680	1278	2385	3958	5473	6178
10	5.86	6.68	11.5	23.6	41.3	64.1	88.7	115	145	180	227	296	419	680	1233	2229	3660	4940	4522
20	5.86	6.64	10.9	22.1	38.7	59.7	83.2	108	136	167	205	258	337	464	694	1079	1543	1668	1500
30	5.86	6.56	9.96	19.3	33.9	51.9	73.1	95.1	119	144	172	205	245	294	357	433	479	496	473
40	5.86	6.43	8.87	15.8	27.5	42.2	59.2	77.9	97.0	117	136	157	178	201	224	236	244	246	240
50	5.86	6.29	7.93	12.2	20.1	31.2	43.9	57.7	72.3	86.8	101	115	128	141	148	152	154	153	150
60	5.86	6.17	7.01	9.20	13.4	19.8	28.1	37.6	47.0	56.7	66.5	75.8	84.3	91.0	93.6	95.3	95.5	94.4	91.9
70	5.86	6.07	6.44	7.30	8.97	11.3	14.8	19.2	24.1	29.4	34.7	39.9	44.6	47.3	48.2	48.4	47.8	46.4	44.4
80	5.86	5.98	6.14	6.35	6.64	7.11	7.87	8.91	9.98	11.2	12.6	14.3	15.9	16.0	15.7	15.0	14.2	13.1	11.9
90	5.86	5.90	5.94	5.99	6.03	6.07	6.11	6.14	6.16	6.18	6.21	6.23	6.26	6.20	6.15	6.10	6.04	5.99	5.94
100	5.86	5.83	5.80	5.78	5.76	5.74	5.72	5.68	5.64	5.61	5.58	5.55	5.52	5.50	5.49	5.48	5.48	5.48	5.47
110	5.86	5.77	5.69	5.63	5.58	5.54	5.51	5.48	5.48	5.48	5.49	5.52	5.56	5.63	5.72	5.82	5.93	6.01	6.08
120	5.86	5.71	5.61	5.54	5.51	5.50	5.50	5.56	5.73	5.93	6.17	6.40	6.62	6.89	7.28	7.62	7.91	8.15	8.32
130	5.86	5.66	5.53	5.51	5.52	5.59	5.82	6.16	6.62	7.16	7.69	8.18	8.60	8.93	9.27	9.53	9.68	9.76	9.80
140	5.86	5.63	5.52	5.51	5.61	5.92	6.45	7.13	7.89	8.60	9.16	9.54	9.77	9.80	9.79	9.75	9.73	9.73	9.74
150	5.86	5.60	5.51	5.54	5.80	6.37	7.20	8.14	8.95	9.50	9.73	9.75	9.68	9.67	9.75	9.98	10.4	10.8	11.1
160	5.86	5.58	5.51	5.60	6.02	6.82	7.87	8.88	9.54	9.72	9.69	9.62	9.73	10.3	10.9	11.7	12.3	12.9	13.3
170	5.86	5.57	5.50	5.66	6.20	7.16	8.35	9.31	9.71	9.65	9.58	9.77	10.5	11.4	12.3	12.9	13.3	13.5	13.5
180	5.86	5.56	5.50	5.69	6.31	7.35	8.58	9.49	9.74	9.57	9.56	10.0	10.9	11.9	12.6	12.7	12.6	12.6	13.1

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1140A P:24.200W PF:0.9690 Freq:50.00Hz Lamp Flux:2176.44x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-25D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	13.4	14.2	14.8	15.0	14.6	13.8	12.4	10.7	8.72	7.01	5.74	4.98	4.60	4.51	4.53	4.61	4.75	4.97	
-170	13.7	14.1	14.5	14.7	14.5	13.7	12.4	10.6	8.70	7.01	5.74	4.98	4.61	4.52	4.53	4.61	4.75	4.97	
-160	15.1	15.1	14.9	14.6	14.0	12.9	11.5	9.80	8.07	6.58	5.52	4.89	4.59	4.52	4.53	4.61	4.75	4.97	
-150	14.2	14.2	13.9	13.3	12.4	11.2	9.82	8.37	6.99	5.90	5.17	4.75	4.56	4.52	4.54	4.62	4.76	4.97	
-140	11.3	11.3	11.1	10.6	9.73	8.70	7.64	6.65	5.84	5.24	4.83	4.61	4.54	4.53	4.56	4.64	4.78	4.97	
-130	7.63	7.63	7.49	7.27	6.88	6.31	5.79	5.35	5.01	4.77	4.62	4.55	4.53	4.54	4.58	4.68	4.81	4.97	
-120	5.30	5.31	5.28	5.21	5.12	4.96	4.82	4.70	4.62	4.56	4.53	4.52	4.53	4.56	4.63	4.71	4.84	4.97	
-110	4.73	4.71	4.67	4.65	4.62	4.59	4.58	4.57	4.56	4.54	4.52	4.52	4.57	4.63	4.69	4.77	4.87	4.97	
-100	4.76	4.74	4.72	4.69	4.67	4.66	4.65	4.63	4.63	4.63	4.62	4.63	4.67	4.73	4.79	4.84	4.91	4.97	
-90	5.11	5.07	5.02	4.98	4.94	4.89	4.88	4.87	4.86	4.84	4.83	4.82	4.84	4.87	4.89	4.92	4.95	4.97	
-80	10.3	9.48	8.60	7.69	6.81	6.03	5.90	5.78	5.64	5.48	5.35	5.22	5.17	5.13	5.08	5.04	5.01	4.97	
-70	40.1	37.0	33.4	29.3	25.0	21.4	19.3	16.9	14.4	12.0	9.98	8.46	7.01	6.07	5.51	5.23	5.07	4.97	
-60	85.6	80.8	74.9	67.8	59.8	53.4	47.8	42.0	36.1	29.6	23.0	17.5	13.0	9.51	6.77	5.56	5.15	4.97	
-50	140	133	124	113	103	94.7	85.6	75.3	64.0	52.7	42.4	32.1	22.8	15.2	9.64	6.33	5.26	4.97	
-40	220	203	184	165	153	139	125	110	94.5	78.5	63.0	48.3	34.5	22.5	13.4	7.32	5.38	4.97	
-30	413	345	282	249	220	193	167	144	124	103	83.5	64.1	45.9	29.8	17.3	8.75	5.48	4.97	
-20	1175	763	568	438	337	268	218	180	151	125	101	77.7	55.9	36.3	20.9	10.0	5.59	4.97	
-10	3135	2268	1481	911	559	370	273	214	173	141	113	87.3	63.2	40.9	23.6	11.0	5.68	4.97	
0	5740	4379	2765	1506	784	451	309	234	185	149	119	92.1	66.9	43.1	24.9	11.5	5.71	4.97	
10	2729	1552	864	624	456	333	257	206	167	137	110	84.8	61.5	39.8	23.1	10.9	5.70	4.97	
20	1098	682	474	360	284	230	197	167	141	117	94.5	73.0	52.8	34.2	20.0	9.91	5.63	4.97	
30	412	340	277	239	208	179	153	130	111	92.8	74.9	58.1	41.4	27.2	16.4	8.67	5.55	4.97	
40	226	207	186	165	149	133	116	98.9	81.6	66.0	53.7	41.3	29.4	19.9	12.5	7.36	5.46	4.97	
50	143	135	124	113	101	90.2	79.0	66.9	54.5	42.8	32.6	24.9	18.5	13.5	9.12	6.47	5.36	4.97	
60	87.5	82.0	75.1	67.1	58.2	50.4	43.4	36.3	29.0	22.1	16.0	12.8	10.8	8.60	6.89	5.77	5.26	4.97	
70	41.2	37.5	33.3	28.8	24.0	19.7	16.7	13.8	11.3	9.40	7.73	6.98	6.84	6.36	5.85	5.48	5.19	4.97	
80	11.1	10.1	9.16	8.18	7.28	6.58	6.44	6.31	6.18	6.07	6.00	5.92	5.80	5.64	5.45	5.29	5.14	4.97	
90	5.88	5.82	5.76	5.70	5.64	5.58	5.57	5.57	5.57	5.57	5.57	5.56	5.47	5.37	5.27	5.17	5.07	4.97	
100	5.48	5.48	5.49	5.48	5.47	5.46	5.43	5.42	5.41	5.40	5.39	5.39	5.30	5.22	5.15	5.09	5.03	4.97	
110	6.20	6.28	6.33	6.35	6.33	6.26	6.10	5.94	5.78	5.64	5.51	5.37	5.23	5.13	5.05	5.01	4.99	4.97	
120	8.45	8.53	8.55	8.52	8.43	8.17	7.81	7.41	6.98	6.56	6.17	5.68	5.31	5.08	4.98	4.94	4.95	4.97	
130	9.79	9.78	9.77	9.78	9.80	9.67	9.41	9.02	8.52	7.90	7.06	6.15	5.50	5.11	4.92	4.88	4.90	4.97	
140	9.78	9.78	9.73	9.68	9.65	9.68	9.74	9.70	9.48	8.78	7.61	6.50	5.67	5.14	4.89	4.82	4.86	4.97	
150	11.3	11.3	11.1	10.6	10.0	9.66	9.58	9.64	9.31	8.59	7.59	6.56	5.68	5.12	4.83	4.77	4.83	4.97	
160	13.3	13.3	12.9	12.2	11.3	10.4	9.89	9.44	8.86	8.07	7.17	6.25	5.48	5.00	4.75	4.71	4.80	4.97	
170	12.9	12.9	12.9	13.0	12.9	12.2	11.2	10.0	8.79	7.60	6.54	5.70	5.10	4.79	4.65	4.66	4.77	4.97	
180	13.4	14.2	14.8	15.0	14.6	13.8	12.4	10.7	8.72	7.01	5.74	4.98	4.60	4.51	4.53	4.61	4.75	4.97	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: