

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3217.0 cd per klm.
(Luminaire orientation as tested.)	0.5 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	51.8V x 51.4H
	At 50% of Imax	26.2V x 26.3H
	At 90% of Imax	10.3V x 10.3H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	675.2 lumens per klm.
	To 50% of Imax	336.5 lumens per klm.
	To 90% of Imax	49.4 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.40V I:0.1030A P:21.800W PF:0.9640 Freq:50.00Hz Lamp Flux:1391.18x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-25D	TYPE:RGBW RED	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

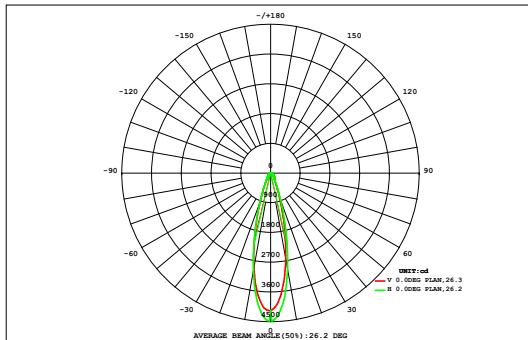

DATA OF LAMP		Eff:63.82lm/W	
MODEL		Imax(cd)	4475
NOMINAL POWER(W)	24	AVAILABILITY(%)	67.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	939.6
NOMINAL FLUX(lm)	1391.18	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1391
TEST VOLTAGE(V)	220	θ @50% (H,V)	26,26DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.42	0.52	0.63	0.74	0.85	0.94	1.00	1.03	1.04	1.00	0.93	0.84	0.74	0.64	0.55	0.46	0.38	0.29	13.0	0.00
45	0.42	0.52	0.63	0.74	0.85	0.94	1.00	1.03	1.04	1.00	0.93	0.84	0.74	0.64	0.55	0.46	0.38	0.29	13.0	0.00
40	0.47	0.59	0.72	0.87	1.03	1.17	1.27	1.33	1.34	1.28	1.17	1.02	0.88	0.76	0.65	0.54	0.44	0.34	15.9	0.00
35	0.53	0.67	0.84	1.03	1.26	1.52	1.72	1.85	1.88	1.76	1.52	1.27	1.06	0.90	0.76	0.62	0.50	0.39	20.1	0.00
30	0.58	0.75	0.96	1.23	1.59	2.09	2.64	2.99	3.04	2.71	2.15	1.62	1.29	1.07	0.87	0.71	0.56	0.45	27.3	2.06
25	0.63	0.83	1.10	1.49	2.10	3.14	4.62	5.63	5.72	4.79	3.34	2.16	1.62	1.27	1.00	0.79	0.64	0.51	41.4	23.6
20	0.67	0.90	1.24	1.80	2.86	4.83	8.03	10.9	11.1	8.87	5.39	3.18	2.11	1.51	1.15	0.91	0.73	0.57	66.8	51.6
15	0.70	0.96	1.35	2.10	3.71	6.91	12.2	18.3	19.5	15.0	8.39	4.69	2.74	1.90	1.43	1.07	0.82	0.62	102	88.3
10	0.72	0.99	1.42	2.29	4.32	8.55	15.5	24.0	28.3	21.3	11.5	6.65	4.55	2.93	1.83	1.24	0.90	0.67	138	125
5	0.72	0.99	1.41	2.29	4.38	8.87	16.3	25.2	31.6	24.0	18.0	13.4	8.09	4.26	2.28	1.40	0.97	0.71	165	154
0	0.72	0.99	1.43	2.35	4.52	9.06	16.1	23.2	28.6	28.7	23.2	15.8	8.99	4.56	2.37	1.43	0.99	0.72	174	163
-5	0.73	1.00	1.47	2.45	4.69	9.15	15.8	23.5	28.2	22.9	16.6	11.2	6.67	3.66	2.07	1.33	0.94	0.69	153	142
-10	0.71	0.98	1.42	2.29	4.17	7.73	13.2	19.4	19.7	15.6	10.3	7.03	4.42	2.69	1.71	1.19	0.87	0.66	114	102
-15	0.68	0.93	1.30	1.96	3.21	5.48	9.05	11.9	11.3	8.94	5.98	3.98	2.82	1.95	1.40	1.04	0.79	0.61	73.3	58.5
-20	0.64	0.86	1.15	1.58	2.29	3.50	5.20	6.11	5.80	4.74	3.47	2.37	1.86	1.46	1.15	0.90	0.71	0.56	44.4	26.1
-25	0.60	0.77	0.99	1.27	1.67	2.23	2.84	3.13	3.03	2.63	2.14	1.65	1.35	1.15	0.96	0.78	0.63	0.50	28.3	3.25
-30	0.55	0.69	0.85	1.05	1.28	1.54	1.75	1.85	1.81	1.67	1.48	1.26	1.06	0.93	0.80	0.68	0.56	0.45	20.2	0.00
-35	0.49	0.60	0.73	0.87	1.03	1.16	1.25	1.29	1.27	1.21	1.12	1.00	0.87	0.77	0.68	0.58	0.49	0.39	15.8	0.00
-40	0.43	0.53	0.63	0.74	0.84	0.92	0.97	0.99	0.97	0.94	0.88	0.81	0.73	0.64	0.57	0.49	0.41	0.34	12.8	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	11.0	14.5	19.6	28.4	45.8	78.8	130	183	204	168	117	80.1	51.8	33.1	22.2	16.2	12.3	9.49	1225	---
Φ a	0.00	0.00	0.00	0.37	27.7	64.4	117	170	192	155	103	63.5	33.5	13.0	0.25	0.00	0.00	0.00	---	940

one-half-peak spread: U:13.6,D:12.8 , L:13.1,R:13.3


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.40V I:0.1030A P:21.800W PF:0.9640 Freq:50.00Hz Lamp Flux:1391.18x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-25D	TYPE:RGBW RED	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

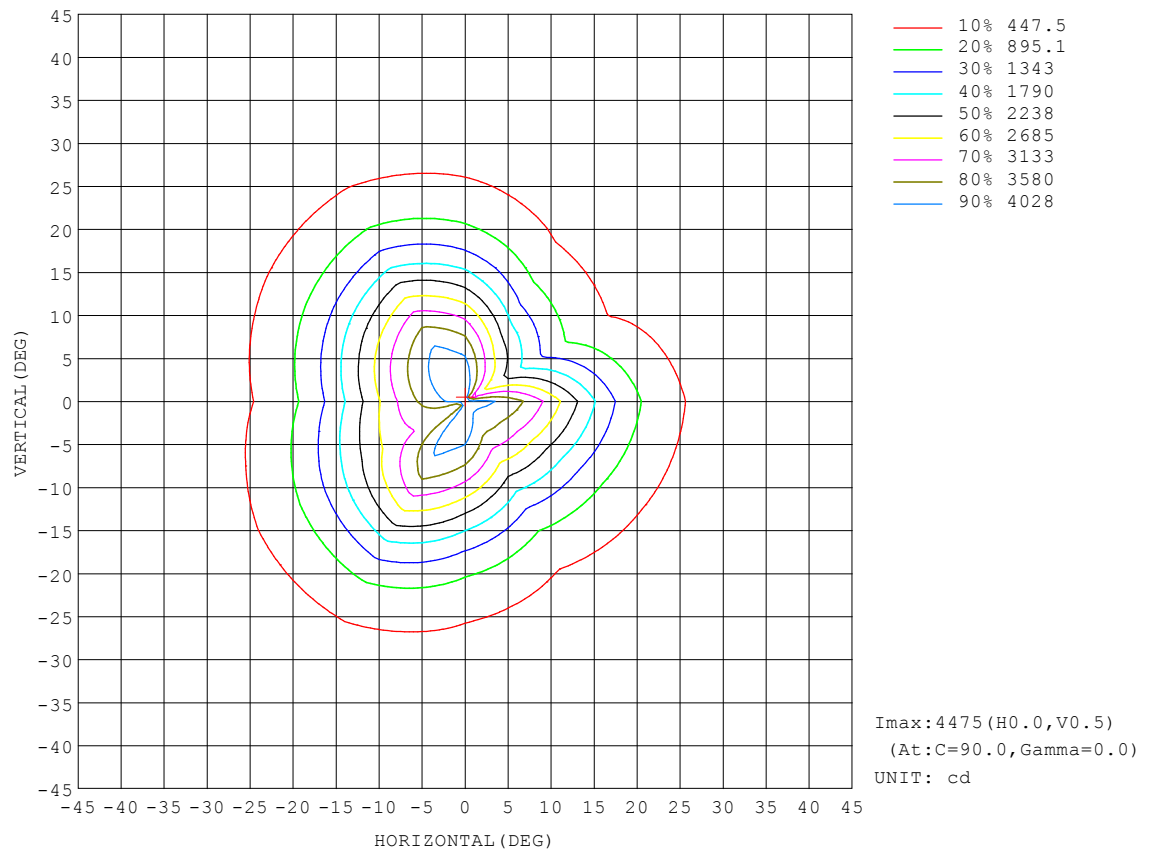


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.40V I:0.1030A P:21.800W PF:0.9640 Freq:50.00Hz Lamp Flux:1391.18x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-25D	TYPE:RGBW RED	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

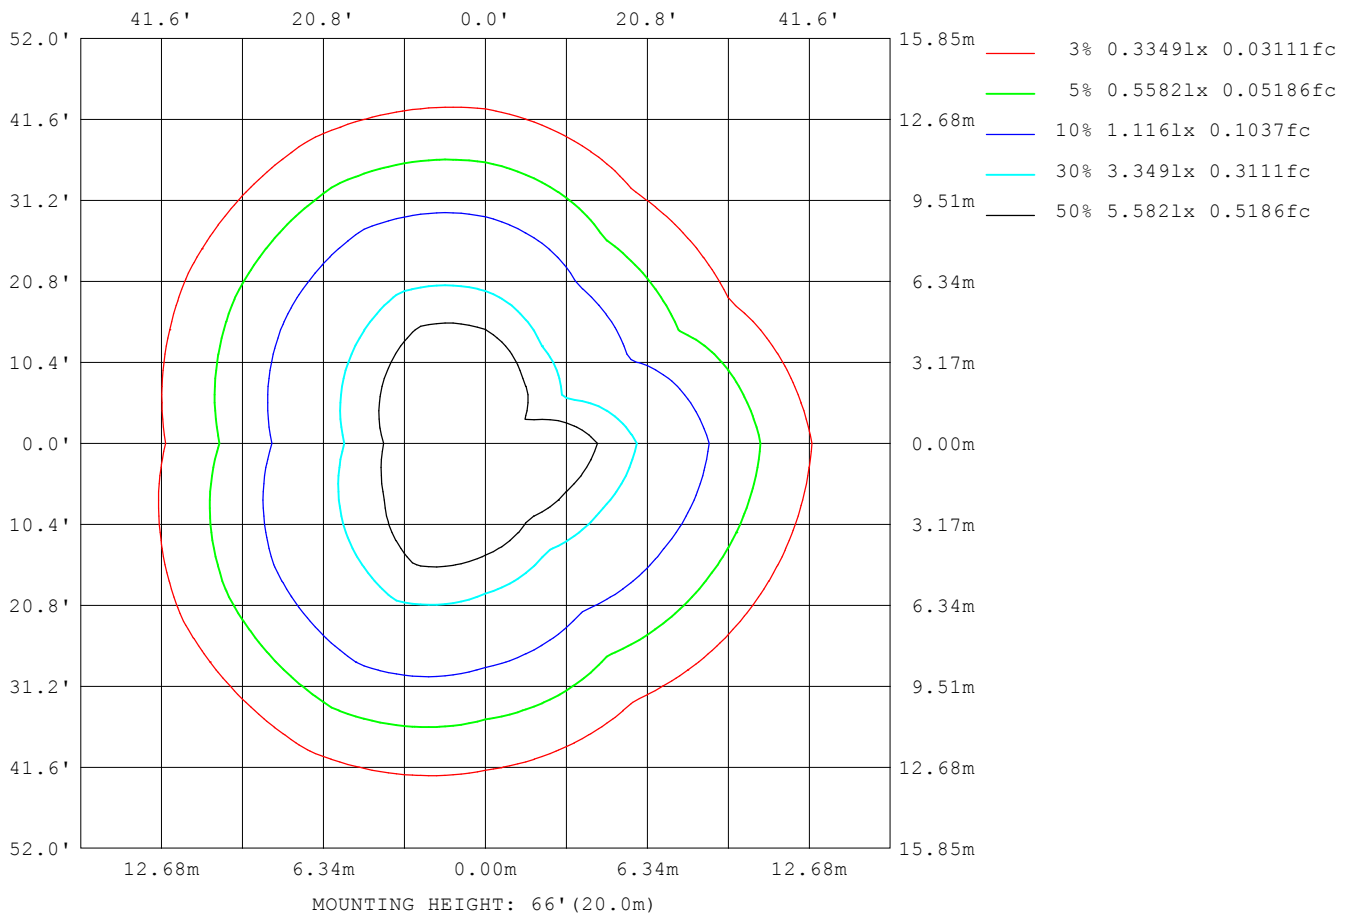

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

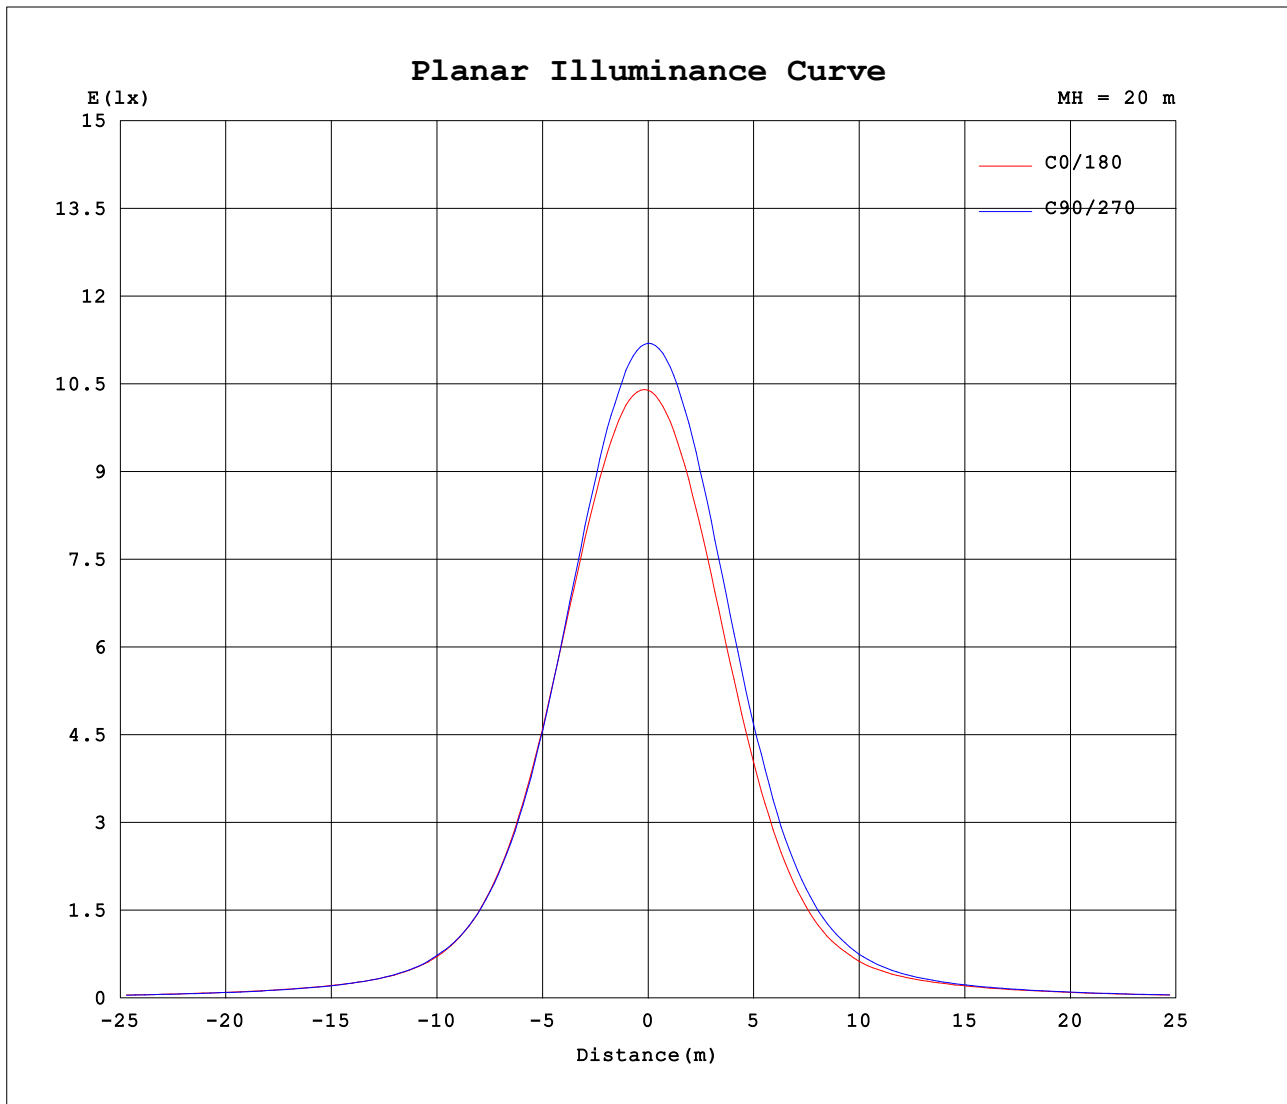


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.40V I:0.1030A P:21.800W PF:0.9640 Freq:50.00Hz Lamp Flux:1391.18x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-25D	TYPE:RGBW RED	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

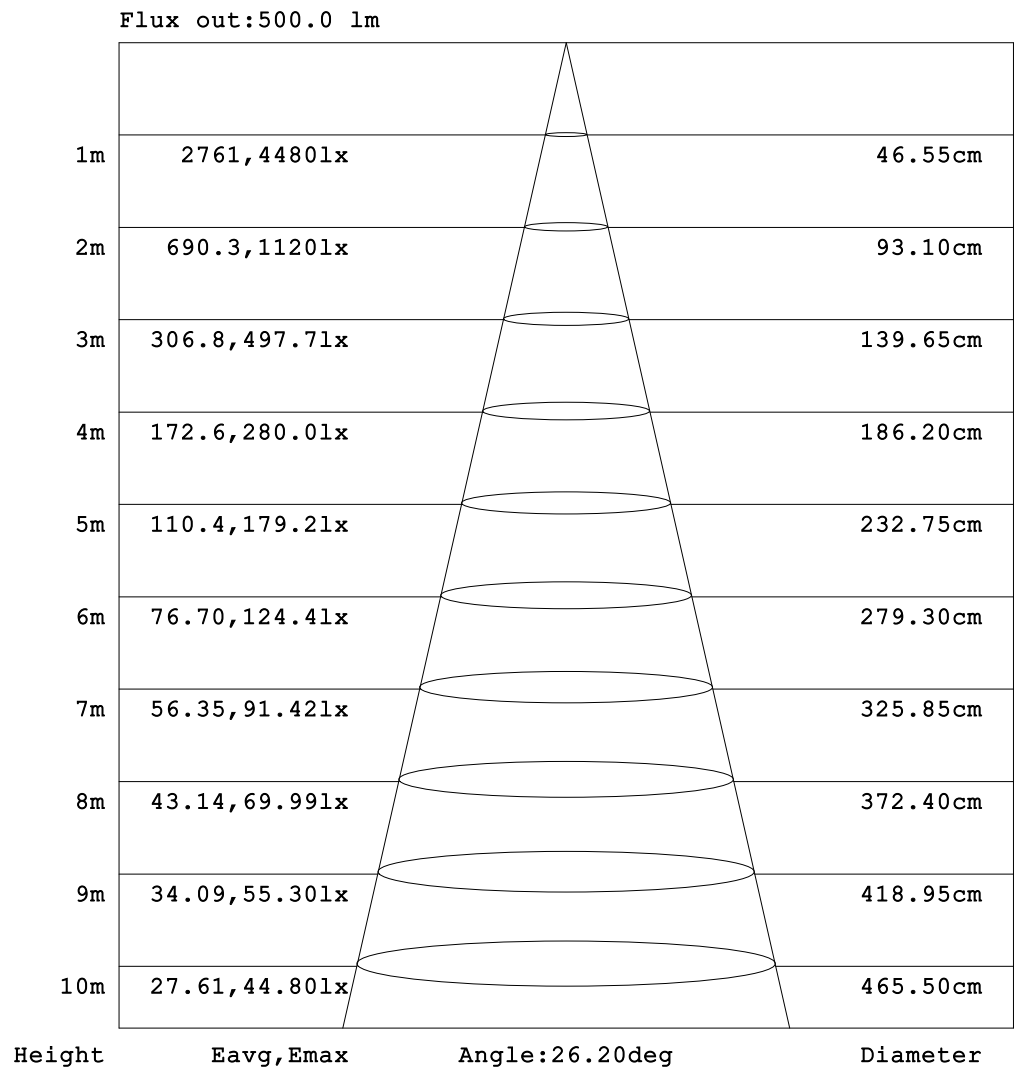

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.40V I:0.1030A P:21.800W PF:0.9640 Freq:50.00Hz Lamp Flux:1391.18x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-25D	TYPE:RGBW RED	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.68	3.46	3.46	3.57	3.96	4.66	5.49	6.12	6.27	6.14	6.13	6.42	7.04	7.72	8.19	8.30	8.22	8.26	8.49
-170	3.68	3.45	3.41	3.48	3.78	4.31	4.92	5.39	5.54	5.63	5.93	6.55	7.43	8.35	9.10	9.47	9.51	9.42	8.97
-160	3.68	3.45	3.37	3.38	3.57	3.90	4.29	4.58	4.73	4.86	5.24	5.98	6.98	7.90	8.61	9.08	9.40	9.60	9.69
-150	3.68	3.45	3.34	3.30	3.37	3.52	3.69	3.78	3.79	3.78	4.03	4.75	5.56	6.36	7.07	7.70	8.34	8.81	9.14
-140	3.68	3.46	3.31	3.23	3.20	3.22	3.23	3.16	2.99	3.01	3.26	3.62	4.05	4.53	5.02	5.71	6.32	6.83	7.21
-130	3.68	3.46	3.30	3.19	3.09	3.02	2.95	2.81	2.74	2.78	2.85	2.95	3.08	3.24	3.54	3.87	4.22	4.52	4.77
-120	3.68	3.48	3.31	3.18	3.07	2.93	2.81	2.72	2.73	2.74	2.76	2.77	2.78	2.81	2.89	2.99	3.10	3.20	3.28
-110	3.68	3.51	3.35	3.20	3.08	2.95	2.82	2.77	2.76	2.77	2.79	2.79	2.80	2.82	2.85	2.88	2.92	2.95	2.99
-100	3.68	3.56	3.42	3.29	3.16	3.05	2.92	2.91	2.91	2.92	2.93	2.94	2.94	2.95	2.95	2.96	2.97	2.98	2.99
-90	3.68	3.61	3.54	3.47	3.40	3.33	3.26	3.28	3.29	3.31	3.33	3.34	3.36	3.34	3.31	3.29	3.27	3.25	3.23
-80	3.68	3.67	3.75	4.01	4.46	5.06	5.82	6.50	7.28	8.10	8.96	9.82	10.6	10.4	9.99	9.36	8.57	7.65	6.62
-70	3.68	3.77	4.19	5.00	6.60	9.04	12.3	15.5	18.5	21.4	24.2	26.7	29.2	30.2	30.4	30.1	29.3	27.9	26.2
-60	3.68	3.88	4.64	6.62	10.2	15.5	21.9	28.1	33.5	39.0	44.4	49.4	53.8	57.2	58.4	58.8	58.4	57.2	55.2
-50	3.68	4.00	5.30	8.78	14.9	22.7	31.4	41.0	49.9	57.9	65.8	73.6	80.9	87.7	91.4	93.3	93.6	92.5	89.9
-40	3.68	4.11	5.99	11.2	19.4	29.2	40.8	52.8	65.0	76.6	87.8	99.6	112	125	138	144	148	147	142
-30	3.68	4.18	6.66	13.3	23.0	35.0	48.7	62.6	77.3	93.2	111	131	155	186	226	273	301	305	280
-20	3.68	4.20	7.13	14.7	25.6	39.3	54.1	69.8	86.9	107	131	166	220	309	475	752	1081	1127	946
-10	3.68	4.20	7.30	15.3	26.7	41.4	56.8	73.4	92.1	114	144	189	274	462	867	1560	2486	3359	2974
0	3.68	4.16	7.13	14.9	26.3	41.1	56.2	73.0	91.8	114	142	184	255	427	818	1572	2654	3681	4158
10	3.68	4.17	7.11	14.9	26.1	40.7	56.0	72.6	91.2	113	142	184	259	421	779	1447	2400	3258	3022
20	3.68	4.15	6.77	13.9	24.4	37.7	52.5	68.0	85.1	104	128	160	208	284	424	662	964	1065	974
30	3.68	4.10	6.20	12.1	21.3	32.7	46.1	59.9	74.5	90.2	108	128	152	182	219	261	291	305	296
40	3.68	4.04	5.51	9.85	17.3	26.5	37.2	49.0	60.9	73.1	85.4	98.2	112	126	140	148	153	154	152
50	3.68	3.95	4.91	7.53	12.5	19.6	27.4	36.1	45.3	54.4	63.3	72.0	80.4	88.3	93.1	96.0	97.5	97.5	95.8
60	3.68	3.88	4.35	5.71	8.27	12.3	17.6	23.5	29.3	35.5	41.7	47.6	53.0	57.2	59.1	60.3	60.7	60.2	58.9
70	3.68	3.82	4.04	4.51	5.53	6.98	9.08	11.9	14.9	18.3	21.6	24.8	27.8	29.6	30.3	30.6	30.4	29.7	28.5
80	3.68	3.75	3.86	3.98	4.15	4.40	4.81	5.44	6.09	6.84	7.73	8.69	9.73	9.81	9.65	9.32	8.85	8.26	7.56
90	3.68	3.71	3.73	3.76	3.79	3.82	3.85	3.86	3.87	3.88	3.88	3.89	3.90	3.87	3.84	3.81	3.78	3.75	3.72
100	3.68	3.66	3.64	3.63	3.61	3.60	3.59	3.56	3.53	3.50	3.48	3.45	3.43	3.42	3.41	3.40	3.40	3.40	3.40
110	3.68	3.62	3.57	3.52	3.50	3.47	3.45	3.43	3.42	3.42	3.42	3.43	3.46	3.50	3.54	3.60	3.65	3.70	3.73
120	3.68	3.58	3.50	3.47	3.45	3.43	3.43	3.45	3.55	3.69	3.84	4.00	4.16	4.33	4.57	4.78	4.96	5.09	5.19
130	3.68	3.55	3.47	3.45	3.45	3.48	3.62	3.83	4.14	4.50	4.86	5.19	5.47	5.70	5.93	6.08	6.16	6.20	6.21
140	3.68	3.53	3.46	3.45	3.51	3.69	4.04	4.48	4.99	5.46	5.85	6.11	6.25	6.26	6.25	6.21	6.18	6.17	6.17
150	3.68	3.51	3.45	3.48	3.63	3.99	4.53	5.17	5.72	6.07	6.22	6.23	6.18	6.16	6.21	6.36	6.61	6.85	7.01
160	3.68	3.49	3.45	3.51	3.77	4.29	5.00	5.68	6.12	6.23	6.20	6.14	6.19	6.52	6.99	7.49	7.93	8.33	8.56
170	3.68	3.47	3.45	3.54	3.89	4.53	5.33	5.98	6.23	6.18	6.14	6.24	6.67	7.28	7.86	8.29	8.55	8.67	8.75
180	3.68	3.46	3.46	3.57	3.96	4.66	5.49	6.12	6.27	6.14	6.13	6.42	7.04	7.72	8.19	8.30	8.22	8.26	8.50

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.40V I:0.1030A P:21.800W PF:0.9640 Freq:50.00Hz Lamp Flux:1391.18x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-25D	TYPE:RGBW RED	WEIGHT:00
SPEC.:25 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.71	9.18	9.62	9.70	9.46	8.89	8.03	6.85	5.55	4.41	3.57	3.08	2.83	2.81	2.82	2.88	2.98	3.14	
-170	8.80	9.12	9.39	9.48	9.36	8.85	7.97	6.80	5.54	4.41	3.58	3.08	2.84	2.81	2.82	2.88	2.98	3.14	
-160	9.70	9.69	9.61	9.40	9.01	8.37	7.41	6.27	5.11	4.13	3.43	3.02	2.84	2.81	2.83	2.88	2.98	3.14	
-150	9.16	9.09	8.94	8.56	7.96	7.18	6.26	5.30	4.40	3.68	3.21	2.93	2.83	2.81	2.83	2.89	2.99	3.14	
-140	7.29	7.23	7.06	6.76	6.17	5.49	4.80	4.16	3.64	3.25	2.99	2.86	2.82	2.81	2.84	2.89	3.00	3.14	
-130	4.83	4.81	4.71	4.54	4.27	3.91	3.59	3.31	3.09	2.95	2.86	2.82	2.81	2.82	2.85	2.92	3.02	3.14	
-120	3.30	3.30	3.27	3.22	3.14	3.04	2.96	2.90	2.85	2.83	2.82	2.81	2.82	2.84	2.88	2.95	3.03	3.14	
-110	2.96	2.94	2.91	2.89	2.87	2.85	2.84	2.83	2.83	2.82	2.81	2.81	2.83	2.88	2.93	2.99	3.06	3.14	
-100	2.98	2.96	2.95	2.93	2.92	2.91	2.89	2.88	2.88	2.87	2.87	2.87	2.91	2.95	2.99	3.03	3.09	3.14	
-90	3.21	3.18	3.16	3.13	3.11	3.08	3.07	3.05	3.04	3.02	3.01	2.99	3.02	3.04	3.07	3.09	3.12	3.14	
-80	6.21	5.75	5.26	4.76	4.26	3.80	3.72	3.62	3.53	3.42	3.34	3.27	3.23	3.21	3.19	3.16	3.15	3.14	
-70	24.7	22.9	20.8	18.4	15.8	13.6	12.2	10.6	9.01	7.52	6.23	5.31	4.39	3.76	3.44	3.28	3.19	3.14	
-60	53.2	50.5	47.0	42.8	37.9	34.0	30.5	26.8	22.9	18.8	14.5	11.0	8.13	5.93	4.19	3.48	3.25	3.14	
-50	87.0	82.8	77.6	71.4	64.9	60.0	54.3	47.8	40.7	33.6	26.9	20.3	14.3	9.54	6.00	3.92	3.31	3.14	
-40	135	126	115	104	96.0	87.9	79.0	69.7	60.0	49.9	40.0	30.6	21.8	14.1	8.31	4.53	3.37	3.14	
-30	249	210	174	155	138	121	105	91.3	78.4	65.6	52.9	40.7	29.0	18.8	10.9	5.43	3.44	3.14	
-20	725	470	351	269	209	167	137	114	95.0	78.9	63.8	49.2	35.3	22.9	13.1	6.23	3.50	3.14	
-10	2051	1481	951	572	344	229	170	134	108	88.7	71.4	55.2	39.9	25.8	14.8	6.82	3.54	3.14	
0	3854	2924	1818	958	484	277	190	145	116	93.8	75.2	58.2	42.2	27.2	15.6	7.10	3.57	3.14	
10	1790	987	533	383	279	204	158	128	105	85.8	69.2	53.4	38.8	25.0	14.5	6.76	3.56	3.14	
20	702	428	290	221	175	142	122	104	88.2	73.5	59.4	45.9	33.2	21.5	12.5	6.13	3.52	3.14	
30	257	212	173	149	129	112	95.5	80.8	69.3	58.1	46.9	36.4	26.0	17.0	10.2	5.37	3.47	3.14	
40	143	131	117	104	93.9	83.6	72.8	62.0	51.0	41.1	33.5	25.9	18.4	12.4	7.76	4.56	3.42	3.14	
50	91.5	85.9	79.1	71.5	63.7	57.0	49.7	41.9	34.0	26.7	20.4	15.6	11.5	8.36	5.64	4.01	3.37	3.14	
60	56.0	52.3	47.9	42.7	36.9	31.9	27.4	22.8	18.2	13.8	9.89	7.93	6.65	5.31	4.27	3.60	3.31	3.14	
70	26.4	24.0	21.2	18.3	15.2	12.4	10.5	8.67	7.05	5.78	4.73	4.31	4.25	3.95	3.64	3.43	3.26	3.14	
80	7.01	6.40	5.76	5.12	4.53	4.07	3.99	3.92	3.85	3.78	3.73	3.68	3.60	3.51	3.41	3.31	3.23	3.14	
90	3.68	3.63	3.59	3.54	3.50	3.45	3.45	3.45	3.45	3.45	3.45	3.45	3.40	3.35	3.30	3.25	3.19	3.14	
100	3.40	3.40	3.40	3.39	3.38	3.37	3.36	3.34	3.33	3.33	3.32	3.32	3.28	3.24	3.21	3.18	3.16	3.14	
110	3.80	3.86	3.90	3.92	3.91	3.86	3.76	3.65	3.54	3.45	3.36	3.29	3.22	3.17	3.14	3.13	3.12	3.14	
120	5.28	5.34	5.37	5.35	5.29	5.12	4.87	4.61	4.33	4.04	3.78	3.48	3.25	3.14	3.09	3.08	3.10	3.14	
130	6.20	6.19	6.18	6.19	6.21	6.13	5.95	5.69	5.34	4.93	4.38	3.79	3.38	3.15	3.05	3.04	3.07	3.14	
140	6.18	6.18	6.14	6.11	6.08	6.10	6.14	6.12	5.98	5.52	4.74	4.04	3.50	3.17	3.02	3.00	3.05	3.14	
150	7.16	7.19	7.07	6.71	6.33	6.06	6.02	6.07	5.85	5.40	4.76	4.07	3.53	3.16	2.99	2.97	3.03	3.14	
160	8.56	8.58	8.27	7.76	7.16	6.55	6.23	5.96	5.59	5.07	4.49	3.89	3.40	3.10	2.95	2.94	3.01	3.14	
170	8.27	8.24	8.25	8.36	8.25	7.81	7.16	6.37	5.57	4.77	4.08	3.54	3.15	2.97	2.89	2.91	2.99	3.14	
180	8.71	9.18	9.62	9.70	9.46	8.89	8.03	6.85	5.55	4.41	3.57	3.08	2.83	2.81	2.82	2.88	2.98	3.14	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: