

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1772.3 cd per klm.
(Luminaire orientation as tested.)	4.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	74.9V x 77.7H
	At 50% of Imax	36.8V x 37.7H
	At 90% of Imax	13.9V x 14.2H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	779.3 lumens per klm.
	To 50% of Imax	377.3 lumens per klm.
	To 90% of Imax	59.1 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.60V I:0.1120A P:23.900W PF:0.9690 Freq:50.00Hz Lamp Flux:2096.85x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-35D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

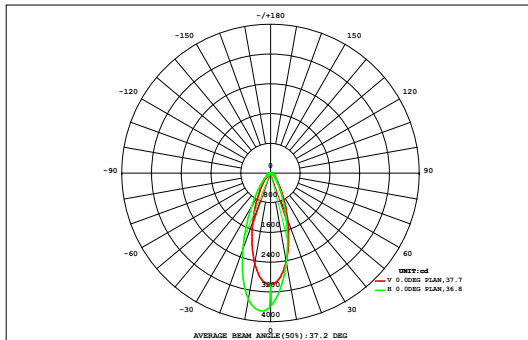

DATA OF LAMP		Eff:87.73lm/W	
MODEL		Imax (cd)	3716
NOMINAL POWER (W)	24	AVAILABILITY (%)	77.9
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	1634
NOMINAL FLUX (lm)	2096.85	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	2097
TEST VOLTAGE (V)	220	θ @50% (H,V)	38,37DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.11	0.25	0.45	0.68	0.94	1.19	1.31	1.36	1.34	1.27	1.15	0.98	0.78	0.59	0.41	0.25	0.13	0.07	13.3	0.00
72	0.11	0.25	0.45	0.68	0.94	1.19	1.31	1.36	1.34	1.27	1.15	0.98	0.78	0.59	0.41	0.25	0.13	0.07	13.3	0.00
64	0.16	0.36	0.64	0.96	1.33	1.71	1.96	2.08	2.08	1.97	1.77	1.51	1.23	0.95	0.68	0.43	0.23	0.10	20.2	0.00
56	0.22	0.47	0.82	1.25	1.80	2.50	3.10	3.39	3.41	3.17	2.74	2.23	1.75	1.33	0.95	0.61	0.34	0.15	30.2	0.00
48	0.26	0.57	1.00	1.59	2.48	3.81	5.36	6.18	6.27	5.67	4.63	3.45	2.52	1.79	1.23	0.79	0.45	0.20	48.3	5.17
40	0.31	0.66	1.17	2.00	3.45	5.93	9.52	12.0	12.3	10.9	8.33	5.69	3.77	2.42	1.54	0.97	0.55	0.25	81.8	54.6
32	0.34	0.73	1.34	2.45	4.64	8.82	15.9	23.1	24.6	21.3	15.1	9.57	5.71	3.27	1.90	1.13	0.64	0.30	141	120
24	0.36	0.78	1.47	2.86	5.81	11.9	23.3	38.3	43.7	38.1	25.9	15.3	8.22	4.32	2.31	1.28	0.71	0.33	225	207
	0.37	0.81	1.54	3.08	6.55	14.1	28.3	48.3	62.0	55.9	38.3	21.7	11.0	5.41	2.68	1.40	0.76	0.36	303	287
	0.37	0.80	1.52	3.02	6.41	13.8	27.7	46.8	63.2	64.5	44.8	25.8	12.9	6.09	2.90	1.47	0.78	0.37	323	307
	0.37	0.79	1.48	2.91	6.11	13.1	26.6	46.5	62.7	49.5	36.7	22.7	11.8	5.74	2.79	1.43	0.77	0.36	292	276
	0.36	0.77	1.44	2.77	5.75	12.2	24.3	38.9	45.4	34.3	23.2	14.8	8.47	4.53	2.39	1.30	0.72	0.34	222	204
-24	0.34	0.72	1.32	2.44	4.77	9.23	15.9	23.2	25.3	20.2	13.0	8.91	5.49	3.26	1.92	1.14	0.64	0.30	138	117
-32	0.31	0.66	1.17	2.02	3.51	5.90	9.10	12.0	12.5	10.5	7.34	5.12	3.55	2.32	1.51	0.96	0.56	0.26	79.3	50.5
-40	0.26	0.58	1.01	1.61	2.46	3.65	5.08	6.09	6.20	5.44	4.19	3.04	2.33	1.70	1.18	0.78	0.46	0.21	46.3	4.37
-48	0.22	0.48	0.83	1.25	1.75	2.35	2.94	3.30	3.32	3.02	2.54	1.99	1.60	1.25	0.91	0.60	0.35	0.15	28.9	0.00
-56	0.16	0.37	0.65	0.95	1.28	1.61	1.87	2.02	2.02	1.89	1.66	1.37	1.11	0.88	0.64	0.42	0.23	0.11	19.2	0.00
-64	0.11	0.26	0.46	0.67	0.90	1.10	1.24	1.31	1.30	1.22	1.08	0.88	0.68	0.53	0.38	0.24	0.13	0.07	12.6	0.00
-72	0.07	0.15	0.27	0.40	0.54	0.66	0.73	0.75	0.73	0.67	0.56	0.43	0.31	0.24	0.17	0.11	0.07	0.04	6.91	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	4.70	10.2	18.6	32.9	60.5	114	204	316	378	329	233	145	83.2	46.6	26.5	15.3	8.51	3.96	2031	---
Φ a	0.00	0.00	0.00	0.00	20.2	87.2	181	293	356	306	208	119	54.2	9.38	0.00	0.00	0.00	0.00	---	1634

one-half-peak spread: U:18.5,D:18.6 , L:19.2,R:18.8


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.60V I:0.1120A P:23.900W PF:0.9690 Freq:50.00Hz Lamp Flux:2096.85x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-35D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

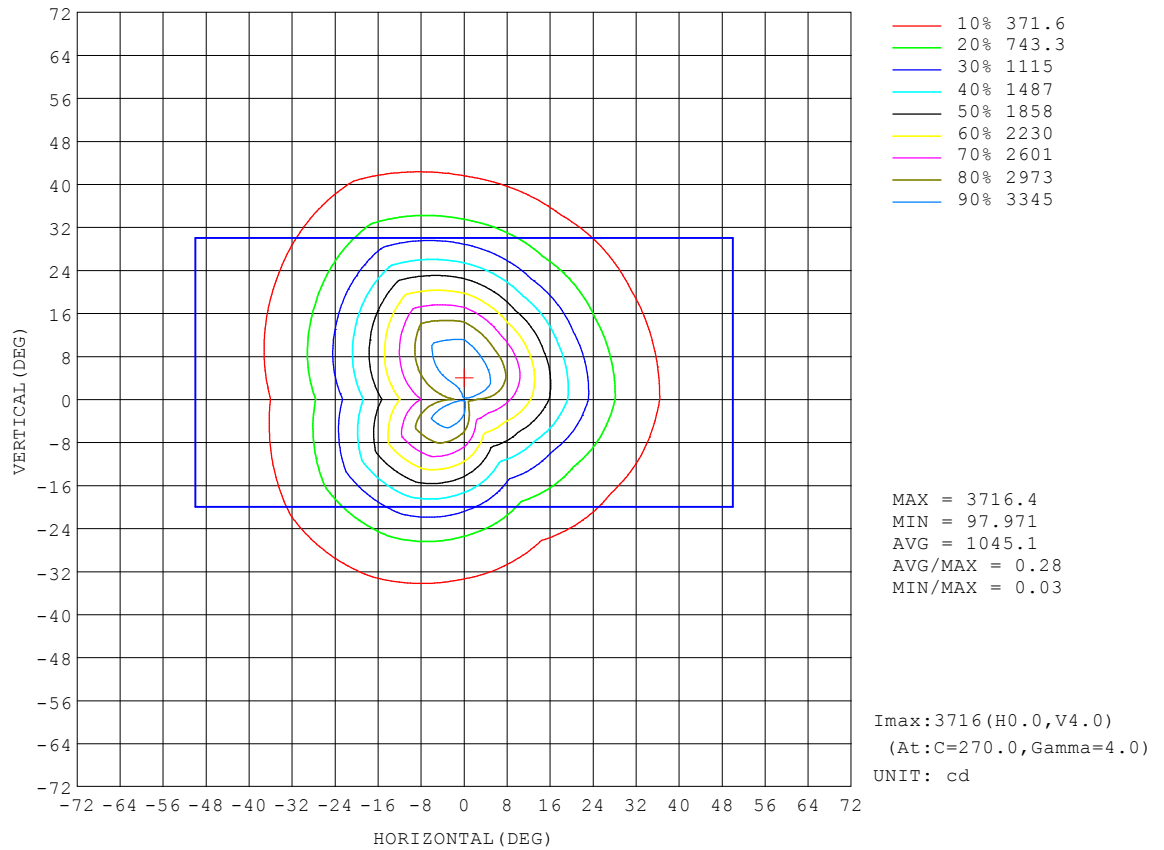


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.60V I:0.1120A P:23.900W PF:0.9690 Freq:50.00Hz Lamp Flux:2096.85x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-35D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

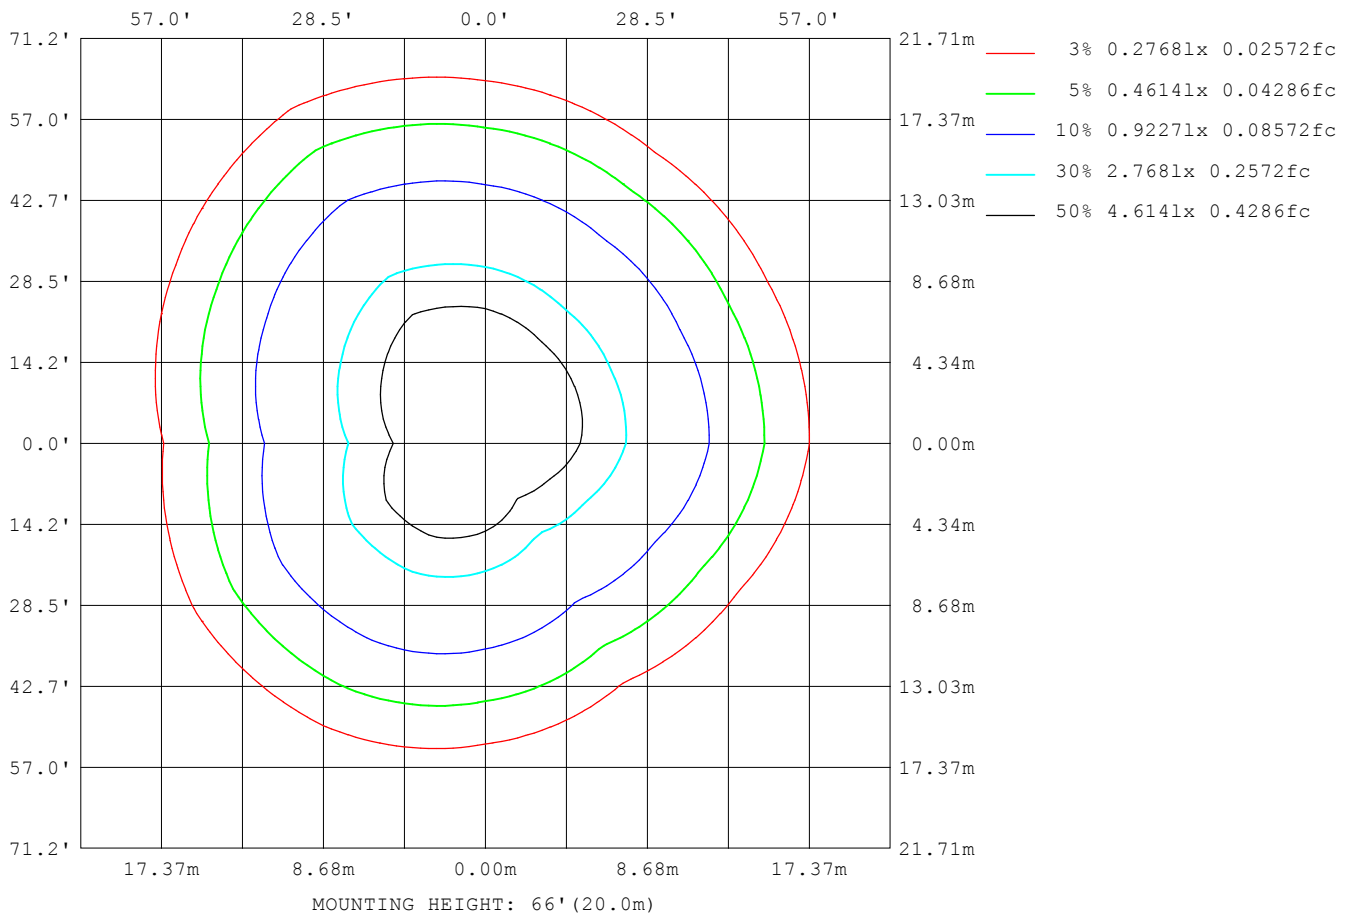

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

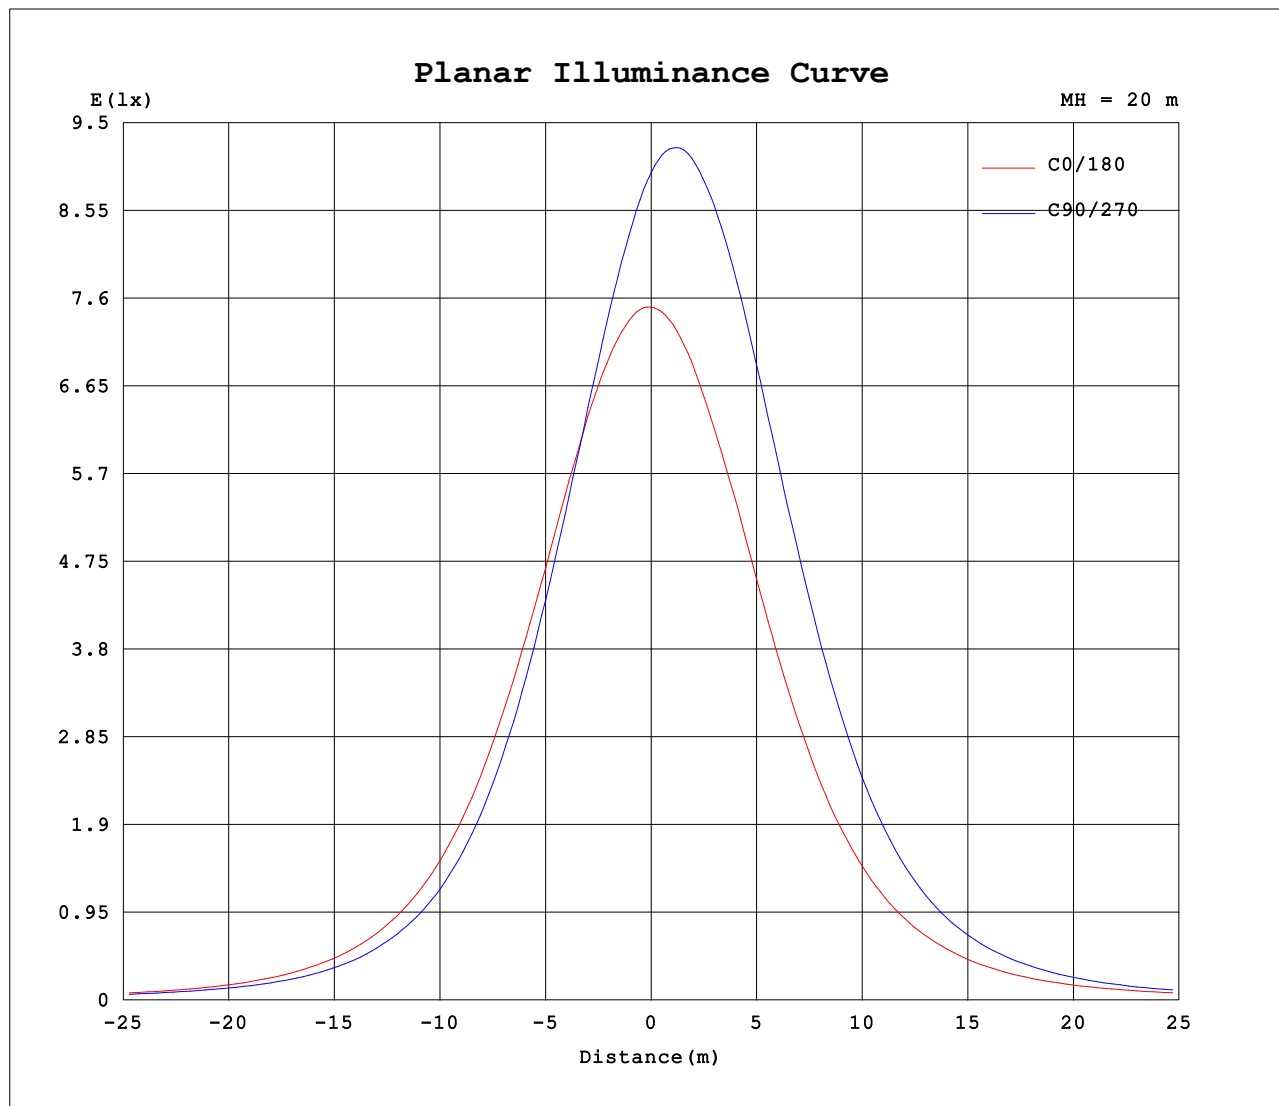


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.60V I:0.1120A P:23.900W PF:0.9690 Freq:50.00Hz Lamp Flux:2096.85x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-35D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

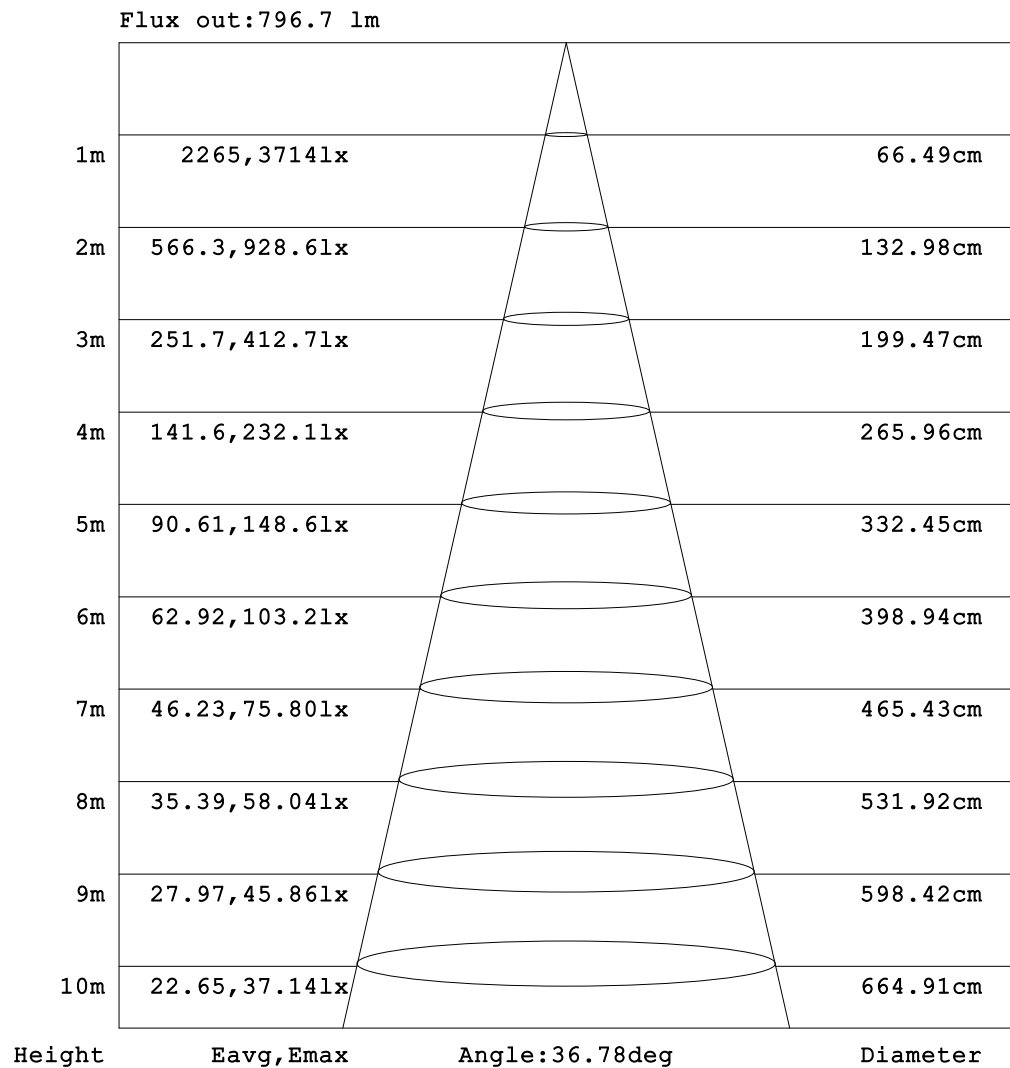

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.60V I:0.1120A P:23.900W PF:0.9690 Freq:50.00Hz Lamp Flux:2096.85x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-35D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	5.67	5.47	5.50	5.72	6.18	6.83	7.54	8.14	8.60	8.90	9.20	9.58	10.1	10.5	10.9	11.2	11.4	11.8	12.2
-170	5.67	5.44	5.43	5.58	5.94	6.45	7.03	7.59	8.10	8.63	9.28	10.1	11.0	11.8	12.6	13.0	13.0	13.0	12.8
-160	5.67	5.42	5.35	5.43	5.66	6.01	6.43	6.87	7.36	7.97	8.77	9.78	10.9	11.8	12.5	12.9	13.1	13.2	13.2
-150	5.67	5.39	5.28	5.28	5.37	5.54	5.77	6.04	6.36	6.83	7.53	8.54	9.54	10.4	11.2	11.8	12.3	12.7	13.0
-140	5.67	5.37	5.23	5.14	5.12	5.14	5.18	5.23	5.31	5.69	6.30	7.00	7.75	8.46	9.11	9.83	10.4	10.9	11.2
-130	5.67	5.37	5.19	5.04	4.93	4.84	4.74	4.62	4.69	4.94	5.25	5.63	6.03	6.44	6.95	7.45	7.90	8.28	8.57
-120	5.67	5.38	5.17	4.99	4.81	4.66	4.49	4.36	4.40	4.48	4.59	4.73	4.87	5.07	5.33	5.58	5.81	6.02	6.19
-110	5.67	5.42	5.18	4.98	4.78	4.58	4.39	4.33	4.34	4.35	4.36	4.37	4.37	4.45	4.55	4.67	4.77	4.87	4.97
-100	5.67	5.45	5.25	5.04	4.84	4.65	4.45	4.42	4.41	4.40	4.40	4.40	4.41	4.43	4.47	4.50	4.54	4.58	4.62
-90	5.67	5.50	5.34	5.17	5.00	4.84	4.67	4.68	4.69	4.69	4.70	4.70	4.71	4.71	4.71	4.71	4.72	4.72	4.72
-80	5.67	5.57	5.49	5.47	5.52	5.70	6.08	6.65	7.22	7.61	7.94	8.31	8.67	8.76	8.61	8.28	7.79	7.16	6.43
-70	5.67	5.65	5.79	6.33	7.88	9.94	13.1	16.5	20.0	23.2	26.3	29.1	31.4	32.6	33.1	32.9	32.3	31.0	29.2
-60	5.67	5.75	6.33	8.48	12.6	18.8	26.4	34.1	40.6	46.7	52.5	57.9	62.7	66.2	67.9	68.6	68.4	67.3	65.1
-50	5.67	5.90	7.45	11.8	19.7	29.9	40.8	51.8	61.8	71.2	80.1	89.1	98.1	107	113	116	117	116	111
-40	5.67	6.05	8.56	15.8	27.2	40.3	54.0	67.8	82.2	97.2	114	134	157	181	207	223	230	228	215
-30	5.67	6.20	9.90	19.8	33.6	49.2	65.2	82.0	102	129	165	211	271	344	424	496	535	537	498
-20	5.67	6.33	11.1	22.9	38.5	55.8	73.7	93.8	121	161	223	319	465	641	859	1092	1281	1310	1195
-10	5.67	6.41	11.8	24.7	41.4	59.8	78.8	101	134	184	266	400	609	936	1412	1982	2435	2701	2447
0	5.67	6.44	12.0	25.1	42.1	60.8	79.9	103	136	187	271	405	608	922	1357	1889	2421	2834	3002
10	5.67	6.55	12.4	25.8	42.9	61.9	81.9	107	143	201	295	447	688	1059	1567	2195	2865	3385	3445
20	5.67	6.60	12.2	25.0	41.5	59.8	79.3	103	136	187	267	391	579	867	1267	1752	2191	2268	2191
30	5.67	6.58	11.4	22.8	37.9	54.8	72.8	92.6	118	155	208	289	403	559	763	974	1052	1067	1009
40	5.67	6.49	10.2	19.5	32.6	47.3	62.9	79.3	97.6	120	151	192	247	315	394	429	447	446	423
50	5.67	6.36	8.99	15.5	25.8	37.9	50.8	63.9	77.4	91.5	108	127	149	175	190	199	202	200	192
60	5.67	6.18	7.77	11.7	18.4	27.3	37.2	47.2	56.8	66.5	76.1	85.7	95.4	104	106	108	108	107	103
70	5.67	6.02	6.98	8.70	11.9	16.5	22.6	29.3	35.9	42.6	48.9	55.1	60.9	63.3	63.8	63.6	62.9	61.5	59.5
80	5.67	5.88	6.27	6.96	8.01	9.30	11.0	13.6	16.6	19.9	23.2	26.5	29.8	29.7	29.0	28.1	26.9	25.4	23.7
90	5.67	5.79	5.91	6.03	6.15	6.27	6.39	6.75	7.12	7.48	7.85	8.21	8.57	8.22	7.86	7.50	7.14	6.79	6.43
100	5.67	5.71	5.71	5.72	5.72	5.73	5.74	5.72	5.71	5.69	5.68	5.67	5.66	5.63	5.61	5.60	5.59	5.59	5.59
110	5.67	5.64	5.60	5.60	5.58	5.55	5.52	5.50	5.49	5.50	5.50	5.51	5.53	5.56	5.61	5.67	5.72	5.78	5.82
120	5.67	5.58	5.55	5.53	5.51	5.51	5.51	5.51	5.60	5.71	5.83	5.94	6.04	6.16	6.37	6.57	6.74	6.89	7.01
130	5.67	5.54	5.52	5.50	5.54	5.59	5.70	5.87	6.10	6.37	6.64	6.89	7.11	7.30	7.59	7.86	8.08	8.25	8.38
140	5.67	5.52	5.50	5.52	5.63	5.82	6.11	6.44	6.82	7.20	7.59	7.91	8.20	8.43	8.63	8.85	9.01	9.14	9.23
150	5.67	5.50	5.49	5.57	5.78	6.12	6.57	7.06	7.54	7.96	8.32	8.62	8.87	9.08	9.28	9.48	9.73	9.97	10.1
160	5.67	5.49	5.49	5.63	5.94	6.43	7.00	7.57	8.08	8.47	8.77	9.01	9.26	9.56	9.90	10.2	10.6	11.0	11.4
170	5.67	5.48	5.50	5.69	6.09	6.68	7.34	7.94	8.41	8.75	9.04	9.36	9.72	10.1	10.5	10.9	11.3	11.8	12.3
180	5.67	5.47	5.50	5.72	6.18	6.83	7.54	8.14	8.60	8.90	9.20	9.58	10.1	10.5	10.9	11.2	11.4	11.8	12.2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.60V I:0.1120A P:23.900W PF:0.9690 Freq:50.00Hz Lamp Flux:2096.85x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-35D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	12.4	12.6	12.8	12.8	12.5	11.8	10.8	9.61	8.30	7.04	5.97	5.16	4.62	4.32	4.24	4.27	4.40	4.62	
-170	12.2	12.3	12.4	12.6	12.5	11.9	11.0	9.82	8.50	7.20	6.09	5.24	4.67	4.35	4.26	4.27	4.40	4.62	
-160	13.0	12.9	12.9	12.7	12.4	11.7	10.7	9.53	8.24	7.02	5.97	5.18	4.65	4.35	4.26	4.28	4.40	4.62	
-150	12.9	12.8	12.7	12.3	11.6	10.8	9.82	8.72	7.57	6.51	5.64	5.00	4.57	4.33	4.27	4.30	4.41	4.62	
-140	11.3	11.2	11.1	10.8	10.1	9.28	8.38	7.47	6.60	5.83	5.21	4.76	4.45	4.31	4.28	4.31	4.43	4.62	
-130	8.66	8.66	8.55	8.38	8.03	7.41	6.77	6.16	5.62	5.16	4.79	4.53	4.36	4.29	4.28	4.33	4.44	4.62	
-120	6.26	6.28	6.25	6.17	6.04	5.75	5.43	5.13	4.86	4.65	4.47	4.37	4.30	4.28	4.31	4.37	4.46	4.62	
-110	4.97	4.96	4.93	4.88	4.82	4.74	4.62	4.52	4.43	4.37	4.32	4.29	4.29	4.30	4.34	4.40	4.50	4.62	
-100	4.58	4.54	4.50	4.46	4.43	4.39	4.37	4.35	4.34	4.32	4.30	4.28	4.31	4.34	4.39	4.46	4.54	4.62	
-90	4.68	4.64	4.60	4.56	4.52	4.48	4.46	4.45	4.43	4.42	4.40	4.38	4.42	4.46	4.50	4.54	4.58	4.62	
-80	6.16	5.86	5.54	5.26	5.02	4.84	4.85	4.83	4.79	4.73	4.67	4.62	4.68	4.69	4.66	4.64	4.62	4.62	
-70	27.0	24.4	21.4	18.1	14.6	12.0	11.2	10.1	8.94	7.87	6.88	6.00	5.86	5.50	5.12	4.84	4.68	4.62	
-60	62.1	58.3	53.6	48.1	41.8	37.8	34.5	30.7	26.4	21.7	16.7	13.0	10.5	8.09	6.34	5.24	4.76	4.62	
-50	106	98.9	90.7	81.8	73.7	68.9	63.1	56.3	49.1	41.5	33.8	26.3	19.2	13.4	8.83	6.04	4.89	4.62	
-40	198	176	152	129	118	106	94.3	83.0	72.1	61.4	51.3	41.0	30.3	20.4	12.6	7.13	5.02	4.62	
-30	439	361	283	240	204	169	140	115	97.1	81.7	67.6	54.3	41.1	27.9	16.7	8.59	5.16	4.62	
-20	983	728	595	481	373	279	215	166	129	102	82.4	65.5	50.0	34.6	20.5	9.97	5.31	4.62	
-10	1795	1505	1186	899	657	466	325	229	164	122	94.6	74.2	56.7	39.6	23.7	11.1	5.45	4.62	
0	2865	2472	1946	1413	959	635	418	278	190	136	102	79.4	60.7	42.6	25.5	11.7	5.51	4.62	
10	2991	2414	1790	1250	847	566	379	258	179	131	99.8	77.6	59.2	41.4	24.7	11.4	5.50	4.62	
20	1897	1500	1137	827	582	405	288	207	153	117	91.5	72.0	54.8	38.0	22.4	10.6	5.42	4.62	
30	893	739	579	454	349	264	200	154	122	98.0	79.3	63.0	47.7	32.7	19.1	9.35	5.30	4.62	
40	388	340	287	235	197	164	136	113	94.1	78.5	64.6	51.4	38.4	25.8	15.0	7.90	5.19	4.62	
50	182	167	150	133	118	105	92.8	81.3	70.1	58.9	48.1	37.8	27.5	18.1	10.9	6.68	5.09	4.62	
60	99.6	94.7	88.8	82.2	75.1	68.5	61.8	54.5	46.7	38.8	30.6	23.1	16.6	11.4	7.80	5.79	4.98	4.62	
70	57.1	54.1	50.5	46.5	41.9	37.1	32.9	28.4	23.7	19.0	14.7	11.4	9.19	7.21	6.03	5.32	4.91	4.62	
80	22.1	20.3	18.3	16.2	14.0	12.0	10.8	9.63	8.54	7.63	6.97	6.49	6.07	5.70	5.38	5.11	4.85	4.62	
90	6.33	6.23	6.12	6.02	5.92	5.82	5.81	5.80	5.79	5.78	5.77	5.76	5.57	5.38	5.19	5.00	4.81	4.62	
100	5.59	5.58	5.57	5.56	5.55	5.54	5.54	5.54	5.53	5.54	5.54	5.54	5.37	5.21	5.05	4.90	4.76	4.62	
110	5.87	5.91	5.93	5.94	5.93	5.90	5.84	5.76	5.68	5.61	5.55	5.46	5.27	5.09	4.94	4.82	4.71	4.62	
120	7.08	7.12	7.13	7.09	7.03	6.89	6.71	6.51	6.31	6.10	5.90	5.55	5.23	5.00	4.85	4.73	4.65	4.62	
130	8.43	8.44	8.42	8.36	8.26	8.05	7.81	7.52	7.19	6.83	6.34	5.74	5.28	4.96	4.76	4.65	4.61	4.62	
140	9.28	9.29	9.26	9.20	9.04	8.86	8.64	8.36	8.01	7.45	6.63	5.90	5.31	4.92	4.68	4.58	4.57	4.62	
150	10.2	10.2	10.1	9.91	9.64	9.38	9.12	8.87	8.33	7.57	6.73	5.94	5.29	4.83	4.60	4.51	4.52	4.62	
160	11.5	11.5	11.2	10.8	10.3	9.91	9.54	9.03	8.35	7.53	6.65	5.83	5.17	4.70	4.50	4.43	4.47	4.62	
170	12.3	12.1	11.8	11.6	11.4	10.9	10.2	9.37	8.40	7.37	6.40	5.57	4.94	4.54	4.38	4.35	4.43	4.62	
180	12.4	12.6	12.8	12.8	12.5	11.8	10.8	9.61	8.30	7.04	5.97	5.16	4.62	4.32	4.24	4.27	4.40	4.62	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: