

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1745.7 cd per klm.
(Luminaire orientation as tested.)	1.0 degrees vertical
	0.5 degrees horizontal

Beam Spread	At 10% of Imax	75.6V x 78.8H
	At 50% of Imax	36.7V x 37.8H
	At 90% of Imax	14.1V x 14.2H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	778.0 lumens per klm.
	To 50% of Imax	371.5 lumens per klm.
	To 90% of Imax	58.7 lumens per klm.

Upward LOR	2.1 %
Downward LOR	97.9 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:377.764x1 lm		
NAME: Auroring Micro-197mm-RGBW-BLUE-35D	TYPE:RGBW BLUE	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

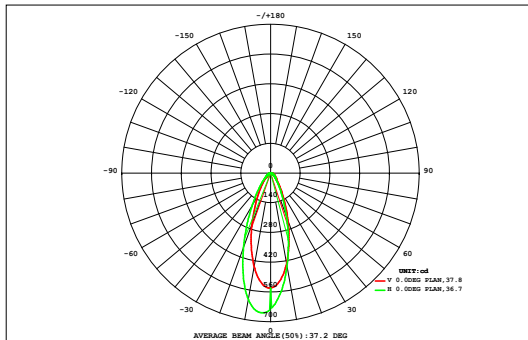

DATA OF LAMP		Eff:15.42lm/W	
MODEL		Imax(cd)	659.5
NOMINAL POWER(W)	24	AVAILABILITY(%)	77.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	294.1
NOMINAL FLUX(lm)	377.764	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	377.8
TEST VOLTAGE(V)	220	θ @50% (H,V)	38,37DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.05	0.08	0.13	0.17	0.22	0.24	0.25	0.25	0.23	0.21	0.18	0.15	0.11	0.08	0.05	0.02	0.01	2.45	0.00
72	0.02	0.05	0.08	0.13	0.17	0.22	0.24	0.25	0.25	0.23	0.21	0.18	0.15	0.11	0.08	0.05	0.02	0.01	2.45	0.00
64	0.03	0.07	0.12	0.18	0.25	0.32	0.36	0.38	0.38	0.36	0.33	0.28	0.23	0.18	0.13	0.08	0.04	0.02	3.75	0.00
56	0.04	0.09	0.15	0.24	0.34	0.46	0.56	0.61	0.61	0.57	0.50	0.42	0.33	0.25	0.18	0.11	0.06	0.03	5.56	0.00
48	0.05	0.11	0.19	0.30	0.46	0.69	0.95	1.09	1.10	1.01	0.84	0.64	0.47	0.34	0.23	0.15	0.09	0.04	8.73	0.85
40	0.06	0.13	0.22	0.37	0.63	1.05	1.66	2.07	2.13	1.90	1.50	1.05	0.70	0.45	0.29	0.18	0.10	0.05	14.5	9.60
32	0.06	0.14	0.25	0.46	0.84	1.56	2.75	3.95	4.20	3.69	2.70	1.75	1.06	0.61	0.36	0.21	0.12	0.06	24.8	21.0
24	0.07	0.15	0.28	0.53	1.05	2.11	4.05	6.61	7.53	6.59	4.62	2.78	1.51	0.80	0.43	0.24	0.14	0.06	39.6	36.4
	0.07	0.15	0.29	0.57	1.19	2.50	5.00	8.54	10.9	9.86	6.85	3.93	2.02	1.01	0.51	0.27	0.14	0.07	53.9	51.1
	0.07	0.15	0.29	0.57	1.18	2.48	4.93	8.35	11.3	11.5	8.03	4.71	2.39	1.14	0.55	0.28	0.15	0.07	58.1	55.3
	0.07	0.15	0.28	0.55	1.13	2.36	4.73	8.31	11.2	9.02	6.68	4.17	2.20	1.08	0.53	0.28	0.15	0.07	53.0	50.2
	0.07	0.15	0.27	0.52	1.06	2.20	4.31	6.89	8.15	6.32	4.30	2.76	1.59	0.86	0.46	0.25	0.14	0.06	40.4	37.2
-24	0.06	0.14	0.25	0.46	0.88	1.66	2.83	4.12	4.60	3.76	2.46	1.69	1.05	0.62	0.37	0.22	0.12	0.06	25.4	21.7
-32	0.06	0.13	0.22	0.38	0.65	1.07	1.64	2.16	2.32	1.99	1.40	0.98	0.68	0.45	0.29	0.19	0.11	0.05	14.8	9.62
-40	0.05	0.11	0.19	0.30	0.46	0.67	0.93	1.12	1.17	1.04	0.81	0.59	0.45	0.33	0.23	0.15	0.09	0.04	8.73	1.15
-48	0.04	0.09	0.16	0.24	0.33	0.44	0.55	0.62	0.64	0.59	0.49	0.39	0.31	0.24	0.18	0.12	0.07	0.03	5.51	0.00
-56	0.03	0.07	0.12	0.18	0.24	0.30	0.35	0.38	0.39	0.37	0.32	0.27	0.22	0.17	0.13	0.08	0.04	0.02	3.70	0.00
-64	0.02	0.05	0.09	0.13	0.17	0.21	0.24	0.25	0.25	0.24	0.21	0.17	0.13	0.11	0.08	0.05	0.02	0.01	2.42	0.00
-72	0.01	0.03	0.05	0.07	0.10	0.12	0.14	0.15	0.15	0.13	0.11	0.09	0.06	0.05	0.03	0.02	0.01	0.01	1.33	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.89	1.94	3.52	6.16	11.1	20.4	36.2	55.9	67.3	59.2	42.4	26.9	15.6	8.81	5.04	2.93	1.63	0.75	367	---
Φ a	0.00	0.00	0.00	0.00	4.07	15.7	31.9	51.8	63.2	54.9	37.8	22.2	10.4	2.21	0.00	0.00	0.00	0.00	---	294

one-half-peak spread: U:19.0,D:18.0 , L:19.0,R:19.0


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:377.764x1 lm		
NAME: Auroring Micro-197mm-RGBW-BLUE-35D	TYPE:RGBW BLUE	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

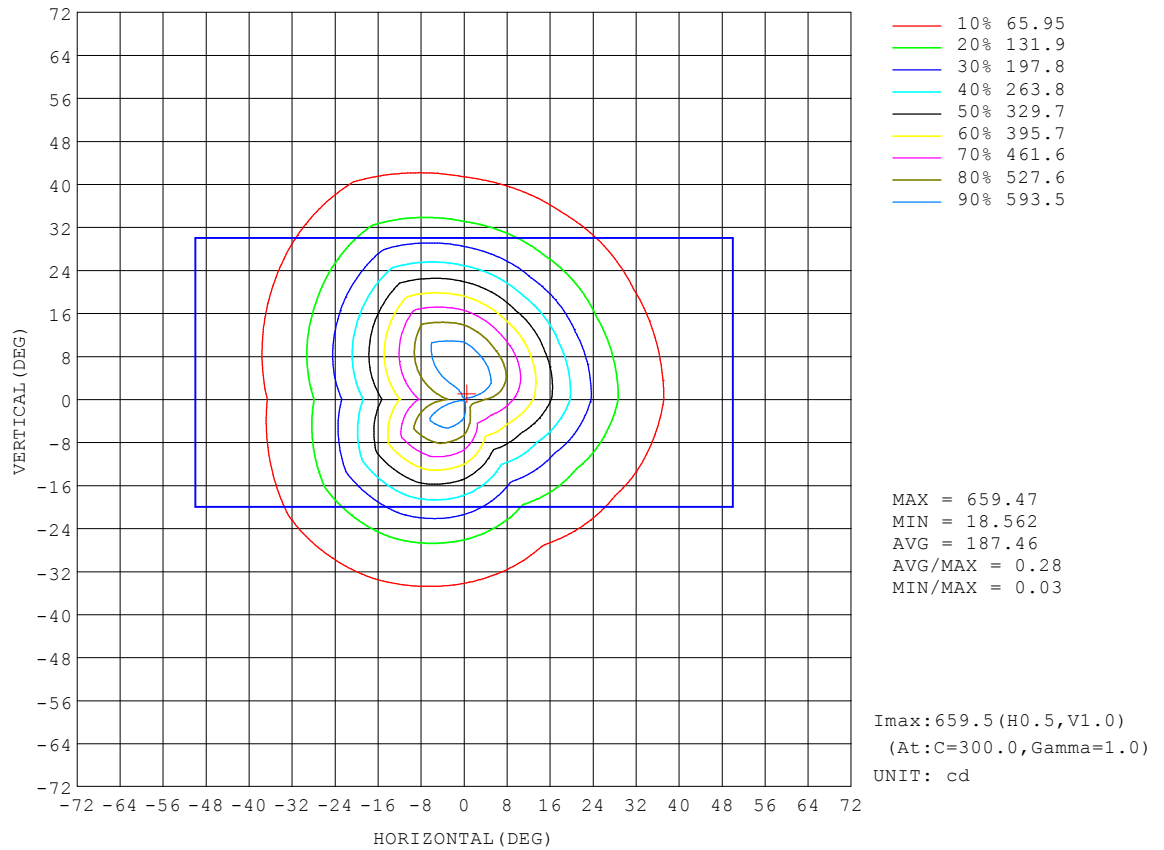


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:377.764x1 lm		
NAME: Auroring Micro-197mm-RGBW-BLUE-35D	TYPE:RGBW BLUE	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

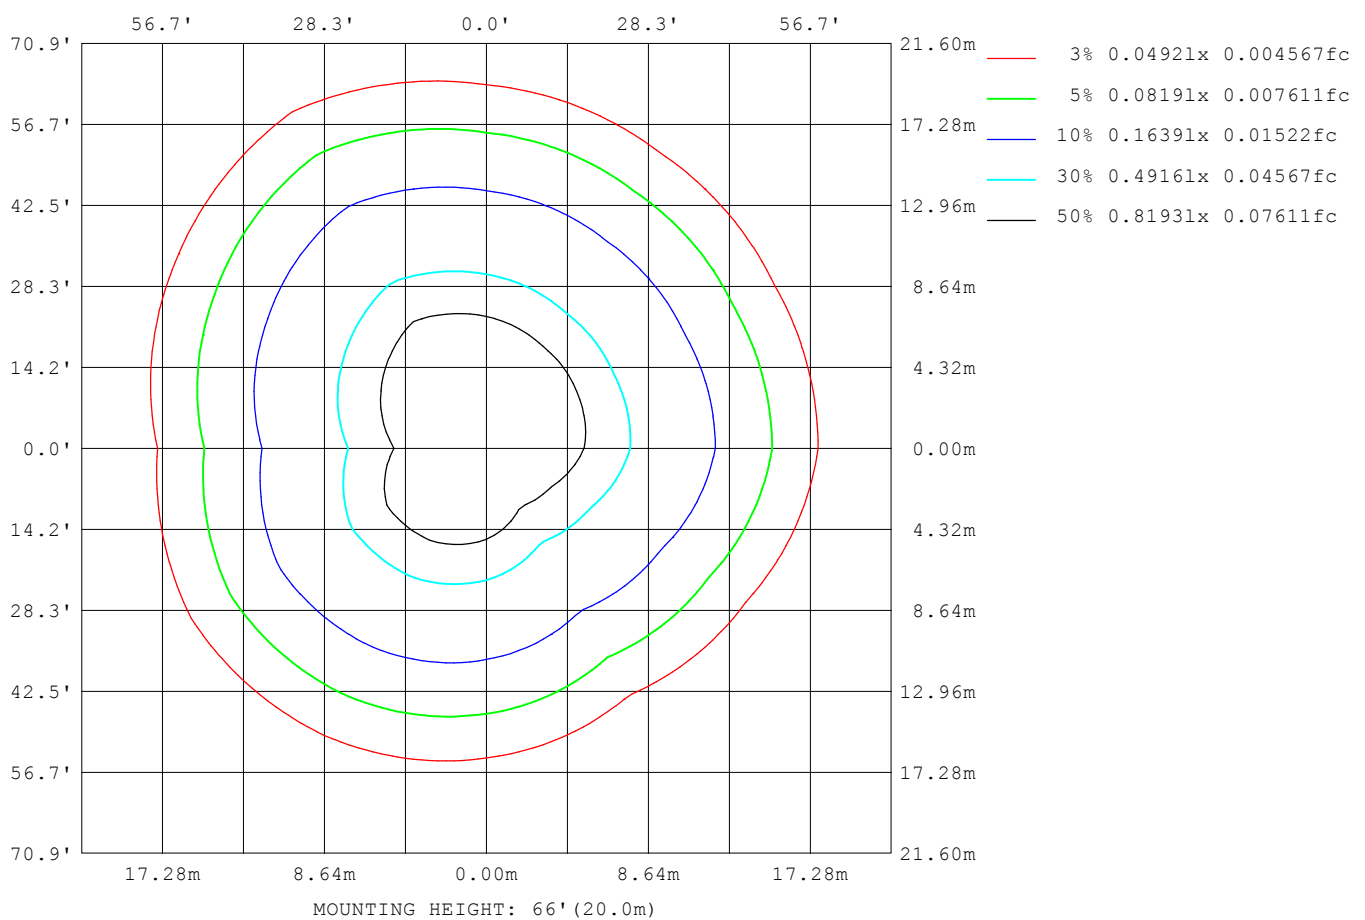

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

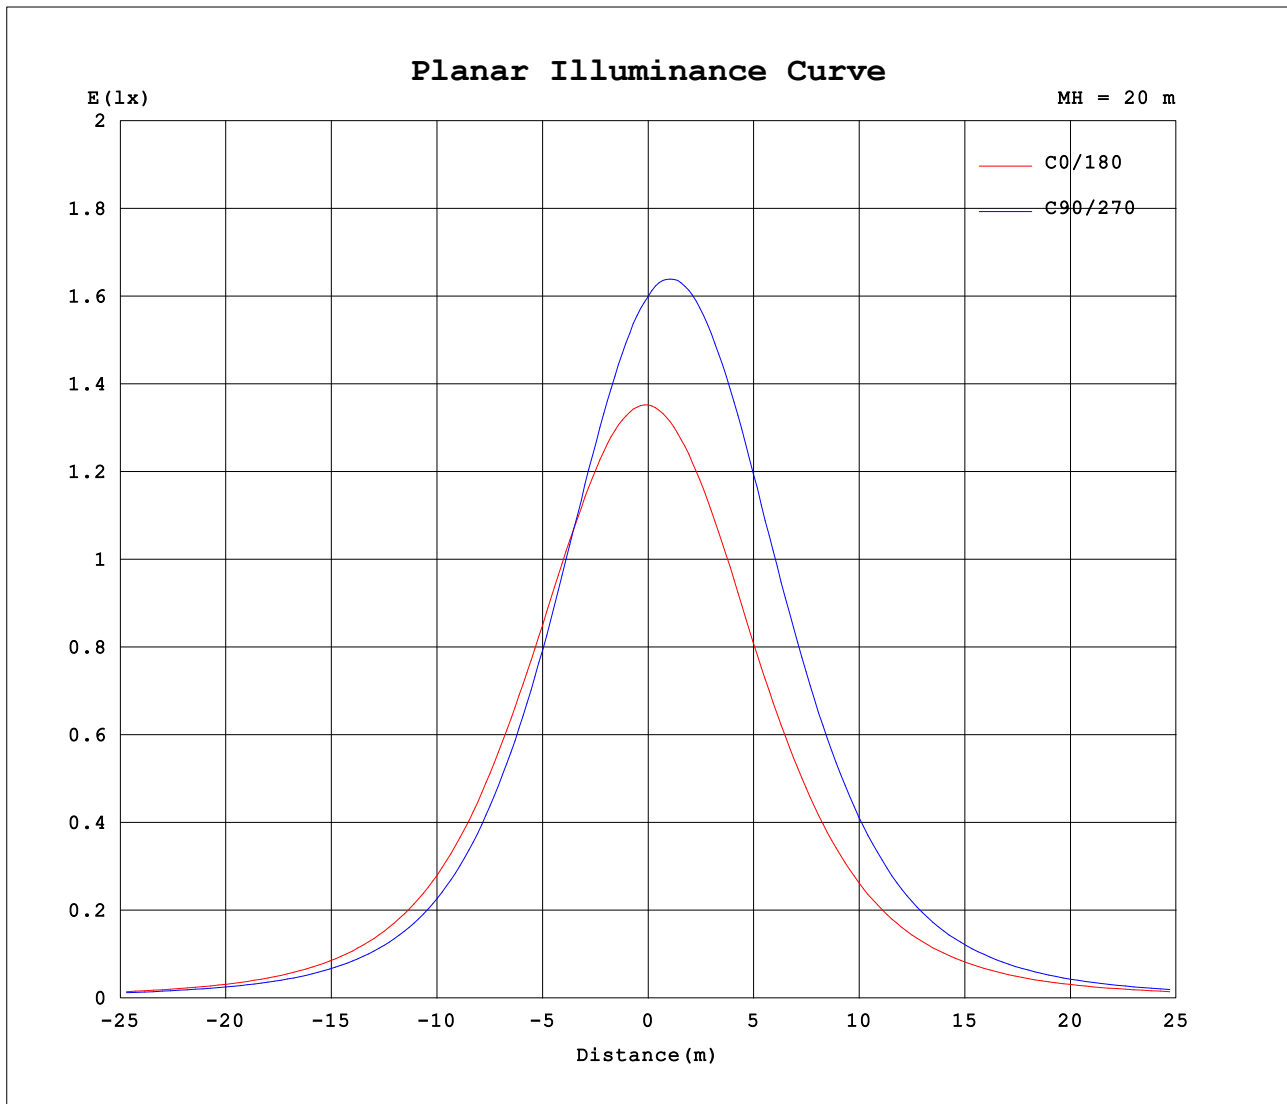


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:377.764x1 lm		
NAME: Auroring Micro-197mm-RGBW-BLUE-35D	TYPE:RGBW BLUE	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

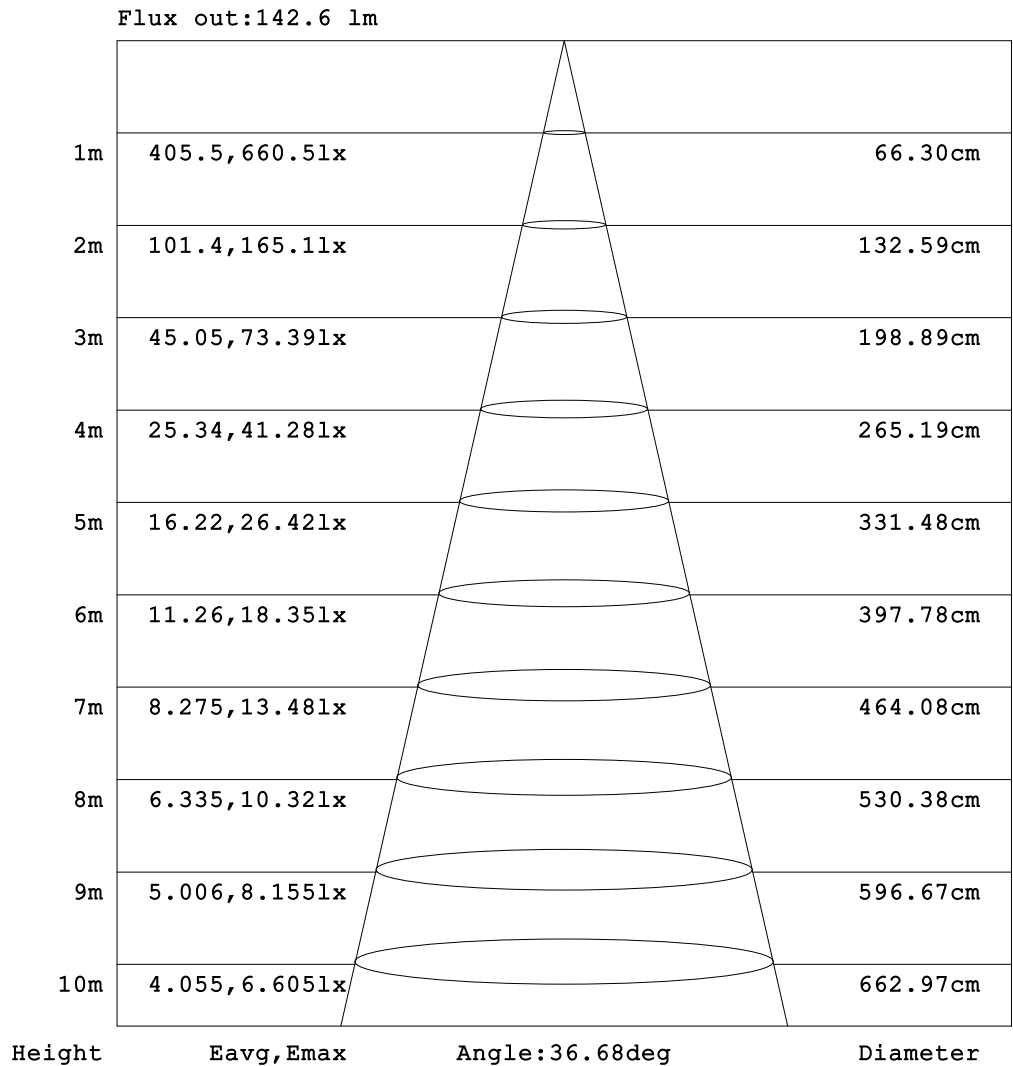

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:377.764x1 lm		
NAME: Auroring Micro-197mm-RGBW-BLUE-35D	TYPE:RGBW BLUE	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.89	0.89	0.90	0.93	1.02	1.13	1.26	1.36	1.45	1.50	1.55	1.62	1.70	1.78	1.85	1.90	1.94	2.01	2.03
-170	0.89	0.88	0.88	0.91	0.98	1.07	1.17	1.27	1.36	1.46	1.58	1.72	1.88	2.03	2.13	2.19	2.20	2.20	2.13
-160	0.89	0.88	0.87	0.88	0.93	0.99	1.07	1.15	1.24	1.35	1.49	1.68	1.89	2.04	2.14	2.18	2.20	2.21	2.22
-150	0.89	0.87	0.86	0.86	0.88	0.91	0.95	1.00	1.07	1.15	1.28	1.45	1.62	1.77	1.90	2.00	2.10	2.18	2.23
-140	0.89	0.87	0.85	0.83	0.84	0.85	0.85	0.86	0.87	0.94	1.05	1.16	1.29	1.41	1.51	1.66	1.78	1.88	1.95
-130	0.89	0.86	0.84	0.82	0.80	0.79	0.78	0.76	0.76	0.80	0.85	0.91	0.98	1.04	1.13	1.24	1.33	1.41	1.48
-120	0.89	0.86	0.83	0.81	0.78	0.75	0.73	0.70	0.72	0.72	0.73	0.74	0.76	0.80	0.87	0.93	0.99	1.04	1.09
-110	0.89	0.86	0.83	0.80	0.77	0.74	0.71	0.70	0.70	0.71	0.71	0.71	0.71	0.74	0.79	0.83	0.87	0.92	0.96
-100	0.89	0.86	0.83	0.79	0.76	0.73	0.70	0.70	0.71	0.71	0.72	0.72	0.73	0.76	0.80	0.83	0.87	0.90	0.94
-90	0.89	0.86	0.83	0.80	0.77	0.74	0.71	0.72	0.73	0.74	0.76	0.77	0.78	0.81	0.83	0.86	0.89	0.91	0.94
-80	0.89	0.86	0.84	0.83	0.85	0.88	0.95	1.07	1.19	1.27	1.34	1.41	1.48	1.53	1.55	1.53	1.49	1.41	1.32
-70	0.89	0.87	0.89	1.00	1.30	1.70	2.30	2.97	3.62	4.25	4.84	5.35	5.79	6.08	6.27	6.36	6.33	6.19	5.94
-60	0.89	0.88	1.01	1.43	2.23	3.43	4.88	6.35	7.59	8.76	9.86	10.9	11.8	12.5	12.9	13.1	13.2	13.1	12.8
-50	0.89	0.91	1.23	2.10	3.64	5.59	7.68	9.75	11.7	13.4	15.1	16.8	18.5	20.0	21.2	22.0	22.4	22.3	21.7
-40	0.89	0.94	1.46	2.90	5.10	7.63	10.2	12.8	15.6	18.4	21.5	25.1	29.2	33.6	38.1	41.3	43.1	43.3	41.5
-30	0.89	0.97	1.74	3.68	6.36	9.33	12.4	15.6	19.3	24.2	30.8	39.1	49.9	62.7	76.4	89.3	97.3	99.2	94.1
-20	0.89	1.00	1.99	4.30	7.33	10.6	14.1	17.8	22.9	30.2	41.4	58.8	84.2	115	153	194	228	237	222
-10	0.89	1.02	2.13	4.66	7.90	11.4	15.1	19.4	25.4	34.6	49.6	73.4	110	167	250	350	433	480	448
0	0.89	1.03	2.17	4.75	8.06	11.7	15.4	19.8	26.0	35.5	50.9	75.0	111	166	242	335	434	509	541
10	0.89	1.05	2.24	4.86	8.18	11.8	15.7	20.3	27.1	37.6	54.4	81.3	123	188	278	390	509	602	605
20	0.89	1.05	2.19	4.69	7.88	11.4	15.1	19.5	25.6	34.8	49.0	70.5	103	152	220	302	377	391	374
30	0.89	1.04	2.00	4.23	7.14	10.4	13.8	17.6	22.3	28.9	38.4	52.3	71.7	97.8	132	167	180	182	172
40	0.89	1.02	1.76	3.57	6.09	8.91	11.9	15.0	18.5	22.7	28.1	35.2	44.5	56.0	69.0	74.9	78.0	77.7	73.6
50	0.89	1.00	1.51	2.79	4.76	7.08	9.51	12.0	14.6	17.2	20.1	23.5	27.3	31.7	34.4	35.8	36.3	35.9	34.4
60	0.89	0.96	1.28	2.01	3.30	4.99	6.86	8.76	10.6	12.4	14.2	15.9	17.7	19.1	19.7	20.0	20.0	19.6	19.1
70	0.89	0.94	1.12	1.45	2.04	2.91	4.04	5.29	6.55	7.81	9.00	10.2	11.2	11.7	11.8	11.7	11.5	11.3	10.9
80	0.89	0.92	0.99	1.12	1.32	1.58	1.88	2.35	2.87	3.45	4.07	4.68	5.29	5.25	5.11	4.91	4.66	4.37	4.02
90	0.89	0.92	0.94	0.97	1.00	1.03	1.06	1.10	1.15	1.20	1.25	1.30	1.34	1.29	1.24	1.19	1.14	1.08	1.03
100	0.89	0.91	0.92	0.92	0.94	0.94	0.94	0.93	0.92	0.91	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.91	0.91
110	0.89	0.90	0.91	0.91	0.91	0.90	0.91	0.90	0.90	0.90	0.90	0.90	0.90	0.91	0.91	0.91	0.91	0.90	0.90
120	0.89	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.91	0.94	0.96	1.00	1.02	1.05	1.07	1.10	1.11	1.12
130	0.89	0.90	0.90	0.90	0.90	0.91	0.92	0.92	0.96	1.01	1.07	1.13	1.18	1.23	1.27	1.31	1.34	1.35	1.36
140	0.89	0.90	0.90	0.90	0.92	0.94	0.98	1.03	1.08	1.15	1.23	1.30	1.36	1.42	1.46	1.49	1.50	1.51	1.51
150	0.89	0.89	0.90	0.91	0.94	0.99	1.06	1.14	1.22	1.29	1.35	1.40	1.47	1.52	1.56	1.60	1.63	1.66	1.66
160	0.89	0.89	0.90	0.92	0.98	1.05	1.15	1.24	1.32	1.39	1.44	1.48	1.51	1.58	1.65	1.73	1.80	1.85	1.89
170	0.89	0.89	0.90	0.93	1.00	1.10	1.21	1.31	1.40	1.46	1.51	1.56	1.61	1.69	1.74	1.81	1.91	2.00	2.03
180	0.89	0.89	0.90	0.93	1.02	1.13	1.26	1.36	1.45	1.50	1.55	1.62	1.70	1.78	1.85	1.90	1.94	2.01	2.09

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:377.764x1 lm		
NAME: Auroring Micro-197mm-RGBW-BLUE-35D	TYPE:RGBW BLUE	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.12	2.14	2.14	2.12	2.10	1.97	1.80	1.58	1.35	1.12	0.92	0.79	0.70	0.67	0.67	0.68	0.70	0.74	
-170	2.10	2.08	2.10	2.11	2.09	2.03	1.86	1.64	1.40	1.17	0.96	0.82	0.71	0.68	0.67	0.68	0.70	0.74	
-160	2.20	2.19	2.16	2.14	2.11	2.00	1.83	1.61	1.37	1.15	0.95	0.81	0.72	0.69	0.68	0.69	0.70	0.74	
-150	2.21	2.17	2.13	2.07	1.97	1.83	1.66	1.48	1.26	1.07	0.91	0.79	0.72	0.69	0.68	0.69	0.70	0.74	
-140	1.94	1.91	1.86	1.80	1.68	1.54	1.39	1.23	1.09	0.96	0.84	0.76	0.71	0.69	0.68	0.69	0.71	0.74	
-130	1.47	1.45	1.43	1.38	1.30	1.21	1.10	1.01	0.92	0.85	0.79	0.73	0.71	0.69	0.69	0.70	0.71	0.74	
-120	1.08	1.07	1.05	1.02	0.97	0.92	0.88	0.83	0.79	0.76	0.73	0.71	0.70	0.69	0.69	0.70	0.72	0.74	
-110	0.93	0.90	0.87	0.84	0.80	0.77	0.76	0.75	0.74	0.73	0.71	0.69	0.69	0.69	0.70	0.71	0.72	0.74	
-100	0.91	0.88	0.85	0.82	0.79	0.77	0.75	0.74	0.73	0.72	0.71	0.70	0.70	0.70	0.71	0.71	0.73	0.74	
-90	0.92	0.89	0.87	0.85	0.82	0.80	0.78	0.76	0.75	0.73	0.71	0.70	0.70	0.71	0.72	0.73	0.73	0.74	
-80	1.25	1.16	1.07	0.98	0.90	0.86	0.85	0.83	0.80	0.77	0.73	0.71	0.73	0.74	0.74	0.74	0.74	0.74	
-70	5.50	4.96	4.34	3.66	2.94	2.40	2.22	1.98	1.72	1.46	1.24	1.03	0.98	0.91	0.84	0.78	0.75	0.74	
-60	12.2	11.5	10.5	9.47	8.27	7.47	6.80	6.04	5.19	4.25	3.24	2.47	1.93	1.45	1.08	0.87	0.76	0.74	
-50	20.7	19.3	17.7	16.0	14.4	13.5	12.3	11.0	9.60	8.11	6.60	5.11	3.67	2.50	1.59	1.03	0.80	0.74	
-40	38.3	34.1	29.6	25.2	22.9	20.6	18.3	16.1	14.0	12.0	9.96	7.94	5.85	3.88	2.32	1.25	0.83	0.74	
-30	83.1	68.8	54.2	46.2	39.3	32.7	27.0	22.3	18.8	15.9	13.1	10.5	7.91	5.33	3.12	1.55	0.86	0.74	
-20	184	137	112	91.0	70.6	53.4	41.1	31.8	24.9	19.8	15.9	12.7	9.64	6.62	3.87	1.82	0.90	0.74	
-10	332	278	220	168	123	87.6	61.7	43.5	31.4	23.5	18.3	14.3	10.9	7.58	4.48	2.04	0.93	0.74	
0	518	448	354	259	177	118	78.6	52.6	36.2	26.1	19.7	15.3	11.6	8.13	4.83	2.17	0.94	0.74	
10	531	430	321	227	155	105	70.8	48.4	34.0	24.9	19.1	14.9	11.3	7.88	4.66	2.10	0.94	0.74	
20	329	266	205	150	107	74.8	53.6	38.8	28.9	22.1	17.5	13.7	10.4	7.21	4.20	1.92	0.92	0.74	
30	155	131	105	83.3	64.5	49.1	37.2	28.8	22.9	18.6	15.1	12.0	9.03	6.14	3.53	1.68	0.89	0.74	
40	68.5	61.0	52.5	43.9	36.7	30.6	25.3	21.2	17.7	14.8	12.2	9.70	7.22	4.80	2.72	1.39	0.86	0.74	
50	32.7	30.4	27.8	24.9	22.1	19.8	17.5	15.4	13.2	11.1	9.01	7.06	5.10	3.31	1.96	1.15	0.84	0.74	
60	18.5	17.6	16.6	15.5	14.2	13.0	11.7	10.3	8.77	7.23	5.64	4.21	2.98	2.02	1.35	0.98	0.80	0.74	
70	10.5	9.98	9.37	8.66	7.86	6.97	6.15	5.26	4.34	3.42	2.58	1.97	1.59	1.22	1.01	0.88	0.79	0.74	
80	3.77	3.48	3.16	2.81	2.43	2.09	1.86	1.64	1.43	1.26	1.15	1.07	1.00	0.94	0.88	0.83	0.78	0.74	
90	1.01	0.99	0.97	0.94	0.92	0.90	0.91	0.91	0.92	0.93	0.93	0.94	0.91	0.87	0.84	0.81	0.77	0.74	
100	0.91	0.91	0.91	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.88	0.84	0.82	0.79	0.77	0.74	
110	0.92	0.94	0.95	0.97	0.97	0.96	0.94	0.92	0.91	0.90	0.90	0.88	0.85	0.82	0.79	0.78	0.75	0.74	
120	1.14	1.16	1.16	1.17	1.16	1.14	1.09	1.05	1.01	0.96	0.91	0.87	0.84	0.80	0.78	0.76	0.75	0.74	
130	1.38	1.40	1.40	1.40	1.39	1.34	1.28	1.22	1.15	1.08	0.99	0.89	0.82	0.79	0.76	0.75	0.74	0.74	
140	1.53	1.55	1.55	1.56	1.51	1.48	1.42	1.36	1.29	1.19	1.04	0.92	0.83	0.77	0.74	0.74	0.73	0.74	
150	1.70	1.72	1.72	1.67	1.61	1.54	1.49	1.46	1.34	1.21	1.06	0.92	0.82	0.76	0.73	0.72	0.72	0.74	
160	1.93	1.95	1.89	1.80	1.71	1.62	1.56	1.47	1.36	1.20	1.05	0.90	0.79	0.74	0.71	0.71	0.71	0.74	
170	2.09	2.03	1.97	1.93	1.88	1.81	1.68	1.54	1.36	1.18	1.00	0.86	0.75	0.71	0.69	0.69	0.70	0.74	
180	2.12	2.14	2.14	2.12	2.10	1.97	1.80	1.58	1.35	1.12	0.92	0.79	0.70	0.67	0.67	0.68	0.70	0.74	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: