

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1776.2 cd per klm.
(Luminaire orientation as tested.)	3.5 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	74.7V x 77.0H
	At 50% of Imax	36.5V x 37.2H
	At 90% of Imax	13.8V x 14.2H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	778.7 lumens per klm.
	To 50% of Imax	377.1 lumens per klm.
	To 90% of Imax	60.2 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2148.47x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-35D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

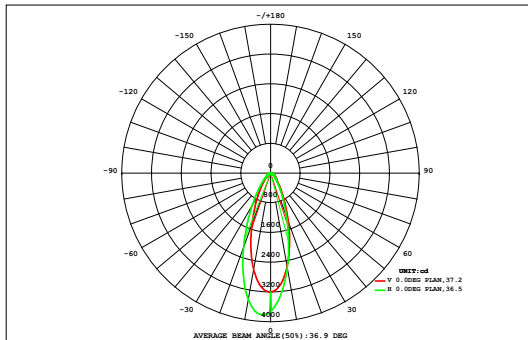

DATA OF LAMP		Eff:89.15lm/W	
MODEL		Imax (cd)	3816
NOMINAL POWER (W)	24	AVAILABILITY (%)	77.9
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	1673
NOMINAL FLUX (lm)	2148.47	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	2148
TEST VOLTAGE (V)	220	θ @50% (H,V)	37,37DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.11	0.25	0.44	0.68	0.93	1.17	1.29	1.34	1.33	1.27	1.16	1.01	0.82	0.62	0.43	0.26	0.14	0.07	13.3	0.00
72	0.11	0.25	0.44	0.68	0.93	1.17	1.29	1.34	1.33	1.27	1.16	1.01	0.82	0.62	0.43	0.26	0.14	0.07	13.3	0.00
64	0.16	0.36	0.64	0.96	1.32	1.69	1.93	2.05	2.05	1.96	1.79	1.55	1.28	0.99	0.70	0.44	0.23	0.10	20.2	0.00
56	0.22	0.48	0.83	1.26	1.79	2.44	3.01	3.30	3.33	3.13	2.76	2.29	1.81	1.38	0.98	0.63	0.35	0.15	30.1	0.00
48	0.27	0.58	1.01	1.59	2.45	3.71	5.16	5.97	6.09	5.60	4.68	3.57	2.61	1.84	1.26	0.81	0.47	0.21	47.9	3.13
40	0.31	0.67	1.19	2.00	3.40	5.76	9.13	11.5	12.0	10.8	8.50	5.96	3.92	2.49	1.57	0.99	0.57	0.26	81.0	52.6
32	0.35	0.75	1.36	2.45	4.61	8.64	15.4	22.3	23.9	21.1	15.6	10.0	5.94	3.36	1.95	1.16	0.66	0.31	140	119
24	0.37	0.80	1.50	2.88	5.82	11.8	23.0	37.8	43.0	37.9	26.8	16.0	8.53	4.46	2.38	1.32	0.73	0.34	225	207
	0.39	0.83	1.57	3.13	6.62	14.2	28.7	49.2	62.7	56.7	39.5	22.4	11.4	5.61	2.77	1.45	0.78	0.37	308	292
	0.39	0.83	1.57	3.09	6.55	14.1	28.6	48.8	66.1	66.3	46.5	27.0	13.5	6.34	3.01	1.52	0.81	0.38	335	319
	0.38	0.82	1.53	2.98	6.26	13.4	27.4	48.1	64.8	63.0	39.3	24.1	12.5	6.01	2.91	1.49	0.79	0.37	306	290
	0.37	0.79	1.48	2.83	5.84	12.3	24.6	39.2	46.6	36.8	25.1	16.0	9.06	4.77	2.50	1.36	0.74	0.35	231	213
-24	0.35	0.75	1.36	2.49	4.82	9.23	15.8	23.0	26.0	21.5	14.1	9.65	5.91	3.45	2.02	1.19	0.67	0.32	143	121
-32	0.32	0.68	1.21	2.07	3.55	5.88	8.96	11.9	12.9	11.2	7.87	5.52	3.80	2.46	1.59	1.01	0.58	0.27	81.8	51.7
-40	0.27	0.59	1.03	1.64	2.49	3.65	5.01	6.11	6.45	5.80	4.49	3.26	2.48	1.80	1.25	0.82	0.48	0.22	47.9	4.48
-48	0.22	0.49	0.86	1.28	1.78	2.36	2.94	3.36	3.47	3.21	2.70	2.12	1.70	1.33	0.97	0.64	0.37	0.16	30.0	0.00
-56	0.17	0.38	0.67	0.97	1.30	1.62	1.89	2.07	2.11	2.00	1.77	1.47	1.19	0.95	0.69	0.45	0.25	0.11	20.1	0.00
-64	0.11	0.27	0.47	0.68	0.91	1.11	1.27	1.36	1.37	1.30	1.16	0.96	0.75	0.59	0.42	0.26	0.14	0.07	13.2	0.00
-72	0.07	0.16	0.27	0.40	0.54	0.66	0.75	0.79	0.79	0.73	0.62	0.49	0.35	0.27	0.19	0.12	0.08	0.05	7.32	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	4.82	10.5	19.0	33.4	61.0	114	205	318	385	341	244	153	87.5	48.7	27.6	15.9	8.85	4.12	2081	---
Φ a	0.00	0.00	0.00	0.00	19.7	86.4	180	295	361	316	219	127	57.8	10.6	0.00	0.00	0.00	0.00	---	1673

one-half-peak spread: U:18.5,D:18.3 , L:18.9,R:18.6


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2148.47x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-35D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

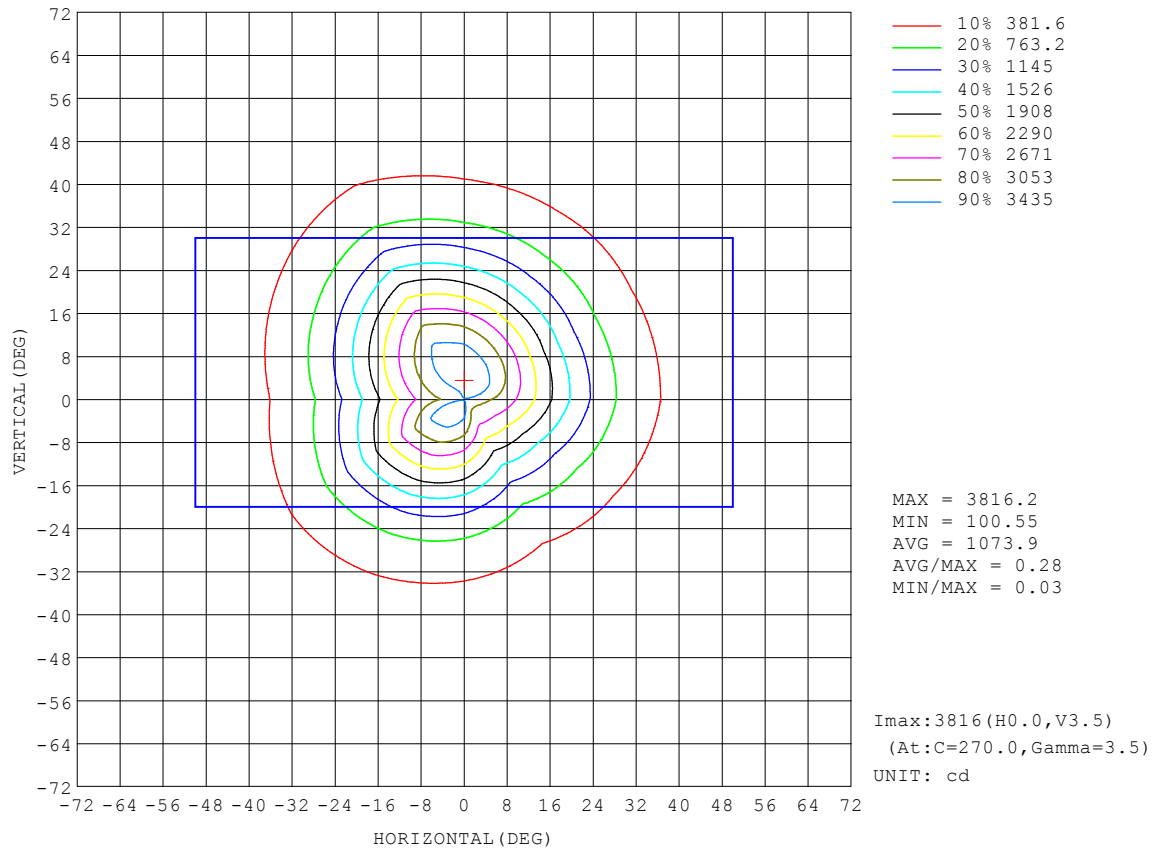


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2148.47x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-35D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

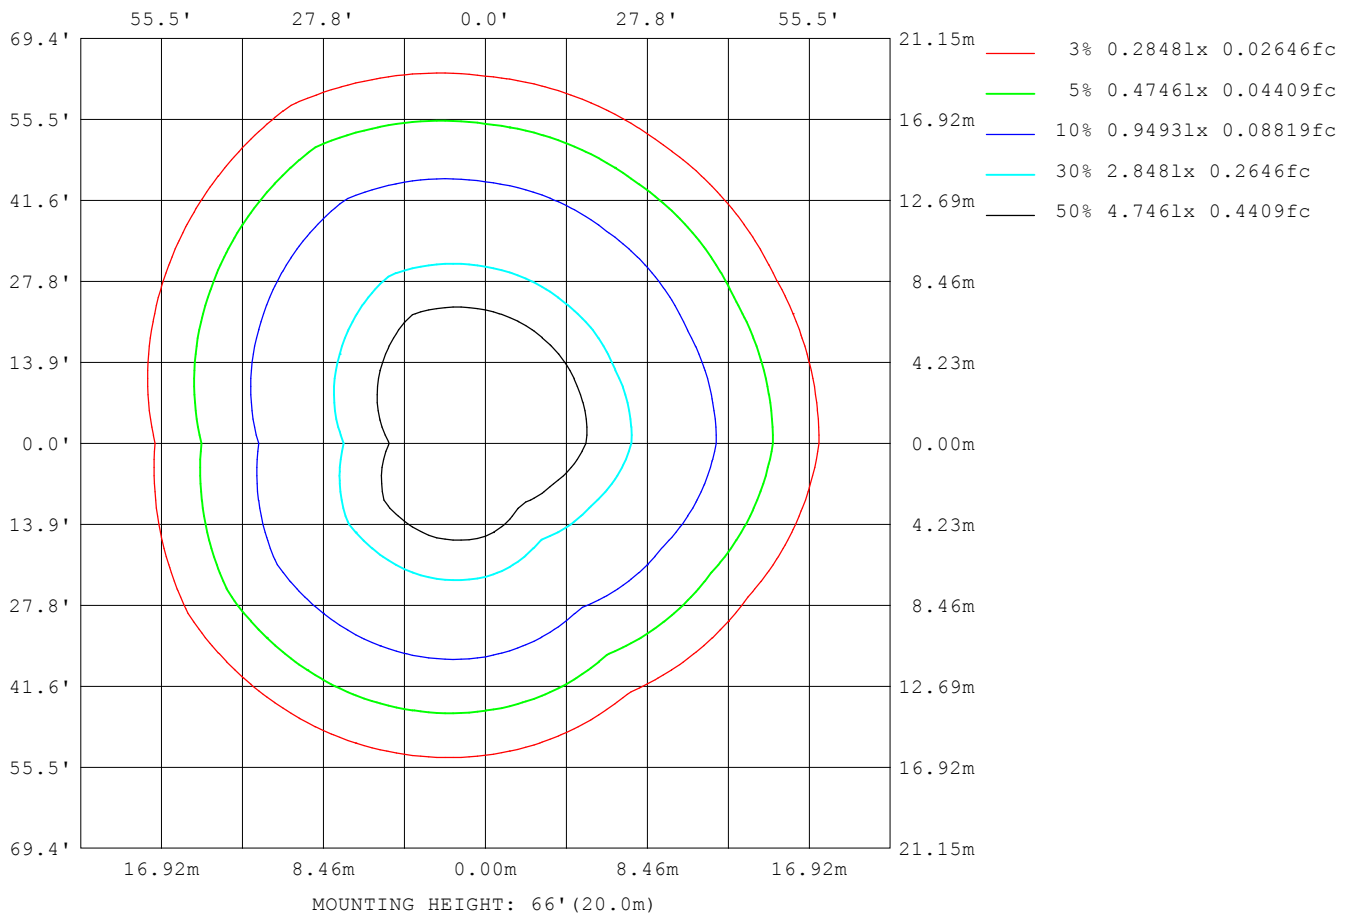

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

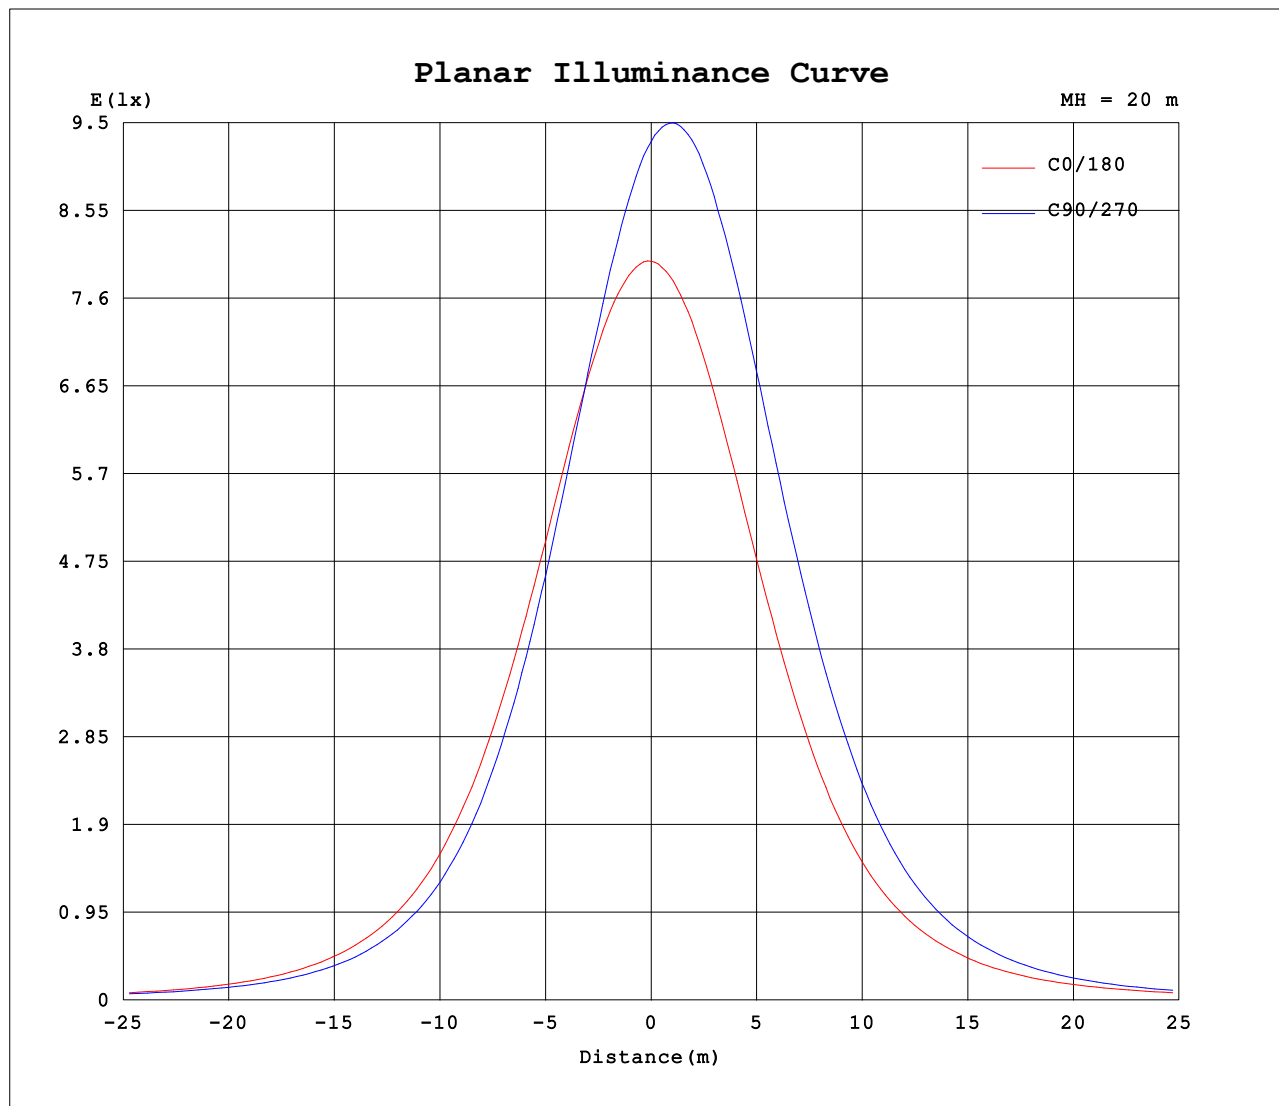


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2148.47x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-35D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

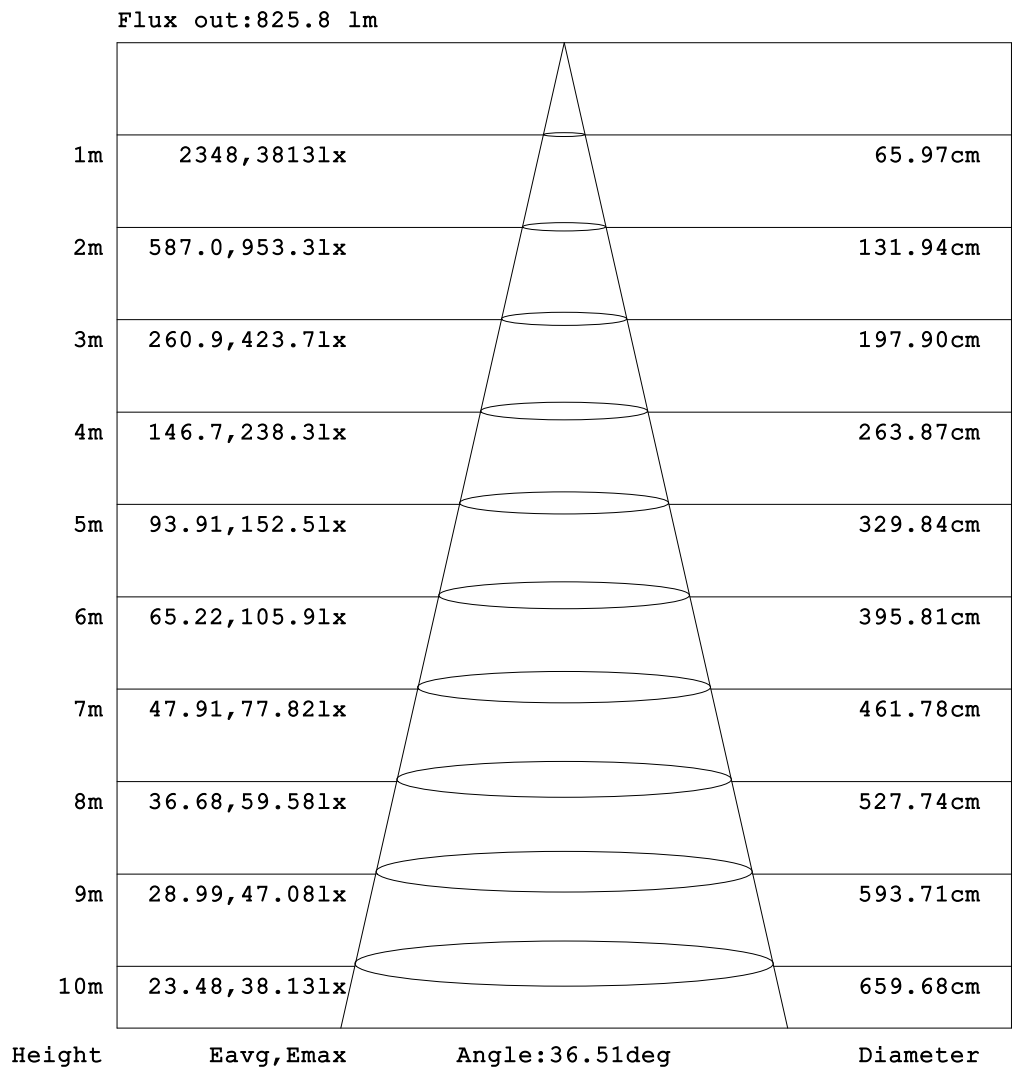

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2148.47x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-35D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	5.81	5.61	5.65	5.88	6.35	6.99	7.70	8.31	8.80	9.13	9.45	9.83	10.3	10.7	11.1	11.4	11.7	12.0	12.5
-170	5.81	5.58	5.58	5.74	6.10	6.62	7.19	7.76	8.30	8.85	9.51	10.3	11.2	12.1	12.8	13.2	13.3	13.3	13.1
-160	5.81	5.55	5.49	5.58	5.81	6.16	6.58	7.03	7.54	8.16	8.98	10.0	11.2	12.1	12.7	13.2	13.4	13.5	13.5
-150	5.81	5.53	5.42	5.42	5.52	5.70	5.93	6.19	6.53	7.00	7.72	8.77	9.78	10.7	11.5	12.1	12.6	12.9	13.1
-140	5.81	5.51	5.36	5.28	5.26	5.28	5.32	5.38	5.45	5.85	6.48	7.21	7.98	8.72	9.40	10.1	10.6	11.0	11.3
-130	5.81	5.51	5.32	5.17	5.06	4.97	4.87	4.75	4.83	5.09	5.42	5.81	6.24	6.67	7.16	7.61	8.01	8.33	8.55
-120	5.81	5.52	5.30	5.11	4.94	4.78	4.60	4.47	4.53	4.62	4.73	4.88	5.04	5.23	5.47	5.69	5.90	6.07	6.20
-110	5.81	5.55	5.31	5.11	4.90	4.69	4.50	4.44	4.45	4.46	4.47	4.48	4.50	4.57	4.67	4.76	4.86	4.94	5.02
-100	5.81	5.59	5.37	5.16	4.96	4.76	4.56	4.53	4.51	4.51	4.51	4.50	4.51	4.53	4.56	4.60	4.63	4.67	4.70
-90	5.81	5.64	5.47	5.30	5.12	4.95	4.78	4.78	4.78	4.78	4.79	4.79	4.79	4.80	4.80	4.81	4.82	4.82	4.83
-80	5.81	5.70	5.61	5.57	5.60	5.74	6.08	6.64	7.18	7.55	7.80	8.06	8.32	8.51	8.51	8.36	8.06	7.63	7.08
-70	5.81	5.78	5.90	6.38	7.95	10.0	13.3	16.7	20.1	23.3	26.4	29.0	31.2	32.8	33.8	34.3	34.2	33.5	32.2
-60	5.81	5.88	6.40	8.59	12.8	19.2	26.9	34.8	41.4	47.6	53.3	58.6	63.2	66.9	69.2	70.7	71.2	70.7	69.2
-50	5.81	6.02	7.54	12.0	20.2	30.6	41.9	53.1	63.3	72.7	81.7	90.5	99.0	107	114	118	121	121	118
-40	5.81	6.17	8.71	16.2	28.0	41.5	55.6	69.8	84.4	99.6	116	136	158	181	205	223	235	237	229
-30	5.81	6.31	10.1	20.4	34.7	50.8	67.2	84.4	105	131	168	214	272	342	417	487	535	552	529
-20	5.81	6.42	11.4	23.6	39.9	57.7	76.1	96.7	124	164	226	322	465	640	852	1079	1266	1339	1269
-10	5.81	6.50	12.2	25.5	43.0	61.9	81.5	105	138	189	272	407	618	947	1432	2007	2466	2743	2596
0	5.81	6.54	12.4	26.0	43.8	63.0	82.8	107	141	193	279	417	628	952	1413	1975	2558	3017	3201
10	5.81	6.63	12.7	26.6	44.4	63.9	84.4	109	146	205	300	454	696	1071	1602	2254	2937	3469	3462
20	5.81	6.67	12.4	25.6	42.7	61.5	81.4	105	138	188	268	391	577	858	1249	1725	2157	2231	2137
30	5.81	6.65	11.5	23.2	38.8	56.1	74.4	94.3	119	155	208	285	395	543	734	933	1014	1034	982
40	5.81	6.57	10.2	19.6	33.1	48.2	64.1	80.6	98.7	121	150	189	241	304	377	413	432	433	413
50	5.81	6.43	8.93	15.5	25.9	38.3	51.4	64.7	78.1	91.9	107	125	146	169	184	193	197	195	188
60	5.81	6.24	7.71	11.5	18.2	27.1	37.1	47.3	57.0	66.5	75.9	85.2	94.3	102	105	106	107	105	102
70	5.81	6.10	6.95	8.54	11.5	16.0	21.9	28.6	35.2	41.8	48.2	54.2	59.8	62.4	62.9	62.8	62.2	60.9	58.9
80	5.81	6.00	6.29	6.85	7.81	9.02	10.5	12.9	15.7	18.7	21.9	25.0	28.1	28.1	27.4	26.5	25.4	24.0	22.3
90	5.81	5.91	6.01	6.11	6.20	6.30	6.40	6.66	6.92	7.18	7.45	7.71	7.97	7.70	7.43	7.16	6.90	6.63	6.36
100	5.81	5.83	5.84	5.84	5.84	5.84	5.84	5.83	5.80	5.79	5.77	5.76	5.75	5.72	5.71	5.70	5.69	5.69	5.69
110	5.81	5.77	5.73	5.72	5.70	5.68	5.66	5.64	5.63	5.63	5.64	5.66	5.68	5.72	5.77	5.83	5.89	5.94	5.98
120	5.81	5.72	5.68	5.66	5.65	5.65	5.65	5.68	5.78	5.90	6.03	6.15	6.26	6.39	6.61	6.80	6.98	7.12	7.22
130	5.81	5.68	5.65	5.65	5.68	5.74	5.88	6.06	6.31	6.60	6.88	7.14	7.37	7.57	7.85	8.10	8.30	8.46	8.57
140	5.81	5.65	5.63	5.67	5.77	5.99	6.29	6.66	7.04	7.44	7.82	8.15	8.43	8.66	8.84	9.05	9.22	9.34	9.43
150	5.81	5.64	5.62	5.72	5.94	6.30	6.76	7.27	7.75	8.18	8.53	8.83	9.08	9.32	9.53	9.73	9.99	10.2	10.4
160	5.81	5.63	5.63	5.79	6.11	6.61	7.19	7.77	8.28	8.67	8.98	9.24	9.51	9.83	10.2	10.5	10.9	11.3	11.6
170	5.81	5.62	5.65	5.84	6.26	6.85	7.51	8.12	8.61	8.97	9.27	9.61	9.97	10.4	10.8	11.2	11.6	12.0	12.5
180	5.81	5.61	5.65	5.88	6.35	6.99	7.70	8.31	8.80	9.13	9.45	9.83	10.3	10.7	11.1	11.4	11.7	12.0	12.5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2148.47x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-35D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	12.7	12.9	13.1	13.1	12.8	12.1	11.1	9.88	8.54	7.25	6.15	5.31	4.76	4.46	4.38	4.40	4.52	4.75	
-170	12.5	12.6	12.8	12.9	12.8	12.2	11.3	10.0	8.70	7.39	6.25	5.39	4.81	4.48	4.39	4.40	4.52	4.75	
-160	13.3	13.3	13.2	13.0	12.6	11.9	10.9	9.69	8.39	7.16	6.11	5.31	4.78	4.48	4.40	4.41	4.53	4.75	
-150	13.1	13.0	12.9	12.4	11.8	11.0	9.94	8.83	7.68	6.63	5.76	5.12	4.69	4.46	4.40	4.42	4.54	4.75	
-140	11.3	11.3	11.1	10.9	10.2	9.34	8.44	7.55	6.70	5.94	5.32	4.87	4.57	4.44	4.40	4.44	4.55	4.75	
-130	8.66	8.66	8.56	8.38	8.04	7.42	6.81	6.23	5.70	5.25	4.90	4.64	4.48	4.42	4.41	4.46	4.57	4.75	
-120	6.27	6.30	6.27	6.18	6.06	5.79	5.48	5.21	4.95	4.75	4.59	4.49	4.42	4.41	4.43	4.49	4.60	4.75	
-110	5.02	5.01	4.99	4.95	4.89	4.81	4.71	4.62	4.54	4.48	4.44	4.41	4.41	4.43	4.46	4.53	4.63	4.75	
-100	4.67	4.63	4.60	4.57	4.53	4.50	4.48	4.47	4.45	4.44	4.42	4.41	4.43	4.47	4.53	4.59	4.66	4.75	
-90	4.79	4.75	4.71	4.68	4.64	4.60	4.59	4.57	4.56	4.55	4.53	4.52	4.56	4.60	4.63	4.67	4.71	4.75	
-80	6.73	6.33	5.92	5.54	5.23	5.01	5.02	5.00	4.97	4.89	4.82	4.77	4.82	4.82	4.79	4.77	4.76	4.75	
-70	30.0	27.3	24.2	20.7	17.0	14.1	12.8	11.5	9.95	8.62	7.47	6.42	6.07	5.67	5.25	4.96	4.81	4.75	
-60	66.3	62.5	57.8	52.3	46.0	41.6	38.0	33.8	29.1	23.9	18.5	14.2	11.1	8.49	6.50	5.36	4.89	4.75	
-50	113	105	96.6	87.3	78.9	73.6	67.4	60.3	52.6	44.6	36.4	28.3	20.5	14.1	9.15	6.18	5.01	4.75	
-40	212	188	163	138	125	113	99.8	87.8	76.1	65.0	54.3	43.5	32.2	21.6	13.1	7.28	5.13	4.75	
-30	467	386	304	259	219	180	148	122	102	85.7	71.0	57.0	43.2	29.3	17.3	8.82	5.25	4.75	
-20	1052	784	643	520	402	299	228	174	135	107	86.0	68.4	52.3	36.2	21.4	10.2	5.41	4.75	
-10	1947	1626	1285	971	704	494	342	239	172	127	98.4	77.1	59.0	41.3	24.6	11.4	5.55	4.75	
0	3059	2639	2066	1488	1009	662	435	289	198	141	106	82.2	62.8	44.2	26.4	12.1	5.62	4.75	
10	3067	2481	1839	1293	881	588	394	267	186	135	103	80.3	61.2	42.9	25.6	11.8	5.61	4.75	
20	1900	1548	1187	862	605	420	298	213	157	120	94.2	74.4	56.7	39.4	23.2	10.8	5.51	4.75	
30	889	753	605	476	365	274	206	158	125	101	81.6	65.1	49.3	33.7	19.6	9.56	5.40	4.75	
40	385	343	295	246	205	169	139	116	96.5	80.6	66.6	53.1	39.7	26.6	15.4	8.04	5.30	4.75	
50	179	167	152	137	122	109	95.9	83.9	72.4	60.8	49.5	39.0	28.4	18.6	11.2	6.80	5.21	4.75	
60	99.5	95.5	90.5	84.5	78.2	71.5	64.4	56.7	48.6	40.2	31.5	23.8	17.0	11.6	7.93	5.90	5.11	4.75	
70	57.1	54.6	51.5	48.0	43.9	39.2	34.7	29.8	24.8	19.7	15.1	11.6	9.34	7.33	6.13	5.44	5.03	4.75	
80	21.1	19.7	18.1	16.4	14.6	12.7	11.4	10.1	8.87	7.83	7.09	6.60	6.19	5.82	5.52	5.23	4.98	4.75	
90	6.29	6.23	6.17	6.10	6.04	5.97	5.96	5.95	5.93	5.92	5.90	5.89	5.70	5.51	5.32	5.13	4.94	4.75	
100	5.68	5.68	5.68	5.67	5.67	5.66	5.66	5.66	5.66	5.67	5.66	5.66	5.50	5.33	5.18	5.03	4.88	4.75	
110	6.02	6.05	6.06	6.05	6.04	6.00	5.94	5.87	5.80	5.73	5.68	5.59	5.39	5.22	5.06	4.94	4.84	4.75	
120	7.28	7.30	7.28	7.23	7.14	6.99	6.82	6.63	6.43	6.23	6.03	5.68	5.35	5.14	4.98	4.86	4.79	4.75	
130	8.61	8.61	8.58	8.50	8.38	8.18	7.94	7.65	7.33	6.97	6.48	5.87	5.41	5.08	4.89	4.78	4.74	4.75	
140	9.46	9.45	9.41	9.33	9.17	8.99	8.77	8.50	8.16	7.59	6.78	6.04	5.45	5.05	4.81	4.71	4.69	4.75	
150	10.5	10.4	10.3	10.1	9.81	9.54	9.29	9.01	8.48	7.73	6.88	6.08	5.42	4.97	4.73	4.63	4.64	4.75	
160	11.7	11.7	11.4	11.0	10.5	10.1	9.73	9.21	8.52	7.70	6.81	5.98	5.31	4.84	4.63	4.55	4.60	4.75	
170	12.5	12.3	12.0	11.8	11.6	11.1	10.5	9.59	8.61	7.56	6.57	5.73	5.09	4.67	4.51	4.48	4.56	4.75	
180	12.7	12.9	13.1	13.1	12.8	12.1	11.1	9.88	8.54	7.25	6.15	5.31	4.76	4.46	4.38	4.40	4.52	4.75	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: