

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1824.0 cd per klm.
(Luminaire orientation as tested.)	3.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	73.2V x 75.4H
	At 50% of Imax	35.9V x 36.8H
	At 90% of Imax	13.5V x 13.9H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	781.0 lumens per klm.
	To 50% of Imax	379.6 lumens per klm.
	To 90% of Imax	56.4 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.40V I:0.1020A P:21.500W PF:0.9640 Freq:50.00Hz Lamp Flux:1375.69x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-35D	TYPE:RGBW RED	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

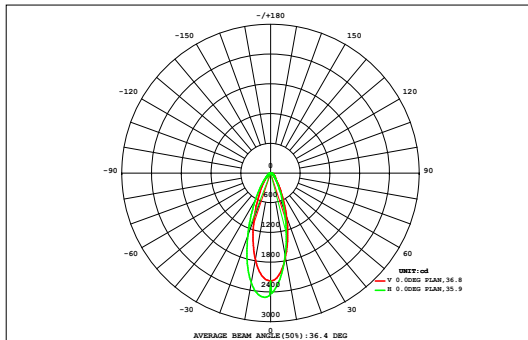

DATA OF LAMP		Eff:63.99lm/W	
MODEL		Imax(cd)	2509
NOMINAL POWER(W)	24	AVAILABILITY(%)	78.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1073
NOMINAL FLUX(lm)	1375.69	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1376
TEST VOLTAGE(V)	220	θ @50% (H,V)	37,36DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.06	0.14	0.26	0.40	0.54	0.68	0.76	0.79	0.79	0.76	0.70	0.61	0.50	0.38	0.26	0.16	0.08	0.04	7.92	0.00
72	0.06	0.14	0.26	0.40	0.54	0.68	0.76	0.79	0.79	0.76	0.70	0.61	0.50	0.38	0.26	0.16	0.08	0.04	7.92	0.00
64	0.09	0.22	0.38	0.57	0.78	1.00	1.14	1.22	1.22	1.18	1.08	0.94	0.78	0.60	0.43	0.27	0.14	0.06	12.1	0.00
56	0.13	0.29	0.50	0.75	1.06	1.44	1.78	1.96	1.99	1.88	1.67	1.40	1.11	0.84	0.59	0.38	0.21	0.09	18.1	0.00
48	0.16	0.35	0.61	0.96	1.46	2.20	3.05	3.55	3.65	3.38	2.86	2.20	1.60	1.12	0.77	0.49	0.28	0.13	28.8	0.00
40	0.19	0.41	0.72	1.21	2.05	3.46	5.45	6.93	7.29	6.62	5.26	3.71	2.43	1.53	0.96	0.60	0.35	0.16	49.3	29.6
32	0.21	0.46	0.83	1.50	2.82	5.30	9.40	13.7	14.8	13.2	9.86	6.32	3.70	2.07	1.19	0.71	0.40	0.19	86.6	72.5
24	0.23	0.49	0.92	1.78	3.64	7.48	14.4	23.7	27.2	24.3	17.3	10.2	5.34	2.77	1.46	0.81	0.45	0.21	143	131
	0.24	0.51	0.97	1.96	4.21	9.14	18.6	31.8	40.6	37.0	25.8	14.4	7.22	3.51	1.72	0.89	0.48	0.22	199	188
	0.24	0.51	0.98	1.96	4.22	9.25	19.0	32.6	44.0	43.7	30.7	17.6	8.63	4.00	1.88	0.94	0.50	0.23	221	211
	0.24	0.51	0.95	1.89	4.00	8.72	18.1	31.6	42.3	35.8	26.5	16.0	8.06	3.82	1.82	0.92	0.49	0.23	202	191
	0.23	0.49	0.91	1.76	3.65	7.79	15.6	25.0	30.1	24.7	17.0	10.6	5.87	3.05	1.57	0.84	0.46	0.22	150	138
-24	0.21	0.46	0.83	1.52	2.95	5.68	9.87	14.5	16.8	14.2	9.51	6.38	3.85	2.21	1.27	0.74	0.42	0.20	91.6	77.6
-32	0.19	0.41	0.72	1.24	2.14	3.58	5.52	7.41	8.24	7.28	5.20	3.63	2.46	1.56	1.00	0.63	0.36	0.17	51.7	32.1
-40	0.16	0.36	0.61	0.97	1.48	2.20	3.04	3.77	4.05	3.69	2.89	2.11	1.58	1.13	0.78	0.52	0.30	0.14	29.8	1.92
-48	0.13	0.29	0.51	0.75	1.05	1.41	1.76	2.04	2.14	2.01	1.70	1.34	1.08	0.84	0.61	0.40	0.23	0.10	18.4	0.00
-56	0.10	0.23	0.39	0.57	0.77	0.96	1.13	1.25	1.29	1.24	1.10	0.92	0.75	0.60	0.44	0.29	0.16	0.07	12.3	0.00
-64	0.07	0.15	0.27	0.40	0.54	0.66	0.76	0.82	0.84	0.81	0.72	0.61	0.48	0.38	0.27	0.17	0.09	0.04	8.08	0.00
-72	0.04	0.09	0.16	0.23	0.31	0.39	0.44	0.48	0.48	0.46	0.40	0.32	0.23	0.18	0.13	0.08	0.05	0.03	4.49	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	2.93	6.36	11.5	20.4	37.7	71.3	130	203	248	222	160	99.3	55.7	30.6	17.1	9.83	5.45	2.53	1334	---
Φ a	0.00	0.00	0.00	0.00	11.1	53.4	114	188	232	207	144	82.1	36.2	5.69	0.00	0.00	0.00	0.00	---	1073

one-half-peak spread: U:17.9,D:18.3 , L:18.4,R:18.7


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.40V I:0.1020A P:21.500W PF:0.9640 Freq:50.00Hz Lamp Flux:1375.69x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-35D	TYPE:RGBW RED	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

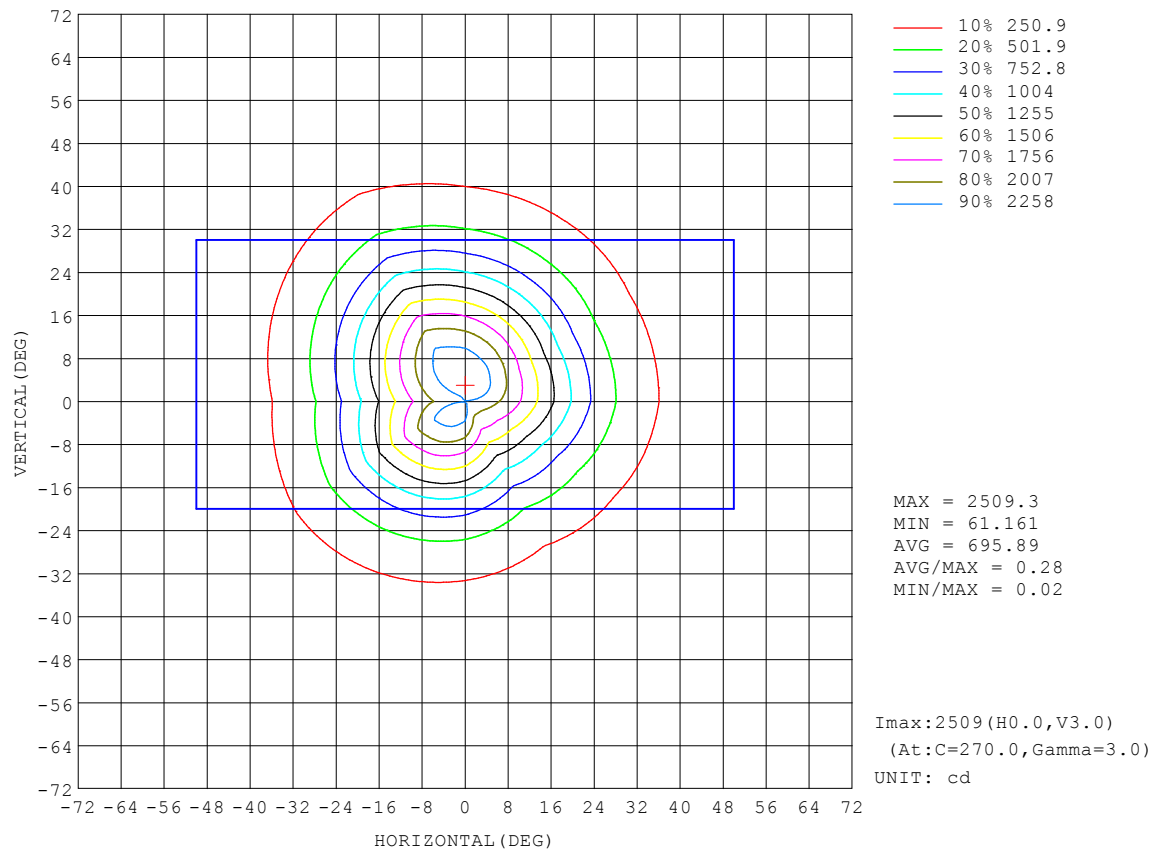


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.40V I:0.1020A P:21.500W PF:0.9640 Freq:50.00Hz Lamp Flux:1375.69x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-35D	TYPE:RGBW RED	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

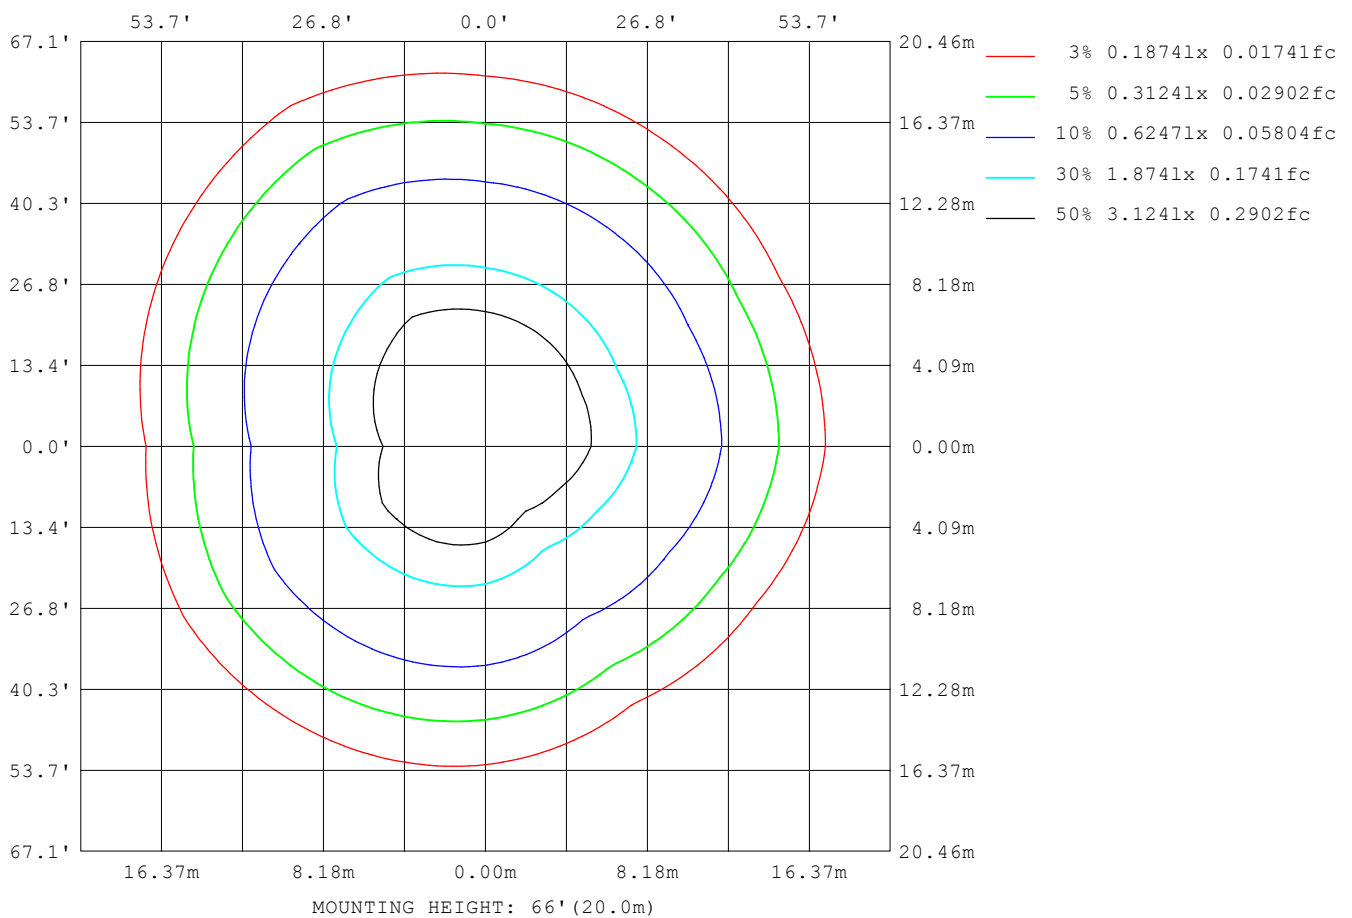

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

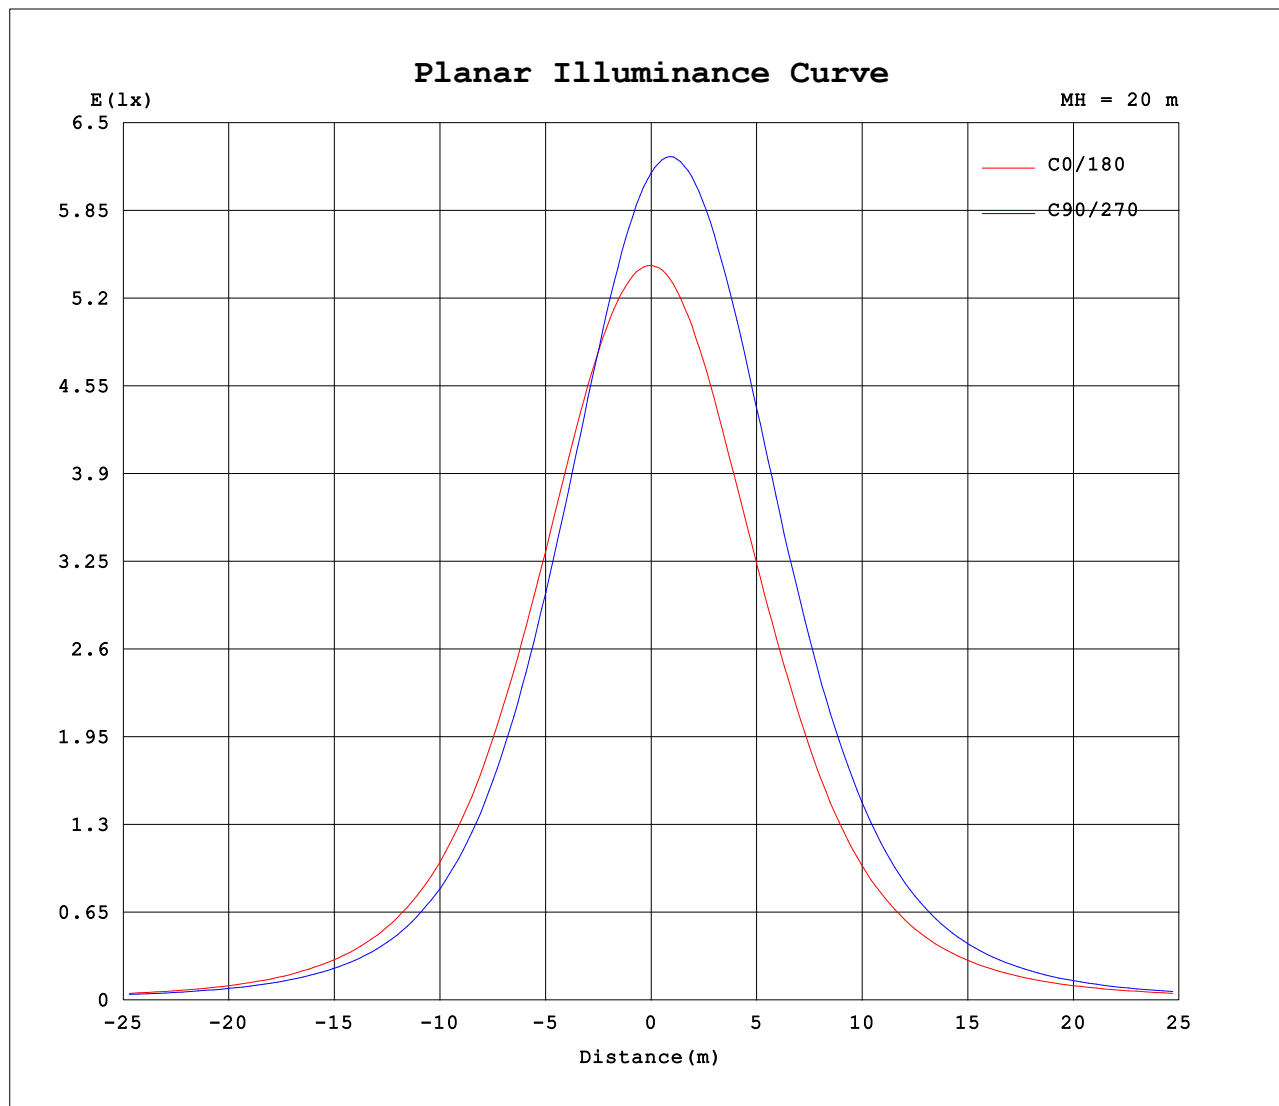


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.40V I:0.1020A P:21.500W PF:0.9640 Freq:50.00Hz Lamp Flux:1375.69x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-35D	TYPE:RGBW RED	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

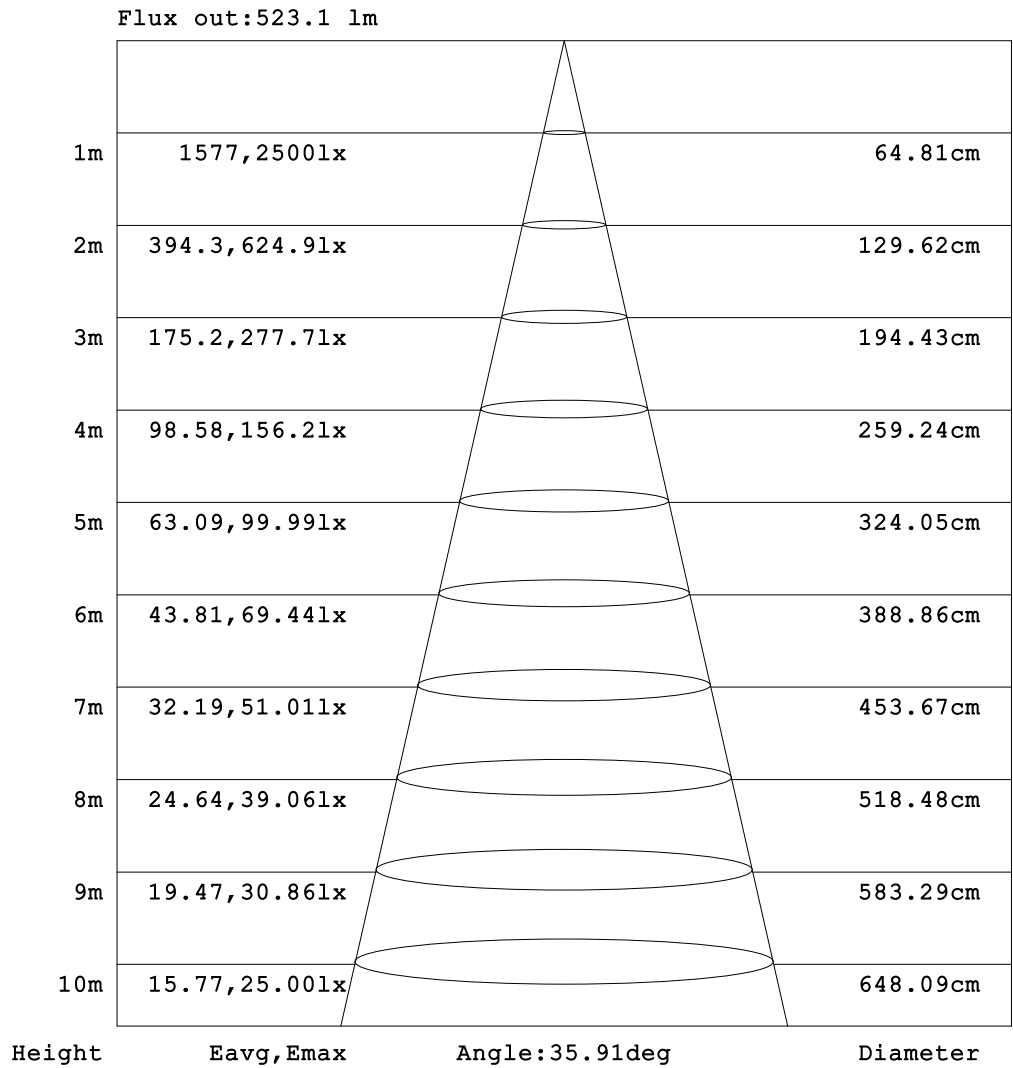

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.40V I:0.1020A P:21.500W PF:0.9640 Freq:50.00Hz Lamp Flux:1375.69x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-35D	TYPE:RGBW RED	WEIGHT:00
SPEC.:35 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.68	3.55	3.57	3.72	4.04	4.46	4.95	5.36	5.67	5.91	6.12	6.39	6.69	7.03	7.32	7.52	7.68	7.92	8.18
-170	3.68	3.53	3.52	3.62	3.87	4.21	4.59	4.97	5.32	5.69	6.11	6.63	7.20	7.76	8.23	8.44	8.47	8.49	8.39
-160	3.68	3.51	3.47	3.51	3.66	3.89	4.17	4.47	4.79	5.19	5.72	6.38	7.11	7.71	8.15	8.42	8.56	8.64	8.69
-150	3.68	3.49	3.42	3.40	3.46	3.57	3.72	3.89	4.10	4.40	4.85	5.54	6.21	6.82	7.33	7.73	8.06	8.29	8.45
-140	3.68	3.48	3.38	3.31	3.29	3.29	3.31	3.34	3.38	3.63	4.04	4.52	5.02	5.50	5.96	6.39	6.75	7.01	7.19
-130	3.68	3.46	3.35	3.24	3.16	3.09	3.00	2.92	2.96	3.13	3.34	3.60	3.87	4.16	4.47	4.77	5.03	5.23	5.38
-120	3.68	3.47	3.33	3.19	3.07	2.96	2.84	2.73	2.77	2.82	2.90	2.99	3.09	3.22	3.38	3.53	3.66	3.77	3.85
-110	3.68	3.49	3.32	3.19	3.04	2.90	2.76	2.72	2.73	2.74	2.75	2.76	2.76	2.80	2.88	2.96	3.03	3.09	3.16
-100	3.68	3.52	3.37	3.21	3.07	2.94	2.79	2.77	2.77	2.77	2.77	2.78	2.79	2.81	2.84	2.88	2.92	2.96	2.99
-90	3.68	3.55	3.43	3.30	3.18	3.05	2.93	2.94	2.95	2.96	2.96	2.97	2.98	3.00	3.02	3.04	3.05	3.07	3.09
-80	3.68	3.61	3.53	3.47	3.42	3.40	3.49	3.79	4.08	4.29	4.42	4.54	4.70	4.86	4.95	4.96	4.88	4.73	4.51
-70	3.68	3.66	3.67	3.83	4.65	5.70	7.42	9.41	11.4	13.4	15.3	16.9	18.2	19.3	20.1	20.6	20.8	20.6	20.1
-60	3.68	3.72	3.91	5.12	7.43	11.1	15.6	20.2	24.2	27.9	31.4	34.6	37.4	39.7	41.4	42.6	43.2	43.2	42.7
-50	3.68	3.80	4.59	7.12	11.9	18.2	24.8	31.3	37.3	42.9	48.3	53.5	58.6	63.5	67.9	71.3	73.3	73.9	72.9
-40	3.68	3.86	5.30	9.75	16.8	25.0	33.3	41.5	49.9	58.8	68.8	80.7	94.3	109	123	136	144	147	144
-30	3.68	3.94	6.11	12.3	21.1	30.8	40.6	50.7	62.5	78.4	100	128	165	208	255	300	333	348	338
-20	3.68	4.01	6.92	14.4	24.4	35.3	46.4	58.7	75.1	99.9	138	198	285	397	533	678	801	859	828
-10	3.68	4.05	7.45	15.7	26.5	38.1	50.2	64.3	85.0	117	171	255	392	604	914	1284	1581	1762	1703
0	3.68	4.08	7.62	16.1	27.2	39.1	51.4	66.5	88.3	123	180	270	414	636	955	1337	1731	2052	2178
10	3.68	4.13	7.77	16.3	27.4	39.4	52.1	67.6	90.7	128	190	289	448	695	1044	1468	1914	2256	2250
20	3.68	4.15	7.52	15.6	26.2	37.8	49.9	64.2	84.5	116	166	245	365	541	783	1079	1350	1409	1358
30	3.68	4.13	6.91	14.0	23.6	34.2	45.3	57.4	72.6	94.4	126	174	241	331	446	566	619	635	606
40	3.68	4.09	6.15	11.8	20.0	29.2	38.8	48.8	59.5	72.7	90.2	113	144	181	223	245	258	260	250
50	3.68	4.02	5.40	9.18	15.5	23.0	30.8	38.9	46.9	55.0	64.0	74.3	86.4	100	109	114	117	116	112
60	3.68	3.91	4.68	6.77	10.6	15.9	21.9	28.0	33.8	39.5	45.0	50.5	55.8	60.2	61.9	63.2	63.4	62.6	61.0
70	3.68	3.84	4.25	5.10	6.74	9.27	12.6	16.5	20.4	24.3	28.0	31.5	34.8	36.4	36.8	36.9	36.7	36.0	35.0
80	3.68	3.79	3.92	4.15	4.62	5.28	6.12	7.33	8.76	10.4	12.1	13.9	15.6	15.7	15.4	15.0	14.4	13.7	12.8
90	3.68	3.73	3.78	3.83	3.88	3.93	3.98	4.07	4.16	4.25	4.34	4.43	4.52	4.43	4.33	4.23	4.14	4.04	3.94
100	3.68	3.68	3.68	3.68	3.68	3.68	3.68	3.65	3.63	3.61	3.60	3.58	3.56	3.55	3.54	3.54	3.54	3.54	3.54
110	3.68	3.64	3.62	3.61	3.60	3.57	3.55	3.54	3.53	3.53	3.54	3.55	3.57	3.59	3.61	3.65	3.67	3.70	3.71
120	3.68	3.61	3.59	3.57	3.56	3.56	3.55	3.56	3.62	3.71	3.80	3.90	3.98	4.07	4.19	4.32	4.41	4.49	4.55
130	3.68	3.58	3.57	3.56	3.58	3.62	3.69	3.82	3.99	4.18	4.38	4.57	4.73	4.88	5.05	5.19	5.30	5.38	5.43
140	3.68	3.58	3.56	3.58	3.65	3.78	3.98	4.22	4.48	4.75	5.01	5.24	5.42	5.57	5.69	5.81	5.89	5.95	5.98
150	3.68	3.57	3.57	3.61	3.75	3.99	4.30	4.64	4.96	5.24	5.47	5.67	5.84	5.99	6.13	6.27	6.42	6.54	6.63
160	3.68	3.56	3.57	3.65	3.87	4.20	4.60	4.99	5.32	5.58	5.78	5.94	6.10	6.33	6.57	6.82	7.06	7.31	7.49
170	3.68	3.56	3.57	3.69	3.97	4.37	4.82	5.23	5.55	5.79	5.99	6.21	6.45	6.72	7.01	7.26	7.54	7.81	8.02
180	3.68	3.55	3.57	3.72	4.04	4.46	4.95	5.36	5.67	5.91	6.12	6.39	6.69	7.03	7.32	7.52	7.68	7.92	8.20

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.40V I:0.1020A P:21.500W PF:0.9640 Freq:50.00Hz Lamp Flux:1375.69x1 lm																		
NAME: Auroring Micro-197mm-RGBW-RED-35D									TYPE:RGBW RED					WEIGHT:00				
SPEC.:35 DEGREE									DIM.: 197mm					SERIAL No.:01				
MFR.: EVERFINE									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.31	8.44	8.57	8.55	8.35	7.90	7.23	6.40	5.50	4.64	3.91	3.35	2.98	2.77	2.74	2.77	2.85	3.01	
-170	8.16	8.23	8.34	8.39	8.31	7.95	7.30	6.49	5.58	4.71	3.96	3.39	3.01	2.79	2.75	2.77	2.85	3.01	
-160	8.62	8.59	8.52	8.42	8.16	7.70	7.04	6.23	5.36	4.54	3.85	3.33	2.98	2.79	2.75	2.78	2.86	3.01	
-150	8.42	8.36	8.24	7.97	7.54	7.00	6.34	5.61	4.86	4.17	3.62	3.20	2.92	2.79	2.76	2.79	2.86	3.01	
-140	7.22	7.17	7.05	6.84	6.40	5.88	5.31	4.73	4.20	3.72	3.33	3.04	2.85	2.78	2.76	2.79	2.87	3.01	
-130	5.43	5.41	5.33	5.20	4.97	4.59	4.22	3.86	3.54	3.27	3.05	2.89	2.80	2.77	2.77	2.81	2.89	3.01	
-120	3.89	3.89	3.86	3.80	3.71	3.55	3.37	3.21	3.07	2.95	2.86	2.79	2.77	2.76	2.79	2.83	2.91	3.01	
-110	3.14	3.13	3.10	3.06	3.01	2.95	2.90	2.86	2.82	2.79	2.77	2.76	2.76	2.78	2.81	2.85	2.92	3.01	
-100	2.97	2.94	2.91	2.88	2.85	2.83	2.81	2.81	2.79	2.78	2.77	2.76	2.78	2.81	2.85	2.90	2.95	3.01	
-90	3.06	3.03	3.00	2.97	2.94	2.91	2.90	2.89	2.88	2.86	2.85	2.84	2.87	2.90	2.93	2.96	2.98	3.01	
-80	4.29	4.04	3.79	3.56	3.37	3.23	3.22	3.18	3.15	3.11	3.06	3.02	3.03	3.03	3.03	3.03	3.02	3.01	
-70	18.9	17.4	15.6	13.5	11.3	9.52	8.62	7.65	6.57	5.55	4.80	4.13	3.76	3.51	3.27	3.12	3.06	3.01	
-60	41.1	39.0	36.3	33.1	29.5	26.8	24.5	21.7	18.7	15.5	11.9	9.14	7.00	5.29	4.00	3.32	3.10	3.01	
-50	69.8	65.4	60.3	54.8	49.8	46.4	42.5	38.1	33.3	28.2	23.1	18.0	12.9	8.79	5.63	3.78	3.16	3.01	
-40	134	120	104	88.5	79.7	71.2	62.9	55.1	47.7	40.9	34.1	27.2	20.1	13.4	8.09	4.45	3.22	3.01	
-30	301	252	201	169	142	116	94.2	76.7	64.0	53.4	44.2	35.5	26.8	18.2	10.7	5.36	3.27	3.01	
-20	699	531	432	344	262	195	146	110	84.8	66.6	53.3	42.4	32.3	22.3	13.1	6.24	3.35	3.01	
-10	1323	1107	866	644	460	318	219	151	107	79.3	60.8	47.6	36.3	25.4	15.1	6.95	3.42	3.01	
0	2073	1779	1380	983	656	425	275	182	123	87.6	65.4	50.6	38.6	27.0	16.1	7.32	3.46	3.01	
10	2014	1624	1192	832	560	371	247	166	115	83.5	63.3	49.2	37.5	26.2	15.6	7.12	3.45	3.01	
20	1218	1002	763	547	381	261	185	132	97.0	73.5	57.6	45.5	34.6	24.0	14.1	6.57	3.41	3.01	
30	553	473	383	298	227	170	127	96.5	75.9	61.2	49.7	39.6	30.0	20.6	12.0	5.78	3.35	3.01	
40	234	211	182	153	127	104	85.3	70.3	58.5	48.8	40.4	32.2	24.1	16.2	9.37	4.88	3.32	3.01	
50	108	101	93.0	84.0	74.8	66.3	58.4	51.0	43.8	36.7	30.0	23.6	17.2	11.4	6.76	4.12	3.28	3.01	
60	59.6	57.4	54.6	51.2	47.6	43.5	39.2	34.4	29.5	24.4	19.1	14.4	10.4	7.05	4.80	3.62	3.23	3.01	
70	34.0	32.7	31.0	29.0	26.7	24.0	21.2	18.2	15.1	12.0	9.15	7.00	5.63	4.41	3.76	3.41	3.19	3.01	
80	12.2	11.6	10.7	9.83	8.84	7.80	6.93	6.14	5.37	4.74	4.31	4.03	3.83	3.64	3.47	3.31	3.15	3.01	
90	3.90	3.86	3.82	3.79	3.75	3.71	3.70	3.69	3.68	3.67	3.67	3.66	3.55	3.44	3.34	3.23	3.12	3.01	
100	3.54	3.53	3.53	3.52	3.52	3.51	3.51	3.50	3.50	3.50	3.51	3.51	3.41	3.33	3.24	3.16	3.09	3.01	
110	3.74	3.76	3.77	3.76	3.74	3.72	3.67	3.62	3.58	3.53	3.49	3.45	3.34	3.24	3.16	3.10	3.05	3.01	
120	4.58	4.58	4.56	4.52	4.46	4.36	4.24	4.11	3.97	3.84	3.71	3.49	3.30	3.19	3.11	3.05	3.02	3.01	
130	5.45	5.45	5.43	5.37	5.28	5.14	4.97	4.78	4.55	4.32	4.00	3.62	3.34	3.15	3.05	3.00	2.99	3.01	
140	6.01	6.00	5.97	5.92	5.81	5.68	5.52	5.33	5.10	4.73	4.20	3.74	3.36	3.13	3.00	2.95	2.95	3.01	
150	6.66	6.63	6.55	6.40	6.20	6.02	5.85	5.67	5.32	4.84	4.30	3.78	3.36	3.09	2.95	2.91	2.93	3.01	
160	7.52	7.47	7.26	6.98	6.67	6.38	6.15	5.84	5.39	4.85	4.28	3.73	3.30	3.01	2.89	2.86	2.90	3.01	
170	8.05	7.86	7.65	7.56	7.43	7.14	6.71	6.15	5.49	4.80	4.15	3.59	3.17	2.90	2.82	2.81	2.88	3.01	
180	8.31	8.44	8.57	8.55	8.35	7.90	7.23	6.40	5.50	4.64	3.91	3.35	2.98	2.77	2.74	2.77	2.85	3.01	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: