

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1526.4 cd per klm.
(Luminaire orientation as tested.)	-1.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	78.3V x 78.0H
	At 50% of Imax	41.8V x 39.3H
	At 90% of Imax	20.8V x 16.7H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	766.9 lumens per klm.
	To 50% of Imax	429.7 lumens per klm.
	To 90% of Imax	100.7 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1070A P:22.700W PF:0.9660 Freq:50.00Hz Lamp Flux:1940.99x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-45D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

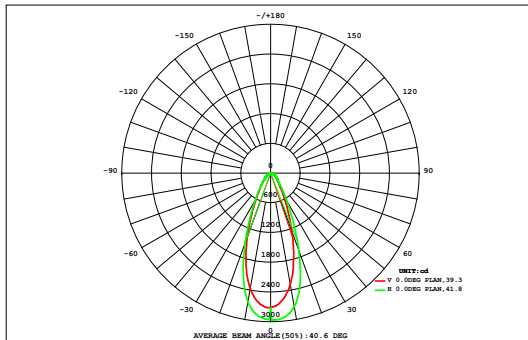

DATA OF LAMP		Eff:85.51lm/W	
MODEL		Imax (cd)	2963
NOMINAL POWER (W)	24	AVAILABILITY (%)	76.7
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	1489
NOMINAL FLUX (lm)	1940.99	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	1941
TEST VOLTAGE (V)	220	θ @50% (H,V)	39,42DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.12	0.28	0.52	0.81	1.12	1.40	1.45	1.39	1.24	1.06	0.86	0.62	0.39	0.27	0.17	0.10	0.07	0.05	11.9	0.00
72	0.12	0.28	0.52	0.81	1.12	1.40	1.45	1.39	1.24	1.06	0.86	0.62	0.39	0.27	0.17	0.10	0.07	0.05	11.9	0.00
64	0.18	0.42	0.75	1.14	1.58	2.02	2.19	2.17	2.02	1.79	1.53	1.20	0.87	0.64	0.41	0.22	0.12	0.07	19.3	0.00
56	0.24	0.55	0.97	1.48	2.08	2.75	3.19	3.23	3.01	2.67	2.28	1.82	1.41	1.07	0.73	0.43	0.22	0.11	28.2	0.00
48	0.30	0.67	1.18	1.83	2.67	3.75	4.85	5.12	4.69	3.98	3.27	2.52	1.98	1.50	1.05	0.65	0.36	0.16	40.6	3.40
40	0.35	0.78	1.37	2.20	3.40	5.31	8.20	9.58	8.49	6.52	4.81	3.43	2.65	1.95	1.35	0.89	0.51	0.22	62.0	35.1
32	0.39	0.86	1.54	2.56	4.28	7.68	14.1	20.2	17.8	12.3	7.47	4.86	3.49	2.44	1.69	1.11	0.64	0.29	104	81.6
24	0.42	0.92	1.66	2.86	5.17	10.4	21.5	35.9	34.8	23.5	12.2	7.33	4.62	3.11	2.08	1.32	0.76	0.35	169	150
	0.44	0.95	1.72	3.02	5.74	12.4	26.4	44.6	50.9	36.6	19.9	11.4	6.91	4.08	2.47	1.51	0.85	0.39	230	215
	0.43	0.94	1.70	2.96	5.60	12.1	26.0	43.7	54.1	45.1	32.3	20.5	10.4	5.12	2.81	1.65	0.92	0.43	267	252
	0.44	0.95	1.71	2.98	5.69	12.4	26.3	43.1	53.2	46.9	35.3	21.6	10.7	5.19	2.83	1.65	0.93	0.43	272	258
	0.44	0.96	1.74	3.08	5.98	13.0	27.2	44.5	51.9	36.7	21.3	13.2	7.51	4.23	2.51	1.52	0.86	0.40	237	222
-24	0.43	0.93	1.68	2.93	5.43	10.9	21.5	35.2	36.2	24.7	11.6	7.70	5.00	3.26	2.14	1.35	0.78	0.36	172	154
-32	0.41	0.88	1.57	2.62	4.40	7.66	13.5	19.4	18.5	13.2	7.23	4.68	3.53	2.53	1.76	1.15	0.67	0.30	104	81.1
-40	0.37	0.80	1.41	2.23	3.38	5.12	7.62	9.11	8.61	6.78	4.69	3.20	2.57	1.97	1.41	0.93	0.54	0.24	61.0	34.1
-48	0.32	0.70	1.22	1.84	2.60	3.55	4.52	4.88	4.65	4.00	3.17	2.35	1.88	1.49	1.08	0.71	0.40	0.17	39.5	2.30
-56	0.26	0.59	1.01	1.48	2.01	2.59	2.99	3.09	2.97	2.66	2.21	1.70	1.31	1.04	0.75	0.48	0.26	0.11	27.5	0.00
-64	0.20	0.46	0.79	1.14	1.52	1.89	2.07	2.10	2.01	1.80	1.49	1.12	0.78	0.61	0.43	0.26	0.14	0.07	18.9	0.00
-72	0.14	0.32	0.55	0.81	1.07	1.31	1.38	1.36	1.27	1.09	0.85	0.58	0.34	0.25	0.18	0.11	0.07	0.04	11.7	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	5.89	13.0	23.1	38.0	63.7	116	215	329	356	271	172	110	66.3	40.7	25.9	16.1	9.09	4.20	1876	---
Φ a	0.00	0.00	0.00	0.00	30.6	92.4	194	308	335	249	148	83.4	38.9	9.42	0.00	0.00	0.00	0.00	---	1489

one-half-peak spread: U:20.6,D:21.4 , L:19.8,R:19.8


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1070A P:22.700W PF:0.9660 Freq:50.00Hz Lamp Flux:1940.99x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-45D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

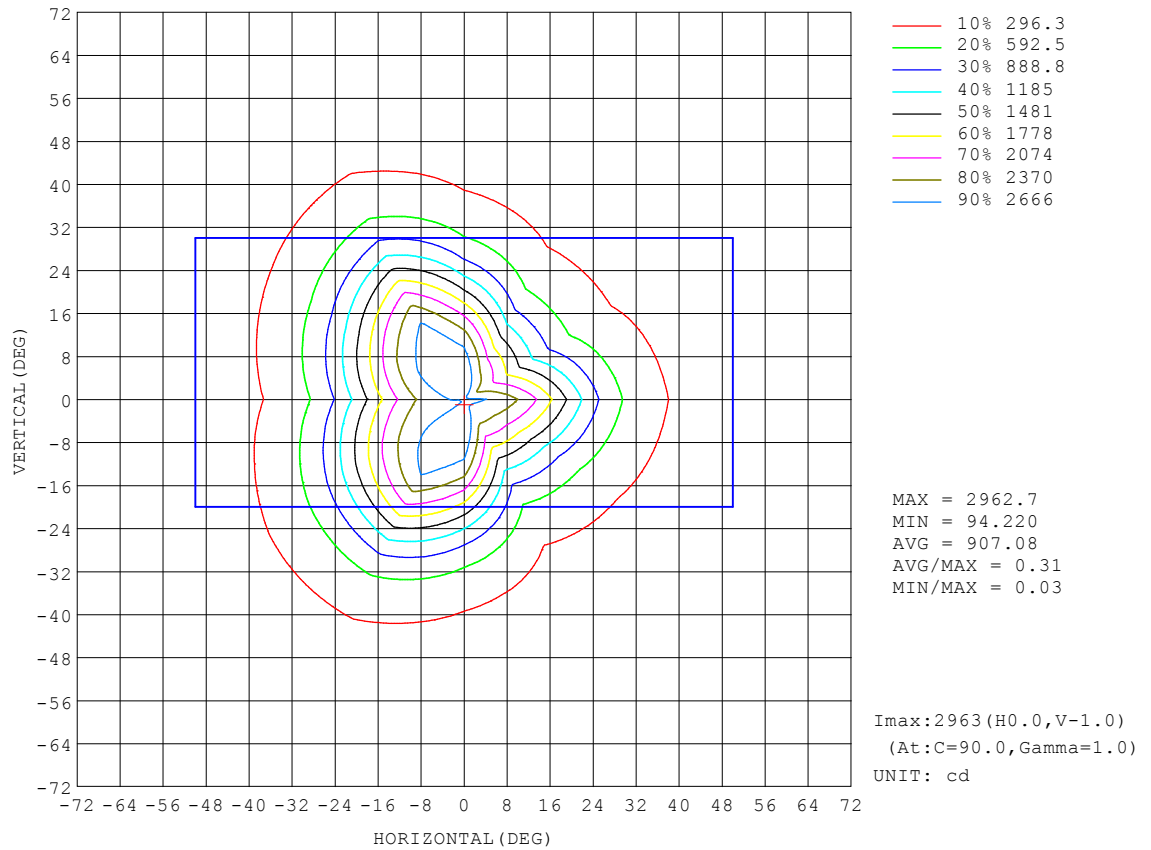


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1070A P:22.700W PF:0.9660 Freq:50.00Hz Lamp Flux:1940.99x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-45D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

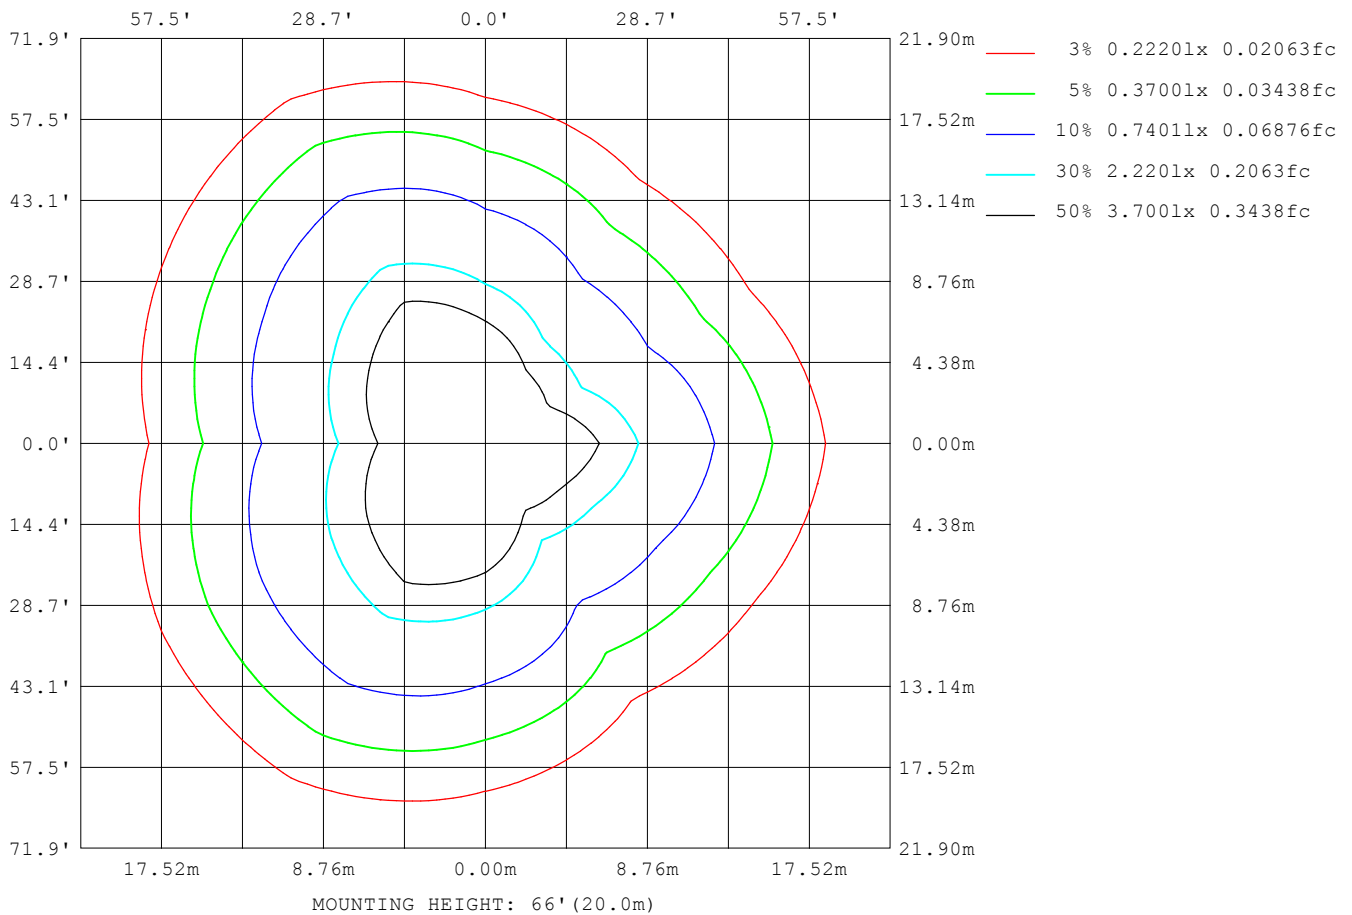

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

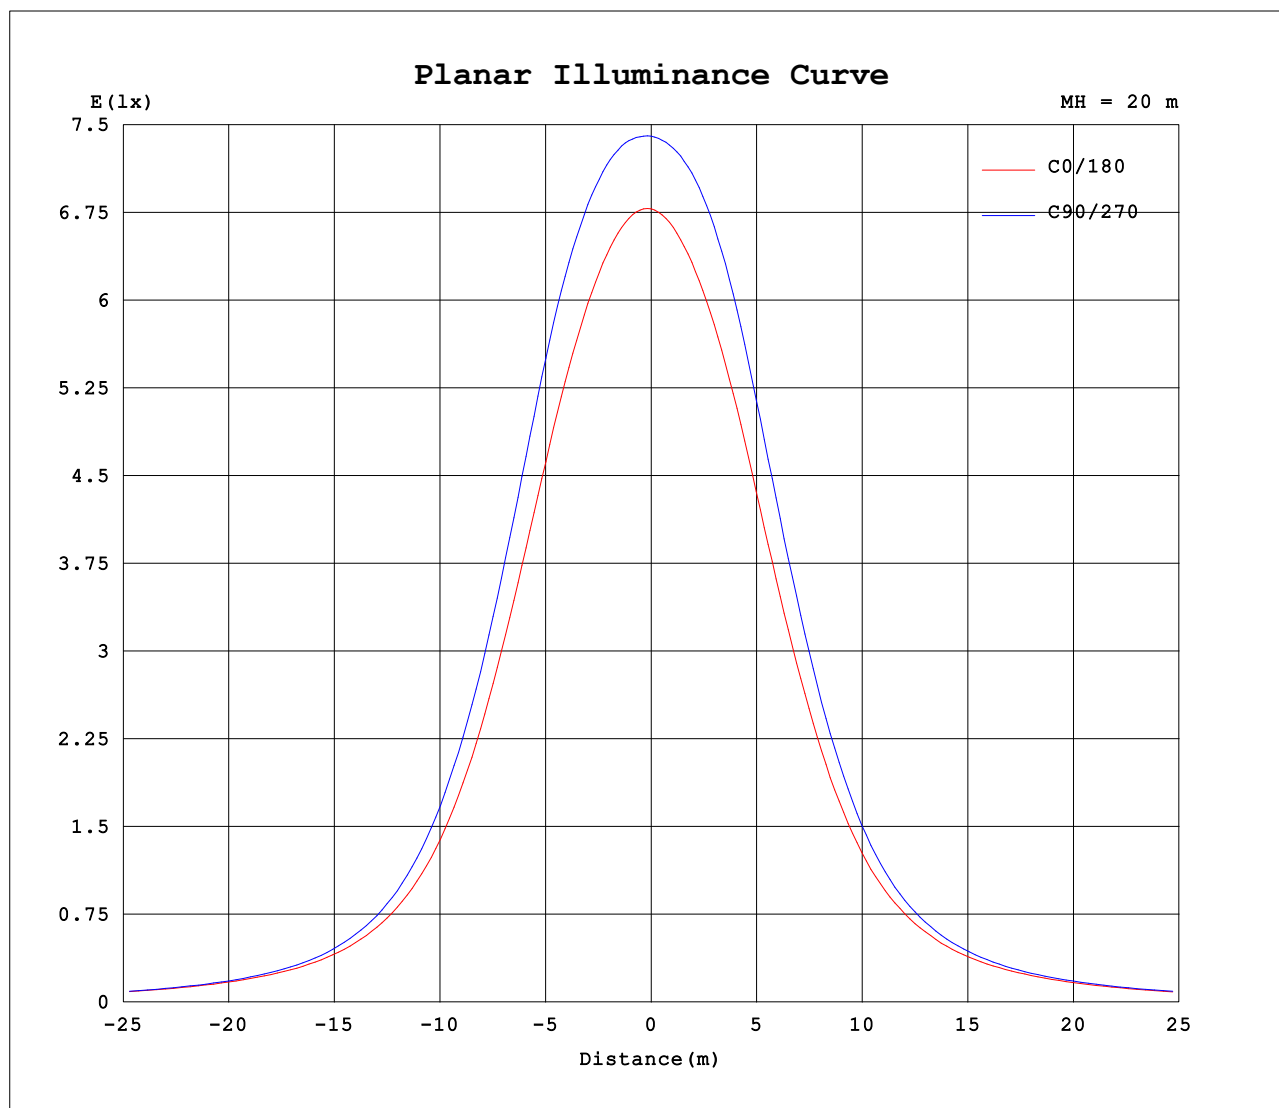


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1070A P:22.700W PF:0.9660 Freq:50.00Hz Lamp Flux:1940.99x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-45D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

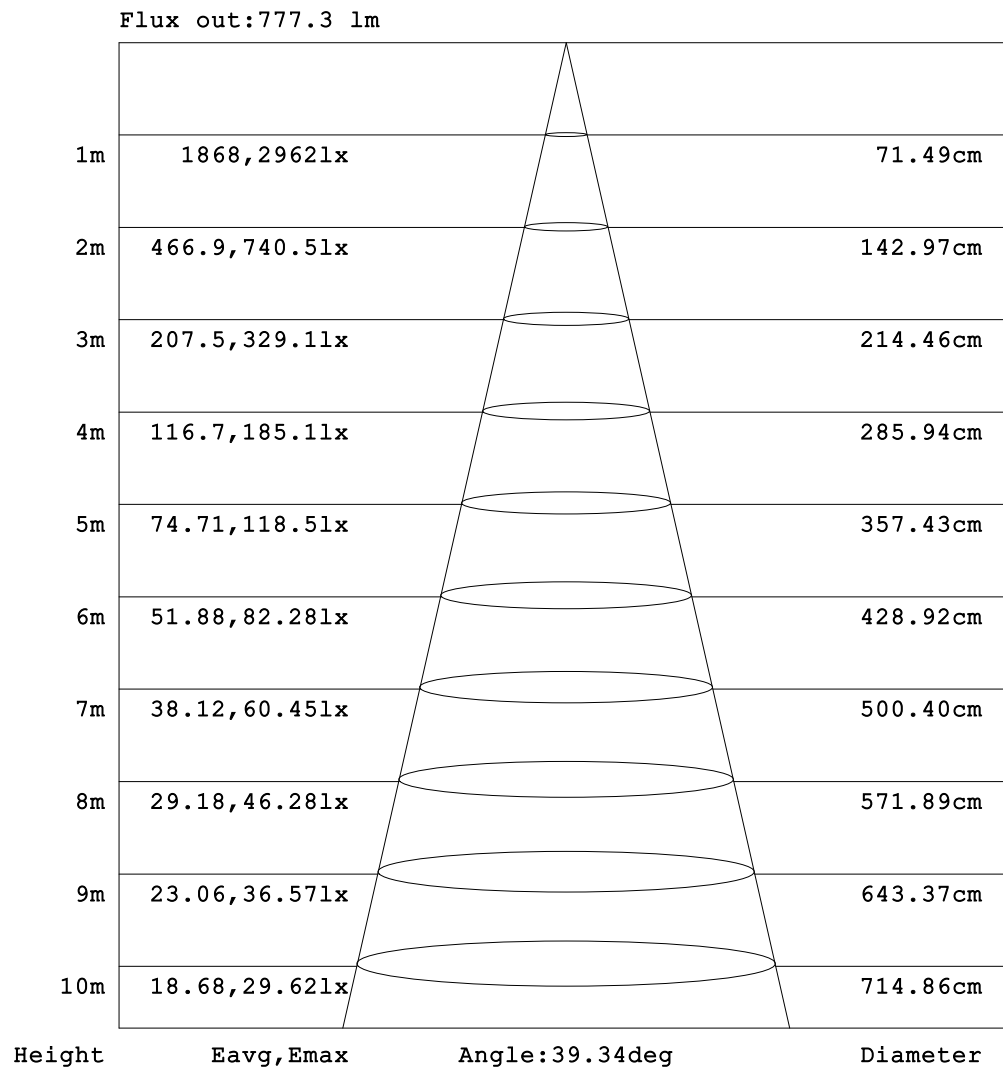

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1070A P:22.700W PF:0.9660 Freq:50.00Hz Lamp Flux:1940.99x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-45D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	5.42	5.22	5.25	5.49	5.94	6.51	7.06	7.52	7.90	8.26	8.61	8.95	9.33	9.75	10.1	10.4	10.6	11.0	11.4
-170	5.42	5.20	5.19	5.35	5.69	6.11	6.51	6.86	7.21	7.62	8.13	8.74	9.46	10.3	11.0	11.6	11.8	12.1	12.1
-160	5.42	5.17	5.12	5.19	5.40	5.66	5.91	6.11	6.36	6.71	7.23	7.91	8.76	9.63	10.4	11.0	11.5	12.0	12.3
-150	5.42	5.15	5.06	5.04	5.12	5.22	5.30	5.35	5.41	5.57	5.92	6.62	7.35	8.06	8.71	9.35	10.2	11.0	11.5
-140	5.42	5.15	5.01	4.91	4.87	4.85	4.79	4.68	4.54	4.66	5.01	5.42	5.85	6.29	6.73	7.52	8.24	8.89	9.42
-130	5.42	5.16	4.98	4.83	4.69	4.58	4.43	4.21	4.15	4.25	4.38	4.54	4.72	4.91	5.31	5.78	6.24	6.66	7.03
-120	5.42	5.18	4.97	4.80	4.61	4.42	4.22	4.07	4.09	4.12	4.14	4.16	4.19	4.27	4.46	4.65	4.84	5.04	5.21
-110	5.42	5.22	5.00	4.81	4.62	4.42	4.21	4.14	4.13	4.14	4.16	4.17	4.18	4.22	4.27	4.32	4.38	4.44	4.50
-100	5.42	5.30	5.12	4.93	4.73	4.54	4.35	4.34	4.35	4.36	4.37	4.38	4.40	4.39	4.39	4.39	4.39	4.40	4.41
-90	5.42	5.41	5.40	5.40	5.39	5.38	5.37	5.56	5.74	5.92	6.11	6.29	6.48	6.18	5.88	5.58	5.28	4.97	4.67
-80	5.42	5.60	6.11	6.99	8.37	10.5	13.2	16.1	19.1	22.1	25.0	27.9	30.6	29.0	26.6	23.8	20.6	17.1	13.4
-70	5.42	5.81	7.00	9.64	14.3	21.1	29.5	37.1	43.7	50.2	56.4	62.2	67.6	68.4	66.7	64.3	61.2	57.3	52.7
-60	5.42	6.00	8.18	13.6	22.7	34.3	47.0	59.3	69.4	79.3	88.8	98.0	107	113	113	112	109	104	98.6
-50	5.42	6.19	9.67	18.3	31.4	46.7	63.0	79.5	94.4	109	123	139	155	171	178	180	177	170	159
-40	5.42	6.35	11.0	22.7	39.1	57.6	77.0	96.7	118	140	164	193	227	269	316	332	334	317	284
-30	5.42	6.41	12.2	26.3	45.1	66.1	87.8	111	138	171	214	271	352	470	631	803	836	791	670
-20	5.42	6.39	13.0	28.5	48.9	71.5	94.9	121	153	195	259	364	532	791	1168	1636	2008	1916	1666
-10	5.42	6.28	13.0	29.0	50.2	73.4	97.3	124	158	204	277	403	624	992	1516	2094	2564	2846	2739
0	5.42	6.09	12.2	27.7	48.6	71.3	94.4	120	151	191	250	349	523	821	1273	1800	2283	2588	2712
10	5.42	6.21	12.7	28.6	49.7	72.8	96.7	123	156	201	270	387	596	948	1468	2079	2586	2834	2643
20	5.42	6.27	12.4	27.7	47.9	70.4	93.7	119	151	191	251	344	498	765	1166	1666	2045	1861	1518
30	5.42	6.26	11.5	25.1	43.6	64.3	85.9	109	135	167	209	267	355	483	668	860	863	776	606
40	5.42	6.20	10.2	21.2	37.1	55.2	74.3	93.9	115	138	165	197	236	285	341	356	348	320	275
50	5.42	6.08	8.82	16.4	29.0	43.8	59.5	75.6	91.8	108	125	144	163	184	191	189	183	173	158
60	5.42	5.91	7.52	11.9	19.9	30.8	43.0	55.3	67.2	79.0	90.7	102	113	121	119	116	111	105	96.9
70	5.42	5.75	6.70	8.54	12.1	17.7	25.0	33.3	41.7	50.0	58.0	65.6	72.8	73.3	70.1	66.2	61.5	56.1	49.9
80	5.42	5.62	5.99	6.69	7.75	9.10	11.0	14.2	17.9	21.9	26.1	30.3	34.4	32.1	28.8	25.0	20.7	16.2	11.4
90	5.42	5.53	5.64	5.75	5.86	5.97	6.07	6.45	6.82	7.19	7.57	7.94	8.31	7.85	7.38	6.92	6.45	5.98	5.52
100	5.42	5.46	5.46	5.46	5.47	5.47	5.48	5.47	5.45	5.44	5.43	5.41	5.40	5.36	5.34	5.32	5.30	5.28	5.27
110	5.42	5.38	5.35	5.34	5.32	5.30	5.26	5.24	5.23	5.23	5.23	5.24	5.25	5.32	5.43	5.56	5.70	5.84	5.96
120	5.42	5.34	5.30	5.28	5.26	5.26	5.25	5.24	5.34	5.44	5.54	5.64	5.72	5.87	6.17	6.46	6.72	6.96	7.17
130	5.42	5.30	5.27	5.26	5.29	5.34	5.45	5.61	5.82	6.07	6.30	6.50	6.69	6.85	7.15	7.44	7.70	7.92	8.10
140	5.42	5.27	5.26	5.28	5.38	5.57	5.83	6.15	6.47	6.78	7.07	7.32	7.55	7.75	7.94	8.25	8.53	8.78	8.98
150	5.42	5.25	5.25	5.34	5.53	5.87	6.27	6.68	7.05	7.35	7.62	7.90	8.18	8.45	8.67	8.89	9.27	9.63	9.93
160	5.42	5.24	5.25	5.40	5.71	6.15	6.63	7.08	7.45	7.77	8.08	8.39	8.70	8.98	9.26	9.55	9.89	10.5	10.9
170	5.42	5.23	5.25	5.45	5.85	6.37	6.90	7.36	7.73	8.08	8.42	8.76	9.08	9.42	9.75	10.1	10.5	10.9	11.4
180	5.42	5.22	5.25	5.49	5.94	6.51	7.06	7.52	7.90	8.26	8.61	8.95	9.33	9.75	10.1	10.4	10.6	11.0	11.4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1070A P:22.700W PF:0.9660 Freq:50.00Hz Lamp Flux:1940.99x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-45D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	11.4	11.5	11.7	11.7	11.4	10.8	9.88	8.75	7.60	6.49	5.54	4.82	4.35	4.09	4.06	4.09	4.21	4.40	
-170	11.3	11.2	11.4	11.5	11.4	10.9	10.1	8.98	7.80	6.66	5.67	4.90	4.40	4.12	4.08	4.09	4.20	4.40	
-160	12.0	11.8	11.8	11.7	11.3	10.7	9.80	8.73	7.60	6.52	5.58	4.87	4.39	4.13	4.08	4.10	4.21	4.40	
-150	11.6	11.6	11.7	11.3	10.7	9.94	9.03	8.05	7.03	6.09	5.29	4.70	4.32	4.13	4.08	4.11	4.21	4.40	
-140	9.72	9.91	10.0	10.00	9.37	8.61	7.80	6.98	6.19	5.48	4.91	4.49	4.22	4.12	4.09	4.13	4.23	4.40	
-130	7.33	7.54	7.67	7.71	7.54	6.96	6.38	5.82	5.30	4.87	4.53	4.29	4.16	4.10	4.10	4.15	4.24	4.40	
-120	5.41	5.56	5.67	5.72	5.70	5.46	5.16	4.87	4.61	4.41	4.25	4.16	4.11	4.10	4.12	4.17	4.27	4.40	
-110	4.55	4.59	4.60	4.60	4.58	4.52	4.41	4.32	4.23	4.17	4.13	4.10	4.10	4.12	4.15	4.21	4.29	4.40	
-100	4.38	4.34	4.31	4.28	4.24	4.21	4.19	4.17	4.15	4.13	4.11	4.10	4.12	4.15	4.20	4.26	4.33	4.40	
-90	4.61	4.55	4.48	4.42	4.35	4.29	4.27	4.25	4.23	4.22	4.20	4.18	4.22	4.25	4.29	4.33	4.36	4.40	
-80	11.9	10.2	8.58	7.02	5.65	4.60	4.61	4.59	4.55	4.49	4.43	4.39	4.44	4.46	4.43	4.41	4.40	4.40	
-70	46.5	39.8	32.5	25.0	17.4	12.0	11.3	10.2	8.99	7.78	6.76	5.78	5.65	5.25	4.87	4.60	4.45	4.40	
-60	90.8	81.9	71.9	61.0	49.4	43.3	39.4	34.9	29.7	23.9	18.0	13.9	10.9	8.17	6.16	4.99	4.54	4.40	
-50	147	132	117	101	87.1	81.5	74.7	66.6	57.8	48.5	39.2	29.8	21.3	14.5	8.97	5.76	4.65	4.40	
-40	251	214	177	145	134	123	111	98.7	86.0	73.2	60.9	48.2	34.9	22.9	13.5	7.01	4.76	4.40	
-30	532	386	265	227	203	178	154	133	115	97.7	81.1	64.8	48.5	32.0	18.4	8.60	4.87	4.40	
-20	1166	666	504	414	328	260	213	176	146	121	99.1	79.0	59.8	40.3	23.1	10.2	5.03	4.40	
-10	1772	1414	1091	814	584	411	297	224	175	141	113	89.8	68.1	46.7	26.9	11.6	5.17	4.40	
0	2637	2370	1922	1379	896	565	371	260	196	154	122	96.3	73.2	50.4	29.1	12.4	5.24	4.40	
10	1853	1322	908	697	533	390	288	219	173	139	112	88.9	67.3	46.0	26.7	11.6	5.21	4.40	
20	1125	712	514	395	304	240	202	170	142	118	96.9	77.2	58.2	39.1	22.8	10.3	5.09	4.40	
30	502	386	285	239	206	177	151	128	110	94.2	78.0	62.1	46.0	30.5	18.2	8.74	4.95	4.40	
40	249	218	186	158	142	127	112	97.2	82.3	68.7	56.9	44.5	32.0	21.6	13.3	7.21	4.87	4.40	
50	148	136	122	108	94.8	86.2	76.8	66.5	55.6	44.3	33.9	25.6	19.0	14.0	9.22	6.02	4.78	4.40	
60	90.7	83.3	74.9	65.3	55.0	47.6	41.5	34.8	27.7	20.4	14.2	11.8	10.4	8.49	6.58	5.29	4.68	4.40	
70	44.9	39.3	33.2	26.7	20.1	14.6	12.4	10.4	8.78	7.57	6.47	6.31	6.35	5.89	5.37	4.93	4.62	4.40	
80	10.4	9.33	8.25	7.24	6.34	5.66	5.63	5.59	5.55	5.51	5.48	5.44	5.30	5.14	4.95	4.75	4.57	4.40	
90	5.47	5.43	5.38	5.34	5.29	5.25	5.24	5.24	5.24	5.23	5.23	5.22	5.09	4.95	4.81	4.67	4.54	4.40	
100	5.32	5.37	5.41	5.44	5.46	5.47	5.41	5.35	5.29	5.23	5.20	5.16	5.01	4.86	4.73	4.61	4.50	4.40	
110	6.08	6.17	6.25	6.31	6.34	6.32	6.16	5.99	5.82	5.66	5.49	5.30	5.02	4.81	4.66	4.55	4.46	4.40	
120	7.27	7.34	7.39	7.41	7.42	7.28	7.08	6.84	6.59	6.31	6.03	5.58	5.15	4.83	4.61	4.49	4.42	4.40	
130	8.18	8.23	8.26	8.26	8.20	7.99	7.77	7.52	7.24	6.93	6.46	5.81	5.27	4.86	4.58	4.43	4.38	4.40	
140	9.06	9.09	9.08	9.03	8.79	8.54	8.27	7.98	7.68	7.25	6.56	5.90	5.29	4.85	4.53	4.37	4.34	4.40	
150	10.0	10.1	10.0	9.71	9.33	8.98	8.66	8.34	7.80	7.16	6.48	5.81	5.21	4.75	4.46	4.31	4.30	4.40	
160	10.9	10.8	10.5	10.1	9.69	9.26	8.93	8.45	7.78	7.03	6.28	5.59	5.02	4.58	4.36	4.24	4.27	4.40	
170	11.1	10.6	10.3	10.4	10.3	10.0	9.43	8.66	7.77	6.85	5.98	5.26	4.72	4.35	4.22	4.17	4.24	4.40	
180	11.4	11.5	11.7	11.7	11.4	10.8	9.88	8.75	7.60	6.49	5.54	4.82	4.35	4.09	4.06	4.09	4.21	4.40	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: