

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1524.2 cd per klm.
(Luminaire orientation as tested.)	1.5 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	77.3V x 77.8H
	At 50% of Imax	41.9V x 39.5H
	At 90% of Imax	21.4V x 16.9H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	768.3 lumens per klm.
	To 50% of Imax	436.3 lumens per klm.
	To 90% of Imax	105.6 lumens per klm.

Upward LOR	2.3 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1120A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1450.88x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-45D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

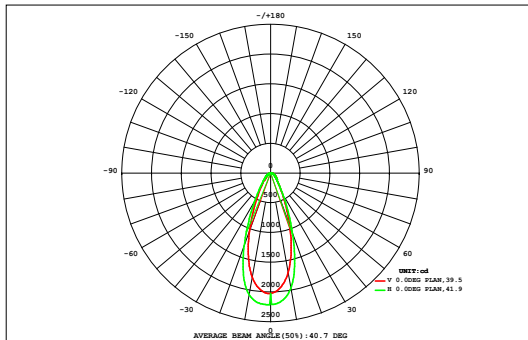

DATA OF LAMP		Eff: 60.45lm/W	
MODEL		Imax (cd)	2211
NOMINAL POWER (W)	24	AVAILABILITY (%)	76.9
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	1116
NOMINAL FLUX (lm)	1450.88	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	1451
TEST VOLTAGE (V)	220	θ @50% (H,V)	40,42DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.09	0.21	0.39	0.61	0.84	1.06	1.10	1.07	0.98	0.85	0.68	0.49	0.30	0.21	0.13	0.08	0.05	0.04	9.17	0.00
72	0.13	0.31	0.56	0.85	1.18	1.51	1.65	1.66	1.57	1.40	1.18	0.92	0.66	0.48	0.31	0.17	0.09	0.05	14.7	0.00
64	0.18	0.41	0.72	1.10	1.55	2.06	2.40	2.46	2.33	2.08	1.75	1.38	1.06	0.80	0.55	0.32	0.17	0.08	21.4	0.00
56	0.22	0.50	0.88	1.36	1.99	2.81	3.66	3.92	3.68	3.14	2.52	1.90	1.48	1.12	0.78	0.49	0.27	0.12	30.8	3.54
48	0.26	0.58	1.02	1.63	2.54	3.98	6.22	7.45	6.86	5.33	3.76	2.58	1.98	1.46	1.01	0.66	0.38	0.17	47.8	28.8
40	0.29	0.64	1.14	1.90	3.19	5.79	10.8	15.8	14.7	10.5	5.89	3.66	2.60	1.81	1.26	0.83	0.48	0.21	81.4	65.0
32	0.31	0.68	1.23	2.12	3.85	7.81	16.3	27.5	28.2	19.7	9.48	5.54	3.45	2.31	1.54	0.98	0.56	0.26	132	118
24	0.32	0.70	1.27	2.23	4.26	9.25	19.9	33.6	39.3	29.0	15.3	8.62	5.18	3.04	1.84	1.12	0.63	0.29	176	164
	0.32	0.70	1.26	2.19	4.13	9.04	19.4	32.6	40.5	34.5	24.5	15.5	7.84	3.83	2.09	1.22	0.69	0.32	201	190
	0.32	0.70	1.26	2.20	4.20	9.24	19.7	32.4	39.9	34.9	26.5	16.3	8.03	3.87	2.10	1.23	0.69	0.32	204	193
	0.32	0.70	1.28	2.27	4.43	9.76	20.5	33.4	37.8	26.4	15.8	9.86	5.59	3.14	1.86	1.13	0.64	0.30	175	164
-24	0.32	0.69	1.24	2.17	4.02	8.13	16.1	26.1	25.1	16.5	8.41	5.67	3.69	2.41	1.58	1.00	0.57	0.26	124	111
-32	0.30	0.65	1.16	1.94	3.25	5.64	9.97	14.0	12.4	8.43	5.00	3.43	2.60	1.86	1.30	0.85	0.49	0.22	73.5	56.1
-40	0.27	0.59	1.04	1.65	2.49	3.75	5.55	6.45	5.71	4.37	3.21	2.33	1.89	1.45	1.04	0.69	0.40	0.18	43.0	21.6
-48	0.23	0.52	0.90	1.36	1.91	2.60	3.27	3.43	3.14	2.66	2.19	1.69	1.38	1.09	0.79	0.52	0.30	0.13	28.1	0.73
-56	0.19	0.43	0.74	1.09	1.48	1.89	2.16	2.18	2.02	1.79	1.53	1.21	0.96	0.76	0.55	0.35	0.19	0.08	19.6	0.00
-64	0.15	0.34	0.58	0.83	1.11	1.38	1.48	1.46	1.35	1.19	1.01	0.78	0.56	0.44	0.31	0.19	0.10	0.05	13.3	0.00
-72	0.10	0.24	0.40	0.59	0.78	0.95	0.96	0.91	0.80	0.68	0.54	0.38	0.24	0.18	0.13	0.08	0.05	0.03	8.04	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	4.34	9.58	17.1	28.1	47.2	86.6	161	246	266	203	129	82.3	49.5	30.3	19.2	11.9	6.74	3.11	1402	---
Φ a	0.00	0.00	0.00	0.00	22.3	68.9	146	231	251	187	111	62.8	28.8	7.03	0.00	0.00	0.00	0.00	---	1116

one-half-peak spread: U:21.4,D:20.7 , L:19.8,R:20.0


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1120A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1450.88x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-45D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

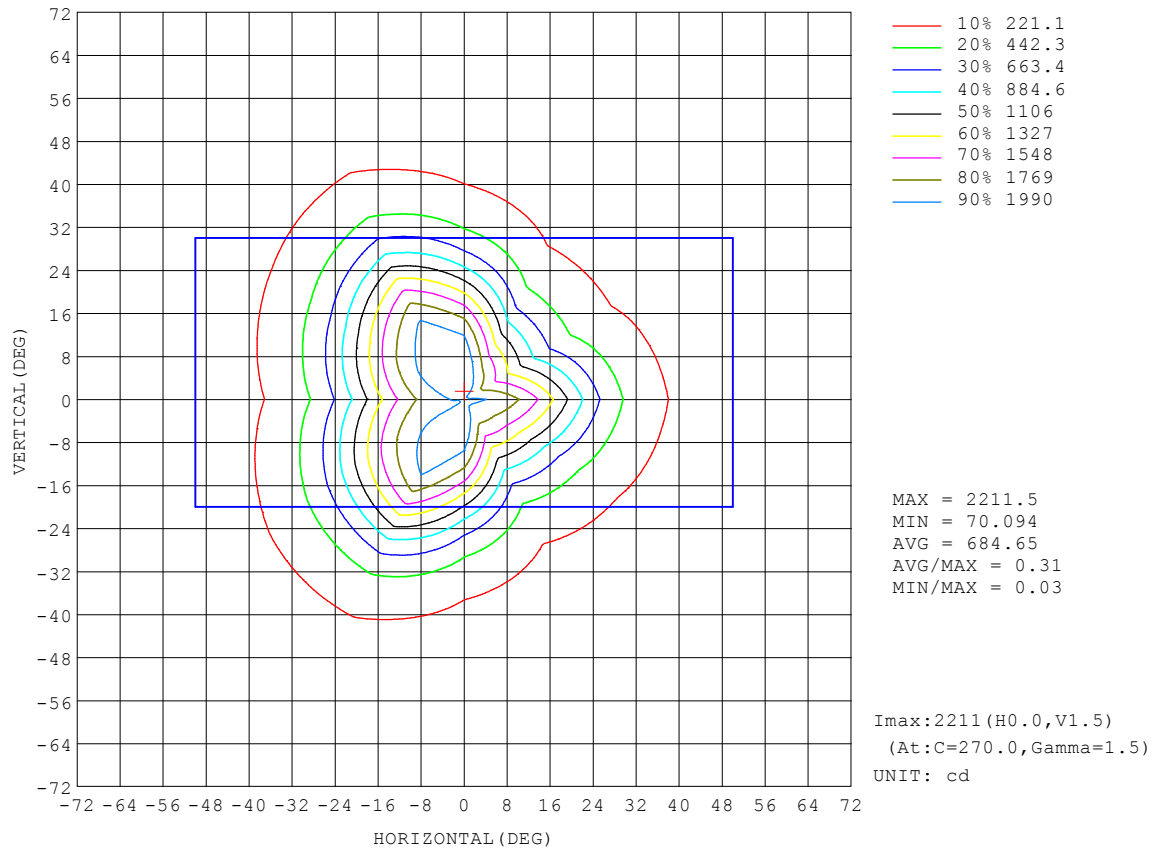


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1120A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1450.88x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-45D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

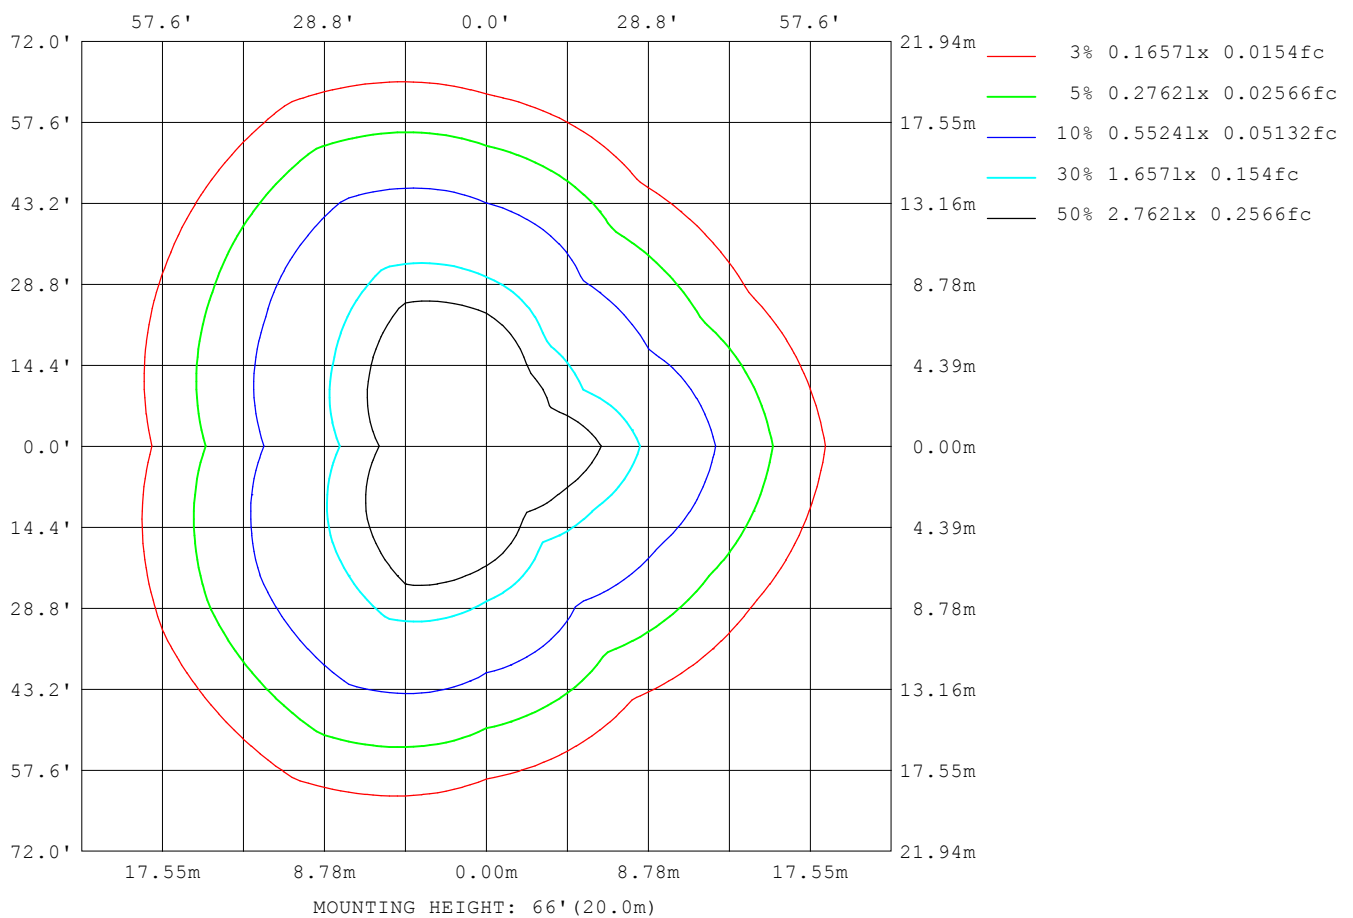

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

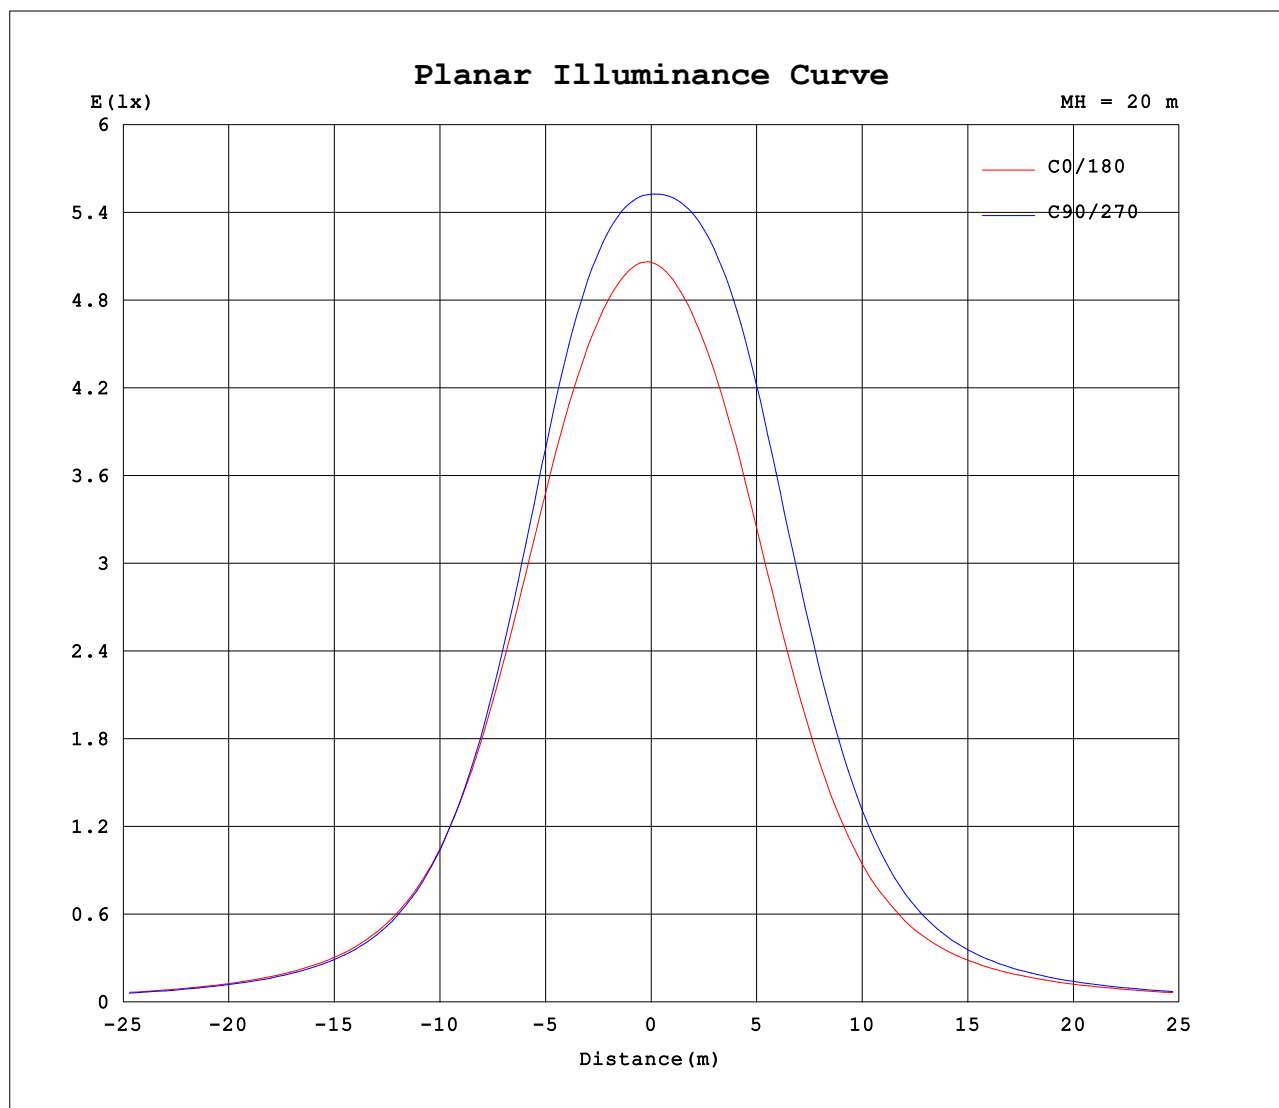


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1120A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1450.88x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-45D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

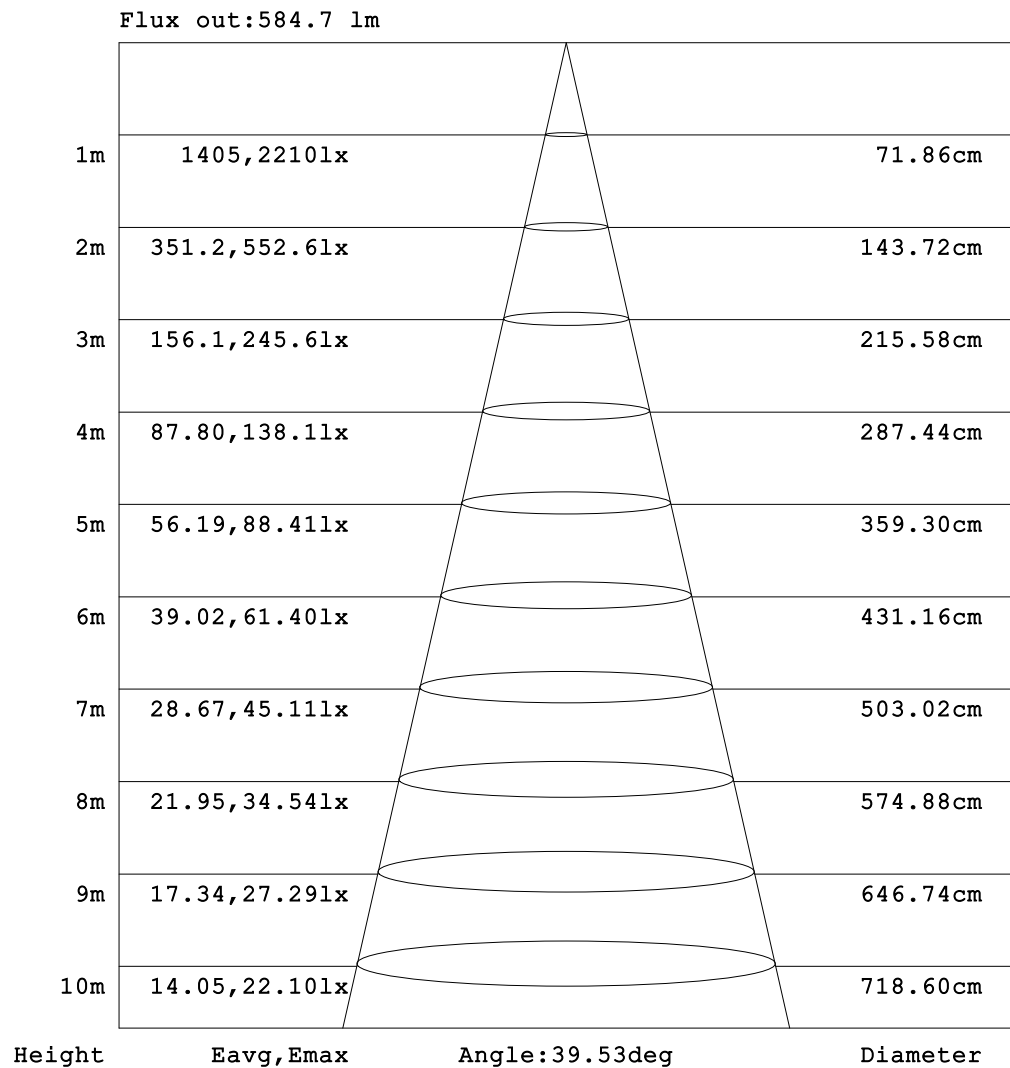

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1120A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1450.88x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-45D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	4.00	3.89	3.92	4.10	4.45	4.88	5.28	5.60	5.89	6.16	6.43	6.70	6.99	7.30	7.56	7.75	7.93	8.26	8.51
-170	4.00	3.87	3.86	4.00	4.26	4.57	4.87	5.13	5.39	5.70	6.09	6.58	7.13	7.74	8.32	8.71	8.87	9.07	8.94
-160	4.00	3.85	3.81	3.88	4.05	4.23	4.41	4.57	4.75	5.04	5.44	5.96	6.62	7.29	7.86	8.31	8.69	8.97	9.13
-150	4.00	3.84	3.77	3.75	3.82	3.91	3.96	4.00	4.05	4.18	4.47	5.00	5.56	6.10	6.58	7.10	7.86	8.47	8.98
-140	4.00	3.83	3.73	3.65	3.63	3.63	3.57	3.49	3.39	3.49	3.76	4.07	4.42	4.75	5.10	5.83	6.51	7.14	7.69
-130	4.00	3.82	3.70	3.59	3.49	3.41	3.30	3.14	3.09	3.17	3.26	3.39	3.54	3.68	4.06	4.53	5.01	5.46	5.86
-120	4.00	3.83	3.69	3.56	3.42	3.28	3.14	3.02	3.05	3.06	3.08	3.10	3.12	3.20	3.41	3.62	3.85	4.08	4.29
-110	4.00	3.86	3.71	3.57	3.43	3.28	3.11	3.05	3.06	3.08	3.09	3.10	3.11	3.15	3.21	3.28	3.36	3.44	3.52
-100	4.00	3.92	3.79	3.65	3.51	3.36	3.22	3.22	3.22	3.23	3.25	3.26	3.28	3.28	3.28	3.29	3.31	3.32	3.34
-90	4.00	4.01	4.01	4.01	4.01	4.01	4.01	4.13	4.25	4.37	4.48	4.60	4.72	4.50	4.29	4.07	3.86	3.65	3.43
-80	4.00	4.15	4.54	5.19	6.25	7.79	9.77	11.8	13.9	15.9	17.9	19.9	21.7	20.2	18.0	15.4	12.5	9.47	6.24
-70	4.00	4.31	5.21	7.14	10.6	15.4	21.5	27.0	31.7	36.4	40.9	45.1	48.9	48.7	46.3	43.4	39.9	35.8	31.2
-60	4.00	4.44	6.07	10.0	16.6	25.0	34.3	43.4	50.8	58.0	64.9	71.6	78.0	81.9	80.7	78.4	74.9	70.3	64.6
-50	4.00	4.59	7.17	13.5	23.0	34.2	46.2	58.4	69.4	79.8	90.6	102	114	125	129	128	123	116	106
-40	4.00	4.71	8.18	16.7	28.6	42.2	56.6	71.2	87.0	103	121	142	166	197	230	237	233	214	183
-30	4.00	4.76	9.09	19.3	33.0	48.5	64.6	81.9	102	126	158	200	259	345	463	586	591	534	416
-20	4.00	4.75	9.66	20.9	35.8	52.5	69.9	89.2	113	144	192	268	398	590	872	1218	1482	1347	1084
-10	4.00	4.67	9.65	21.2	36.7	53.9	71.7	91.6	117	151	205	299	465	745	1142	1577	1924	2115	1966
0	4.00	4.54	9.10	20.3	35.6	52.4	69.5	88.4	111	141	184	257	390	611	948	1343	1702	1929	2024
10	4.00	4.63	9.48	21.0	36.4	53.6	71.3	91.1	116	149	200	288	444	711	1102	1562	1940	2133	2079
20	4.00	4.68	9.33	20.4	35.3	51.9	69.2	88.4	111	142	186	256	373	578	887	1273	1575	1494	1305
30	4.00	4.67	8.63	18.6	32.1	47.5	63.5	80.8	100	124	155	199	265	367	510	664	680	633	523
40	4.00	4.62	7.67	15.8	27.4	40.8	55.1	69.6	85.3	102	123	147	177	214	258	270	269	252	222
50	4.00	4.53	6.65	12.4	21.5	32.5	44.2	56.2	68.3	80.5	93.5	107	122	138	144	144	140	134	124
60	4.00	4.41	5.67	8.99	14.9	23.0	31.9	41.2	50.1	59.0	67.7	76.3	84.8	90.6	90.0	88.4	85.4	81.2	76.0
70	4.00	4.28	5.04	6.48	9.21	13.4	18.7	24.9	31.2	37.5	43.5	49.3	54.7	55.4	53.5	51.0	47.9	44.4	40.2
80	4.00	4.17	4.48	5.06	5.90	6.96	8.41	10.9	13.7	16.7	19.9	23.0	26.1	24.6	22.3	19.7	16.7	13.6	10.2
90	4.00	4.10	4.19	4.28	4.38	4.47	4.56	4.89	5.23	5.56	5.90	6.23	6.56	6.16	5.76	5.36	4.95	4.55	4.15
100	4.00	4.04	4.04	4.06	4.07	4.07	4.07	4.07	4.05	4.04	4.04	4.02	4.01	3.98	3.96	3.94	3.93	3.92	3.92
110	4.00	3.98	3.98	3.97	3.96	3.94	3.92	3.90	3.89	3.89	3.89	3.90	3.90	3.95	4.02	4.11	4.20	4.29	4.37
120	4.00	3.95	3.94	3.93	3.92	3.91	3.91	3.89	3.96	4.04	4.12	4.20	4.26	4.36	4.57	4.78	4.97	5.13	5.27
130	4.00	3.93	3.92	3.91	3.94	3.98	4.05	4.17	4.33	4.51	4.68	4.84	4.98	5.09	5.31	5.53	5.71	5.87	6.00
140	4.00	3.92	3.91	3.93	4.02	4.15	4.35	4.58	4.81	5.04	5.25	5.44	5.61	5.77	5.92	6.14	6.35	6.54	6.70
150	4.00	3.91	3.91	3.98	4.13	4.38	4.67	4.98	5.25	5.46	5.66	5.88	6.09	6.30	6.47	6.65	6.93	7.18	7.39
160	4.00	3.90	3.91	4.03	4.27	4.60	4.95	5.28	5.54	5.78	6.01	6.25	6.48	6.71	6.92	7.14	7.39	7.80	8.16
170	4.00	3.89	3.91	4.08	4.38	4.77	5.16	5.49	5.76	6.02	6.28	6.55	6.80	7.04	7.28	7.53	7.81	8.11	8.57
180	4.00	3.89	3.92	4.10	4.45	4.88	5.28	5.60	5.89	6.16	6.43	6.70	6.99	7.30	7.56	7.75	7.93	8.26	8.56

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1120A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1450.88x1 lm																		
NAME: Auroring Micro-197mm-RGBW-ALL-45D									TYPE:RGBW ALL					WEIGHT:00				
SPEC.:45 DEGREE									DIM.: 197mm					SERIAL No.:01				
MFR.: EVERFINE									SUR.:0.8					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.57	8.65	8.77	8.74	8.56	8.07	7.36	6.51	5.63	4.81	4.09	3.55	3.21	3.02	3.01	3.04	3.12	3.27	
-170	8.47	8.42	8.51	8.61	8.54	8.18	7.52	6.68	5.80	4.94	4.20	3.62	3.25	3.05	3.02	3.04	3.12	3.27	
-160	8.95	8.84	8.82	8.73	8.50	8.03	7.34	6.53	5.66	4.85	4.14	3.60	3.24	3.06	3.02	3.04	3.12	3.27	
-150	8.92	8.84	8.76	8.49	8.04	7.46	6.77	6.02	5.25	4.54	3.93	3.48	3.19	3.06	3.03	3.05	3.13	3.27	
-140	7.76	7.75	7.68	7.53	7.04	6.46	5.84	5.22	4.62	4.08	3.64	3.33	3.14	3.05	3.03	3.06	3.14	3.27	
-130	5.96	6.00	5.96	5.87	5.66	5.22	4.78	4.35	3.96	3.63	3.37	3.18	3.09	3.05	3.04	3.08	3.15	3.27	
-120	4.36	4.40	4.40	4.37	4.30	4.10	3.85	3.63	3.44	3.28	3.16	3.08	3.05	3.05	3.05	3.10	3.16	3.27	
-110	3.52	3.52	3.50	3.48	3.43	3.36	3.28	3.21	3.14	3.10	3.07	3.05	3.04	3.06	3.08	3.12	3.18	3.27	
-100	3.31	3.28	3.24	3.21	3.18	3.15	3.13	3.11	3.09	3.07	3.06	3.04	3.06	3.08	3.11	3.15	3.21	3.27	
-90	3.39	3.35	3.32	3.28	3.24	3.20	3.18	3.17	3.15	3.13	3.11	3.10	3.13	3.16	3.18	3.21	3.24	3.27	
-80	5.75	5.22	4.69	4.18	3.75	3.43	3.43	3.42	3.38	3.33	3.29	3.25	3.30	3.31	3.29	3.28	3.27	3.27	
-70	27.9	24.2	20.2	15.9	11.6	8.62	8.13	7.41	6.60	5.75	4.99	4.29	4.21	3.93	3.64	3.42	3.31	3.27	
-60	60.3	55.1	49.1	42.5	35.1	31.1	28.3	25.2	21.5	17.3	13.1	10.2	8.14	6.12	4.63	3.74	3.37	3.27	
-50	99.4	91.1	82.0	72.2	63.7	59.6	54.6	48.7	42.2	35.5	28.6	21.8	15.6	10.8	6.76	4.33	3.46	3.27	
-40	166	146	125	106	98.1	90.4	81.7	72.7	63.3	53.9	44.8	35.5	25.7	16.9	10.1	5.28	3.55	3.27	
-30	342	259	189	166	149	131	114	98.1	84.8	72.2	59.9	47.8	35.7	23.5	13.7	6.50	3.65	3.27	
-20	783	476	371	304	242	192	158	130	108	89.4	73.3	58.4	44.2	29.7	17.1	7.72	3.78	3.27	
-10	1305	1054	815	609	438	307	221	166	130	104	83.9	66.5	50.5	34.5	19.9	8.75	3.89	3.27	
0	1971	1782	1452	1045	679	426	277	194	145	114	90.6	71.5	54.3	37.3	21.6	9.32	3.95	3.27	
10	1445	1019	692	528	402	292	214	163	128	103	83.3	66.0	50.0	34.1	19.8	8.77	3.92	3.27	
20	938	561	395	297	228	178	150	126	106	87.8	72.0	57.3	43.2	29.0	16.9	7.79	3.82	3.27	
30	421	310	218	180	154	132	112	94.9	82.1	70.1	58.0	46.1	34.1	22.6	13.5	6.61	3.71	3.27	
40	198	170	143	118	106	95.1	83.7	72.5	61.4	51.1	42.3	33.0	23.8	16.1	9.95	5.44	3.64	3.27	
50	115	105	93.4	81.7	71.2	64.7	57.6	49.8	41.5	33.0	25.2	19.1	14.2	10.5	6.96	4.54	3.56	3.27	
60	70.7	64.6	57.8	50.0	41.8	36.0	31.3	26.2	20.8	15.5	10.8	8.94	7.82	6.39	4.96	3.97	3.48	3.27	
70	36.1	31.5	26.5	21.3	15.9	11.6	9.72	8.11	6.80	5.80	4.88	4.73	4.75	4.42	4.02	3.67	3.43	3.27	
80	9.17	8.06	6.94	5.89	4.95	4.22	4.19	4.16	4.13	4.10	4.08	4.05	3.95	3.83	3.68	3.54	3.40	3.27	
90	4.10	4.06	4.02	3.98	3.93	3.89	3.89	3.89	3.88	3.88	3.88	3.88	3.88	3.78	3.67	3.57	3.47	3.37	3.27
100	3.95	3.99	4.01	4.03	4.05	4.05	4.01	3.96	3.92	3.88	3.86	3.84	3.72	3.61	3.51	3.42	3.34	3.27	
110	4.46	4.55	4.62	4.67	4.69	4.68	4.56	4.44	4.31	4.19	4.07	3.92	3.72	3.56	3.46	3.37	3.31	3.27	
120	5.36	5.42	5.47	5.49	5.51	5.41	5.25	5.08	4.89	4.68	4.46	4.13	3.81	3.58	3.41	3.33	3.28	3.27	
130	6.07	6.12	6.15	6.16	6.11	5.96	5.78	5.59	5.38	5.14	4.79	4.31	3.91	3.60	3.39	3.29	3.25	3.27	
140	6.76	6.79	6.79	6.76	6.58	6.38	6.17	5.95	5.72	5.39	4.87	4.37	3.92	3.59	3.36	3.24	3.23	3.27	
150	7.48	7.51	7.49	7.27	6.99	6.72	6.48	6.23	5.82	5.32	4.81	4.30	3.85	3.52	3.31	3.20	3.20	3.27	
160	8.13	8.09	7.88	7.57	7.24	6.94	6.68	6.31	5.80	5.22	4.66	4.14	3.71	3.40	3.22	3.14	3.17	3.27	
170	8.33	7.97	7.71	7.76	7.73	7.47	7.04	6.44	5.77	5.08	4.43	3.89	3.49	3.22	3.12	3.09	3.15	3.27	
180	8.57	8.65	8.77	8.74	8.56	8.07	7.36	6.51	5.63	4.81	4.09	3.55	3.21	3.02	3.01	3.04	3.12	3.27	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: