

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1501.2 cd per klm.
(Luminaire orientation as tested.)		1.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	78.2V x 77.9H
	At 50% of Imax	42.4V x 40.1H
	At 90% of Imax	21.7V x 17.8H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	771.0 lumens per klm.
	To 50% of Imax	437.3 lumens per klm.
	To 90% of Imax	111.0 lumens per klm.
	Upward LOR	2.2 %
	Downward LOR	97.8 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1060A P:22.500W PF:0.9660 Freq:50.00Hz Lamp Flux:1966.87x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-45D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

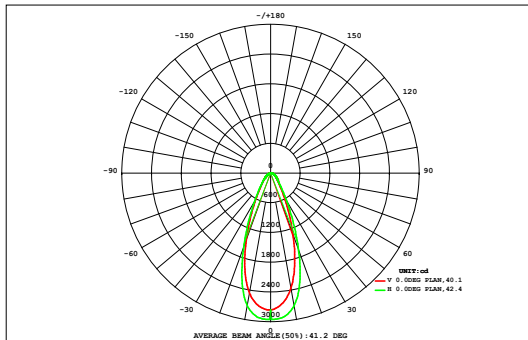

DATA OF LAMP		Eff:87.42lm/W	
MODEL		Imax(cd)	2953
NOMINAL POWER(W)	24	AVAILABILITY(%)	77.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1517
NOMINAL FLUX(lm)	1966.87	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1967
TEST VOLTAGE(V)	220	θ @50%(H,V)	40,42DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.12	0.27	0.50	0.78	1.08	1.36	1.42	1.37	1.26	1.09	0.88	0.64	0.41	0.28	0.18	0.11	0.07	0.05	11.9	0.00
72	0.12	0.27	0.50	0.78	1.08	1.36	1.42	1.37	1.26	1.09	0.88	0.64	0.41	0.28	0.18	0.11	0.07	0.05	11.9	0.00
64	0.17	0.41	0.73	1.11	1.54	1.96	2.14	2.15	2.02	1.82	1.56	1.23	0.89	0.65	0.42	0.23	0.12	0.07	19.2	0.00
56	0.24	0.54	0.96	1.45	2.03	2.67	3.10	3.17	3.00	2.69	2.31	1.85	1.43	1.09	0.74	0.43	0.22	0.11	28.0	0.00
48	0.30	0.66	1.17	1.81	2.61	3.64	4.69	5.00	4.68	4.02	3.30	2.54	2.00	1.52	1.05	0.66	0.36	0.16	40.2	3.06
40	0.35	0.77	1.36	2.17	3.34	5.16	7.90	9.35	8.54	6.70	4.89	3.46	2.66	1.96	1.36	0.89	0.51	0.22	61.6	34.7
32	0.39	0.86	1.53	2.53	4.23	7.53	13.7	19.8	18.1	12.9	7.72	4.94	3.50	2.44	1.69	1.11	0.64	0.29	104	82.1
24	0.42	0.92	1.66	2.85	5.15	10.4	21.3	35.6	35.5	24.7	12.8	7.51	4.65	3.11	2.08	1.32	0.76	0.35	171	153
	0.43	0.95	1.72	3.02	5.78	12.6	26.7	44.9	51.7	38.2	20.7	11.7	7.05	4.12	2.48	1.51	0.85	0.39	235	219
	0.43	0.95	1.71	2.98	5.69	12.5	26.9	44.6	54.6	46.5	33.4	21.4	10.8	5.21	2.83	1.65	0.93	0.43	273	259
	0.43	0.95	1.72	3.01	5.80	12.8	27.1	44.0	53.8	48.3	37.3	22.9	11.2	5.30	2.86	1.66	0.93	0.43	281	266
	0.44	0.96	1.74	3.09	6.06	13.3	27.6	44.6	51.6	37.8	23.1	14.2	7.89	4.33	2.55	1.53	0.87	0.40	242	227
-24	0.43	0.93	1.69	2.93	5.46	11.0	21.6	35.0	35.9	25.0	12.5	8.20	5.22	3.35	2.17	1.36	0.78	0.36	174	157
-32	0.40	0.88	1.57	2.62	4.38	7.62	13.4	19.2	18.2	13.1	7.42	4.87	3.64	2.59	1.79	1.17	0.67	0.30	104	81.4
-40	0.36	0.80	1.40	2.23	3.35	5.04	7.47	8.92	8.41	6.65	4.70	3.28	2.63	2.01	1.44	0.95	0.55	0.24	60.4	32.9
-48	0.31	0.70	1.21	1.83	2.57	3.49	4.41	4.75	4.52	3.91	3.15	2.38	1.93	1.52	1.11	0.73	0.41	0.18	39.1	1.46
-56	0.26	0.58	1.00	1.46	1.98	2.54	2.92	3.02	2.90	2.60	2.20	1.73	1.35	1.07	0.78	0.50	0.27	0.12	27.3	0.00
-64	0.20	0.45	0.77	1.12	1.49	1.85	2.02	2.05	1.96	1.76	1.48	1.14	0.82	0.64	0.45	0.28	0.15	0.07	18.7	0.00
-72	0.14	0.32	0.54	0.78	1.04	1.27	1.33	1.31	1.22	1.06	0.84	0.59	0.36	0.27	0.19	0.12	0.07	0.05	11.5	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	5.82	12.9	23.0	37.8	63.6	117	216	329	358	279	180	115	68.3	41.5	26.2	16.2	9.17	4.21	1901	---
Φ a	0.00	0.00	0.00	0.00	31.6	92.7	195	308	337	257	156	88.7	41.1	10.2	0.00	0.00	0.00	0.00	---	1517

one-half-peak spread: U:22.5,D:20.1 , L:20.2,R:20.2


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1060A P:22.500W PF:0.9660 Freq:50.00Hz Lamp Flux:1966.87x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-45D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

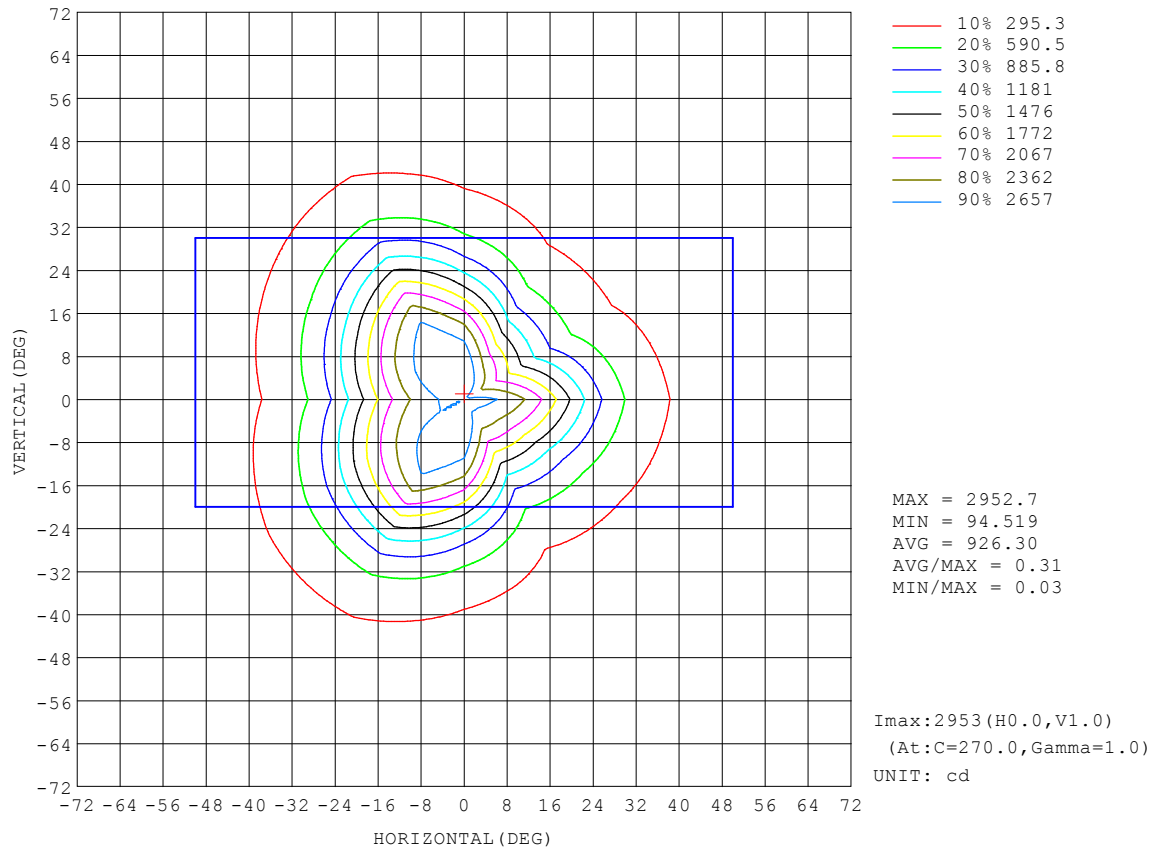


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1060A P:22.500W PF:0.9660 Freq:50.00Hz Lamp Flux:1966.87x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-45D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

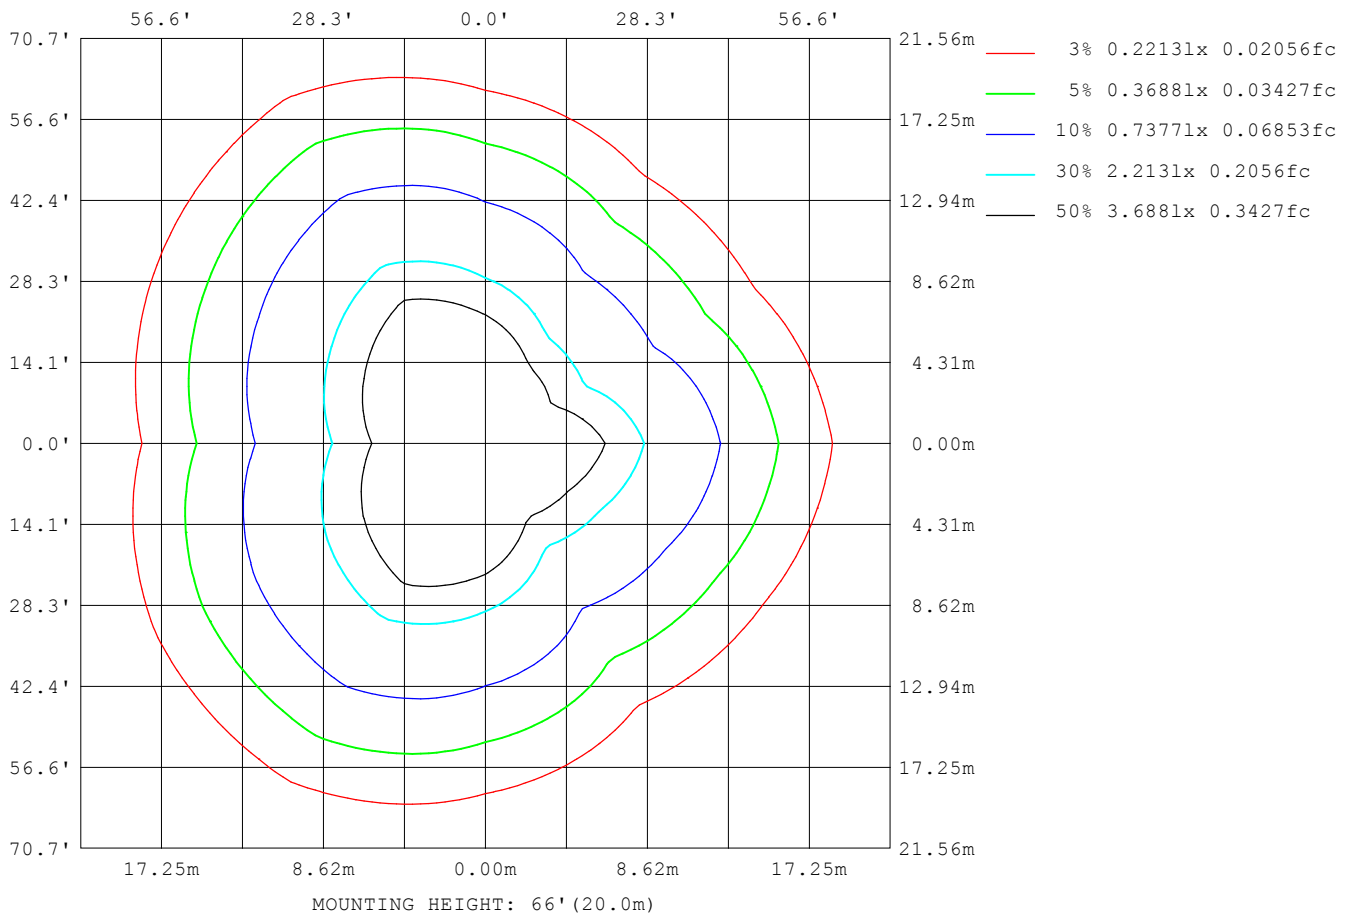

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

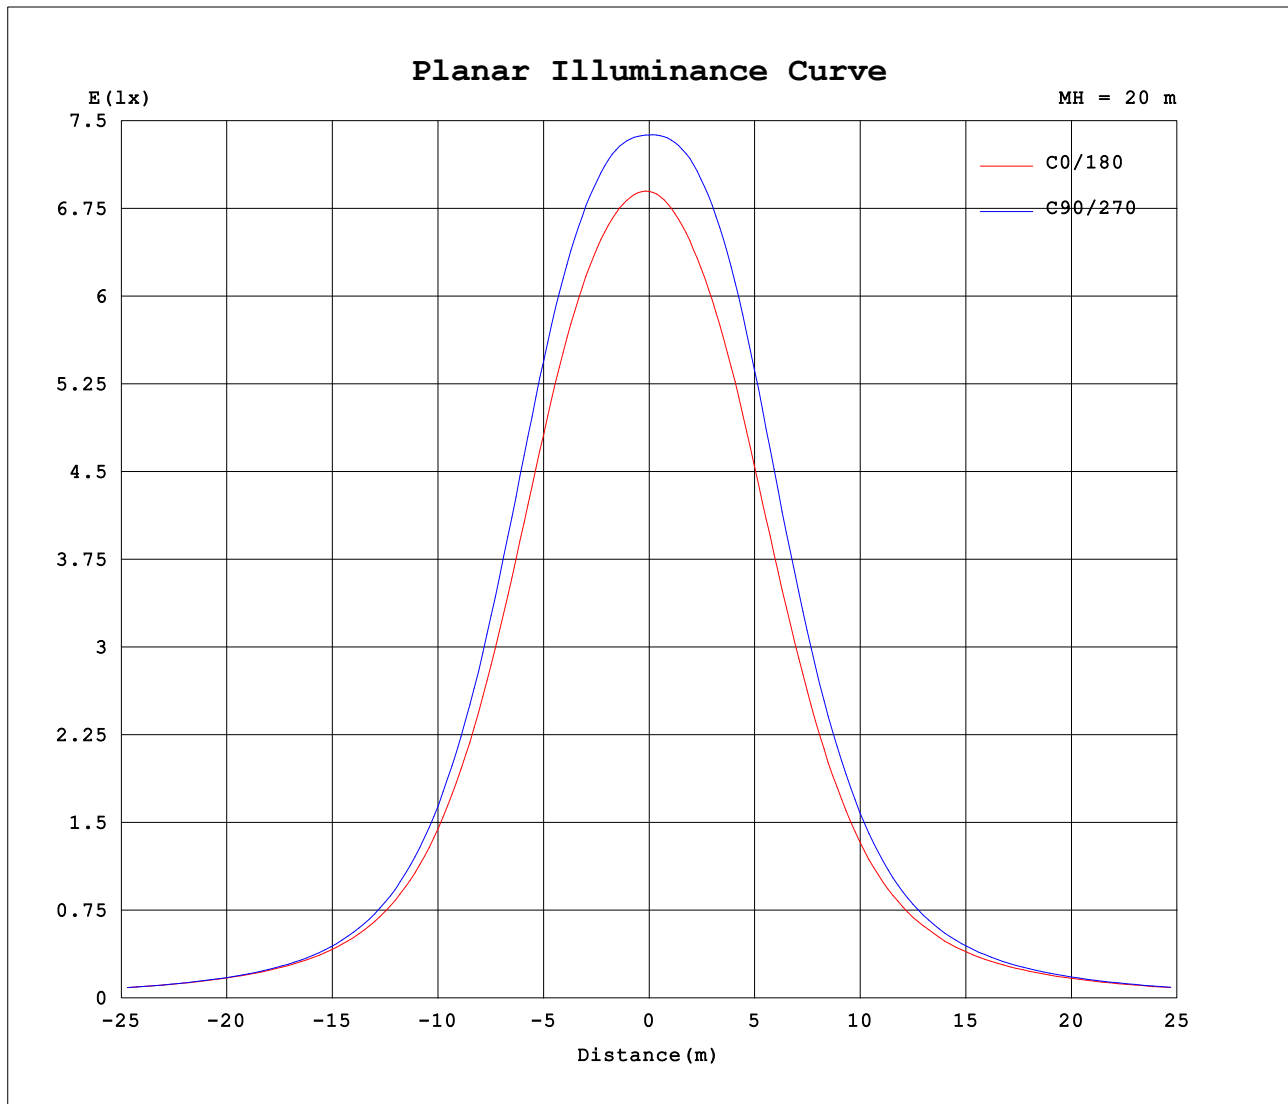


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1060A P:22.500W PF:0.9660 Freq:50.00Hz Lamp Flux:1966.87x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-45D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

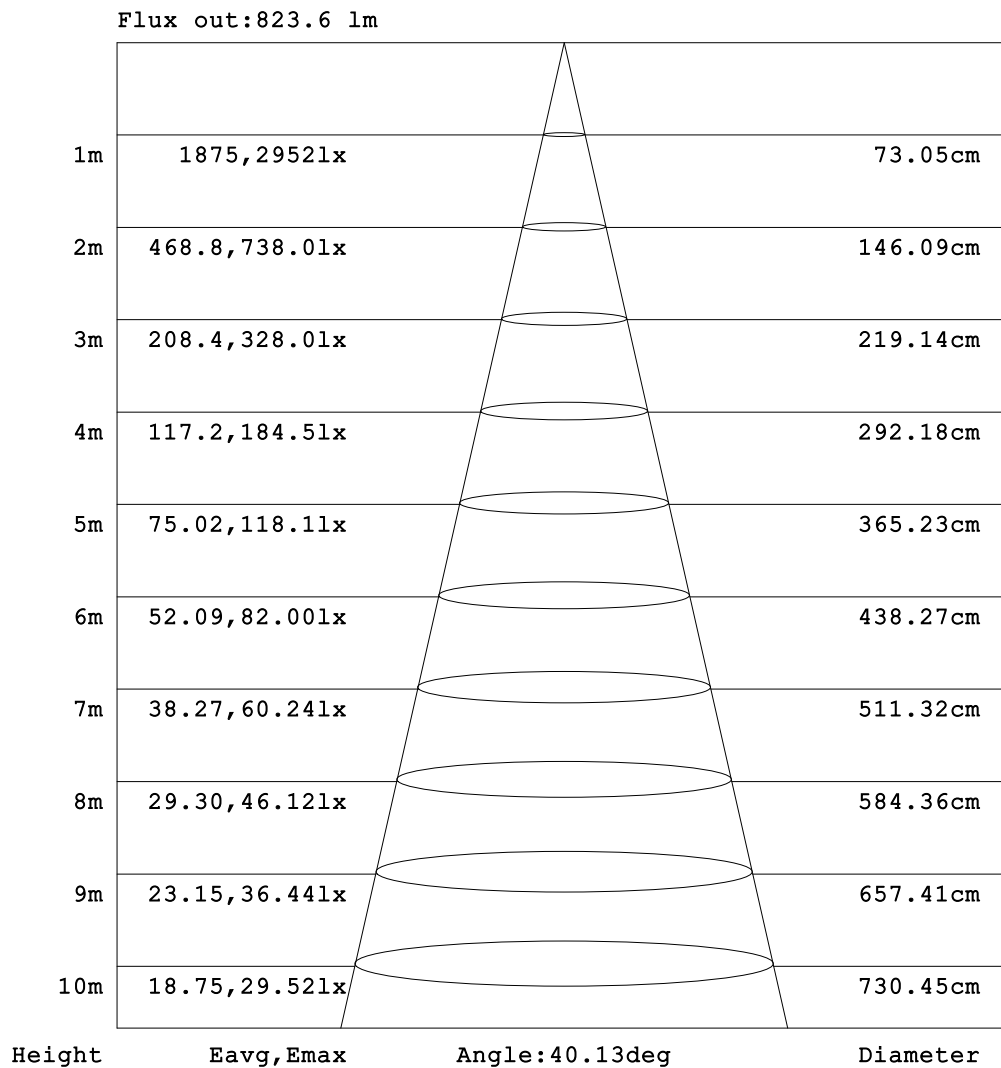

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1060A P:22.500W PF:0.9660 Freq:50.00Hz Lamp Flux:1966.87x1 lm								
NAME: Auroring Micro-197mm-RGBW-GREEN-45D					TYPE:RGBW GREEN			WEIGHT:00
SPEC.:45 DEGREE					DIM.: 197mm			SERIAL No.:01
MFR.: EVERFINE					SUR.:0.8			Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	5.47	5.28	5.31	5.55	6.00	6.59	7.14	7.61	8.01	8.39	8.75	9.10	9.47	9.87	10.2	10.5	10.7	11.2	11.6
-170	5.47	5.26	5.24	5.41	5.75	6.18	6.59	6.95	7.31	7.73	8.25	8.87	9.59	10.4	11.2	11.7	12.0	12.2	12.2
-160	5.47	5.23	5.17	5.25	5.46	5.73	5.98	6.19	6.45	6.81	7.34	8.02	8.86	9.77	10.5	11.2	11.7	12.1	12.4
-150	5.47	5.21	5.11	5.09	5.17	5.28	5.36	5.42	5.48	5.64	6.01	6.73	7.48	8.22	8.86	9.53	10.4	11.1	11.7
-140	5.47	5.20	5.06	4.97	4.93	4.90	4.84	4.73	4.60	4.72	5.09	5.50	5.97	6.43	6.90	7.70	8.44	9.10	9.64
-130	5.47	5.20	5.04	4.87	4.74	4.63	4.47	4.26	4.20	4.30	4.44	4.62	4.81	5.01	5.42	5.91	6.39	6.83	7.21
-120	5.47	5.23	5.02	4.84	4.66	4.47	4.27	4.11	4.13	4.16	4.19	4.21	4.25	4.34	4.53	4.73	4.95	5.15	5.33
-110	5.47	5.28	5.04	4.85	4.67	4.46	4.25	4.17	4.17	4.18	4.20	4.21	4.22	4.25	4.31	4.37	4.44	4.51	4.57
-100	5.47	5.34	5.17	4.97	4.77	4.58	4.39	4.38	4.39	4.39	4.40	4.42	4.43	4.42	4.42	4.42	4.43	4.44	4.46
-90	5.47	5.45	5.43	5.41	5.39	5.37	5.35	5.51	5.66	5.82	5.98	6.13	6.29	6.02	5.76	5.49	5.23	4.96	4.70
-80	5.47	5.63	6.15	7.02	8.35	10.4	13.1	15.6	18.3	21.0	23.6	26.2	28.5	27.0	24.8	22.2	19.2	16.0	12.5
-70	5.47	5.86	7.02	9.59	14.1	20.5	28.7	35.9	42.1	48.4	54.4	60.0	65.2	65.9	64.3	61.9	58.7	54.8	50.2
-60	5.47	6.05	8.17	13.4	22.3	33.5	45.8	58.1	68.2	77.8	87.1	96.0	104	110	110	109	106	102	95.8
-50	5.47	6.24	9.64	18.1	30.8	45.9	62.1	78.7	93.5	107	122	137	152	168	174	175	172	166	155
-40	5.47	6.38	11.0	22.5	38.5	56.9	76.4	96.2	118	139	163	191	224	263	308	324	325	308	276
-30	5.47	6.45	12.3	26.1	44.5	65.6	87.5	111	138	171	214	269	349	466	623	791	823	778	656
-20	5.47	6.43	13.1	28.3	48.5	71.3	94.9	121	153	196	260	367	537	799	1174	1631	1991	1902	1652
-10	5.47	6.32	13.1	28.8	49.9	73.3	97.5	125	159	206	279	409	638	1016	1548	2114	2570	2833	2720
0	5.47	6.14	12.4	27.6	48.4	71.4	94.8	121	152	193	254	356	541	861	1335	1883	2362	2647	2758
10	5.47	6.25	12.8	28.4	49.3	72.7	96.8	124	157	202	271	391	605	968	1495	2105	2602	2845	2717
20	5.47	6.30	12.5	27.5	47.4	70.0	93.4	119	150	191	249	343	499	762	1155	1649	2032	1891	1594
30	5.47	6.28	11.5	24.8	42.9	63.6	85.3	108	134	166	206	263	347	471	646	831	848	781	635
40	5.47	6.22	10.1	20.8	36.4	54.3	73.4	92.9	114	136	162	192	230	276	329	344	342	319	280
50	5.47	6.10	8.73	16.1	28.3	42.8	58.3	74.4	90.3	106	123	141	159	178	185	185	181	172	159
60	5.47	5.93	7.44	11.6	19.3	29.8	41.6	53.7	65.5	77.1	88.4	99.4	110	117	117	114	111	105	98.3
70	5.47	5.77	6.67	8.37	11.8	16.9	23.7	31.7	39.8	47.8	55.6	63.1	70.1	71.0	68.5	65.2	61.2	56.5	51.0
80	5.47	5.65	5.97	6.59	7.61	8.87	10.6	13.4	16.7	20.3	24.1	27.9	31.7	29.9	27.2	24.0	20.4	16.5	12.3
90	5.47	5.57	5.67	5.76	5.86	5.96	6.05	6.33	6.61	6.88	7.16	7.43	7.71	7.35	7.00	6.64	6.29	5.94	5.58
100	5.47	5.49	5.50	5.50	5.50	5.50	5.50	5.49	5.47	5.46	5.45	5.43	5.41	5.38	5.35	5.34	5.33	5.32	5.31
110	5.47	5.44	5.39	5.38	5.36	5.33	5.31	5.28	5.28	5.28	5.28	5.29	5.31	5.39	5.49	5.62	5.75	5.87	5.98
120	5.47	5.38	5.35	5.33	5.31	5.31	5.30	5.31	5.42	5.53	5.65	5.75	5.85	6.00	6.28	6.54	6.78	7.00	7.18
130	5.47	5.34	5.32	5.31	5.34	5.40	5.53	5.70	5.93	6.19	6.42	6.64	6.83	6.98	7.27	7.55	7.78	7.98	8.15
140	5.47	5.32	5.30	5.34	5.44	5.64	5.93	6.25	6.58	6.90	7.19	7.44	7.68	7.89	8.08	8.38	8.65	8.87	9.06
150	5.47	5.31	5.30	5.39	5.60	5.95	6.36	6.78	7.15	7.46	7.74	8.05	8.34	8.61	8.82	9.05	9.39	9.71	9.97
160	5.47	5.30	5.30	5.45	5.77	6.23	6.73	7.18	7.56	7.89	8.22	8.54	8.84	9.14	9.41	9.70	10.0	10.5	11.0
170	5.47	5.29	5.31	5.51	5.91	6.45	6.99	7.45	7.84	8.20	8.56	8.91	9.24	9.56	9.88	10.2	10.6	11.0	11.5
180	5.47	5.28	5.31	5.55	6.00	6.59	7.14	7.61	8.01	8.39	8.75	9.10	9.47	9.87	10.2	10.5	10.7	11.2	11.6

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1060A P:22.500W PF:0.9660 Freq:50.00Hz Lamp Flux:1966.87x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-45D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	11.6	11.7	11.9	11.9	11.6	11.0	10.1	8.95	7.77	6.65	5.68	4.93	4.44	4.17	4.12	4.15	4.27	4.46	
-170	11.5	11.4	11.6	11.7	11.6	11.1	10.2	9.13	7.94	6.79	5.79	5.00	4.48	4.20	4.13	4.16	4.27	4.46	
-160	12.1	12.0	12.0	11.8	11.5	10.8	9.93	8.85	7.71	6.62	5.68	4.95	4.46	4.20	4.14	4.16	4.27	4.46	
-150	11.8	11.8	11.8	11.4	10.8	10.0	9.10	8.13	7.12	6.17	5.37	4.78	4.39	4.19	4.14	4.18	4.28	4.46	
-140	9.89	10.0	10.1	10.0	9.38	8.63	7.84	7.02	6.24	5.54	4.97	4.56	4.29	4.18	4.15	4.19	4.29	4.46	
-130	7.47	7.65	7.73	7.72	7.52	6.97	6.40	5.84	5.35	4.92	4.59	4.35	4.22	4.16	4.16	4.20	4.30	4.46	
-120	5.50	5.63	5.71	5.74	5.71	5.47	5.17	4.90	4.66	4.46	4.31	4.22	4.17	4.16	4.19	4.24	4.33	4.46	
-110	4.61	4.63	4.64	4.63	4.61	4.54	4.44	4.35	4.28	4.22	4.18	4.16	4.17	4.18	4.22	4.27	4.35	4.46	
-100	4.42	4.39	4.36	4.33	4.30	4.27	4.25	4.23	4.21	4.20	4.18	4.16	4.18	4.22	4.27	4.32	4.39	4.46	
-90	4.64	4.58	4.52	4.46	4.41	4.35	4.33	4.32	4.30	4.29	4.28	4.26	4.30	4.33	4.36	4.40	4.43	4.46	
-80	11.1	9.66	8.20	6.83	5.61	4.70	4.71	4.69	4.66	4.59	4.53	4.48	4.53	4.53	4.51	4.48	4.47	4.46	
-70	44.8	38.8	32.3	25.5	18.6	13.6	12.5	11.3	9.80	8.46	7.31	6.13	5.81	5.38	4.95	4.67	4.52	4.46	
-60	89.0	81.1	72.1	62.2	51.3	45.2	41.0	36.3	31.1	25.2	19.1	14.6	11.4	8.48	6.31	5.06	4.60	4.46	
-50	144	131	117	102	89.8	83.9	76.9	68.5	59.4	49.7	40.3	30.7	21.8	14.8	9.23	5.89	4.71	4.46	
-40	246	212	178	148	137	126	114	101	88.0	74.8	62.0	49.0	35.4	23.1	13.7	7.16	4.82	4.46	
-30	527	389	273	235	209	183	158	136	117	99.3	82.3	65.5	48.9	32.0	18.5	8.78	4.93	4.46	
-20	1190	711	543	441	345	270	219	179	148	122	100	79.6	60.1	40.3	23.1	10.4	5.10	4.46	
-10	1879	1530	1186	876	619	428	305	227	177	142	114	90.2	68.3	46.5	26.7	11.8	5.25	4.46	
0	2695	2459	2010	1443	937	585	378	263	197	154	122	96.5	73.2	50.1	28.8	12.6	5.31	4.46	
10	1944	1380	937	718	548	398	291	221	173	140	112	89.1	67.4	45.7	26.4	11.9	5.28	4.46	
20	1183	750	535	404	307	240	202	170	142	118	97.2	77.3	58.2	38.8	22.6	10.5	5.15	4.46	
30	523	398	291	242	207	177	151	128	111	94.5	78.3	62.2	45.9	30.3	18.2	8.91	5.01	4.46	
40	252	220	188	159	143	128	113	97.8	82.8	69.0	57.0	44.5	32.0	21.6	13.4	7.35	4.93	4.46	
50	149	137	124	109	96.4	87.6	78.0	67.4	56.1	44.5	34.0	25.8	19.1	14.1	9.40	6.14	4.84	4.46	
60	92.2	84.9	76.5	67.0	56.6	48.9	42.4	35.5	28.2	21.0	14.6	12.1	10.5	8.63	6.70	5.35	4.75	4.46	
70	46.1	40.5	34.4	28.0	21.4	16.0	13.4	11.1	9.28	7.87	6.63	6.38	6.43	5.98	5.42	4.98	4.68	4.46	
80	11.2	9.98	8.76	7.60	6.57	5.76	5.71	5.66	5.61	5.57	5.53	5.48	5.35	5.19	5.00	4.81	4.63	4.46	
90	5.54	5.49	5.44	5.39	5.34	5.29	5.29	5.28	5.28	5.28	5.27	5.27	5.13	5.00	4.87	4.73	4.60	4.46	
100	5.36	5.41	5.45	5.48	5.50	5.51	5.46	5.40	5.34	5.29	5.25	5.22	5.06	4.92	4.78	4.66	4.55	4.46	
110	6.10	6.19	6.27	6.33	6.37	6.34	6.19	6.04	5.87	5.71	5.56	5.36	5.09	4.87	4.72	4.60	4.52	4.46	
120	7.28	7.36	7.41	7.42	7.43	7.30	7.10	6.87	6.63	6.37	6.10	5.65	5.22	4.90	4.68	4.55	4.48	4.46	
130	8.23	8.28	8.31	8.31	8.24	8.03	7.80	7.56	7.28	6.98	6.51	5.88	5.34	4.93	4.64	4.48	4.44	4.46	
140	9.13	9.16	9.14	9.09	8.86	8.61	8.33	8.04	7.74	7.29	6.62	5.96	5.36	4.91	4.60	4.44	4.41	4.46	
150	10.1	10.1	10.1	9.75	9.39	9.05	8.74	8.41	7.89	7.24	6.55	5.88	5.29	4.82	4.53	4.38	4.37	4.46	
160	10.9	10.9	10.6	10.2	9.75	9.33	9.02	8.54	7.89	7.13	6.37	5.67	5.09	4.65	4.41	4.30	4.33	4.46	
170	11.2	10.7	10.4	10.5	10.4	10.1	9.56	8.79	7.91	6.97	6.09	5.36	4.80	4.43	4.28	4.23	4.30	4.46	
180	11.6	11.7	11.9	11.9	11.6	11.0	10.1	8.95	7.77	6.65	5.68	4.93	4.44	4.17	4.12	4.15	4.27	4.46	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: