

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1489.1 cd per klm.
(Luminaire orientation as tested.)	0.5 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	77.4V x 76.0H
	At 50% of Imax	42.8V x 40.7H
	At 90% of Imax	22.9V x 19.8H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	775.8 lumens per klm.
	To 50% of Imax	459.5 lumens per klm.
	To 90% of Imax	147.2 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1020A P:21.600W PF:0.9640 Freq:50.00Hz Lamp Flux:1353.35x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-45D	TYPE:RGBW RED	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

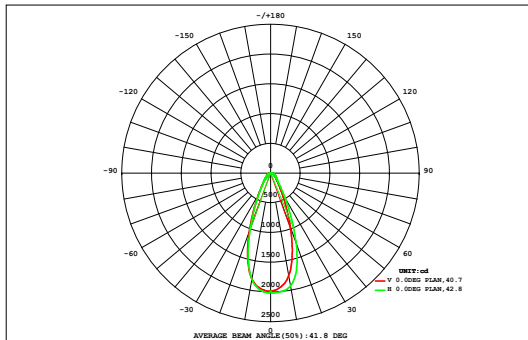

DATA OF LAMP		Eff:62.66lm/W	
MODEL		Imax(cd)	2015
NOMINAL POWER(W)	24	AVAILABILITY(%)	77.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1050
NOMINAL FLUX(lm)	1353.35	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1353
TEST VOLTAGE(V)	220	θ @50% (H,V)	41,43DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.07	0.16	0.30	0.47	0.66	0.82	0.86	0.83	0.76	0.66	0.56	0.43	0.30	0.21	0.13	0.08	0.05	0.03	7.38	0.00
72	0.11	0.25	0.45	0.69	0.95	1.21	1.32	1.33	1.26	1.14	1.01	0.82	0.62	0.46	0.31	0.17	0.09	0.05	12.2	0.00
64	0.15	0.34	0.60	0.92	1.27	1.66	1.92	1.96	1.87	1.70	1.50	1.24	0.98	0.75	0.52	0.31	0.16	0.07	17.9	0.00
56	0.19	0.43	0.75	1.15	1.64	2.25	2.85	3.03	2.86	2.53	2.15	1.71	1.36	1.04	0.73	0.46	0.26	0.11	25.5	0.00
48	0.23	0.50	0.88	1.39	2.10	3.16	4.68	5.55	5.14	4.15	3.19	2.36	1.82	1.34	0.93	0.61	0.35	0.15	38.5	18.5
40	0.26	0.56	0.99	1.63	2.68	4.65	8.35	12.0	11.1	8.06	5.15	3.43	2.42	1.67	1.15	0.76	0.44	0.20	65.5	50.4
32	0.28	0.60	1.08	1.85	3.33	6.66	13.7	23.0	22.9	16.3	9.08	5.37	3.27	2.14	1.41	0.90	0.51	0.23	113	100
24	0.29	0.63	1.14	1.99	3.79	8.38	18.2	30.8	34.9	26.7	15.6	8.72	5.00	2.82	1.68	1.02	0.58	0.27	163	152
	0.29	0.63	1.14	1.99	3.82	8.65	19.3	32.1	38.2	33.4	25.2	15.8	7.61	3.54	1.90	1.11	0.62	0.29	196	186
	0.29	0.63	1.15	2.00	3.87	8.81	19.4	31.6	37.5	35.5	28.2	17.1	7.93	3.61	1.92	1.12	0.62	0.29	202	192
	0.29	0.63	1.14	2.01	3.91	8.78	18.8	30.7	36.1	28.6	18.2	10.9	5.68	2.99	1.73	1.04	0.59	0.27	172	162
-24	0.28	0.61	1.09	1.88	3.44	6.99	14.1	23.4	25.8	19.2	9.71	6.15	3.76	2.33	1.48	0.93	0.53	0.24	122	110
-32	0.26	0.57	1.00	1.65	2.74	4.73	8.38	12.4	13.0	10.0	5.57	3.54	2.58	1.80	1.23	0.80	0.46	0.21	71.0	55.8
-40	0.23	0.51	0.89	1.40	2.10	3.13	4.61	5.73	5.86	4.88	3.40	2.33	1.85	1.40	1.00	0.66	0.38	0.17	40.5	21.6
-48	0.20	0.44	0.76	1.15	1.62	2.19	2.78	3.10	3.11	2.78	2.24	1.69	1.36	1.07	0.78	0.51	0.29	0.12	26.2	0.55
-56	0.16	0.36	0.63	0.92	1.25	1.60	1.87	1.99	1.99	1.83	1.55	1.23	0.97	0.77	0.56	0.36	0.20	0.08	18.3	0.00
-64	0.12	0.28	0.48	0.70	0.94	1.17	1.31	1.36	1.35	1.24	1.05	0.83	0.61	0.48	0.34	0.21	0.11	0.05	12.6	0.00
-72	0.08	0.19	0.32	0.48	0.65	0.80	0.86	0.88	0.86	0.77	0.62	0.45	0.29	0.22	0.15	0.10	0.06	0.03	7.81	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	3.78	8.33	14.8	24.3	40.8	75.6	143	222	245	199	134	84.1	48.4	28.6	18.0	11.1	6.29	2.88	1310	---
Φ a	0.00	0.00	0.00	0.00	18.1	59.1	129	208	230	184	118	66.6	30.0	7.15	0.00	0.00	0.00	0.00	---	1050

one-half-peak spread: U:23.4,D:19.6 , L:20.5,R:20.4


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1020A P:21.600W PF:0.9640 Freq:50.00Hz Lamp Flux:1353.35x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-45D	TYPE:RGBW RED	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

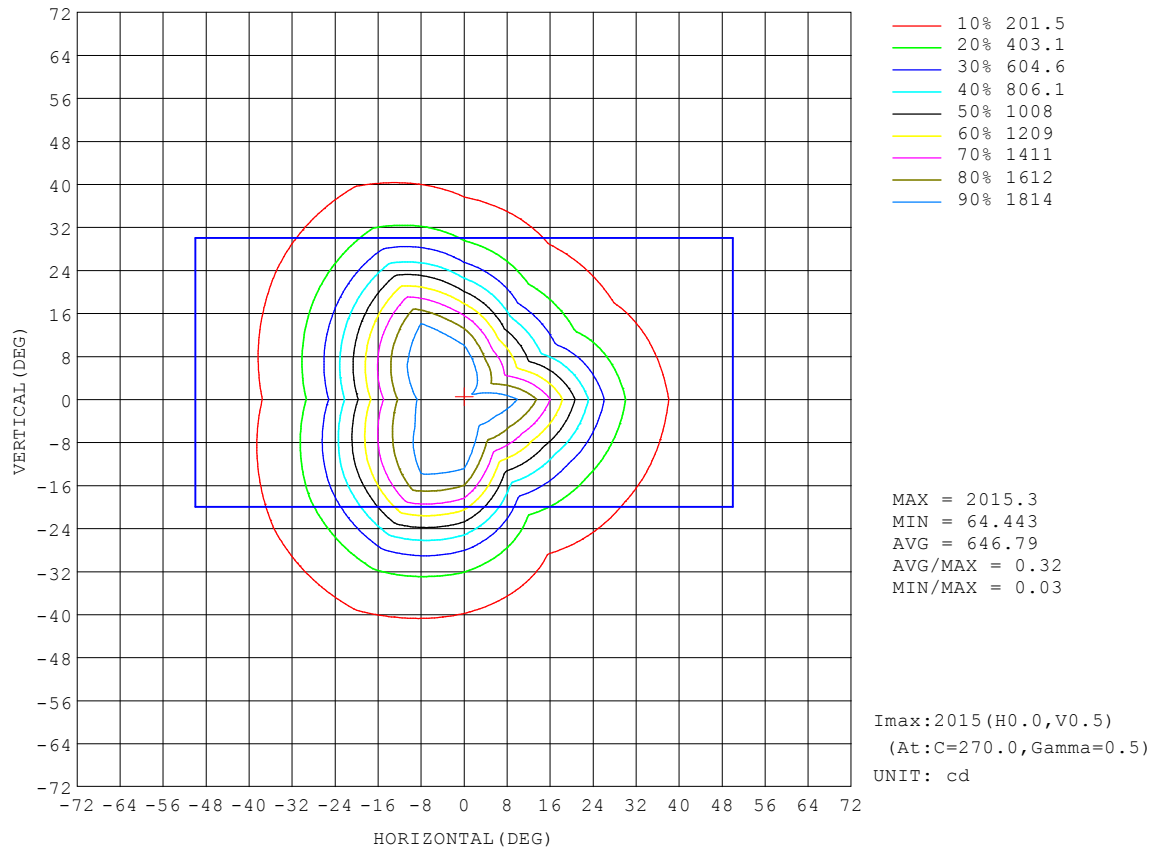


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1020A P:21.600W PF:0.9640 Freq:50.00Hz Lamp Flux:1353.35x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-45D	TYPE:RGBW RED	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

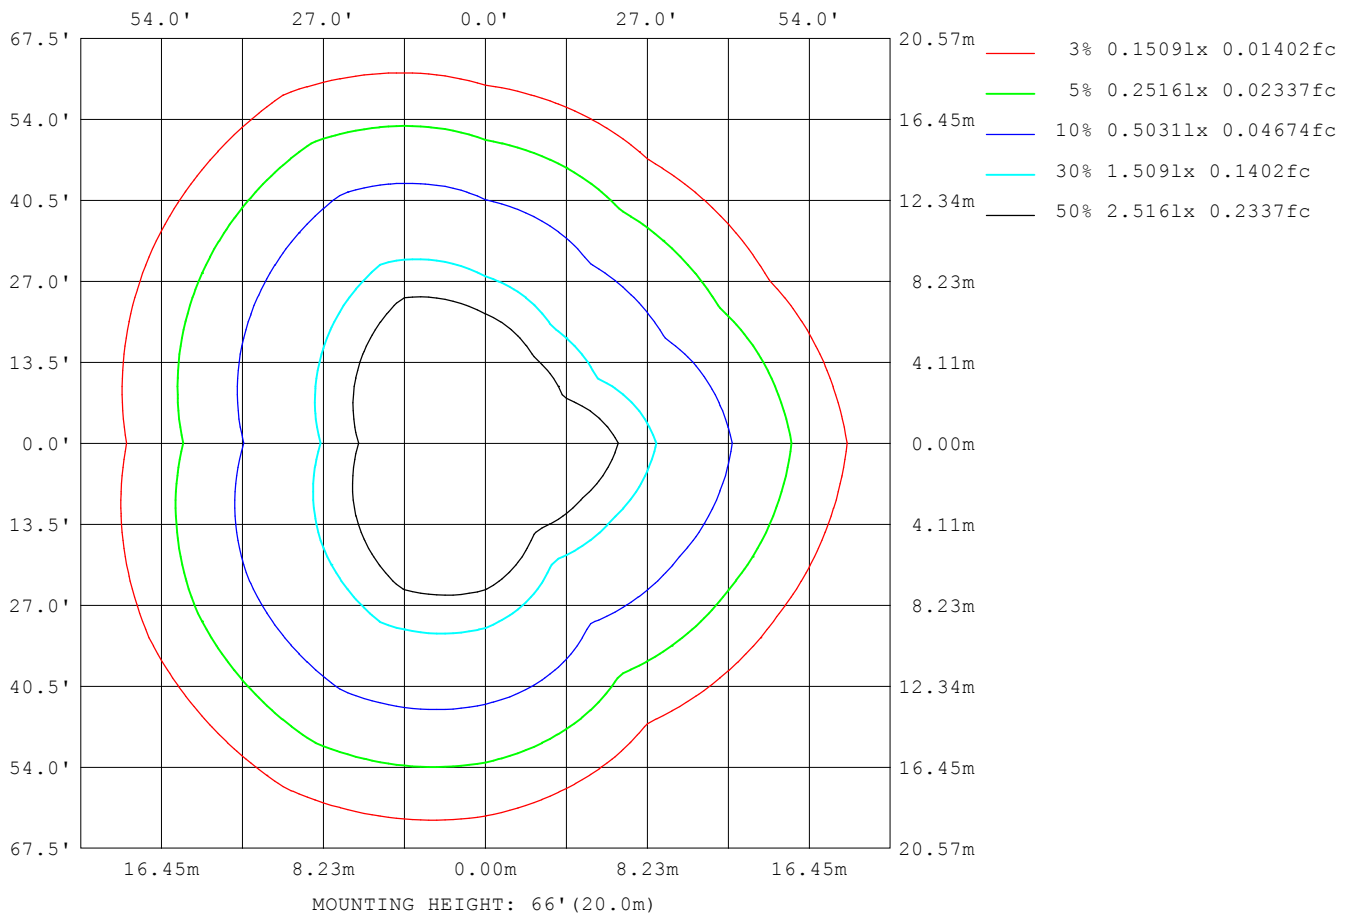

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

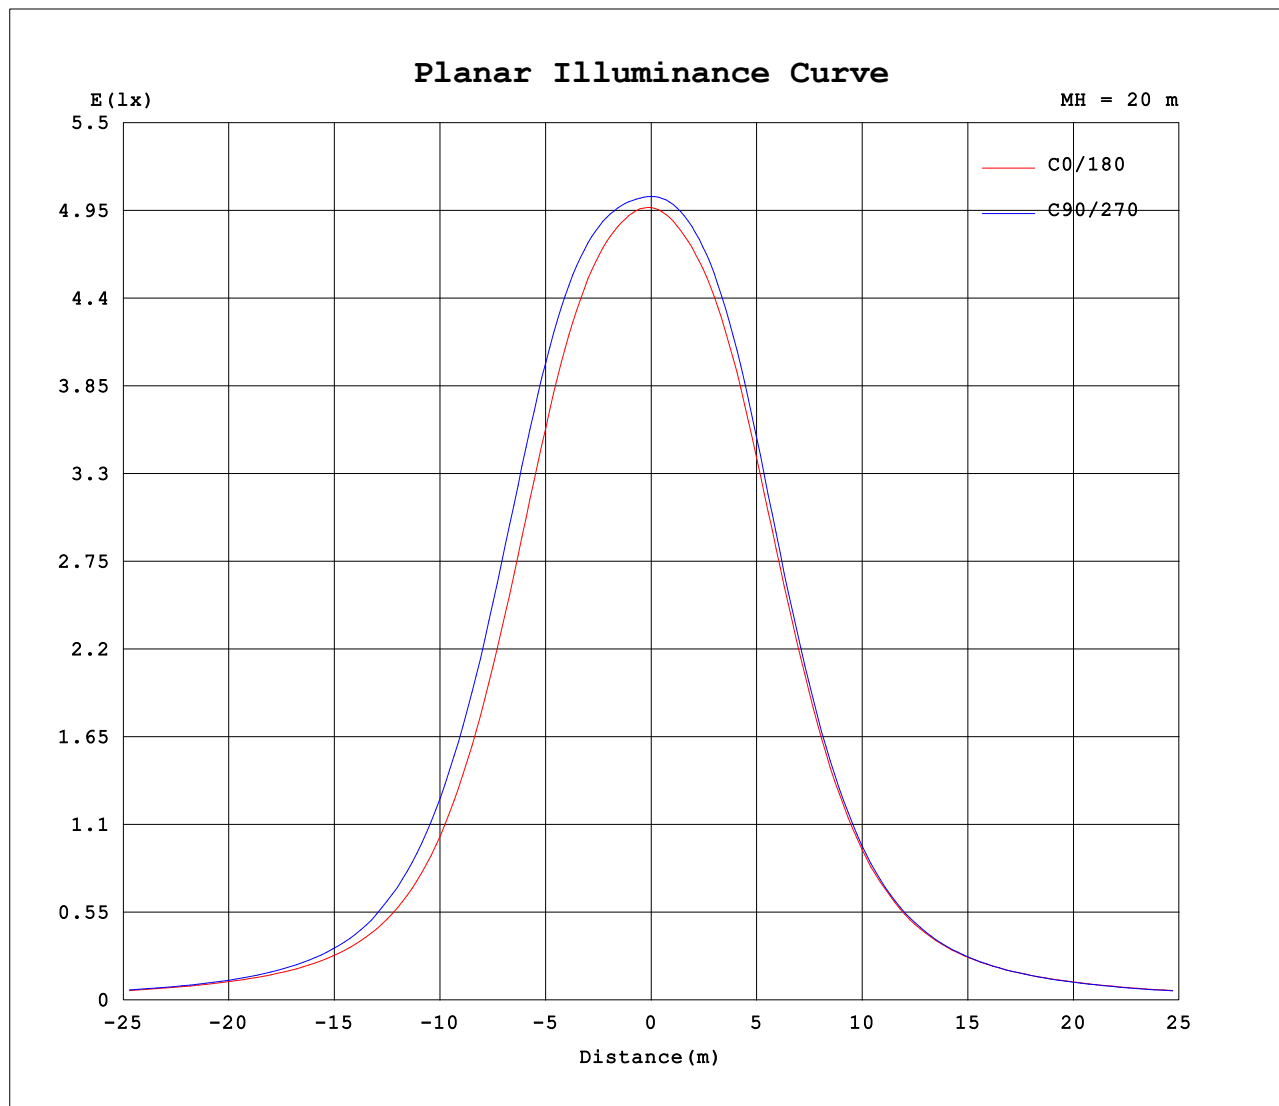


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1020A P:21.600W PF:0.9640 Freq:50.00Hz Lamp Flux:1353.35x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-45D	TYPE:RGBW RED	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

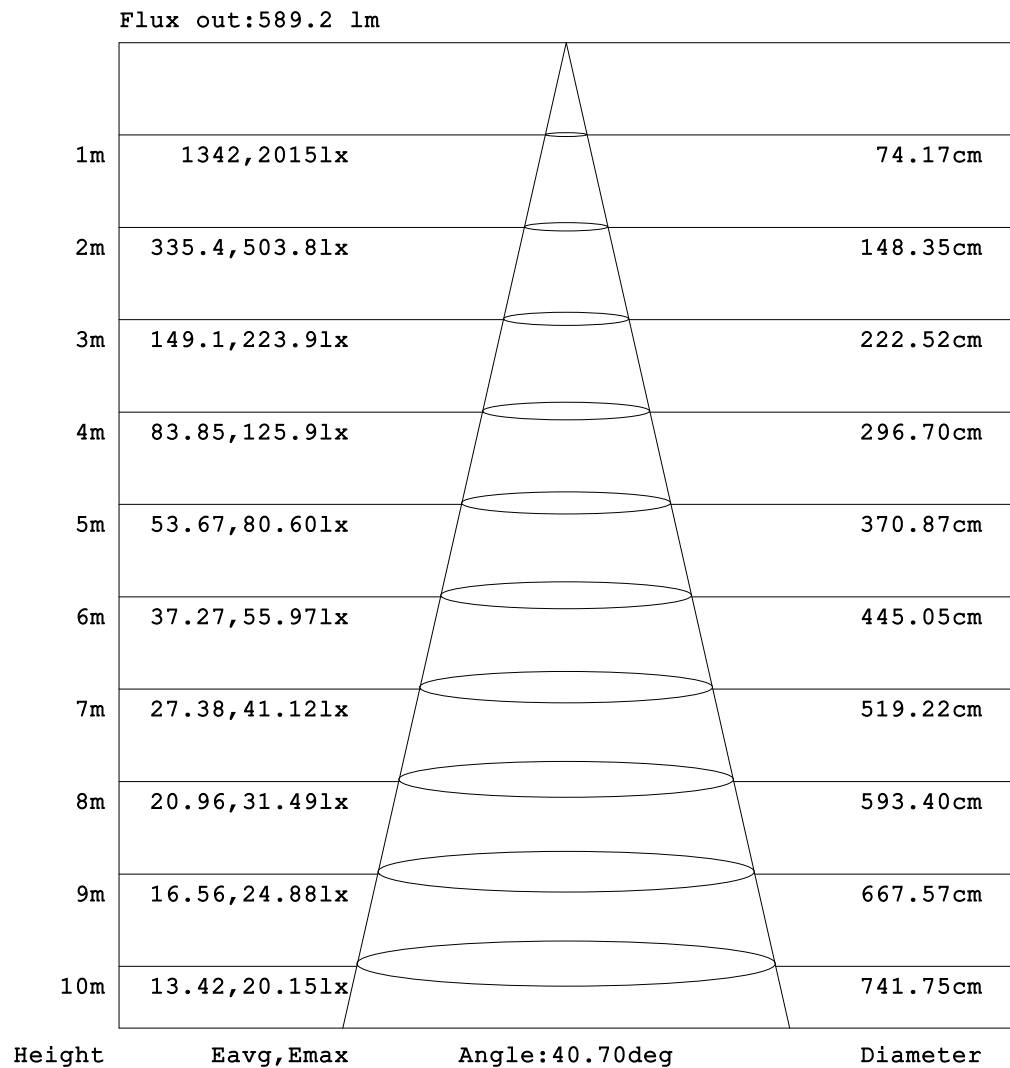

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1020A P:21.600W PF:0.9640 Freq:50.00Hz Lamp Flux:1353.35x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-45D	TYPE:RGBW RED	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.71	3.58	3.60	3.77	4.10	4.51	4.92	5.25	5.55	5.83	6.11	6.37	6.65	6.95	7.23	7.42	7.60	7.88	8.13
-170	3.71	3.56	3.55	3.67	3.91	4.22	4.52	4.78	5.05	5.36	5.75	6.19	6.69	7.23	7.71	7.99	8.12	8.33	8.38
-160	3.71	3.54	3.49	3.55	3.70	3.89	4.07	4.24	4.44	4.70	5.09	5.57	6.16	6.77	7.28	7.68	8.00	8.30	8.49
-150	3.71	3.52	3.45	3.43	3.49	3.56	3.63	3.67	3.73	3.86	4.13	4.65	5.17	5.67	6.12	6.55	7.10	7.53	7.87
-140	3.71	3.51	3.41	3.32	3.31	3.28	3.24	3.17	3.07	3.18	3.45	3.75	4.08	4.39	4.71	5.21	5.65	6.04	6.34
-130	3.71	3.51	3.39	3.26	3.16	3.08	2.97	2.82	2.77	2.86	2.95	3.08	3.22	3.36	3.63	3.92	4.21	4.46	4.66
-120	3.71	3.51	3.37	3.24	3.09	2.96	2.82	2.70	2.72	2.74	2.76	2.78	2.80	2.86	2.98	3.10	3.23	3.35	3.45
-110	3.71	3.54	3.38	3.24	3.10	2.95	2.78	2.72	2.74	2.75	2.77	2.78	2.78	2.81	2.85	2.90	2.95	3.01	3.06
-100	3.71	3.58	3.44	3.29	3.15	3.01	2.88	2.87	2.88	2.89	2.90	2.91	2.93	2.94	2.95	2.97	2.98	3.00	3.03
-90	3.71	3.63	3.55	3.47	3.39	3.31	3.23	3.31	3.40	3.48	3.57	3.65	3.73	3.65	3.58	3.50	3.42	3.34	3.26
-80	3.71	3.71	3.89	4.30	4.91	5.86	7.24	8.73	10.3	12.0	13.7	15.3	16.9	16.5	15.7	14.7	13.4	12.0	10.4
-70	3.71	3.84	4.41	5.72	8.22	11.9	16.7	21.3	25.5	29.5	33.4	37.1	40.5	41.7	41.6	41.1	40.1	38.6	36.6
-60	3.71	3.97	5.07	8.10	13.4	20.4	28.1	35.7	42.3	48.6	54.6	60.4	65.9	69.9	71.2	71.5	70.9	69.5	67.1
-50	3.71	4.10	6.01	11.2	19.3	28.8	39.0	49.3	58.6	67.5	76.7	86.3	96.1	106	111	114	115	113	109
-40	3.71	4.19	6.99	14.3	24.6	36.4	48.8	61.0	73.9	87.5	102	120	140	164	192	205	213	211	199
-30	3.71	4.25	7.89	16.9	28.9	42.6	56.5	71.1	87.6	108	134	168	217	288	384	494	542	545	499
-20	3.71	4.27	8.55	18.6	31.9	46.9	62.0	78.7	98.8	125	165	230	338	510	761	1075	1342	1355	1260
-10	3.71	4.25	8.73	19.2	33.3	48.8	64.5	82.2	104	134	182	265	420	684	1062	1466	1779	1943	1929
0	3.71	4.17	8.43	18.7	32.7	48.2	63.8	81.1	102	130	171	243	378	616	984	1409	1755	1925	1987
10	3.71	4.22	8.56	19.0	33.0	48.5	64.3	82.0	104	133	179	258	403	657	1033	1465	1805	1946	1817
20	3.71	4.23	8.22	18.2	31.4	46.3	61.5	78.2	98.1	124	161	221	321	487	739	1061	1314	1223	1010
30	3.71	4.20	7.45	16.1	28.0	41.6	55.7	70.4	86.9	107	132	166	215	285	389	495	510	473	384
40	3.71	4.15	6.51	13.3	23.4	35.0	47.3	59.8	72.8	86.9	103	121	143	168	197	205	204	192	171
50	3.71	4.06	5.57	10.1	17.7	27.1	37.0	47.2	57.3	67.3	77.4	88.0	99.0	110	114	114	112	107	99.5
60	3.71	3.94	4.80	7.17	11.7	18.2	25.7	33.3	40.7	48.0	54.9	61.7	68.1	72.5	72.1	70.9	68.5	65.3	61.1
70	3.71	3.87	4.30	5.26	7.05	9.96	13.9	18.6	23.5	28.5	33.2	37.7	42.0	42.6	41.2	39.2	36.7	33.8	30.3
80	3.71	3.81	3.95	4.18	4.69	5.42	6.33	7.64	9.25	11.2	13.2	15.2	17.3	16.4	15.0	13.2	11.2	9.06	6.74
90	3.71	3.76	3.80	3.85	3.90	3.95	3.99	4.07	4.14	4.21	4.29	4.36	4.43	4.31	4.19	4.06	3.94	3.82	3.70
100	3.71	3.71	3.70	3.70	3.70	3.70	3.69	3.67	3.64	3.62	3.61	3.58	3.56	3.55	3.54	3.54	3.54	3.54	3.54
110	3.71	3.66	3.64	3.63	3.61	3.59	3.56	3.55	3.55	3.55	3.55	3.57	3.58	3.64	3.73	3.82	3.91	4.00	4.08
120	3.71	3.63	3.61	3.59	3.58	3.58	3.58	3.59	3.67	3.77	3.86	3.96	4.04	4.16	4.35	4.52	4.67	4.80	4.91
130	3.71	3.62	3.60	3.58	3.61	3.64	3.75	3.89	4.06	4.26	4.44	4.60	4.75	4.86	5.04	5.20	5.34	5.45	5.54
140	3.71	3.60	3.59	3.60	3.68	3.84	4.05	4.30	4.53	4.76	4.96	5.14	5.31	5.46	5.59	5.78	5.95	6.10	6.21
150	3.71	3.59	3.58	3.65	3.80	4.06	4.37	4.67	4.93	5.15	5.34	5.55	5.77	5.96	6.13	6.29	6.52	6.71	6.87
160	3.71	3.59	3.59	3.70	3.93	4.27	4.62	4.95	5.22	5.46	5.69	5.91	6.14	6.35	6.56	6.78	7.01	7.32	7.56
170	3.71	3.58	3.60	3.74	4.04	4.42	4.81	5.15	5.42	5.69	5.95	6.21	6.45	6.68	6.90	7.13	7.39	7.63	7.90
180	3.71	3.58	3.60	3.77	4.10	4.51	4.92	5.25	5.55	5.83	6.11	6.37	6.65	6.95	7.23	7.42	7.60	7.88	8.14

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1020A P:21.600W PF:0.9640 Freq:50.00Hz Lamp Flux:1353.35x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-45D	TYPE:RGBW RED	WEIGHT:00
SPEC.:45 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.15	8.20	8.31	8.29	8.11	7.67	7.02	6.21	5.37	4.56	3.87	3.31	2.97	2.79	2.78	2.81	2.90	3.05	
-170	8.00	8.01	8.09	8.17	8.08	7.70	7.07	6.28	5.43	4.62	3.91	3.36	3.00	2.81	2.79	2.81	2.90	3.05	
-160	8.38	8.33	8.27	8.18	7.91	7.44	6.79	6.02	5.22	4.46	3.81	3.30	2.98	2.82	2.79	2.81	2.90	3.05	
-150	7.95	7.98	7.97	7.72	7.30	6.76	6.13	5.46	4.77	4.12	3.58	3.18	2.92	2.81	2.79	2.82	2.90	3.05	
-140	6.53	6.64	6.67	6.62	6.19	5.70	5.17	4.64	4.14	3.68	3.30	3.03	2.86	2.80	2.79	2.83	2.91	3.05	
-130	4.84	4.95	5.00	5.00	4.86	4.52	4.16	3.82	3.50	3.24	3.04	2.89	2.82	2.80	2.80	2.84	2.92	3.05	
-120	3.56	3.63	3.68	3.69	3.66	3.52	3.35	3.19	3.05	2.94	2.87	2.82	2.80	2.80	2.82	2.87	2.94	3.05	
-110	3.06	3.06	3.05	3.03	3.00	2.95	2.91	2.87	2.84	2.82	2.80	2.79	2.80	2.81	2.85	2.89	2.96	3.05	
-100	3.00	2.97	2.94	2.91	2.89	2.86	2.86	2.84	2.83	2.82	2.80	2.79	2.81	2.85	2.88	2.94	2.98	3.05	
-90	3.21	3.16	3.11	3.06	3.01	2.96	2.95	2.93	2.92	2.91	2.89	2.88	2.91	2.93	2.96	2.99	3.02	3.05	
-80	9.18	7.87	6.56	5.31	4.20	3.32	3.31	3.27	3.23	3.18	3.12	3.06	3.08	3.08	3.07	3.05	3.05	3.05	
-70	33.0	29.0	24.7	20.1	15.3	11.7	10.6	9.29	7.94	6.66	5.54	4.75	4.06	3.68	3.37	3.17	3.09	3.05	
-60	62.7	57.6	51.7	45.4	38.3	34.1	30.9	27.3	23.5	19.3	14.7	11.1	8.27	6.06	4.28	3.44	3.14	3.05	
-50	101	92.4	82.7	72.6	63.9	59.5	54.6	48.8	42.5	35.8	29.1	22.3	15.7	10.4	6.40	3.96	3.21	3.05	
-40	177	152	127	105	96.7	88.3	79.4	70.3	61.2	52.2	43.4	34.3	25.0	16.2	9.39	4.82	3.27	3.05	
-30	399	291	200	169	148	128	110	93.9	80.4	68.2	56.5	45.1	33.7	22.1	12.6	5.90	3.35	3.05	
-20	919	556	417	328	252	193	152	123	101	83.1	68.0	54.1	40.9	27.5	15.7	7.02	3.46	3.05	
-10	1456	1202	926	667	456	303	210	154	120	95.6	76.7	60.8	46.1	31.4	18.0	7.93	3.56	3.05	
0	1951	1811	1495	1064	672	406	256	176	132	103	81.9	64.6	49.0	33.5	19.3	8.40	3.60	3.05	
10	1404	1042	720	537	395	278	199	149	117	94.0	75.6	59.9	45.4	30.8	17.8	7.91	3.58	3.05	
20	785	529	385	288	217	168	139	116	96.6	80.2	65.8	52.4	39.5	26.4	15.3	7.00	3.50	3.05	
30	326	259	198	167	143	122	103	87.3	75.5	64.4	53.4	42.6	31.6	20.7	12.2	5.95	3.40	3.05	
40	158	142	125	108	97.6	87.3	77.0	66.9	57.0	47.7	39.5	31.1	22.3	14.9	9.09	4.93	3.34	3.05	
50	94.7	88.5	81.3	73.4	65.8	59.9	53.6	46.7	39.2	31.6	24.6	18.6	13.5	9.69	6.30	4.10	3.29	3.05	
60	58.2	54.5	50.1	45.0	39.2	34.4	30.1	25.5	20.7	15.7	11.1	8.77	7.42	5.83	4.51	3.62	3.23	3.05	
70	27.9	25.1	22.0	18.6	15.0	11.9	10.1	8.30	6.83	5.74	4.79	4.38	4.37	4.03	3.66	3.37	3.18	3.05	
80	6.26	5.75	5.22	4.71	4.26	3.90	3.86	3.82	3.78	3.75	3.72	3.69	3.60	3.50	3.38	3.26	3.15	3.05	
90	3.67	3.63	3.60	3.57	3.54	3.51	3.51	3.51	3.51	3.51	3.51	3.51	3.43	3.36	3.28	3.20	3.12	3.05	
100	3.56	3.59	3.61	3.62	3.63	3.63	3.59	3.55	3.52	3.49	3.48	3.46	3.37	3.28	3.21	3.15	3.09	3.05	
110	4.13	4.18	4.20	4.22	4.22	4.19	4.08	3.97	3.85	3.74	3.63	3.50	3.35	3.24	3.16	3.10	3.06	3.05	
120	4.95	4.98	4.99	4.98	4.96	4.86	4.72	4.55	4.37	4.18	3.99	3.70	3.43	3.24	3.12	3.06	3.03	3.05	
130	5.58	5.60	5.60	5.59	5.52	5.37	5.21	5.03	4.83	4.62	4.30	3.87	3.52	3.26	3.09	3.02	3.01	3.05	
140	6.24	6.24	6.21	6.15	5.98	5.79	5.58	5.36	5.15	4.85	4.39	3.95	3.55	3.26	3.06	2.98	2.98	3.05	
150	6.91	6.90	6.85	6.63	6.37	6.12	5.89	5.64	5.28	4.83	4.36	3.91	3.50	3.21	3.02	2.94	2.96	3.05	
160	7.51	7.45	7.24	6.94	6.63	6.33	6.12	5.79	5.33	4.81	4.27	3.78	3.39	3.11	2.96	2.90	2.94	3.05	
170	7.67	7.36	7.14	7.19	7.19	6.97	6.57	6.03	5.40	4.74	4.11	3.60	3.21	2.96	2.88	2.85	2.92	3.05	
180	8.15	8.20	8.31	8.29	8.11	7.67	7.02	6.21	5.37	4.56	3.87	3.31	2.97	2.79	2.78	2.81	2.90	3.05	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-08

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: