

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	889.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	-1.0 degrees horizontal

Beam Spread	At 10% of Imax	106.9V x 107.0H
	At 50% of Imax	56.6V x 56.8H
	At 90% of Imax	21.1V x 21.3H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	864.0 lumens per klm.
	To 50% of Imax	479.1 lumens per klm.
	To 90% of Imax	89.1 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:2004.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-60D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

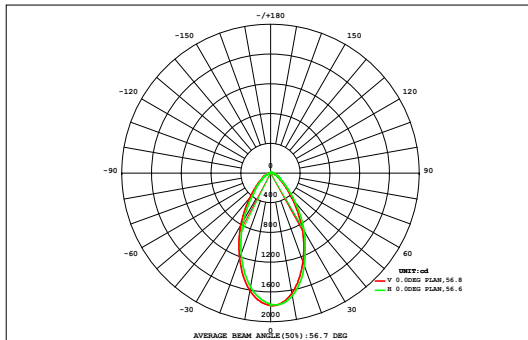

DATA OF LAMP		Eff:81.80lm/W	
MODEL		Imax(cd)	1783
NOMINAL POWER(W)	24	AVAILABILITY(%)	86.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1731
NOMINAL FLUX(lm)	2004.06	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2004
TEST VOLTAGE(V)	220	θ @50% (H,V)	57,57DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.05	0.08	0.11	0.14	0.17	0.19	0.20	0.21	0.21	0.20	0.19	0.17	0.14	0.11	0.08	0.04	0.01	2.31	0.00
90	0.02	0.05	0.11	0.20	0.33	0.50	0.65	0.76	0.81	0.80	0.75	0.64	0.49	0.33	0.20	0.10	0.05	0.01	6.80	0.00
80	0.02	0.07	0.21	0.50	0.92	1.40	1.85	2.16	2.27	2.25	2.11	1.77	1.34	0.90	0.49	0.21	0.06	0.01	18.5	0.00
70	0.02	0.11	0.40	0.95	1.70	2.54	3.34	3.97	4.30	4.23	3.79	3.15	2.44	1.63	0.92	0.38	0.10	0.01	34.0	0.99
60	0.02	0.16	0.62	1.43	2.51	3.90	5.62	7.25	8.08	7.88	6.78	5.19	3.68	2.41	1.37	0.59	0.15	0.02	57.6	38.4
50	0.02	0.22	0.83	1.88	3.47	6.13	9.88	13.7	16.0	15.7	13.0	9.17	5.84	3.35	1.81	0.79	0.20	0.02	102	90.8
40	0.03	0.27	1.01	2.31	4.72	9.28	16.1	23.6	28.1	27.8	22.9	15.5	8.92	4.57	2.21	0.96	0.25	0.02	169	160
30	0.03	0.31	1.15	2.69	6.06	12.8	23.0	33.8	40.7	40.2	32.6	22.1	12.2	5.82	2.57	1.09	0.28	0.02	237	230
	0.03	0.33	1.23	2.95	7.03	15.4	28.0	41.2	50.0	49.1	39.7	26.7	14.7	6.70	2.81	1.17	0.30	0.02	287	281
	0.03	0.34	1.24	3.00	7.21	15.9	28.8	42.3	51.4	51.4	41.6	27.8	15.2	6.87	2.86	1.18	0.31	0.02	297	291
	0.03	0.32	1.19	2.82	6.54	14.0	25.2	36.7	44.6	44.5	36.3	24.7	13.6	6.28	2.70	1.14	0.30	0.02	261	254
	0.03	0.29	1.08	2.49	5.33	10.8	19.0	27.5	32.8	32.7	27.1	18.6	10.5	5.15	2.39	1.03	0.27	0.02	197	189
-30	0.02	0.24	0.92	2.07	4.01	7.40	12.3	17.5	20.8	20.7	17.2	12.0	7.21	3.88	2.01	0.88	0.22	0.02	129	120
-40	0.02	0.19	0.72	1.64	2.91	4.73	7.19	9.65	11.3	11.2	9.53	7.05	4.62	2.83	1.60	0.69	0.17	0.02	76.0	61.7
-50	0.02	0.13	0.51	1.18	2.06	3.06	4.14	5.14	5.77	5.75	5.09	4.08	3.01	2.02	1.14	0.48	0.12	0.02	43.7	13.8
-60	0.02	0.09	0.29	0.71	1.27	1.91	2.50	2.95	3.21	3.20	2.93	2.47	1.87	1.24	0.68	0.27	0.07	0.01	25.7	0.00
-70	0.02	0.06	0.14	0.31	0.56	0.87	1.16	1.39	1.53	1.52	1.37	1.14	0.84	0.54	0.29	0.13	0.05	0.01	11.9	0.00
-80	0.02	0.04	0.07	0.11	0.17	0.23	0.29	0.33	0.36	0.36	0.33	0.28	0.22	0.16	0.11	0.07	0.04	0.01	3.18	0.00
-90	0.02	0.04	0.07	0.11	0.17	0.23	0.29	0.33	0.36	0.36	0.33	0.28	0.22	0.16	0.11	0.07	0.04	0.01	3.18	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	0.39	3.26	11.8	27.3	56.9	111	189	270	322	319	263	183	107	54.8	26.3	11.2	2.97	0.32	1960	---
Φ a	0.00	0.00	0.00	4.75	39.7	95.6	174	256	308	305	249	167	91.2	37.3	3.44	0.00	0.00	0.00	---	1731

one-half-peak spread: U:27.6,D:26.4 , L:28.2,R:29.1


NEMA Beam Type: Type 6

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:2004.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-60D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

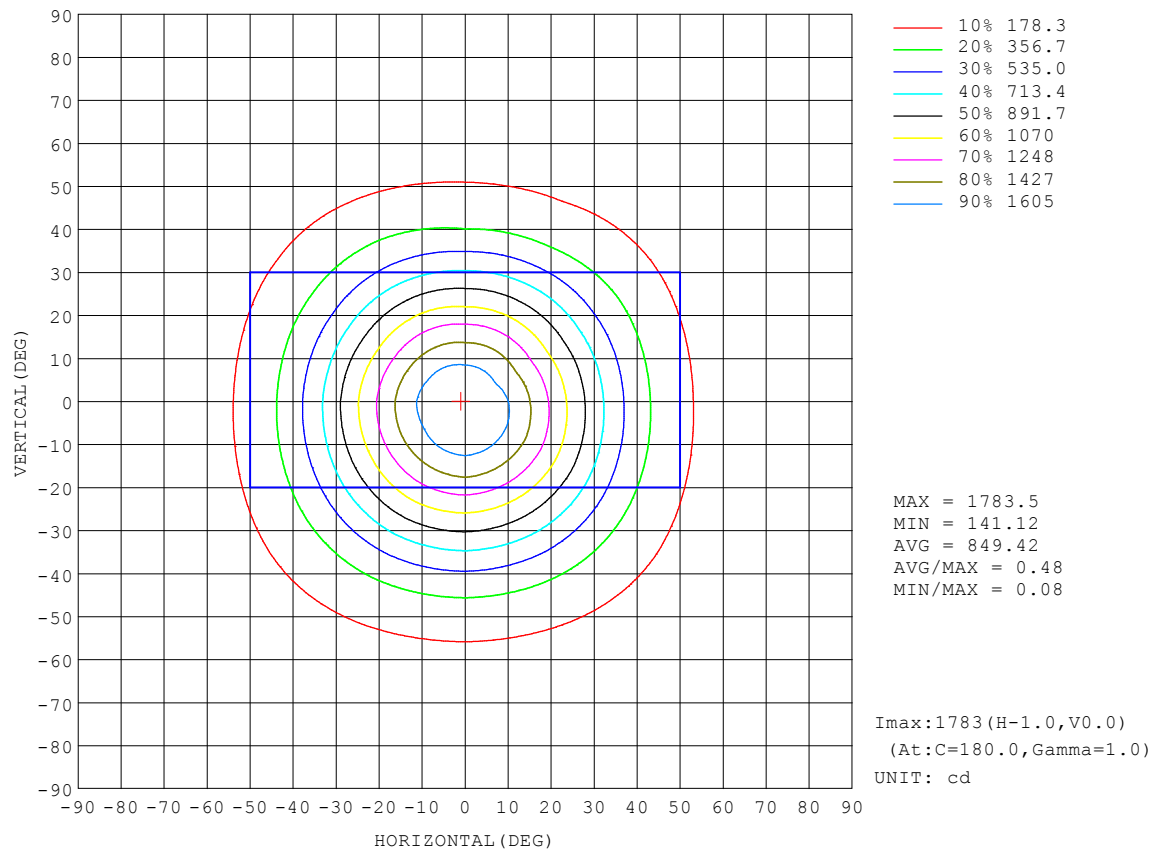


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:2004.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-60D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

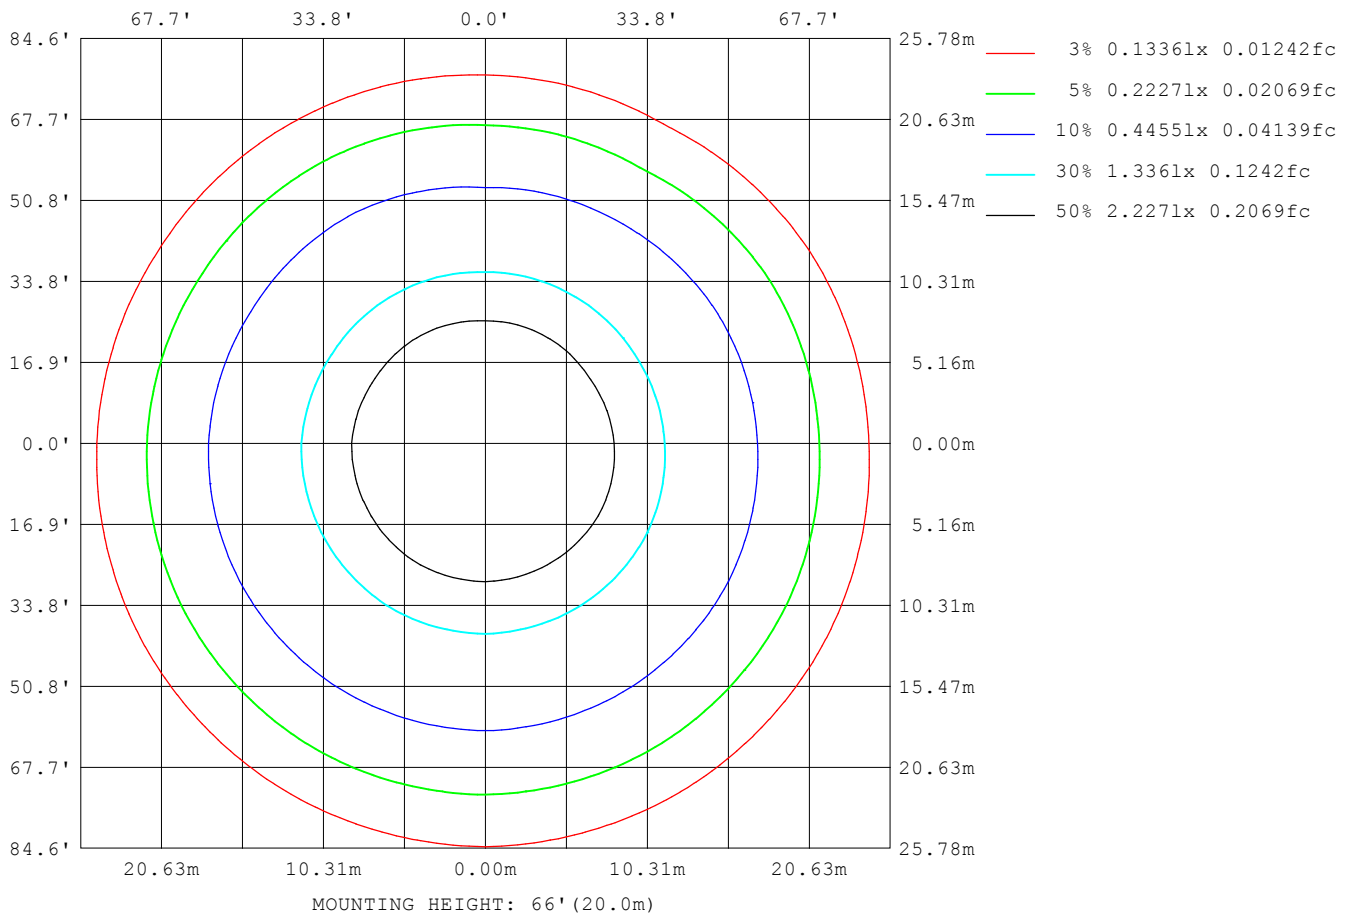

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

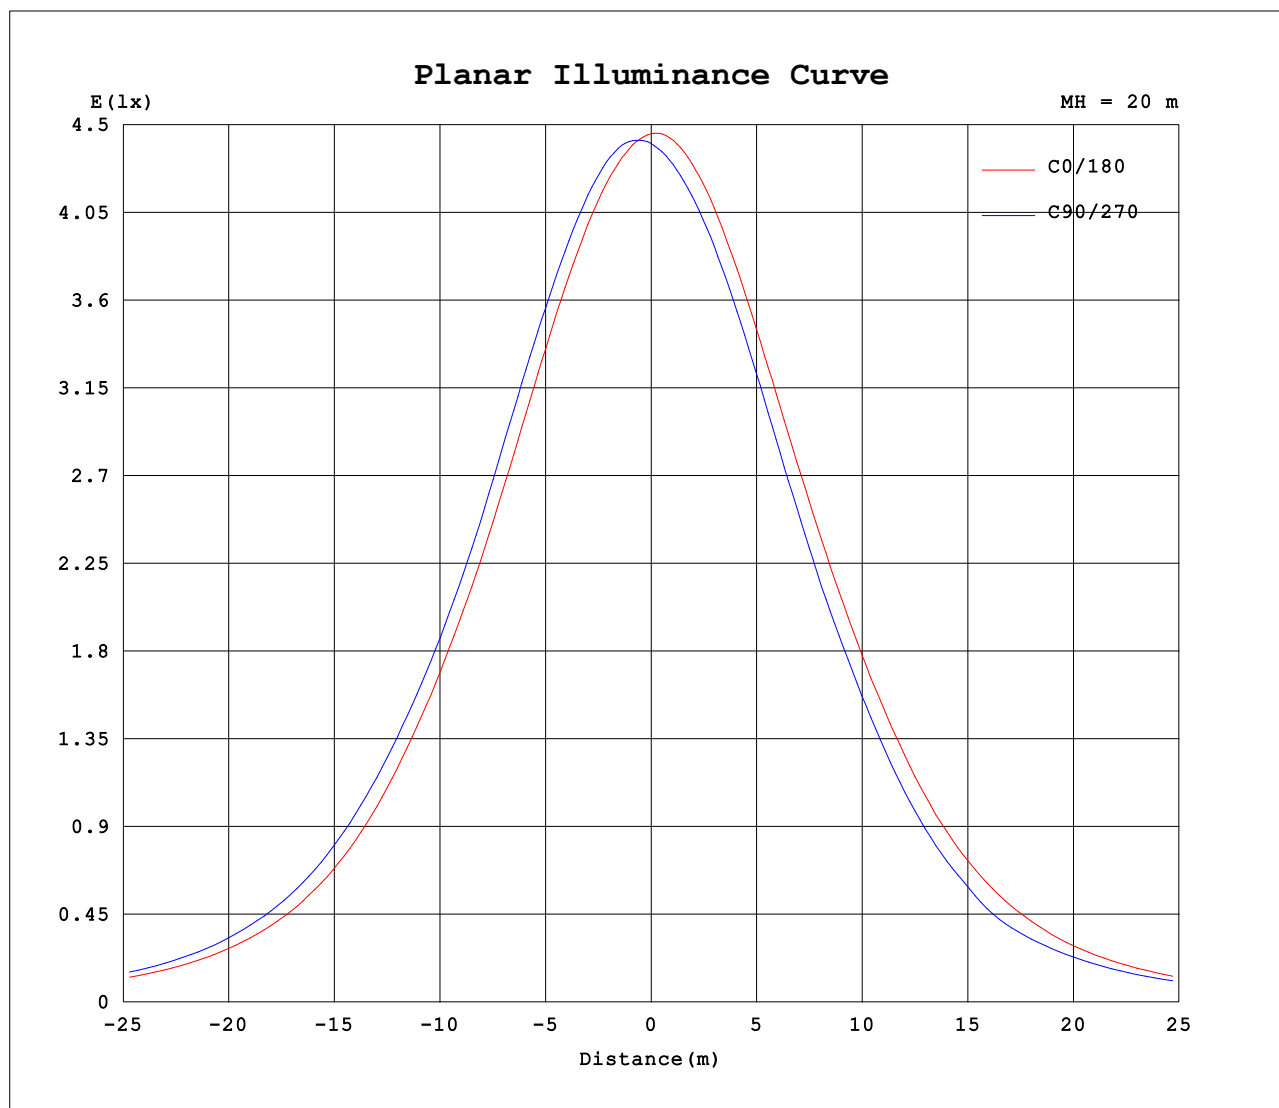


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:2004.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-60D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

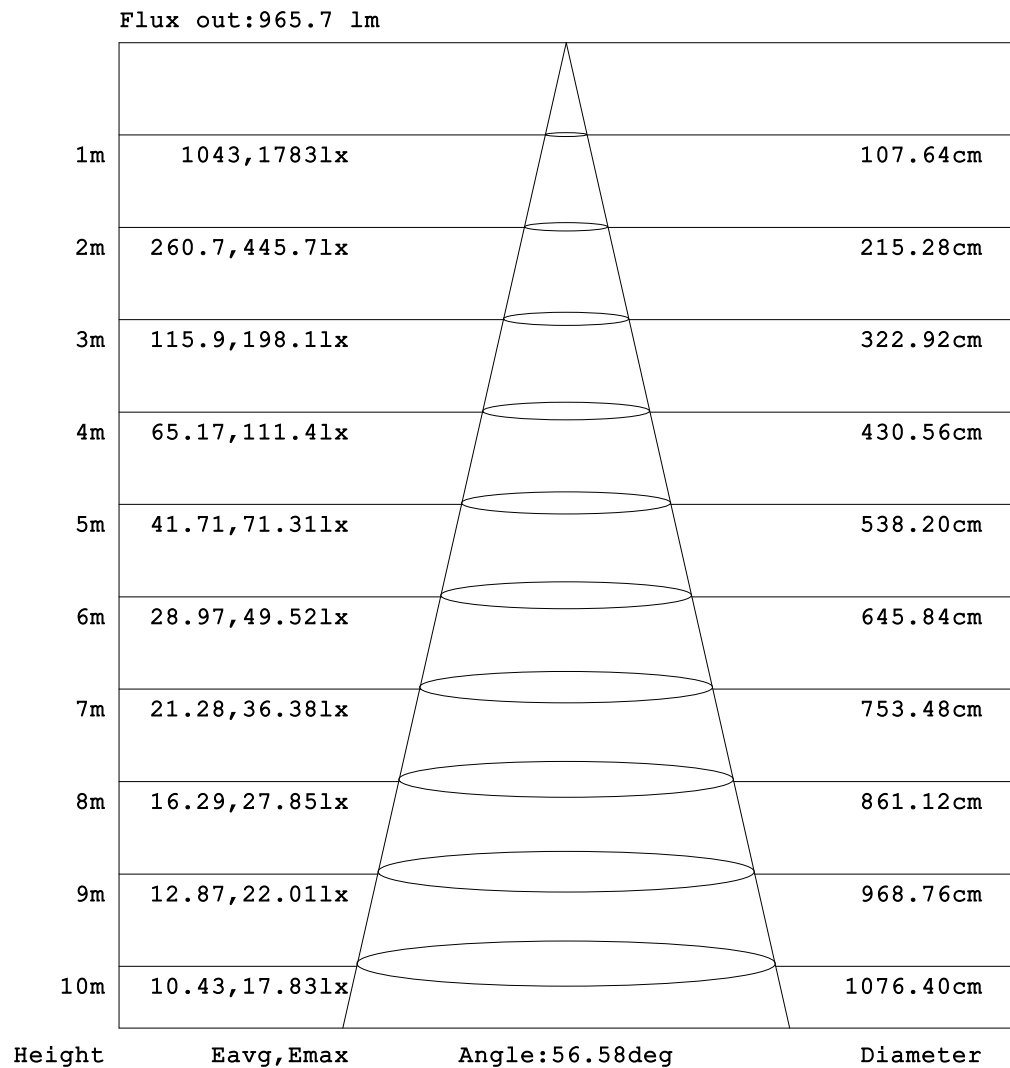

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:2004.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-60D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	6.07	5.91	5.92	6.02	6.24	6.58	6.97	7.41	7.87	8.33	8.78	9.21	9.61	9.96	10.3	10.6	10.9	11.3	11.6
-170	6.07	5.87	5.84	5.89	6.05	6.31	6.66	7.05	7.49	7.97	8.48	8.98	9.48	9.95	10.4	10.7	10.9	11.1	11.4
-160	6.07	5.84	5.76	5.73	5.83	6.00	6.26	6.57	6.95	7.39	7.88	8.41	8.93	9.44	9.85	10.2	10.4	10.6	10.8
-150	6.07	5.80	5.68	5.60	5.60	5.67	5.81	6.02	6.28	6.60	7.01	7.54	8.05	8.51	8.88	9.19	9.48	9.68	9.79
-140	6.07	5.78	5.61	5.48	5.40	5.36	5.38	5.44	5.55	5.81	6.17	6.56	6.93	7.27	7.58	7.89	8.13	8.29	8.38
-130	6.07	5.76	5.55	5.38	5.22	5.10	5.00	4.94	5.01	5.19	5.40	5.61	5.82	6.02	6.25	6.45	6.62	6.73	6.79
-120	6.07	5.76	5.51	5.31	5.10	4.91	4.74	4.61	4.67	4.74	4.81	4.89	4.97	5.07	5.19	5.31	5.40	5.47	5.52
-110	6.07	5.78	5.51	5.26	5.04	4.81	4.59	4.53	4.52	4.52	4.52	4.51	4.50	4.55	4.61	4.67	4.73	4.78	4.82
-100	6.07	5.80	5.55	5.28	5.04	4.79	4.56	4.53	4.53	4.53	4.52	4.52	4.51	4.53	4.54	4.57	4.59	4.62	4.65
-90	6.07	5.85	5.62	5.40	5.17	4.95	4.73	4.74	4.76	4.78	4.80	4.81	4.83	4.88	4.93	4.97	5.02	5.07	5.12
-80	6.07	5.92	5.88	6.04	6.43	7.18	8.46	10.1	11.8	13.6	15.7	17.8	19.9	21.5	22.9	24.2	25.1	25.8	26.2
-70	6.07	6.05	6.56	8.22	11.2	15.2	20.8	27.1	34.3	41.3	48.0	54.4	60.3	65.3	69.6	72.9	75.4	77.0	77.7
-60	6.07	6.25	7.93	12.2	19.7	29.7	41.5	53.4	65.4	77.1	88.3	98.6	108	117	124	130	135	138	140
-50	6.07	6.55	9.92	18.2	31.1	46.6	63.4	80.2	96.9	113	131	150	170	193	215	235	251	262	266
-40	6.07	6.85	12.2	24.9	42.6	62.8	84.0	105	129	156	191	235	286	339	394	442	482	508	519
-30	6.07	7.17	14.6	31.0	52.4	76.7	101	129	163	212	278	357	453	559	667	767	841	889	905
-20	6.07	7.47	16.8	36.1	60.3	87.2	115	149	199	272	370	496	646	812	968	1106	1219	1294	1327
-10	6.07	7.68	18.1	38.7	64.9	93.5	124	163	225	316	442	604	799	998	1190	1378	1531	1637	1678
0	6.07	7.73	18.5	39.3	66.1	95.0	125	166	232	328	463	638	847	1061	1273	1474	1643	1753	1782
10	6.07	7.63	17.7	37.6	63.3	91.4	121	158	215	301	417	567	750	944	1127	1303	1451	1540	1558
20	6.07	7.40	16.0	33.9	57.2	83.0	110	140	183	246	331	437	564	712	861	990	1090	1148	1158
30	6.07	7.10	13.7	28.1	48.1	70.8	94.1	118	147	185	236	301	377	460	545	621	683	721	728
40	6.07	6.82	11.2	21.8	37.1	55.5	74.8	94.2	114	136	161	192	229	268	305	335	356	364	358
50	6.07	6.56	8.98	15.5	25.4	38.5	52.9	67.6	82.5	97.4	112	126	139	153	166	177	185	190	189
60	6.07	6.33	7.44	10.2	15.4	22.0	30.5	40.5	50.3	60.1	69.9	78.7	86.5	93.4	97.6	101	102	103	102
70	6.07	6.20	6.56	7.36	8.68	11.1	13.7	17.1	21.6	26.3	30.9	35.5	39.1	42.4	45.0	47.0	48.2	48.6	48.1
80	6.07	6.13	6.20	6.30	6.44	6.58	6.80	7.10	7.47	7.91	8.55	9.05	9.40	9.85	10.3	10.6	10.8	10.9	10.7
90	6.07	6.07	6.07	6.08	6.08	6.08	6.08	6.06	6.04	6.03	6.01	5.99	5.98	5.98	5.98	5.98	5.98	5.98	5.98
100	6.07	6.03	6.00	5.97	5.95	5.94	5.93	5.92	5.92	5.91	5.91	5.91	5.92	5.91	5.90	5.89	5.89	5.88	5.87
110	6.07	6.00	5.94	5.92	5.91	5.91	5.91	5.91	5.94	6.00	6.06	6.12	6.18	6.22	6.25	6.27	6.29	6.30	6.30
120	6.07	5.96	5.92	5.91	5.91	5.92	5.98	6.07	6.19	6.33	6.46	6.60	6.74	6.85	6.93	6.99	7.04	7.06	7.06
130	6.07	5.94	5.91	5.91	5.94	6.03	6.17	6.34	6.56	6.78	7.01	7.22	7.42	7.60	7.73	7.83	7.89	7.92	7.93
140	6.07	5.93	5.91	5.93	6.01	6.18	6.40	6.67	6.96	7.25	7.55	7.83	8.09	8.33	8.53	8.67	8.76	8.79	8.79
150	6.07	5.92	5.91	5.95	6.10	6.33	6.63	6.97	7.33	7.69	8.04	8.38	8.70	8.98	9.23	9.42	9.53	9.58	9.57
160	6.07	5.92	5.92	5.98	6.18	6.46	6.82	7.21	7.63	8.04	8.43	8.79	9.14	9.47	9.74	9.97	10.1	10.2	10.2
170	6.07	5.91	5.92	6.01	6.22	6.54	6.94	7.37	7.81	8.26	8.69	9.09	9.47	9.81	10.1	10.3	10.6	10.9	10.9
180	6.07	5.91	5.92	6.02	6.24	6.58	6.97	7.41	7.87	8.33	8.78	9.21	9.61	9.96	10.3	10.6	10.9	11.3	11.6

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.60V I:0.1150A P:24.500W PF:0.9700 Freq:50.00Hz Lamp Flux:2004.06x1 lm		
NAME: Auroring Micro-197mm-RGBW-3000K-60D	TYPE:RGBW W=3000K	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	11.6	11.5	11.3	11.1	10.7	10.2	9.59	8.86	8.08	7.27	6.50	5.82	5.27	4.86	4.59	4.51	4.53	4.64	
-170	11.3	11.2	11.1	10.8	10.4	9.94	9.34	8.64	7.88	7.10	6.37	5.74	5.22	4.83	4.58	4.51	4.53	4.64	
-160	10.7	10.6	10.4	10.2	9.81	9.34	8.77	8.12	7.43	6.74	6.11	5.56	5.11	4.78	4.56	4.51	4.53	4.64	
-150	9.76	9.66	9.45	9.18	8.82	8.40	7.89	7.34	6.77	6.23	5.73	5.30	4.95	4.69	4.53	4.51	4.53	4.64	
-140	8.37	8.27	8.10	7.85	7.56	7.22	6.83	6.44	6.04	5.66	5.32	5.01	4.78	4.60	4.52	4.51	4.54	4.64	
-130	6.79	6.73	6.61	6.46	6.26	6.06	5.83	5.59	5.36	5.14	4.94	4.77	4.62	4.53	4.51	4.51	4.55	4.64	
-120	5.51	5.48	5.43	5.35	5.26	5.16	5.06	4.95	4.84	4.75	4.66	4.59	4.53	4.51	4.51	4.52	4.56	4.64	
-110	4.81	4.79	4.75	4.72	4.67	4.63	4.61	4.58	4.57	4.55	4.53	4.51	4.51	4.51	4.52	4.54	4.58	4.64	
-100	4.63	4.62	4.61	4.59	4.58	4.56	4.56	4.55	4.55	4.54	4.52	4.51	4.51	4.53	4.55	4.58	4.61	4.64	
-90	5.07	5.02	4.97	4.92	4.87	4.83	4.79	4.76	4.73	4.70	4.67	4.64	4.64	4.64	4.64	4.64	4.64	4.64	
-80	25.7	24.9	23.8	22.5	20.9	19.2	17.0	14.8	12.7	10.9	9.24	7.68	6.37	5.57	5.07	4.81	4.68	4.64	
-70	76.7	74.8	72.0	68.5	64.1	59.0	53.0	46.7	40.1	33.0	25.8	19.3	13.7	9.74	6.90	5.29	4.75	4.64	
-60	138	134	129	123	115	107	97.3	86.7	75.3	63.6	51.7	39.8	27.8	17.8	10.5	6.43	4.86	4.64	
-50	261	249	232	212	190	167	146	128	111	95.1	78.0	61.0	44.3	28.8	16.0	8.21	5.06	4.64	
-40	506	478	436	388	333	279	229	186	151	125	103	81.1	59.9	39.9	22.4	10.2	5.29	4.64	
-30	883	831	754	655	548	444	348	269	205	157	124	98.3	73.2	49.3	28.2	12.4	5.54	4.64	
-20	1289	1206	1089	952	797	633	482	357	262	191	143	111	83.4	56.6	32.9	14.3	5.77	4.64	
-10	1633	1525	1366	1171	972	773	581	424	303	215	156	118	89.4	60.9	35.5	15.5	5.92	4.64	
0	1727	1606	1431	1222	1011	805	604	438	312	220	158	119	90.5	61.6	35.9	15.8	5.93	4.64	
10	1518	1410	1249	1075	901	716	541	398	288	206	150	115	86.9	59.3	34.5	15.2	5.90	4.64	
20	1133	1061	956	829	684	542	420	319	238	176	134	105	78.8	53.7	31.0	13.7	5.74	4.64	
30	714	670	602	523	439	355	289	230	179	141	114	89.9	67.1	45.3	25.7	11.8	5.51	4.64	
40	354	336	308	275	246	215	183	154	130	110	90.3	71.1	53.0	35.0	19.8	9.47	5.31	4.64	
50	186	179	168	154	140	130	119	108	94.2	78.6	64.9	51.2	37.0	23.9	14.0	7.62	5.13	4.64	
60	102	101	98.6	95.4	91.0	84.1	75.2	66.1	57.6	49.0	40.0	30.0	21.3	14.5	9.12	6.18	4.98	4.64	
70	48.0	47.2	45.6	43.4	40.7	37.7	34.6	30.5	26.1	21.6	17.3	14.0	10.9	8.12	6.43	5.42	4.93	4.64	
80	10.9	10.8	10.6	10.3	9.88	9.44	9.12	8.66	8.08	7.63	7.22	6.80	6.24	5.84	5.48	5.18	4.90	4.64	
90	5.96	5.95	5.94	5.93	5.92	5.90	5.93	5.95	5.98	6.00	6.02	6.05	5.81	5.58	5.34	5.11	4.87	4.64	
100	5.87	5.87	5.87	5.87	5.87	5.87	5.87	5.87	5.87	5.88	5.89	5.88	5.66	5.46	5.25	5.04	4.84	4.64	
110	6.29	6.28	6.26	6.23	6.19	6.14	6.08	6.03	5.96	5.90	5.88	5.81	5.59	5.38	5.17	4.98	4.80	4.64	
120	7.05	7.02	6.96	6.89	6.80	6.69	6.56	6.42	6.28	6.16	6.05	5.80	5.52	5.31	5.11	4.92	4.77	4.64	
130	7.91	7.85	7.77	7.67	7.52	7.34	7.14	6.93	6.71	6.50	6.23	5.86	5.52	5.23	5.04	4.86	4.73	4.64	
140	8.77	8.70	8.59	8.43	8.22	7.97	7.70	7.42	7.14	6.81	6.37	5.94	5.55	5.20	4.95	4.80	4.69	4.64	
150	9.52	9.42	9.28	9.07	8.82	8.53	8.21	7.87	7.47	7.00	6.50	6.01	5.55	5.16	4.87	4.74	4.65	4.64	
160	10.1	9.98	9.78	9.53	9.25	8.93	8.65	8.25	7.75	7.18	6.59	6.03	5.51	5.10	4.80	4.67	4.61	4.64	
170	10.7	10.4	10.1	9.97	9.84	9.58	9.17	8.63	7.99	7.29	6.60	5.97	5.43	5.00	4.70	4.59	4.57	4.64	
180	11.6	11.5	11.3	11.1	10.7	10.2	9.59	8.86	8.08	7.27	6.50	5.82	5.27	4.86	4.59	4.51	4.53	4.64	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: