

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	885.3 cd per klm.
(Luminaire orientation as tested.)	-2.5 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	107.3V x 108.0H
	At 50% of Imax	56.6V x 56.6H
	At 90% of Imax	21.6V x 21.4H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	864.4 lumens per klm.
	To 50% of Imax	477.4 lumens per klm.
	To 90% of Imax	93.4 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1130A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1403.57x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-60D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

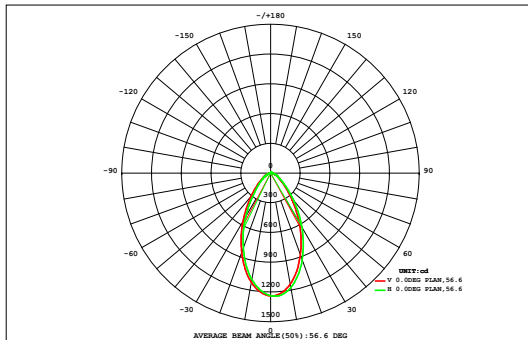

DATA OF LAMP		Eff:58.48lm/W	
MODEL		Imax(cd)	1243
NOMINAL POWER(W)	24	AVAILABILITY(%)	86.4
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1213
NOMINAL FLUX(lm)	1403.57	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1404
TEST VOLTAGE(V)	220	θ @50%(H,V)	57,57DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.03	0.06	0.08	0.10	0.12	0.14	0.15	0.15	0.15	0.15	0.13	0.12	0.10	0.08	0.05	0.03	0.01	1.65	0.00
90	0.01	0.04	0.08	0.15	0.25	0.37	0.48	0.56	0.58	0.57	0.54	0.46	0.35	0.24	0.15	0.08	0.03	0.01	4.95	0.00
80	0.01	0.06	0.16	0.36	0.67	1.00	1.32	1.52	1.59	1.56	1.46	1.23	0.93	0.62	0.35	0.15	0.05	0.01	13.0	0.00
70	0.01	0.08	0.29	0.68	1.21	1.81	2.38	2.82	3.03	2.95	2.62	2.15	1.68	1.13	0.64	0.27	0.08	0.01	23.8	0.73
60	0.02	0.12	0.45	1.02	1.79	2.78	3.98	5.07	5.58	5.47	4.75	3.61	2.57	1.68	0.95	0.42	0.11	0.01	40.4	26.9
50	0.02	0.16	0.60	1.35	2.47	4.32	6.89	9.48	11.0	10.9	9.22	6.56	4.12	2.37	1.27	0.56	0.15	0.01	71.5	63.7
40	0.02	0.20	0.73	1.65	3.34	6.47	11.2	16.3	19.5	19.4	16.0	10.9	6.28	3.24	1.57	0.68	0.18	0.02	118	112
30	0.02	0.23	0.83	1.93	4.26	8.83	15.9	23.4	28.4	28.2	22.9	15.4	8.55	4.11	1.84	0.78	0.21	0.02	166	161
	0.02	0.24	0.89	2.11	4.91	10.6	19.3	28.6	34.9	34.6	27.9	18.7	10.2	4.71	2.01	0.83	0.22	0.02	201	196
	0.02	0.25	0.89	2.15	5.04	11.0	19.9	29.6	36.0	35.9	29.0	19.4	10.6	4.84	2.05	0.85	0.22	0.02	208	203
	0.02	0.23	0.85	2.02	4.58	9.72	17.6	25.7	31.3	31.2	25.4	17.2	9.46	4.44	1.94	0.81	0.22	0.02	183	178
	0.02	0.21	0.77	1.77	3.75	7.50	13.2	19.2	23.1	23.0	19.0	13.0	7.36	3.66	1.72	0.74	0.19	0.02	138	133
-30	0.02	0.18	0.66	1.47	2.83	5.19	8.55	12.2	14.6	14.5	12.0	8.42	5.10	2.78	1.44	0.63	0.16	0.02	90.7	84.0
-40	0.02	0.14	0.52	1.16	2.06	3.35	5.05	6.77	7.89	7.86	6.71	4.99	3.30	2.03	1.14	0.50	0.13	0.01	53.6	43.8
-50	0.01	0.10	0.36	0.83	1.45	2.17	2.94	3.65	4.11	4.10	3.63	2.92	2.15	1.44	0.82	0.35	0.09	0.01	31.1	10.5
-60	0.01	0.07	0.21	0.50	0.90	1.35	1.77	2.10	2.29	2.29	2.09	1.76	1.33	0.89	0.50	0.21	0.06	0.01	18.3	0.00
-70	0.01	0.04	0.11	0.23	0.40	0.61	0.82	0.99	1.09	1.09	0.99	0.82	0.61	0.40	0.22	0.10	0.04	0.01	8.58	0.00
-80	0.01	0.03	0.05	0.08	0.12	0.17	0.21	0.25	0.27	0.27	0.25	0.21	0.16	0.12	0.08	0.05	0.03	0.01	2.38	0.00
-90	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	0.29	2.41	8.52	19.5	40.1	77.3	132	188	225	224	185	128	74.9	38.8	18.8	8.06	2.19	0.24	1373	---
Φ a	0.00	0.00	0.00	3.76	28.3	66.6	121	178	215	214	174	117	64.0	26.8	2.97	0.00	0.00	0.00	---	1213

one-half-peak spread: U:28.2,D:28.8 , L:28.4,R:28.6


NEMA Beam Type: Type 6

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1130A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1403.57x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-60D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

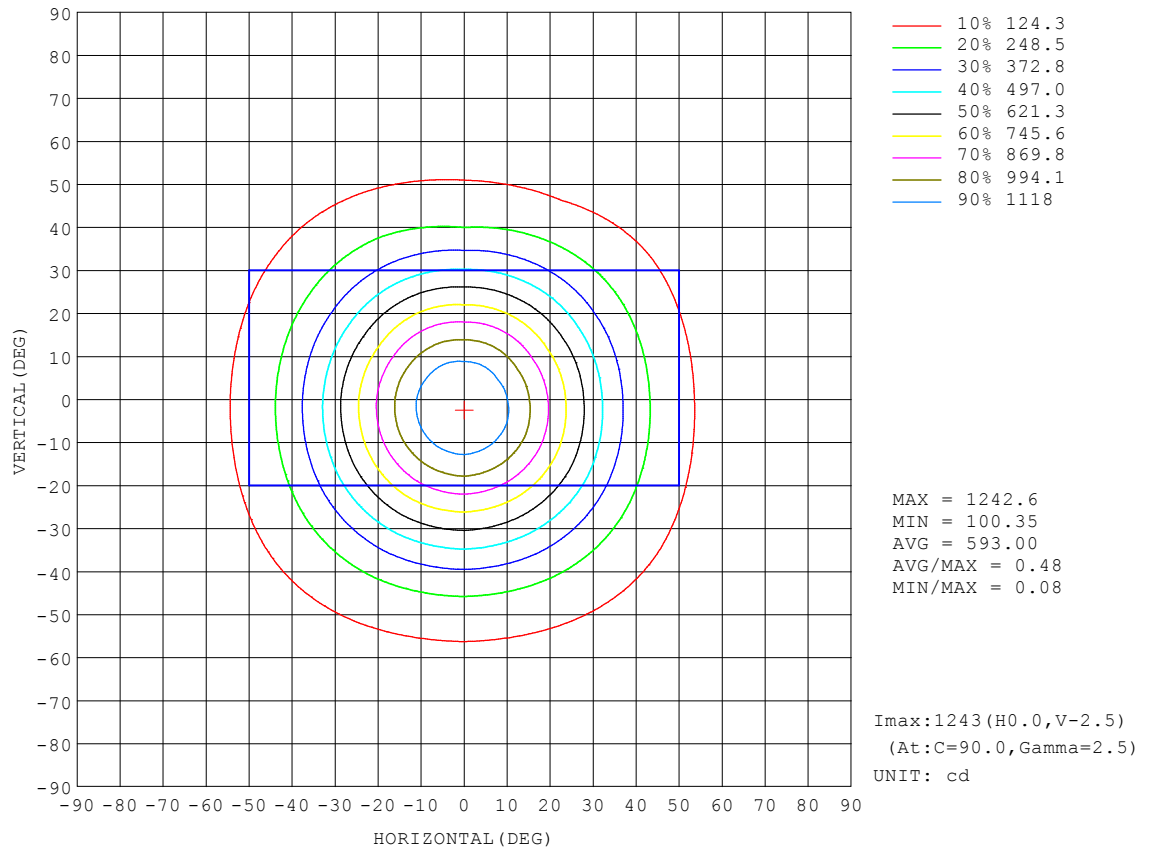


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1130A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1403.57x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-60D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

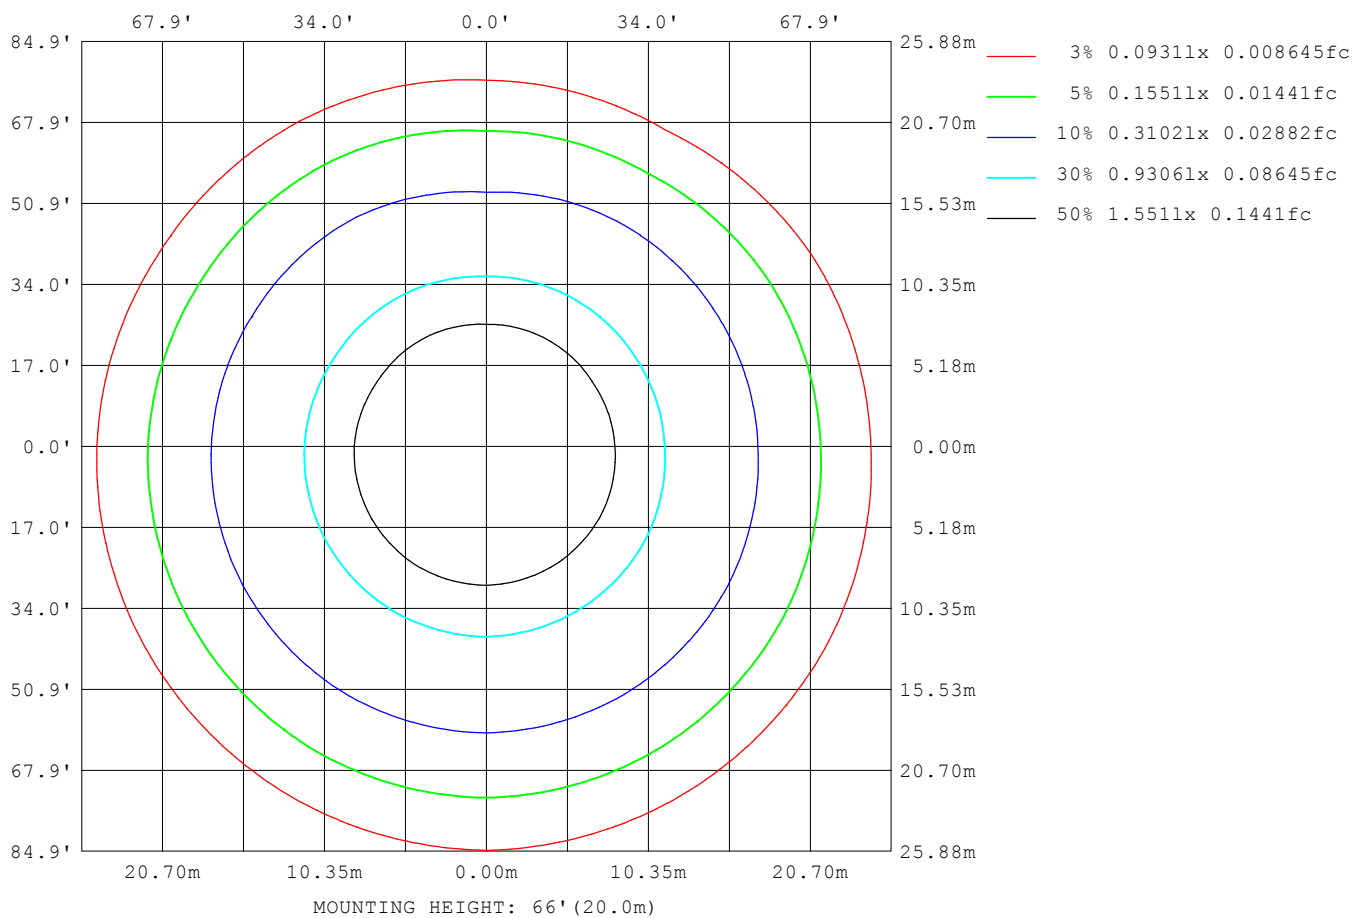

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

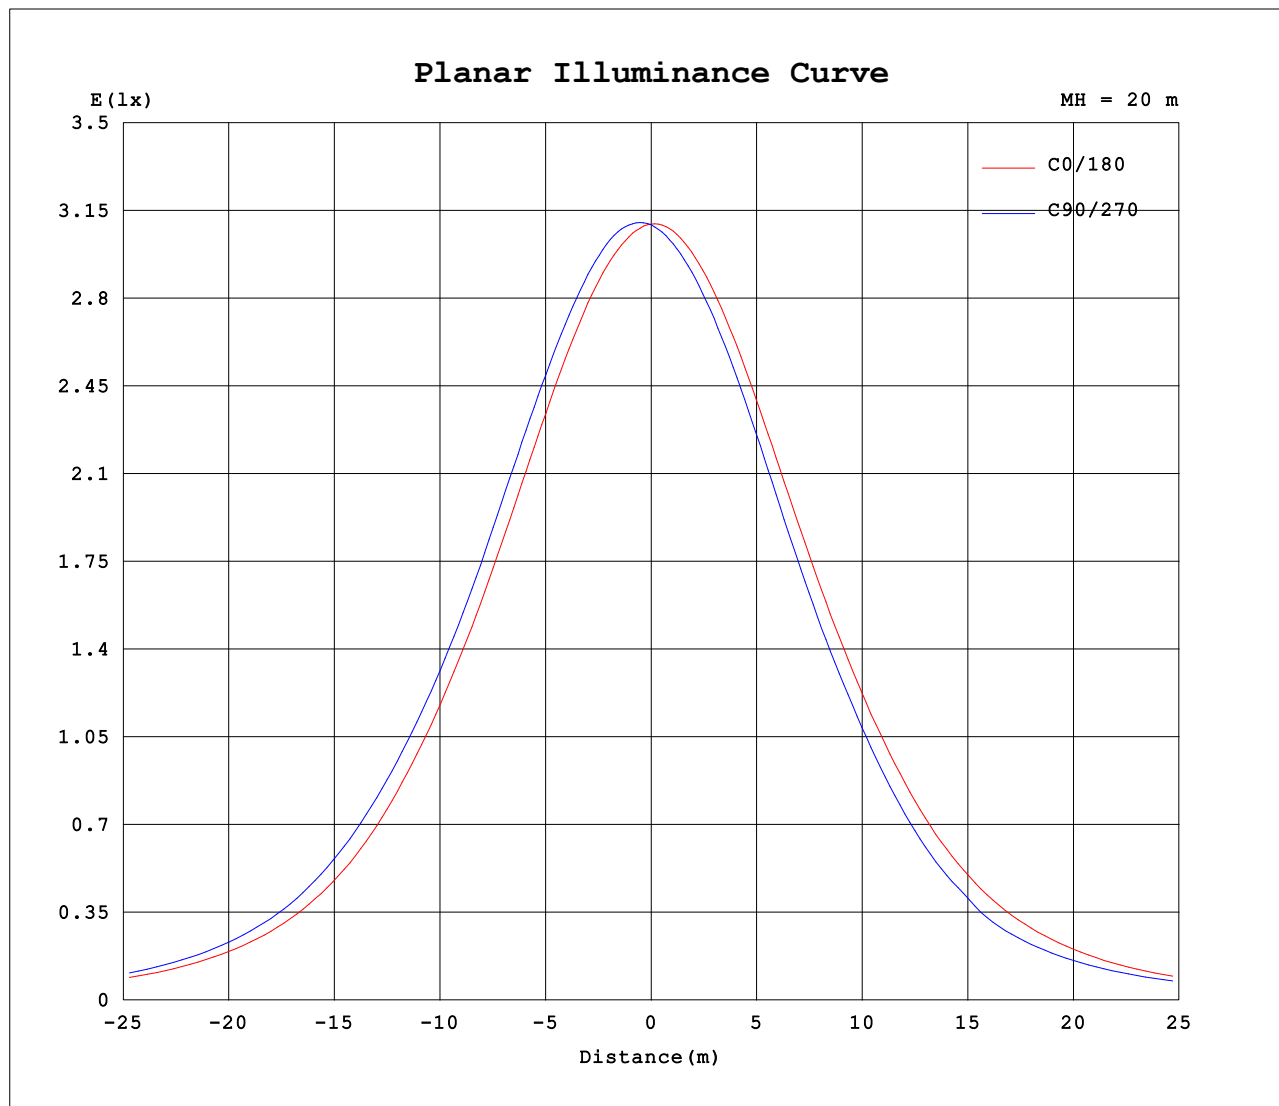


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1130A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1403.57x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-60D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

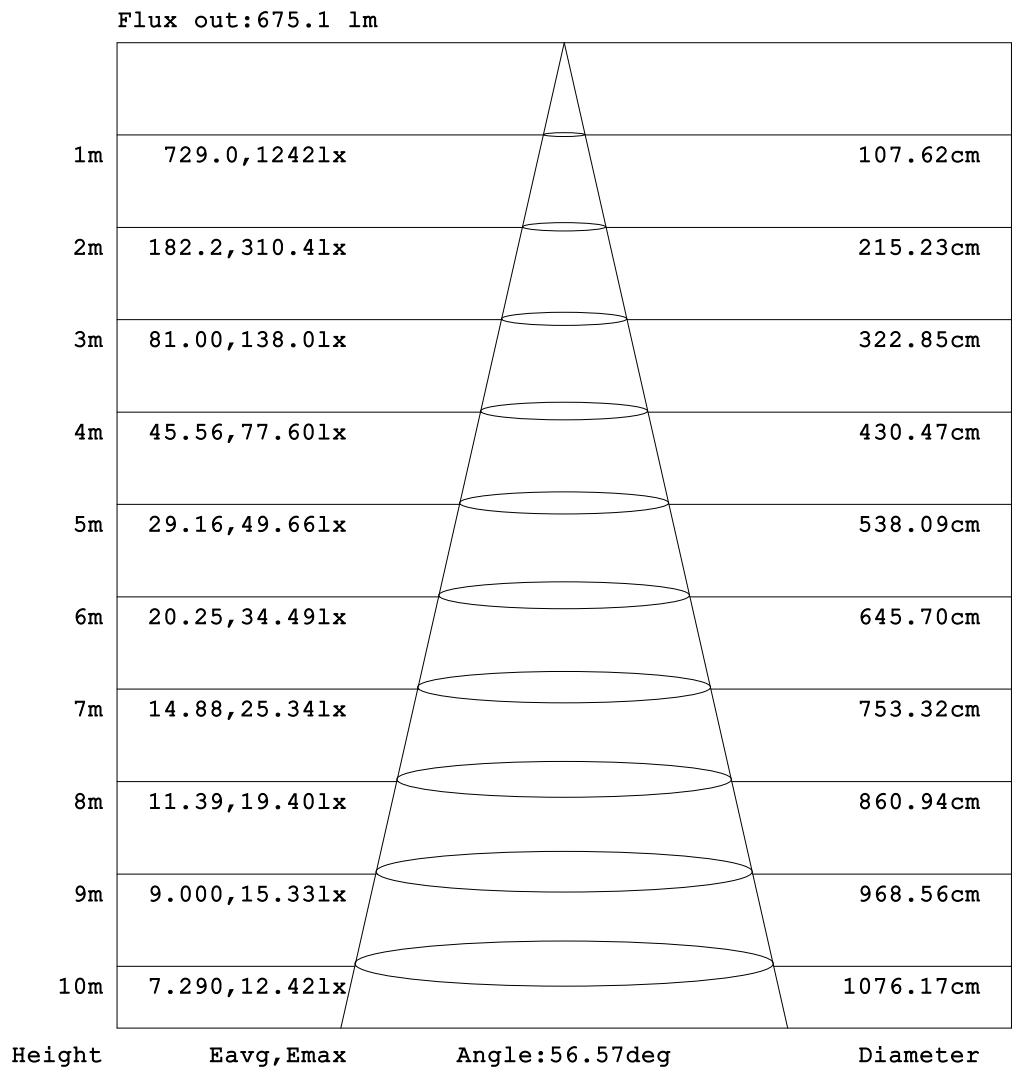

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1130A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1403.57x1 lm								
NAME: Auroring Micro-197mm-RGBW-ALL-60D					TYPE:RGBW ALL			WEIGHT:00
SPEC.:60 DEGREE					DIM.: 197mm			SERIAL No.:01
MFR.: EVERFINE					SUR.:0.8			Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	4.21	4.11	4.11	4.20	4.35	4.57	4.85	5.15	5.46	5.78	6.10	6.40	6.67	6.92	7.14	7.36	7.59	7.84	8.02
-170	4.21	4.09	4.06	4.10	4.21	4.39	4.63	4.90	5.21	5.55	5.90	6.26	6.62	6.95	7.27	7.52	7.65	7.76	7.94
-160	4.21	4.06	4.01	4.01	4.07	4.18	4.36	4.58	4.85	5.16	5.50	5.87	6.26	6.61	6.90	7.13	7.29	7.43	7.52
-150	4.21	4.04	3.95	3.90	3.91	3.95	4.05	4.20	4.38	4.61	4.91	5.26	5.62	5.94	6.21	6.43	6.63	6.76	6.84
-140	4.21	4.02	3.91	3.81	3.76	3.74	3.74	3.80	3.87	4.06	4.31	4.57	4.84	5.08	5.28	5.50	5.67	5.79	5.85
-130	4.21	4.00	3.87	3.74	3.64	3.56	3.49	3.44	3.49	3.62	3.76	3.91	4.05	4.19	4.35	4.50	4.61	4.70	4.75
-120	4.21	4.00	3.84	3.69	3.55	3.42	3.30	3.22	3.25	3.29	3.34	3.39	3.45	3.52	3.61	3.70	3.77	3.83	3.86
-110	4.21	4.00	3.82	3.66	3.51	3.35	3.20	3.15	3.15	3.16	3.15	3.14	3.13	3.16	3.21	3.27	3.32	3.37	3.41
-100	4.21	4.02	3.84	3.66	3.49	3.32	3.16	3.16	3.16	3.16	3.16	3.15	3.14	3.16	3.19	3.21	3.24	3.26	3.29
-90	4.21	4.05	3.90	3.74	3.58	3.42	3.26	3.28	3.30	3.32	3.34	3.36	3.38	3.42	3.47	3.52	3.57	3.61	3.66
-80	4.21	4.10	4.09	4.31	4.75	5.39	6.43	7.66	8.85	10.1	11.5	13.0	14.4	15.6	16.6	17.5	18.3	18.8	19.1
-70	4.21	4.20	4.81	6.31	8.56	11.3	15.0	19.3	24.2	29.1	33.8	38.4	42.6	46.2	49.3	51.8	53.6	54.8	55.4
-60	4.21	4.40	6.10	9.42	14.6	21.4	29.4	37.7	46.2	54.4	62.3	69.8	76.6	82.8	88.2	92.7	96.4	98.9	100.0
-50	4.21	4.74	7.75	13.8	22.6	33.3	45.0	56.7	68.4	80.3	92.8	106	121	136	152	166	177	185	188
-40	4.21	5.11	9.52	18.5	30.6	44.9	59.7	74.6	91.0	111	135	165	200	238	276	309	336	354	361
-30	4.21	5.46	11.4	22.8	37.8	54.8	72.3	91.5	116	150	195	250	315	388	464	534	587	622	636
-20	4.21	5.75	13.0	26.3	43.5	62.4	82.3	106	141	191	258	343	449	565	676	776	858	911	932
-10	4.21	5.93	14.1	28.3	46.9	67.2	88.7	117	159	222	306	418	552	694	833	967	1076	1147	1173
0	4.21	5.98	14.4	28.8	48.0	68.6	90.5	120	165	230	319	439	581	730	880	1022	1140	1216	1238
10	4.21	5.89	13.8	27.6	45.9	65.8	86.8	113	153	211	289	392	516	650	780	905	1011	1076	1092
20	4.21	5.68	12.6	24.9	41.5	59.7	78.8	101	131	174	231	304	390	491	594	684	756	798	806
30	4.21	5.39	10.8	21.0	35.0	51.0	67.5	84.9	105	131	166	211	263	319	376	431	472	498	503
40	4.21	5.05	8.84	16.5	27.1	40.1	53.7	67.4	81.4	96.9	115	137	162	188	214	233	246	251	247
50	4.21	4.72	7.06	12.1	19.0	28.1	38.2	48.5	58.9	69.5	79.6	89.7	99.6	109	118	125	130	132	131
60	4.21	4.43	5.66	8.06	12.0	16.6	22.4	29.4	36.2	43.1	49.9	56.0	61.6	66.4	69.2	71.3	72.3	72.5	71.5
70	4.21	4.29	4.72	5.54	6.79	8.75	10.8	13.1	16.2	19.4	22.6	25.7	28.1	30.3	32.1	33.4	34.0	34.1	33.5
80	4.21	4.25	4.30	4.41	4.56	4.70	4.92	5.28	5.66	6.09	6.55	6.95	7.23	7.59	7.93	8.15	8.27	8.27	8.16
90	4.21	4.22	4.22	4.22	4.23	4.23	4.24	4.22	4.20	4.19	4.17	4.15	4.13	4.14	4.15	4.15	4.16	4.17	4.17
100	4.21	4.18	4.16	4.15	4.15	4.14	4.14	4.12	4.12	4.12	4.12	4.12	4.12	4.12	4.12	4.11	4.10	4.10	4.09
110	4.21	4.15	4.13	4.13	4.12	4.12	4.12	4.12	4.14	4.17	4.22	4.26	4.31	4.34	4.36	4.37	4.37	4.38	4.37
120	4.21	4.14	4.12	4.12	4.12	4.13	4.15	4.21	4.30	4.40	4.50	4.60	4.69	4.77	4.83	4.86	4.89	4.90	4.90
130	4.21	4.13	4.12	4.12	4.14	4.19	4.29	4.40	4.55	4.71	4.86	5.02	5.16	5.29	5.38	5.45	5.49	5.51	5.51
140	4.21	4.12	4.12	4.13	4.19	4.30	4.45	4.63	4.83	5.03	5.24	5.44	5.62	5.80	5.94	6.03	6.09	6.12	6.12
150	4.21	4.12	4.12	4.15	4.25	4.40	4.60	4.84	5.09	5.33	5.56	5.81	6.04	6.25	6.43	6.58	6.64	6.67	6.66
160	4.21	4.12	4.12	4.17	4.30	4.49	4.74	5.01	5.29	5.57	5.85	6.10	6.34	6.58	6.78	6.95	7.07	7.12	7.11
170	4.21	4.12	4.12	4.19	4.33	4.55	4.82	5.12	5.42	5.73	6.03	6.32	6.58	6.81	7.00	7.19	7.40	7.57	7.58
180	4.21	4.11	4.11	4.20	4.35	4.57	4.85	5.15	5.46	5.78	6.10	6.40	6.67	6.92	7.14	7.36	7.59	7.84	8.04

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1130A P:24.000W PF:0.9690 Freq:50.00Hz Lamp Flux:1403.57x1 lm		
NAME: Auroring Micro-197mm-RGBW-ALL-60D	TYPE:RGBW ALL	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	8.04	7.98	7.85	7.66	7.40	7.06	6.63	6.13	5.57	5.01	4.49	4.02	3.64	3.35	3.16	3.13	3.15	3.23	
-170	7.85	7.82	7.69	7.49	7.23	6.89	6.47	5.98	5.45	4.91	4.41	3.96	3.61	3.34	3.16	3.13	3.15	3.23	
-160	7.49	7.38	7.26	7.08	6.82	6.47	6.07	5.62	5.14	4.66	4.22	3.84	3.53	3.30	3.16	3.13	3.15	3.23	
-150	6.82	6.73	6.58	6.38	6.12	5.82	5.47	5.10	4.70	4.32	3.97	3.67	3.43	3.25	3.15	3.13	3.15	3.23	
-140	5.83	5.76	5.63	5.44	5.24	5.01	4.74	4.46	4.20	3.93	3.68	3.48	3.31	3.19	3.14	3.13	3.15	3.23	
-130	4.73	4.68	4.60	4.49	4.34	4.20	4.05	3.89	3.73	3.57	3.44	3.31	3.22	3.15	3.13	3.14	3.16	3.23	
-120	3.86	3.83	3.79	3.73	3.65	3.58	3.51	3.44	3.37	3.31	3.25	3.19	3.16	3.14	3.13	3.15	3.17	3.23	
-110	3.39	3.36	3.33	3.30	3.26	3.22	3.21	3.20	3.19	3.18	3.16	3.15	3.14	3.13	3.14	3.15	3.19	3.23	
-100	3.27	3.26	3.24	3.23	3.21	3.20	3.19	3.19	3.18	3.16	3.15	3.14	3.14	3.14	3.16	3.18	3.19	3.23	
-90	3.62	3.57	3.52	3.48	3.43	3.38	3.36	3.33	3.30	3.27	3.25	3.22	3.22	3.22	3.22	3.22	3.23	3.23	
-80	18.8	18.3	17.5	16.6	15.6	14.5	12.9	11.4	9.91	8.61	7.40	6.18	5.00	4.22	3.68	3.38	3.25	3.23	
-70	54.7	53.4	51.5	48.9	45.8	42.2	38.0	33.6	28.9	24.1	19.2	14.7	10.8	7.82	5.49	3.91	3.32	3.23	
-60	98.7	96.2	92.3	87.7	82.2	76.1	69.3	61.8	53.8	45.7	37.3	28.9	20.7	13.6	8.38	5.09	3.42	3.23	
-50	184	176	165	150	135	119	105	91.8	79.6	67.9	55.9	43.9	32.1	21.4	12.4	6.60	3.66	3.23	
-40	353	334	306	272	235	198	163	133	109	89.7	73.4	58.0	43.1	29.0	16.9	8.17	3.95	3.23	
-30	619	582	527	457	382	310	246	191	146	113	89.2	70.2	52.5	35.7	21.0	9.85	4.23	3.23	
-20	907	849	764	665	555	441	336	252	186	137	103	79.4	59.6	40.8	24.1	11.2	4.48	3.23	
-10	1142	1066	954	817	677	537	405	296	214	153	112	84.9	63.7	43.8	25.9	12.1	4.63	3.23	
0	1203	1120	999	855	705	559	420	306	220	157	114	86.0	64.6	44.3	26.1	12.3	4.65	3.23	
10	1067	994	883	758	631	499	377	279	203	147	108	82.2	61.8	42.5	25.1	11.8	4.59	3.23	
20	792	743	670	580	479	379	295	224	168	126	95.7	74.6	55.9	38.4	22.6	10.7	4.42	3.23	
30	495	466	423	367	309	253	204	162	127	100	80.0	63.6	47.3	32.4	19.0	9.27	4.17	3.23	
40	248	240	222	198	174	150	128	109	91.5	76.5	63.5	49.8	37.3	25.1	14.9	7.53	3.90	3.23	
50	129	124	116	106	96.7	89.2	81.8	73.9	65.3	55.0	44.8	35.6	26.2	17.5	10.7	5.99	3.66	3.23	
60	71.1	69.7	67.7	65.2	62.1	57.8	52.6	46.3	39.7	33.7	27.7	21.1	15.5	11.0	7.12	4.70	3.47	3.23	
70	33.4	32.8	31.6	29.9	28.0	25.9	23.9	21.3	18.4	15.5	12.6	10.3	8.24	6.21	4.82	3.87	3.43	3.23	
80	8.23	8.18	8.02	7.76	7.43	7.07	6.81	6.45	6.03	5.62	5.24	4.87	4.43	4.12	3.83	3.61	3.40	3.23	
90	4.16	4.15	4.14	4.13	4.11	4.10	4.12	4.14	4.16	4.18	4.20	4.22	4.06	3.89	3.73	3.56	3.39	3.23	
100	4.09	4.10	4.10	4.10	4.10	4.10	4.10	4.10	4.10	4.11	4.11	4.10	3.96	3.80	3.66	3.52	3.36	3.23	
110	4.37	4.37	4.36	4.34	4.31	4.29	4.24	4.20	4.15	4.12	4.10	4.05	3.90	3.75	3.60	3.47	3.35	3.23	
120	4.90	4.88	4.85	4.81	4.74	4.67	4.57	4.48	4.38	4.29	4.21	4.02	3.84	3.70	3.56	3.43	3.32	3.23	
130	5.50	5.47	5.41	5.33	5.25	5.12	4.98	4.83	4.68	4.54	4.33	4.07	3.83	3.64	3.51	3.39	3.29	3.23	
140	6.10	6.06	5.98	5.88	5.73	5.56	5.36	5.17	4.98	4.74	4.43	4.12	3.85	3.60	3.45	3.34	3.26	3.23	
150	6.64	6.58	6.50	6.35	6.16	5.95	5.72	5.47	5.19	4.86	4.51	4.17	3.84	3.58	3.38	3.29	3.24	3.23	
160	7.06	6.97	6.83	6.66	6.46	6.24	6.02	5.73	5.37	4.98	4.57	4.17	3.82	3.53	3.32	3.24	3.21	3.23	
170	7.48	7.27	7.05	6.96	6.86	6.66	6.37	5.98	5.53	5.05	4.57	4.13	3.76	3.46	3.24	3.19	3.18	3.23	
180	8.04	7.98	7.85	7.66	7.40	7.06	6.63	6.13	5.57	5.01	4.49	4.02	3.64	3.35	3.16	3.13	3.15	3.23	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: