

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	909.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	-0.5 degrees horizontal

Beam Spread	At 10% of Imax	105.7V x 105.7H
	At 50% of Imax	55.7V x 55.8H
	At 90% of Imax	20.5V x 21.0H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	860.9 lumens per klm.
	To 50% of Imax	473.2 lumens per klm.
	To 90% of Imax	87.0 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2067.67x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-60D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

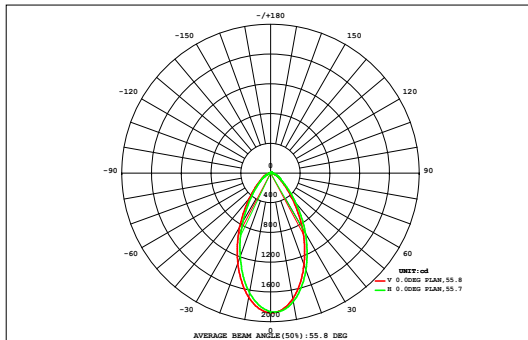

DATA OF LAMP		Eff:85.80lm/W	
MODEL		Imax(cd)	1880
NOMINAL POWER(W)	24	AVAILABILITY(%)	86.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1781
NOMINAL FLUX(lm)	2067.67	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2068
TEST VOLTAGE(V)	220	θ @50% (H,V)	56,56DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.05	0.08	0.11	0.14	0.17	0.19	0.21	0.21	0.21	0.21	0.19	0.17	0.14	0.11	0.08	0.04	0.01	2.35	0.00
90	0.02	0.05	0.11	0.20	0.34	0.51	0.66	0.76	0.79	0.78	0.75	0.65	0.50	0.34	0.20	0.11	0.05	0.01	6.82	0.00
80	0.02	0.07	0.22	0.50	0.94	1.43	1.88	2.19	2.32	2.30	2.14	1.80	1.37	0.91	0.50	0.21	0.07	0.01	18.9	0.00
70	0.02	0.11	0.40	0.97	1.73	2.58	3.38	4.03	4.37	4.35	3.96	3.31	2.51	1.68	0.95	0.39	0.10	0.02	34.9	0.29
60	0.02	0.16	0.63	1.45	2.55	3.94	5.67	7.38	8.41	8.35	7.24	5.50	3.84	2.49	1.42	0.61	0.15	0.02	59.8	38.8
50	0.02	0.22	0.85	1.91	3.50	6.17	9.97	14.0	16.4	16.3	13.5	9.71	6.01	3.42	1.85	0.81	0.20	0.02	105	92.7
40	0.03	0.27	1.03	2.34	4.76	9.36	16.3	24.0	28.9	28.7	23.5	15.9	9.14	4.62	2.26	0.99	0.25	0.02	172	163
30	0.03	0.31	1.17	2.72	6.10	12.9	23.5	34.9	42.4	42.0	34.2	22.8	12.5	5.91	2.61	1.11	0.29	0.02	245	238
	0.03	0.34	1.25	2.98	7.07	15.5	28.7	42.9	52.6	51.9	42.0	28.0	15.1	6.82	2.85	1.18	0.31	0.02	299	292
	0.03	0.34	1.27	3.02	7.25	16.0	29.5	44.0	53.9	54.1	43.7	29.0	15.6	7.01	2.90	1.19	0.31	0.02	309	302
	0.03	0.32	1.21	2.84	6.56	14.2	25.8	38.2	46.6	46.6	38.0	25.6	13.9	6.39	2.74	1.15	0.30	0.02	270	263
	0.03	0.29	1.10	2.50	5.33	10.9	19.3	28.4	34.3	34.2	28.2	19.1	10.7	5.22	2.42	1.04	0.27	0.02	203	195
-30	0.02	0.24	0.93	2.09	4.01	7.43	12.4	17.8	21.5	21.4	17.7	12.3	7.33	3.93	2.03	0.89	0.23	0.02	132	122
-40	0.02	0.19	0.73	1.65	2.92	4.75	7.24	9.76	11.4	11.4	9.69	7.14	4.67	2.86	1.61	0.70	0.17	0.02	77.0	61.3
-50	0.02	0.13	0.51	1.19	2.07	3.08	4.18	5.18	5.83	5.81	5.13	4.12	3.04	2.03	1.16	0.49	0.12	0.02	44.1	11.8
-60	0.02	0.09	0.29	0.71	1.29	1.92	2.52	2.98	3.24	3.24	2.96	2.49	1.89	1.26	0.69	0.28	0.08	0.01	26.0	0.00
-70	0.02	0.06	0.14	0.31	0.56	0.86	1.16	1.40	1.55	1.54	1.39	1.15	0.85	0.55	0.30	0.13	0.05	0.01	12.0	0.00
-80	0.02	0.05	0.07	0.11	0.16	0.22	0.29	0.34	0.37	0.37	0.33	0.28	0.22	0.16	0.11	0.07	0.04	0.01	3.21	0.00
-90	0.02	0.05	0.07	0.11	0.16	0.22	0.29	0.34	0.37	0.37	0.33	0.28	0.22	0.16	0.11	0.07	0.04	0.01	3.21	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	0.40	3.29	12.0	27.6	57.3	112	193	278	335	333	275	189	109	55.7	26.7	11.4	3.03	0.32	2022	---
Φ a	0.00	0.00	0.00	3.55	38.7	95.5	177	263	320	318	259	173	92.8	36.8	2.62	0.00	0.00	0.00	---	1781

one-half-peak spread: U:28.3,D:25.8 , L:27.9,R:28.3


NEMA Beam Type: Type 6

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2067.67x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-60D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

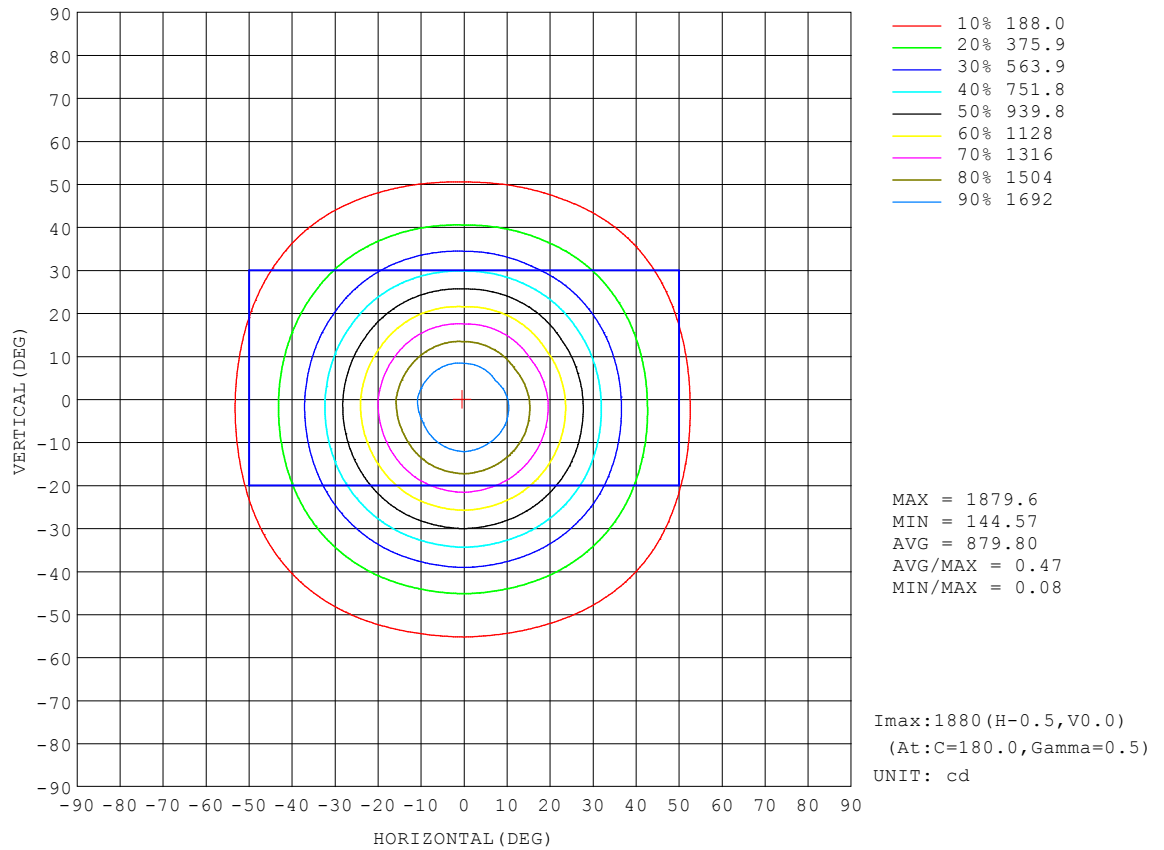


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2067.67x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-60D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

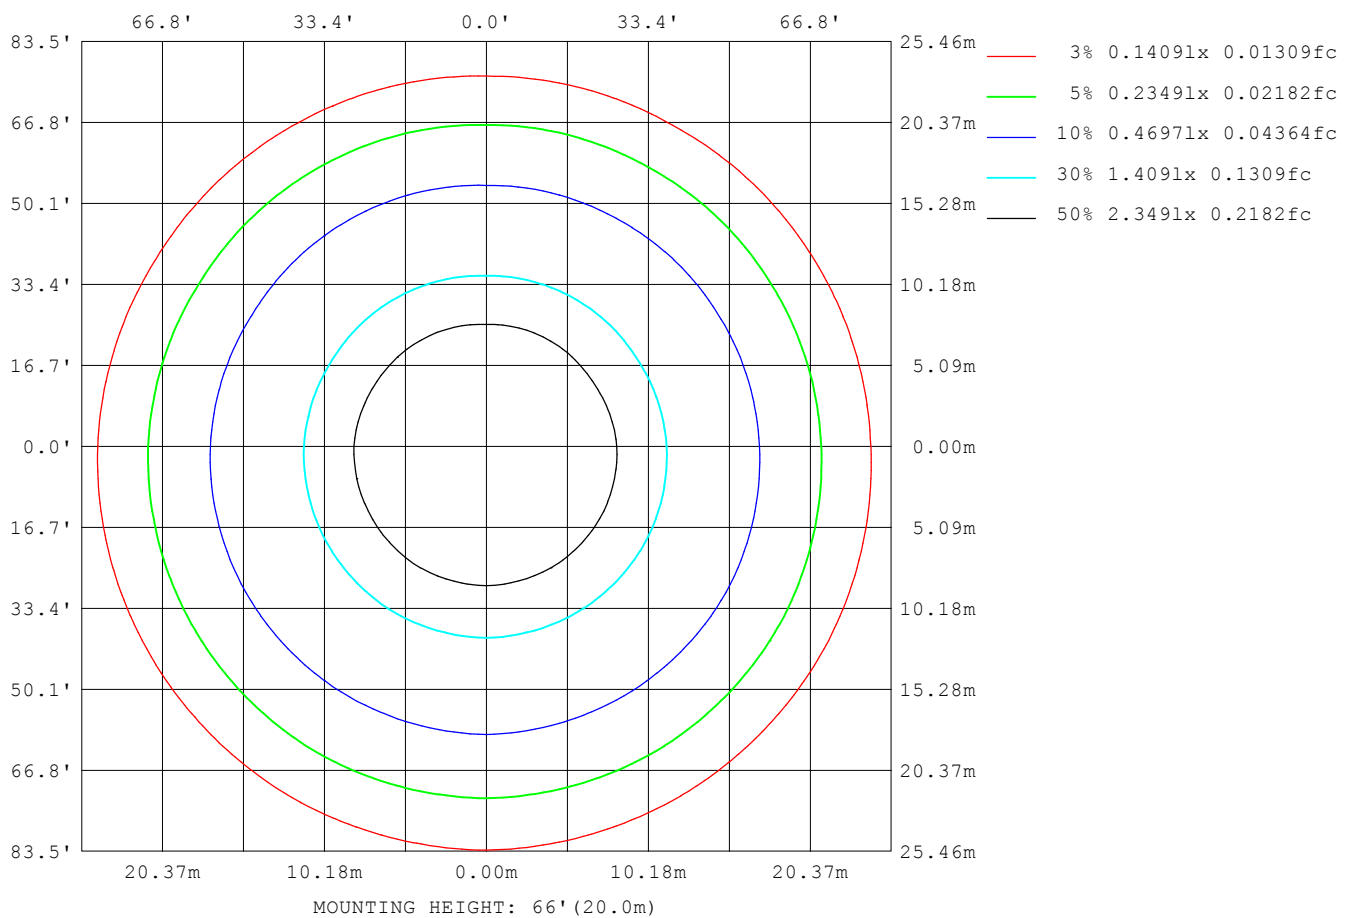

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

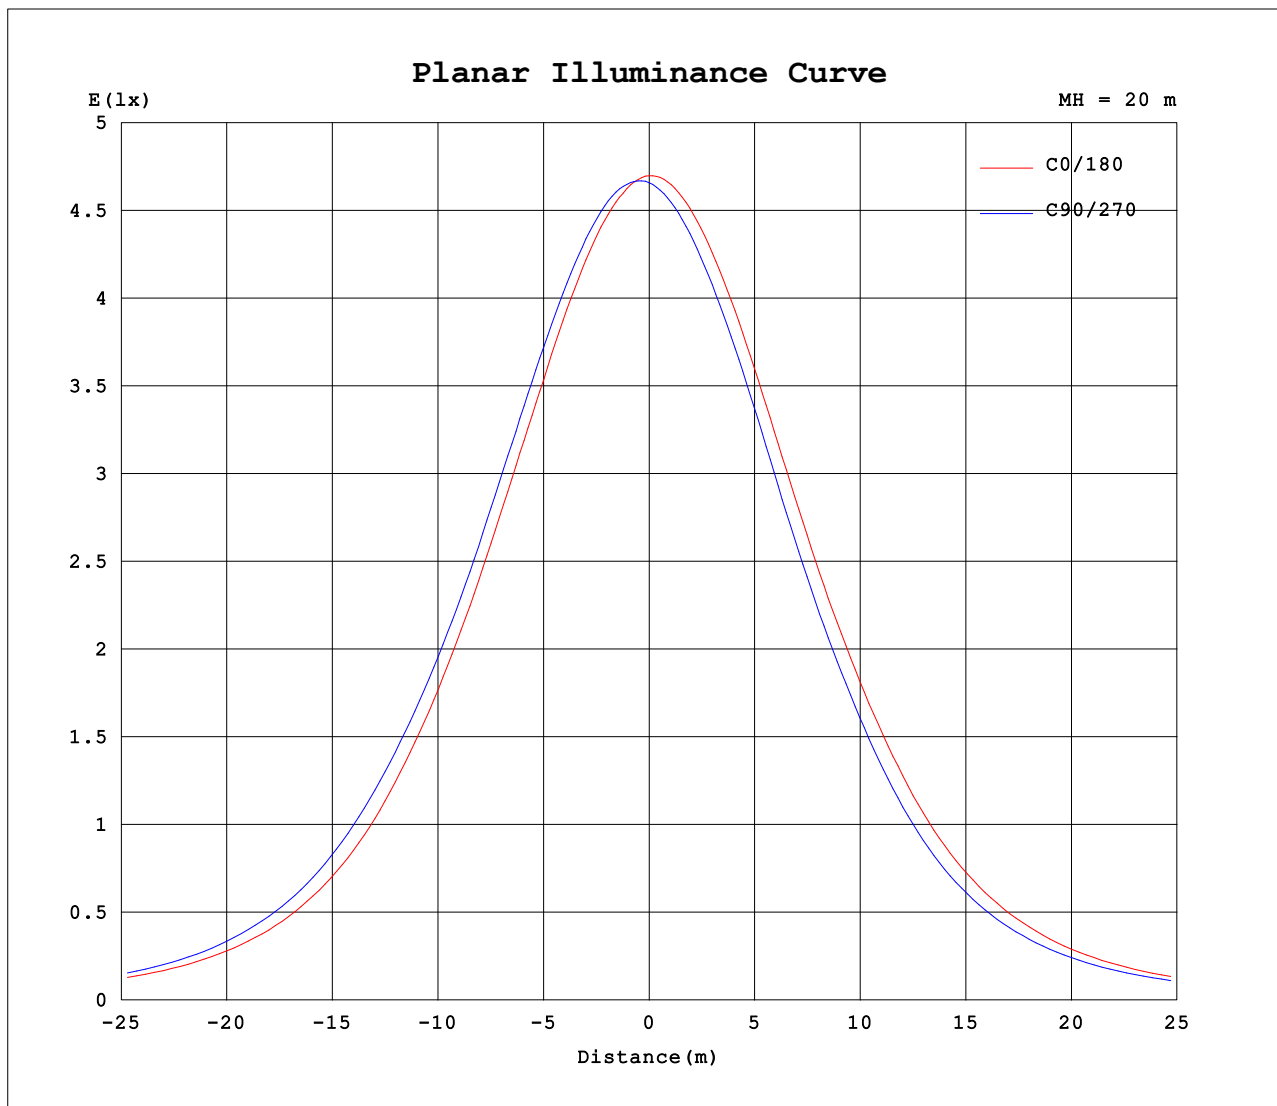


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2067.67x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-60D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

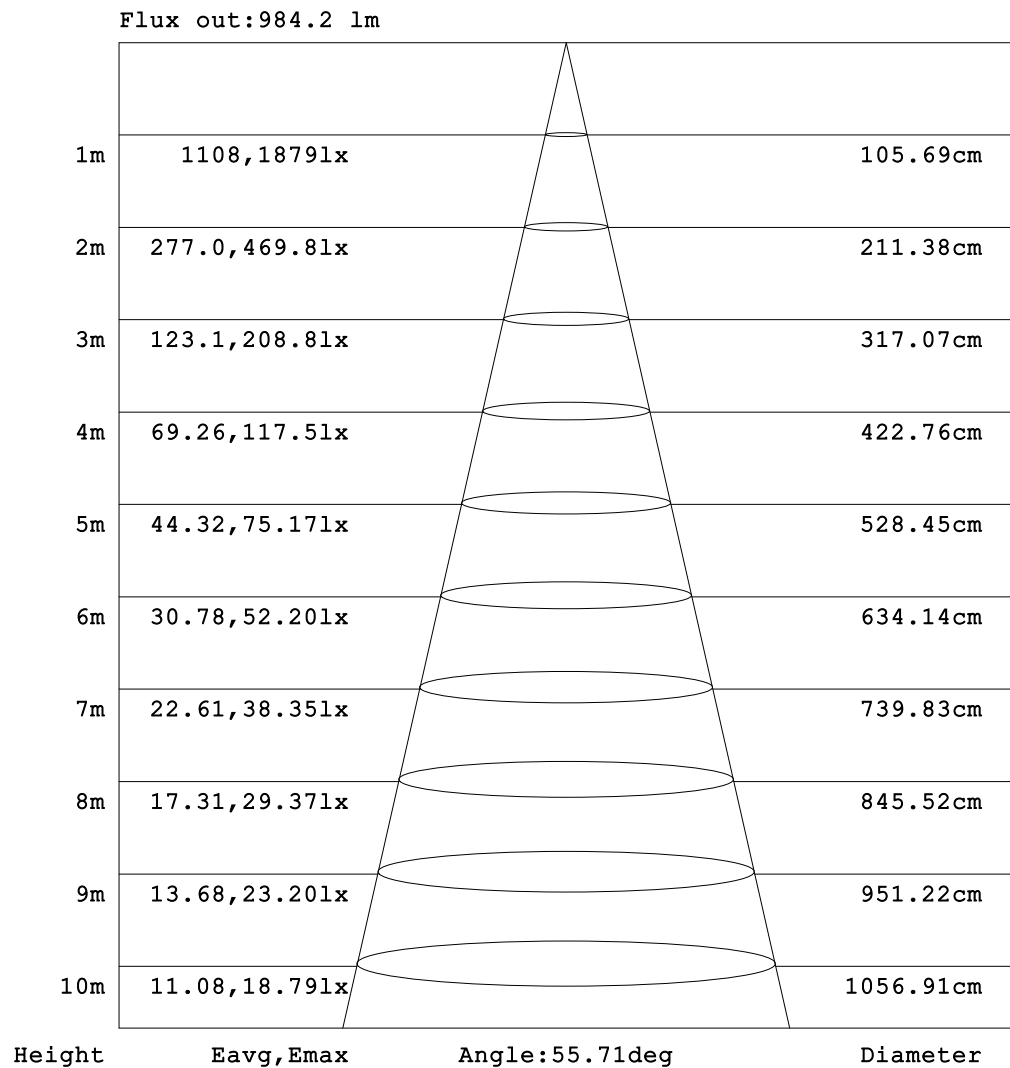

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2067.67x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-60D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	6.21	6.06	6.08	6.19	6.43	6.78	7.19	7.64	8.10	8.58	9.04	9.49	9.89	10.2	10.6	10.9	11.2	11.6	11.9
-170	6.21	6.02	5.99	6.05	6.23	6.50	6.86	7.27	7.73	8.22	8.74	9.27	9.79	10.3	10.7	11.1	11.3	11.5	11.7
-160	6.21	5.98	5.91	5.91	6.00	6.18	6.45	6.78	7.17	7.63	8.15	8.70	9.25	9.77	10.2	10.5	10.8	11.0	11.1
-150	6.21	5.94	5.82	5.76	5.76	5.84	5.98	6.19	6.48	6.81	7.25	7.80	8.32	8.79	9.19	9.51	9.81	10.00	10.1
-140	6.21	5.92	5.75	5.62	5.54	5.52	5.53	5.59	5.71	5.99	6.38	6.77	7.16	7.52	7.84	8.16	8.40	8.57	8.66
-130	6.21	5.91	5.69	5.52	5.36	5.24	5.14	5.06	5.15	5.35	5.56	5.78	6.01	6.21	6.45	6.66	6.83	6.95	7.01
-120	6.21	5.90	5.65	5.44	5.24	5.04	4.86	4.74	4.80	4.86	4.95	5.04	5.12	5.23	5.36	5.47	5.57	5.64	5.69
-110	6.21	5.92	5.65	5.39	5.16	4.94	4.71	4.64	4.64	4.65	4.65	4.65	4.64	4.68	4.76	4.81	4.87	4.91	4.95
-100	6.21	5.95	5.68	5.42	5.17	4.91	4.67	4.65	4.66	4.66	4.66	4.66	4.65	4.67	4.68	4.70	4.72	4.75	4.77
-90	6.21	5.99	5.76	5.53	5.30	5.08	4.85	4.87	4.89	4.91	4.93	4.95	4.97	5.02	5.06	5.10	5.14	5.18	5.23
-80	6.21	6.06	5.98	6.06	6.34	7.00	8.29	9.99	11.8	13.5	15.6	17.8	19.9	21.6	23.0	24.3	25.3	26.0	26.4
-70	6.21	6.17	6.55	8.16	11.2	15.1	20.5	27.0	34.2	41.3	48.2	54.8	60.8	66.0	70.3	73.8	76.3	77.9	78.6
-60	6.21	6.35	7.90	12.2	19.6	29.7	41.7	54.1	66.3	77.8	88.9	99.4	109	118	125	131	136	140	141
-50	6.21	6.60	10.0	18.2	31.2	47.0	64.3	81.0	97.6	114	132	150	171	195	217	237	253	264	269
-40	6.21	6.87	12.3	25.0	42.8	63.9	85.0	106	129	157	192	235	287	342	399	448	491	519	532
-30	6.21	7.14	14.8	31.2	53.2	77.8	103	130	164	212	277	359	457	566	678	785	867	921	943
-20	6.21	7.45	17.0	36.1	61.4	88.5	117	150	199	272	371	500	655	829	997	1148	1274	1356	1388
-10	6.21	7.69	18.4	38.7	66.2	95.2	125	164	226	318	445	609	811	1024	1232	1431	1599	1711	1757
0	6.21	7.75	18.8	39.3	67.5	97.1	127	168	233	330	466	642	857	1084	1314	1536	1719	1840	1879
10	6.21	7.65	18.0	37.7	64.6	93.3	123	159	217	303	420	571	759	963	1161	1353	1513	1612	1636
20	6.21	7.39	16.3	33.9	58.3	84.7	112	142	184	248	333	441	570	723	878	1014	1121	1185	1197
30	6.21	7.09	13.9	28.4	48.8	72.2	96.0	120	148	186	238	304	380	465	552	631	695	735	743
40	6.21	6.87	11.3	22.1	37.4	56.5	76.3	96.0	116	137	163	194	230	270	308	343	371	386	388
50	6.21	6.66	9.12	15.8	25.6	39.0	53.8	69.0	84.1	99.2	113	127	141	155	168	179	189	194	194
60	6.21	6.47	7.48	10.3	15.7	22.3	30.8	41.1	51.2	61.4	71.2	80.0	87.9	94.9	99.7	103	106	106	106
70	6.21	6.34	6.66	7.42	8.76	11.3	14.0	17.5	21.9	26.7	31.5	35.9	39.6	42.8	45.3	47.0	47.9	48.0	47.2
80	6.21	6.27	6.34	6.44	6.56	6.69	6.88	7.13	7.49	7.94	8.69	9.25	9.58	10.0	10.4	10.7	10.8	10.8	10.6
90	6.21	6.22	6.22	6.22	6.23	6.23	6.23	6.22	6.20	6.18	6.16	6.14	6.12	6.12	6.12	6.12	6.12	6.12	6.12
100	6.21	6.18	6.14	6.12	6.10	6.09	6.09	6.08	6.07	6.07	6.07	6.07	6.07	6.07	6.07	6.06	6.05	6.04	6.03
110	6.21	6.14	6.09	6.07	6.06	6.06	6.07	6.08	6.12	6.18	6.24	6.30	6.37	6.41	6.44	6.46	6.48	6.48	6.48
120	6.21	6.11	6.07	6.06	6.07	6.09	6.15	6.25	6.38	6.52	6.66	6.80	6.94	7.06	7.14	7.20	7.25	7.27	7.27
130	6.21	6.09	6.06	6.07	6.11	6.21	6.36	6.54	6.76	6.99	7.22	7.44	7.65	7.84	7.97	8.07	8.14	8.18	8.18
140	6.21	6.07	6.06	6.09	6.19	6.37	6.60	6.87	7.17	7.48	7.79	8.08	8.35	8.59	8.80	8.92	9.01	9.06	9.07
150	6.21	6.06	6.06	6.13	6.29	6.53	6.84	7.19	7.56	7.93	8.29	8.64	8.95	9.25	9.51	9.70	9.81	9.86	9.85
160	6.21	6.06	6.07	6.16	6.37	6.66	7.02	7.44	7.86	8.29	8.70	9.06	9.42	9.75	10.0	10.3	10.4	10.5	10.5
170	6.21	6.06	6.08	6.18	6.42	6.75	7.15	7.59	8.05	8.51	8.94	9.37	9.76	10.1	10.4	10.6	10.9	11.2	11.2
180	6.21	6.06	6.08	6.19	6.43	6.78	7.19	7.64	8.10	8.58	9.04	9.49	9.89	10.2	10.6	10.9	11.2	11.6	12.0

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1130A P:24.100W PF:0.9690 Freq:50.00Hz Lamp Flux:2067.67x1 lm		
NAME: Auroring Micro-197mm-RGBW-GREEN-60D	TYPE:RGBW GREEN	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	12.0	11.9	11.7	11.4	11.0	10.5	9.88	9.13	8.30	7.47	6.67	5.97	5.41	4.98	4.71	4.64	4.67	4.78	
-170	11.6	11.6	11.4	11.1	10.7	10.2	9.61	8.89	8.10	7.30	6.54	5.89	5.36	4.96	4.70	4.64	4.67	4.78	
-160	11.1	11.0	10.8	10.5	10.1	9.61	9.02	8.35	7.63	6.92	6.27	5.70	5.24	4.91	4.69	4.64	4.66	4.78	
-150	10.1	9.98	9.76	9.47	9.09	8.66	8.12	7.54	6.96	6.39	5.87	5.44	5.08	4.81	4.66	4.64	4.66	4.78	
-140	8.64	8.54	8.35	8.09	7.79	7.42	7.03	6.62	6.20	5.81	5.46	5.15	4.91	4.73	4.65	4.64	4.67	4.78	
-130	7.00	6.93	6.81	6.64	6.45	6.22	5.99	5.75	5.50	5.29	5.07	4.90	4.76	4.67	4.64	4.64	4.68	4.78	
-120	5.68	5.65	5.58	5.50	5.40	5.30	5.20	5.09	4.98	4.88	4.80	4.72	4.67	4.64	4.64	4.66	4.70	4.78	
-110	4.94	4.92	4.88	4.84	4.80	4.76	4.74	4.72	4.71	4.69	4.67	4.65	4.64	4.64	4.65	4.67	4.72	4.78	
-100	4.76	4.75	4.73	4.72	4.71	4.70	4.70	4.69	4.68	4.67	4.66	4.64	4.65	4.66	4.69	4.72	4.75	4.78	
-90	5.18	5.14	5.09	5.05	5.00	4.95	4.93	4.90	4.87	4.84	4.81	4.78	4.78	4.78	4.78	4.78	4.78	4.78	
-80	25.9	25.2	24.1	22.8	21.3	19.6	17.4	15.2	13.0	11.2	9.52	7.89	6.46	5.61	5.16	4.94	4.82	4.78	
-70	77.7	75.8	73.1	69.6	65.1	59.8	53.7	47.2	40.3	33.3	26.2	19.7	14.1	10.1	7.03	5.37	4.89	4.78	
-60	139	136	130	124	116	108	98.0	87.4	76.2	64.5	52.4	40.2	28.3	18.2	10.8	6.52	4.98	4.78	
-50	264	252	235	214	191	169	148	129	112	95.6	78.9	61.9	44.8	29.4	16.5	8.49	5.17	4.78	
-40	518	489	446	395	338	283	232	188	154	126	103	81.9	60.8	40.4	23.0	10.5	5.39	4.78	
-30	919	863	780	674	561	453	355	273	208	159	125	98.9	74.2	50.1	28.9	12.9	5.59	4.78	
-20	1352	1266	1139	988	821	648	493	365	266	193	145	112	84.2	57.6	33.4	14.8	5.81	4.78	
-10	1711	1598	1430	1222	1009	797	596	433	309	218	158	119	90.0	61.9	35.9	16.1	5.96	4.78	
0	1827	1698	1511	1291	1060	835	622	449	318	223	160	121	91.3	62.7	36.4	16.4	5.97	4.78	
10	1594	1482	1317	1132	937	739	556	407	293	209	153	117	88.1	60.4	34.9	15.8	5.93	4.78	
20	1178	1108	996	857	703	556	430	324	240	178	137	107	80.6	54.7	31.4	14.2	5.77	4.78	
30	729	682	609	530	452	371	296	232	181	145	116	92.0	69.0	46.1	26.3	12.1	5.57	4.78	
40	383	365	336	301	262	224	188	159	135	113	92.9	73.9	54.2	35.4	20.3	9.70	5.41	4.78	
50	192	186	175	163	150	138	125	111	96.5	82.1	67.8	52.3	37.4	24.3	14.3	7.80	5.26	4.78	
60	106	105	102	98.0	92.6	84.8	76.5	68.2	59.6	50.2	40.5	30.2	21.5	14.8	9.25	6.23	5.12	4.78	
70	47.5	47.0	45.8	43.9	41.4	38.5	35.1	31.0	26.4	21.8	17.4	14.1	11.0	8.19	6.49	5.54	5.08	4.78	
80	10.7	10.7	10.6	10.3	9.94	9.54	9.22	8.73	8.06	7.61	7.22	6.89	6.37	5.98	5.63	5.32	5.04	4.78	
90	6.12	6.11	6.10	6.09	6.08	6.07	6.09	6.11	6.13	6.15	6.17	6.19	5.95	5.72	5.48	5.25	5.01	4.78	
100	6.03	6.03	6.03	6.03	6.04	6.03	6.02	6.02	6.02	6.02	6.03	6.03	5.81	5.60	5.38	5.18	4.98	4.78	
110	6.47	6.46	6.44	6.41	6.36	6.32	6.25	6.19	6.13	6.07	6.03	5.96	5.73	5.52	5.32	5.12	4.94	4.78	
120	7.26	7.22	7.17	7.09	7.00	6.87	6.74	6.60	6.46	6.33	6.21	5.95	5.66	5.45	5.24	5.07	4.91	4.78	
130	8.16	8.10	8.01	7.89	7.74	7.55	7.34	7.12	6.91	6.69	6.41	6.02	5.68	5.38	5.17	5.00	4.87	4.78	
140	9.03	8.94	8.83	8.68	8.46	8.21	7.93	7.64	7.35	7.00	6.55	6.10	5.70	5.34	5.09	4.94	4.82	4.78	
150	9.80	9.70	9.55	9.34	9.08	8.78	8.45	8.10	7.68	7.20	6.68	6.17	5.70	5.30	5.01	4.87	4.78	4.78	
160	10.4	10.3	10.1	9.81	9.53	9.21	8.90	8.49	7.97	7.38	6.77	6.19	5.66	5.24	4.93	4.80	4.74	4.78	
170	11.0	10.7	10.4	10.3	10.2	9.88	9.44	8.87	8.21	7.50	6.78	6.13	5.57	5.13	4.83	4.72	4.71	4.78	
180	12.0	11.9	11.7	11.4	11.0	10.5	9.88	9.13	8.30	7.47	6.67	5.97	5.41	4.98	4.71	4.64	4.67	4.78	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: