

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	908.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	-0.5 degrees horizontal

Beam Spread	At 10% of Imax	105.0V x 105.5H
	At 50% of Imax	56.3V x 56.8H
	At 90% of Imax	20.5V x 22.1H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	863.3 lumens per klm.
	To 50% of Imax	483.6 lumens per klm.
	To 90% of Imax	87.8 lumens per klm.

Upward LOR	2.2 %
Downward LOR	97.8 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.50V I:0.1140A P:24.300W PF:0.9690 Freq:0Hz Lamp Flux:1274.05x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-60D	TYPE:RGBW RED	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

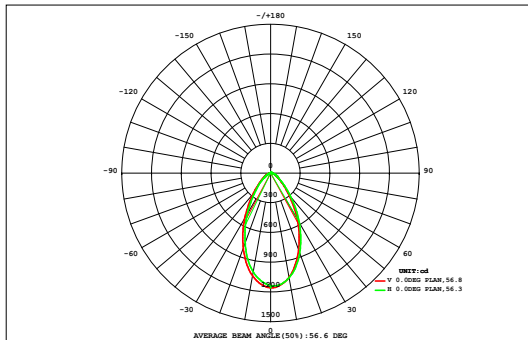

DATA OF LAMP		Eff:52.43lm/W	
MODEL		Imax(cd)	1157
NOMINAL POWER(W)	24	AVAILABILITY(%)	86.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1099
NOMINAL FLUX(lm)	1274.05	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1274
TEST VOLTAGE(V)	220	θ @50% (H,V)	57,56DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.13	0.13	0.12	0.11	0.10	0.08	0.07	0.05	0.03	0.01	1.44	0.00
90	0.01	0.03	0.07	0.13	0.23	0.35	0.45	0.49	0.46	0.44	0.43	0.37	0.28	0.19	0.11	0.06	0.03	0.01	4.15	0.00
80	0.01	0.04	0.14	0.33	0.62	0.95	1.22	1.34	1.34	1.30	1.23	1.06	0.80	0.53	0.28	0.12	0.04	0.01	11.4	0.00
70	0.01	0.07	0.26	0.62	1.11	1.66	2.18	2.52	2.63	2.56	2.32	1.94	1.48	0.99	0.55	0.22	0.06	0.01	21.2	0.00
60	0.01	0.10	0.40	0.92	1.62	2.56	3.77	4.85	5.30	5.13	4.41	3.29	2.26	1.46	0.83	0.36	0.09	0.01	37.4	24.9
50	0.01	0.13	0.53	1.19	2.24	4.08	6.73	9.36	10.6	10.2	8.47	5.95	3.60	2.02	1.10	0.48	0.12	0.01	66.8	59.4
40	0.02	0.16	0.63	1.45	3.05	6.20	11.0	16.2	18.7	18.0	14.7	9.82	5.53	2.76	1.35	0.59	0.15	0.01	110	105
30	0.02	0.19	0.71	1.68	3.88	8.40	15.5	22.9	27.2	26.2	21.2	14.1	7.70	3.59	1.57	0.67	0.17	0.01	156	151
	0.02	0.20	0.76	1.82	4.42	9.90	18.3	27.3	32.9	31.9	26.0	17.5	9.39	4.20	1.73	0.72	0.18	0.01	187	183
	0.02	0.20	0.76	1.84	4.47	10.0	18.5	27.3	33.0	32.9	26.9	18.0	9.65	4.29	1.75	0.72	0.19	0.01	190	186
	0.02	0.19	0.72	1.71	4.00	8.71	16.0	23.5	28.7	28.3	22.8	15.5	8.34	3.82	1.63	0.69	0.18	0.01	165	160
	0.02	0.17	0.65	1.49	3.22	6.59	11.8	17.5	21.2	20.8	16.6	11.2	6.25	3.05	1.43	0.62	0.16	0.01	123	118
-30	0.01	0.14	0.55	1.23	2.38	4.47	7.52	10.9	13.2	12.9	10.2	6.98	4.18	2.26	1.19	0.52	0.13	0.01	78.7	72.0
-40	0.01	0.11	0.43	0.97	1.71	2.82	4.33	5.88	6.92	6.79	5.54	3.98	2.63	1.64	0.93	0.40	0.09	0.01	45.2	34.9
-50	0.01	0.07	0.29	0.69	1.22	1.81	2.46	3.07	3.47	3.42	2.93	2.30	1.72	1.15	0.65	0.26	0.06	0.01	25.6	5.68
-60	0.01	0.05	0.16	0.41	0.74	1.13	1.49	1.76	1.93	1.90	1.70	1.38	1.03	0.68	0.36	0.14	0.04	0.01	14.9	0.00
-70	0.01	0.03	0.08	0.17	0.32	0.49	0.67	0.81	0.90	0.88	0.76	0.59	0.42	0.26	0.14	0.07	0.03	0.01	6.63	0.00
-80	0.01	0.03	0.04	0.06	0.09	0.12	0.16	0.19	0.20	0.20	0.17	0.13	0.10	0.08	0.06	0.04	0.02	0.01	1.72	0.00
-90	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
Φ t	0.23	1.95	7.23	16.8	35.4	70.4	122	176	209	204	167	114	65.5	33.1	15.7	6.72	1.75	0.19	1246	---
Φ a	0.00	0.00	0.00	2.07	24.0	60.3	113	167	199	195	157	104	55.2	21.3	1.24	0.00	0.00	0.00	---	1099

one-half-peak spread: U:28.4,D:26.3 , L:28.4,R:28.8


NEMA Beam Type: Type 6

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.50V I:0.1140A P:24.300W PF:0.9690 Freq:0Hz Lamp Flux:1274.05x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-60D	TYPE:RGBW RED	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

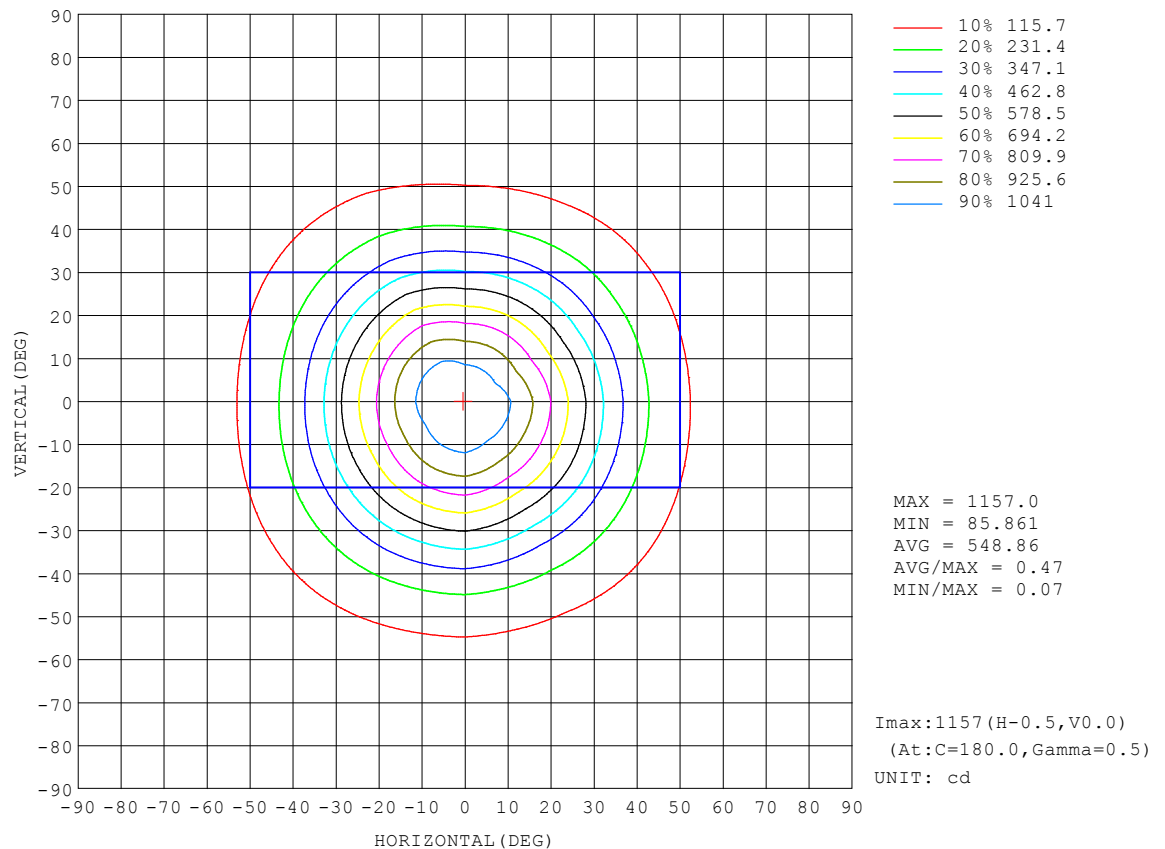


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.50V I:0.1140A P:24.300W PF:0.9690 Freq:0Hz Lamp Flux:1274.05x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-60D	TYPE:RGBW RED	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

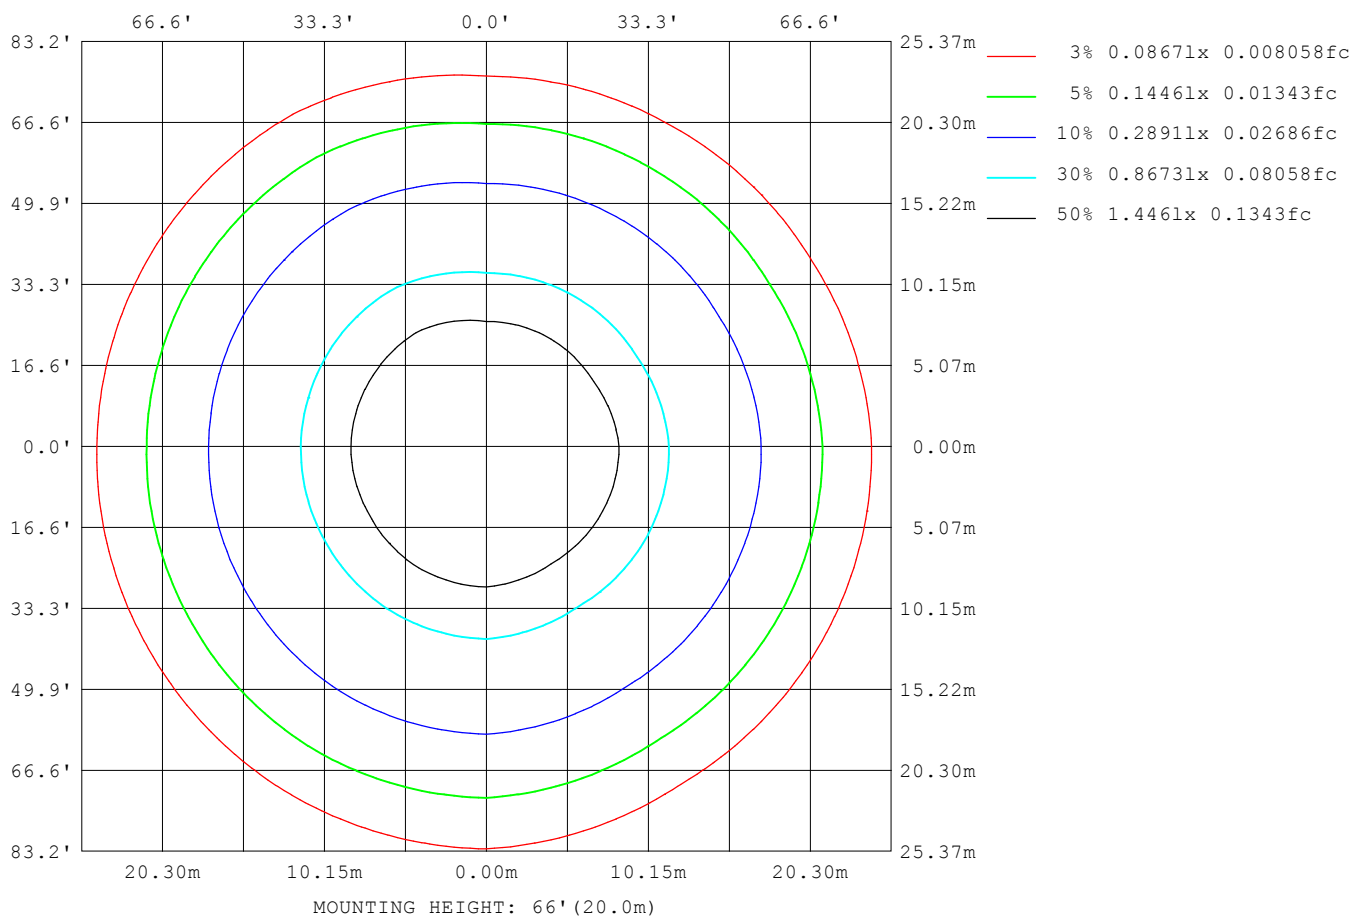

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

Planar Illuminance Curve

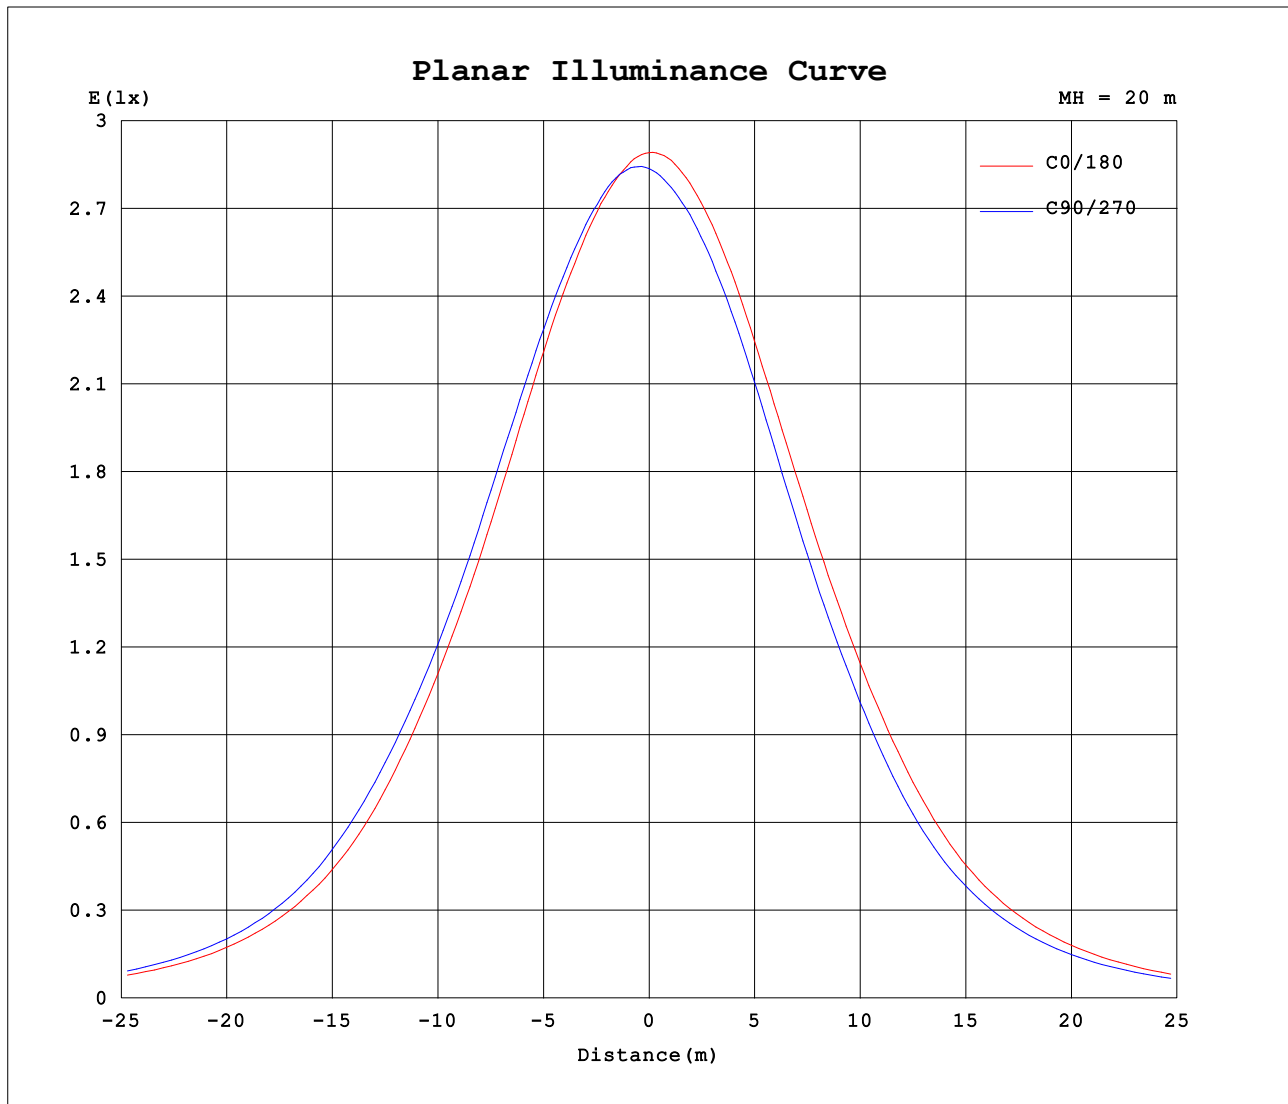


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 10.000m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.50V I:0.1140A P:24.300W PF:0.9690 Freq:0Hz Lamp Flux:1274.05x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-60D	TYPE:RGBW RED	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

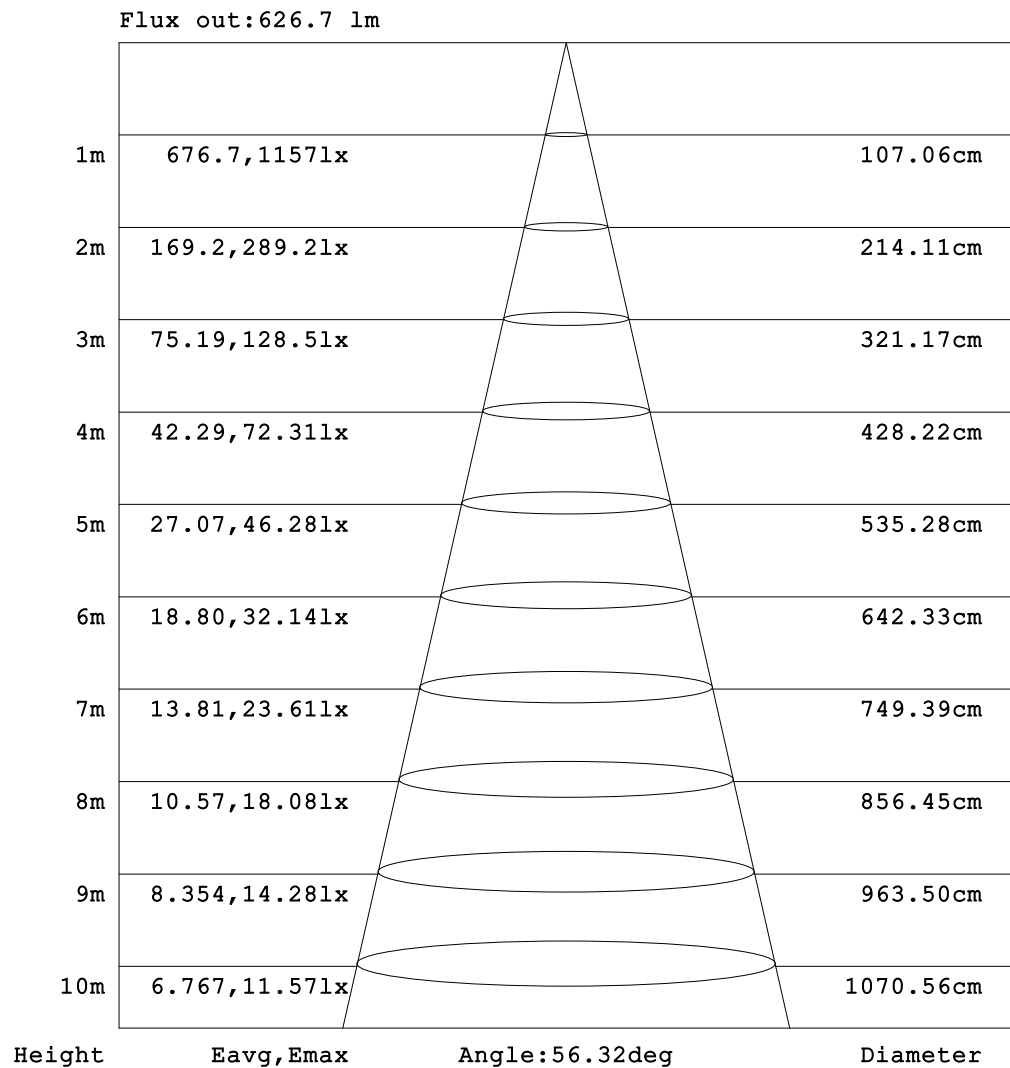

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2026-07-03

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:10.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1140A P:24.300W PF:0.9690 Freq:0Hz Lamp Flux:1274.05x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-60D	TYPE:RGBW RED	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.82	3.72	3.73	3.81	3.95	4.16	4.42	4.70	5.00	5.31	5.60	5.89	6.14	6.36	6.56	6.77	6.99	7.24	7.40
-170	3.82	3.69	3.68	3.71	3.82	3.97	4.21	4.46	4.75	5.06	5.39	5.73	6.05	6.33	6.60	6.83	6.96	7.06	7.28
-160	3.82	3.67	3.62	3.61	3.67	3.78	3.93	4.14	4.38	4.67	4.99	5.33	5.67	6.00	6.26	6.47	6.62	6.79	6.90
-150	3.82	3.64	3.56	3.51	3.51	3.55	3.64	3.76	3.93	4.14	4.40	4.75	5.08	5.38	5.63	5.83	6.04	6.18	6.27
-140	3.82	3.62	3.52	3.42	3.37	3.34	3.35	3.37	3.44	3.61	3.86	4.10	4.35	4.57	4.77	4.99	5.16	5.28	5.35
-130	3.82	3.61	3.48	3.36	3.25	3.16	3.10	3.04	3.08	3.20	3.34	3.48	3.63	3.76	3.91	4.05	4.18	4.27	4.32
-120	3.82	3.60	3.45	3.30	3.17	3.03	2.91	2.83	2.87	2.91	2.96	3.01	3.07	3.14	3.24	3.32	3.39	3.45	3.49
-110	3.82	3.61	3.44	3.27	3.12	2.97	2.81	2.77	2.78	2.78	2.79	2.79	2.78	2.82	2.86	2.92	2.97	3.02	3.06
-100	3.82	3.62	3.45	3.28	3.11	2.95	2.78	2.78	2.78	2.79	2.79	2.80	2.80	2.83	2.85	2.87	2.90	2.93	2.96
-90	3.82	3.66	3.51	3.35	3.20	3.05	2.89	2.91	2.93	2.96	2.98	3.00	3.02	3.04	3.07	3.09	3.11	3.14	3.16
-80	3.82	3.70	3.62	3.58	3.65	3.90	4.53	5.43	6.43	7.41	8.58	9.82	11.1	12.0	12.9	13.6	14.2	14.6	14.8
-70	3.82	3.77	3.87	4.62	6.25	8.40	11.4	15.1	19.4	23.6	27.8	31.7	35.4	38.6	41.2	43.4	45.0	46.1	46.7
-60	3.82	3.84	4.53	6.89	11.1	16.9	23.8	31.0	38.4	45.5	52.3	58.6	64.3	69.3	73.6	77.4	80.4	82.5	83.4
-50	3.82	3.96	5.74	10.3	17.9	27.2	37.4	47.4	57.4	67.0	77.2	88.6	101	115	129	141	152	159	162
-40	3.82	4.08	6.99	14.4	24.9	37.4	50.2	62.5	75.7	92.2	113	141	172	207	241	272	298	315	323
-30	3.82	4.20	8.46	18.1	31.2	46.1	60.9	76.8	97.1	127	167	217	277	345	416	482	534	569	584
-20	3.82	4.37	9.74	21.1	36.3	52.8	69.5	89.8	120	165	226	304	403	510	614	708	787	839	859
-10	3.82	4.50	10.6	22.8	39.4	57.0	75.4	99.2	137	195	273	377	505	636	762	884	984	1048	1073
0	3.82	4.55	10.9	23.2	40.4	58.3	77.2	102	143	205	289	403	541	684	828	959	1068	1135	1156
10	3.82	4.50	10.5	22.4	38.9	56.5	74.7	98.0	135	191	267	368	494	625	753	877	975	1028	1014
20	3.82	4.37	9.50	20.4	35.4	51.7	68.4	87.8	116	158	216	290	380	484	586	676	743	766	754
30	3.82	4.23	8.19	17.1	29.8	44.5	59.3	74.7	93.4	119	156	201	255	313	374	430	463	476	467
40	3.82	4.14	6.73	13.4	23.2	35.2	47.7	60.3	72.7	87.2	105	127	153	182	209	229	241	246	242
50	3.82	4.05	5.45	9.51	15.9	24.7	34.3	44.0	53.7	63.1	72.1	81.6	91.2	101	109	115	119	120	117
60	3.82	3.96	4.47	6.39	9.75	14.3	20.3	26.9	33.5	40.1	46.3	52.0	57.2	61.1	62.5	63.4	63.3	62.3	60.3
70	3.82	3.90	4.07	4.48	5.53	7.29	9.23	11.8	14.9	18.2	21.5	24.4	27.0	28.7	29.4	29.3	28.8	27.7	26.1
80	3.82	3.86	3.91	3.98	4.07	4.18	4.30	4.54	4.99	5.53	6.00	6.41	6.85	7.09	7.19	7.10	6.86	6.50	6.05
90	3.82	3.82	3.83	3.84	3.84	3.85	3.86	3.84	3.82	3.81	3.79	3.78	3.76	3.76	3.76	3.75	3.75	3.75	3.75
100	3.82	3.78	3.77	3.75	3.75	3.74	3.73	3.71	3.71	3.70	3.69	3.69	3.69	3.69	3.68	3.68	3.67	3.67	3.66
110	3.82	3.76	3.74	3.72	3.72	3.71	3.70	3.70	3.71	3.72	3.76	3.79	3.83	3.86	3.88	3.89	3.90	3.91	3.91
120	3.82	3.74	3.72	3.72	3.72	3.71	3.72	3.76	3.84	3.92	4.00	4.08	4.17	4.24	4.29	4.34	4.37	4.39	4.40
130	3.82	3.74	3.72	3.72	3.73	3.76	3.84	3.94	4.06	4.19	4.34	4.47	4.60	4.71	4.81	4.88	4.93	4.97	4.98
140	3.82	3.73	3.72	3.72	3.77	3.86	4.00	4.15	4.32	4.50	4.69	4.87	5.05	5.21	5.34	5.44	5.50	5.55	5.57
150	3.82	3.72	3.72	3.74	3.83	3.97	4.15	4.36	4.57	4.79	5.01	5.24	5.45	5.65	5.81	5.94	6.01	6.05	6.06
160	3.82	3.72	3.72	3.77	3.89	4.07	4.28	4.53	4.79	5.04	5.30	5.54	5.75	5.96	6.14	6.29	6.41	6.46	6.46
170	3.82	3.72	3.73	3.79	3.93	4.12	4.38	4.65	4.93	5.23	5.51	5.77	6.01	6.20	6.36	6.52	6.71	6.89	6.90
180	3.82	3.72	3.73	3.81	3.95	4.16	4.42	4.70	5.00	5.31	5.60	5.89	6.14	6.36	6.56	6.77	6.99	7.24	7.41

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.50V I:0.1140A P:24.300W PF:0.9690 Freq:0Hz Lamp Flux:1274.05x1 lm		
NAME: Auroring Micro-197mm-RGBW-RED-60D	TYPE:RGBW RED	WEIGHT:00
SPEC.:60 DEGREE	DIM.: 197mm	SERIAL No.:01
MFR.: EVERFINE	SUR.:0.8	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	7.41	7.34	7.24	7.06	6.81	6.50	6.10	5.62	5.11	4.56	4.06	3.62	3.26	2.99	2.83	2.81	2.83	2.92	
-170	7.20	7.18	7.09	6.92	6.68	6.38	5.98	5.52	5.01	4.49	4.01	3.59	3.24	2.99	2.83	2.81	2.83	2.92	
-160	6.89	6.81	6.71	6.56	6.34	6.03	5.65	5.21	4.75	4.28	3.86	3.48	3.18	2.96	2.83	2.82	2.84	2.92	
-150	6.27	6.21	6.11	5.94	5.72	5.44	5.11	4.74	4.35	3.97	3.62	3.33	3.09	2.92	2.82	2.82	2.84	2.92	
-140	5.36	5.33	5.24	5.09	4.90	4.68	4.42	4.14	3.87	3.61	3.36	3.15	2.98	2.86	2.82	2.82	2.84	2.92	
-130	4.34	4.31	4.25	4.17	4.05	3.91	3.74	3.58	3.42	3.26	3.12	2.99	2.89	2.83	2.82	2.82	2.85	2.92	
-120	3.50	3.48	3.46	3.41	3.36	3.28	3.21	3.13	3.06	2.99	2.93	2.87	2.83	2.82	2.82	2.83	2.86	2.92	
-110	3.05	3.03	3.00	2.98	2.94	2.91	2.89	2.88	2.86	2.85	2.84	2.82	2.82	2.82	2.82	2.84	2.87	2.92	
-100	2.94	2.92	2.90	2.89	2.87	2.86	2.85	2.85	2.84	2.83	2.82	2.81	2.82	2.83	2.84	2.86	2.89	2.92	
-90	3.13	3.10	3.07	3.05	3.02	2.99	2.97	2.95	2.93	2.91	2.89	2.87	2.88	2.89	2.90	2.91	2.92	2.92	
-80	14.1	13.3	12.2	11.1	9.82	8.53	7.61	6.67	5.87	5.19	4.42	3.77	3.34	3.12	3.03	2.97	2.94	2.92	
-70	45.4	43.5	41.2	38.3	34.8	31.3	27.9	24.4	20.7	16.8	13.0	9.64	7.14	5.20	3.68	3.12	2.97	2.92	
-60	81.5	78.6	74.8	70.4	65.4	60.5	55.1	48.8	42.3	35.5	28.5	21.6	14.8	9.44	5.67	3.56	3.02	2.92	
-50	156	146	134	119	106	94.3	83.6	73.7	64.3	54.7	44.8	34.9	25.0	15.9	8.83	4.63	3.09	2.92	
-40	309	286	255	222	191	159	131	107	88.2	73.2	60.2	47.5	35.0	22.9	12.7	5.73	3.17	2.92	
-30	558	512	450	387	322	260	205	158	120	92.8	73.9	58.5	43.6	29.1	16.3	7.14	3.25	2.92	
-20	823	756	679	590	490	384	290	216	157	114	85.9	66.9	50.2	34.0	19.3	8.33	3.36	2.92	
-10	1032	967	866	745	619	488	362	262	186	131	94.7	72.2	54.3	37.1	21.1	9.16	3.46	2.92	
0	1125	1052	945	808	665	524	389	279	197	137	97.6	73.9	55.6	38.0	21.6	9.42	3.48	2.92	
10	988	919	814	700	583	459	343	251	179	127	92.4	70.8	53.3	36.5	20.6	9.04	3.46	2.92	
20	739	692	620	533	435	340	262	197	144	107	82.1	64.2	48.4	32.7	18.4	8.14	3.39	2.92	
30	458	429	384	333	279	226	178	138	107	85.9	69.2	55.0	41.2	27.3	15.3	6.91	3.30	2.92	
40	238	226	208	185	159	134	112	93.4	79.3	66.2	54.9	43.8	32.0	20.7	11.6	5.50	3.25	2.92	
50	116	111	104	96.2	88.0	80.8	73.3	65.1	56.7	48.2	39.7	30.6	21.7	13.9	8.13	4.44	3.19	2.92	
60	60.9	60.5	59.3	57.3	54.8	50.5	45.3	40.2	34.8	29.0	23.2	17.2	12.2	8.29	5.22	3.64	3.14	2.92	
70	26.5	26.5	26.0	25.1	23.9	22.1	20.2	17.7	15.0	12.2	9.69	7.76	6.15	4.62	3.79	3.35	3.11	2.92	
80	6.12	6.12	6.04	5.86	5.65	5.41	5.24	4.94	4.56	4.32	4.16	4.05	3.82	3.61	3.42	3.25	3.09	2.92	
90	3.73	3.71	3.70	3.68	3.66	3.64	3.66	3.67	3.69	3.70	3.72	3.73	3.60	3.46	3.33	3.19	3.06	2.92	
100	3.66	3.66	3.66	3.65	3.65	3.64	3.64	3.63	3.63	3.63	3.64	3.63	3.51	3.38	3.26	3.15	3.03	2.92	
110	3.91	3.90	3.89	3.87	3.85	3.83	3.78	3.73	3.68	3.65	3.63	3.58	3.46	3.33	3.22	3.10	3.01	2.92	
120	4.40	4.37	4.34	4.30	4.25	4.16	4.08	3.98	3.89	3.81	3.72	3.56	3.41	3.29	3.17	3.07	2.98	2.92	
130	4.97	4.93	4.88	4.80	4.71	4.59	4.45	4.30	4.16	4.02	3.84	3.61	3.40	3.24	3.13	3.03	2.96	2.92	
140	5.54	5.49	5.42	5.32	5.17	5.00	4.82	4.63	4.44	4.21	3.94	3.66	3.42	3.20	3.08	2.99	2.93	2.92	
150	6.03	5.98	5.89	5.75	5.57	5.36	5.14	4.91	4.65	4.35	4.03	3.71	3.42	3.19	3.02	2.95	2.91	2.92	
160	6.41	6.33	6.20	6.04	5.85	5.63	5.44	5.18	4.85	4.48	4.10	3.73	3.41	3.14	2.96	2.91	2.88	2.92	
170	6.80	6.59	6.38	6.31	6.24	6.08	5.80	5.45	5.02	4.57	4.12	3.71	3.36	3.08	2.90	2.86	2.86	2.92	
180	7.41	7.34	7.24	7.06	6.81	6.50	6.10	5.62	5.11	4.56	4.06	3.62	3.26	2.99	2.83	2.81	2.83	2.92	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2026-07-03

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:10.000m [K=1.0000]
Remarks: