

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	4112.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	47.9V x 47.7H
	At 50% of Imax	25.1V x 25.0H
	At 90% of Imax	8.8V x 9.2H

Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	813.8 lumens per klm.
	To 50% of Imax	442.8 lumens per klm.
	To 90% of Imax	84.8 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.5 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.77V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:316.869x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-25D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

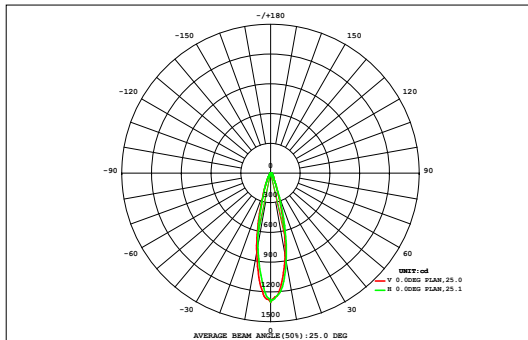

DATA OF LAMP			Eff:40.11lm/W	
MODEL			Imax (cd)	1303
NOMINAL POWER (W)	30		AVAILABILITY (%)	81.3
RATED VOLTAGE (V)	220		Avai. FLUX (lm)	257.7
NOMINAL FLUX (lm)	316.869		LOR (%)	100.0
LAMPS INSIDE	1		TOTAL FLUX (lm)	316.9
TEST VOLTAGE (V)	220		θ @50° (H,V)	25,25DEG

		AREA FLUX DIAGRAM															UNIT: lm		Φ t	Φ a	
		0.01	0.01	0.01	0.02	0.04	0.05	0.07	0.08	0.08	0.08	0.07	0.06	0.05	0.03	0.02	0.01	0.01	0.01	0.01	
VERTICAL (DEG)	45	0.01	0.01	0.01	0.02	0.04	0.05	0.07	0.08	0.08	0.08	0.07	0.06	0.05	0.03	0.02	0.01	0.01	0.71	0.00	
	40	0.01	0.02	0.03	0.05	0.08	0.11	0.14	0.16	0.18	0.17	0.15	0.13	0.09	0.06	0.04	0.02	0.01	0.01	1.45	0.00
	35	0.01	0.03	0.05	0.09	0.14	0.20	0.26	0.31	0.33	0.33	0.29	0.24	0.18	0.12	0.07	0.04	0.02	0.01	2.71	0.00
	30	0.02	0.04	0.08	0.15	0.23	0.34	0.46	0.55	0.60	0.59	0.52	0.42	0.30	0.20	0.12	0.07	0.03	0.02	4.74	0.00
	25	0.03	0.06	0.12	0.22	0.36	0.55	0.79	1.01	1.11	1.08	0.92	0.70	0.48	0.31	0.18	0.10	0.05	0.02	8.11	2.63
	20	0.04	0.09	0.17	0.31	0.53	0.88	1.37	1.90	2.18	2.08	1.66	1.15	0.73	0.44	0.26	0.14	0.07	0.03	14.0	10.5
	15	0.05	0.12	0.23	0.41	0.75	1.33	2.33	3.60	4.36	4.14	3.08	1.84	1.04	0.60	0.35	0.20	0.10	0.04	24.6	21.6
	10	0.06	0.14	0.27	0.51	0.98	1.90	3.64	5.73	6.94	6.51	4.90	2.85	1.50	0.81	0.44	0.24	0.12	0.05	37.6	34.9
	5	0.07	0.15	0.30	0.57	1.15	2.40	4.71	7.26	9.03	8.44	6.55	4.20	2.08	1.00	0.52	0.27	0.14	0.06	48.9	46.3
	0	0.07	0.16	0.31	0.60	1.24	2.68	5.21	7.84	9.34	9.22	7.30	4.62	2.25	1.04	0.53	0.28	0.14	0.06	52.9	50.3
	-5	0.07	0.16	0.31	0.59	1.19	2.56	4.87	6.85	7.91	7.62	6.03	3.76	1.87	0.91	0.48	0.26	0.13	0.06	45.6	43.0
	-10	0.06	0.14	0.28	0.52	0.99	1.86	3.26	4.73	5.51	5.23	3.96	2.43	1.31	0.71	0.39	0.21	0.11	0.05	31.8	29.0
	-15	0.05	0.12	0.24	0.42	0.70	1.14	1.76	2.49	2.95	2.77	2.07	1.36	0.85	0.51	0.30	0.17	0.08	0.04	18.0	14.6
	-20	0.04	0.09	0.18	0.30	0.47	0.69	0.95	1.21	1.37	1.31	1.06	0.78	0.54	0.35	0.21	0.12	0.06	0.03	9.76	4.89
	-25	0.03	0.07	0.12	0.20	0.30	0.42	0.54	0.65	0.70	0.67	0.58	0.45	0.33	0.23	0.14	0.08	0.04	0.02	5.58	0.00
	-30	0.02	0.04	0.07	0.12	0.18	0.25	0.32	0.37	0.39	0.38	0.33	0.27	0.20	0.14	0.08	0.05	0.03	0.01	3.24	0.00
-35	0.01	0.02	0.04	0.07	0.10	0.14	0.17	0.20	0.21	0.21	0.18	0.15	0.11	0.07	0.05	0.03	0.02	0.01	1.77	0.00	
-40	0.01	0.01	0.02	0.03	0.05	0.07	0.08	0.10	0.10	0.10	0.09	0.07	0.05	0.04	0.02	0.01	0.01	0.01	0.88	0.00	
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
Φ t	0.68	1.47	2.85	5.19	9.47	17.6	30.9	45.0	53.3	50.9	39.8	25.5	13.9	7.58	4.21	2.30	1.16	0.54	312	---	
Φ a	0.00	0.00	0.00	0.00	4.68	14.0	27.8	42.0	50.3	47.9	36.6	22.1	10.0	2.23	0.00	0.00	0.00	0.00	---	258	

one-half-peak spread: U:13.7,D:11.5 , L:12.8,R:12.3

NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06


```

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:219.77V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:316.869x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-25D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

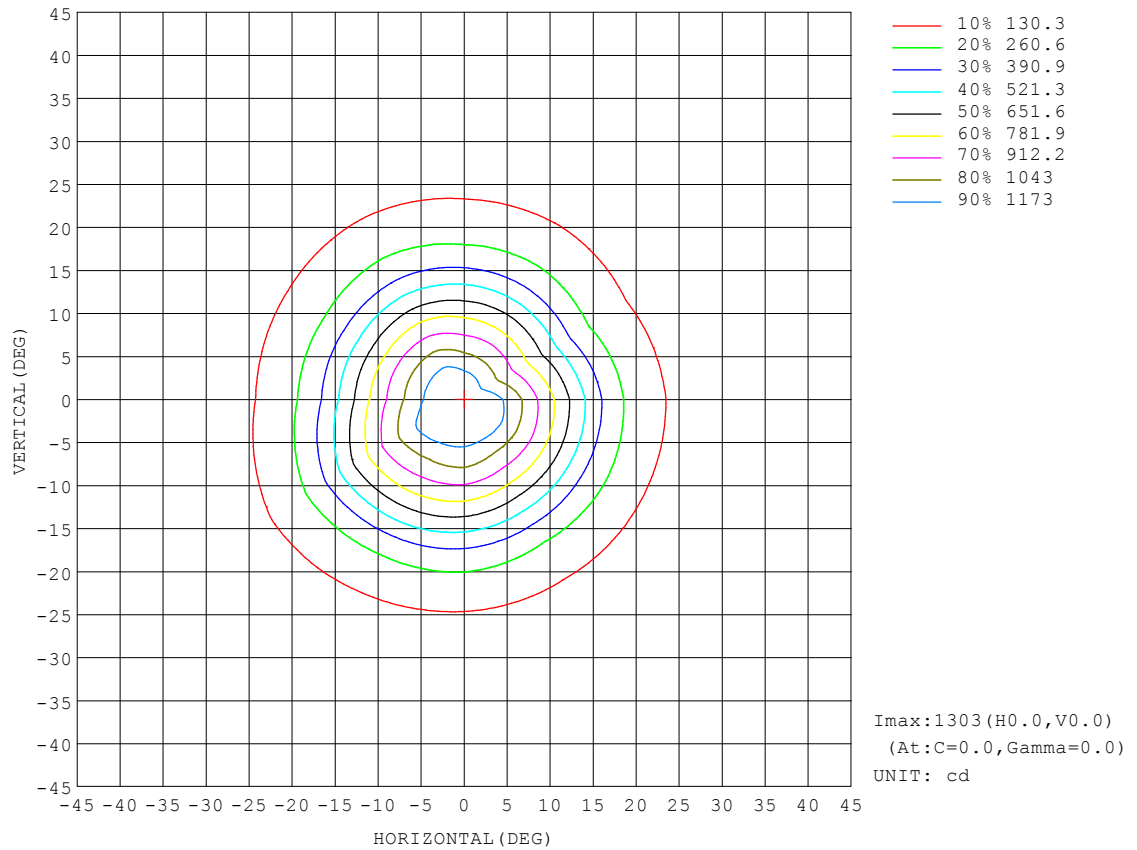


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.77V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:316.869x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-25D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

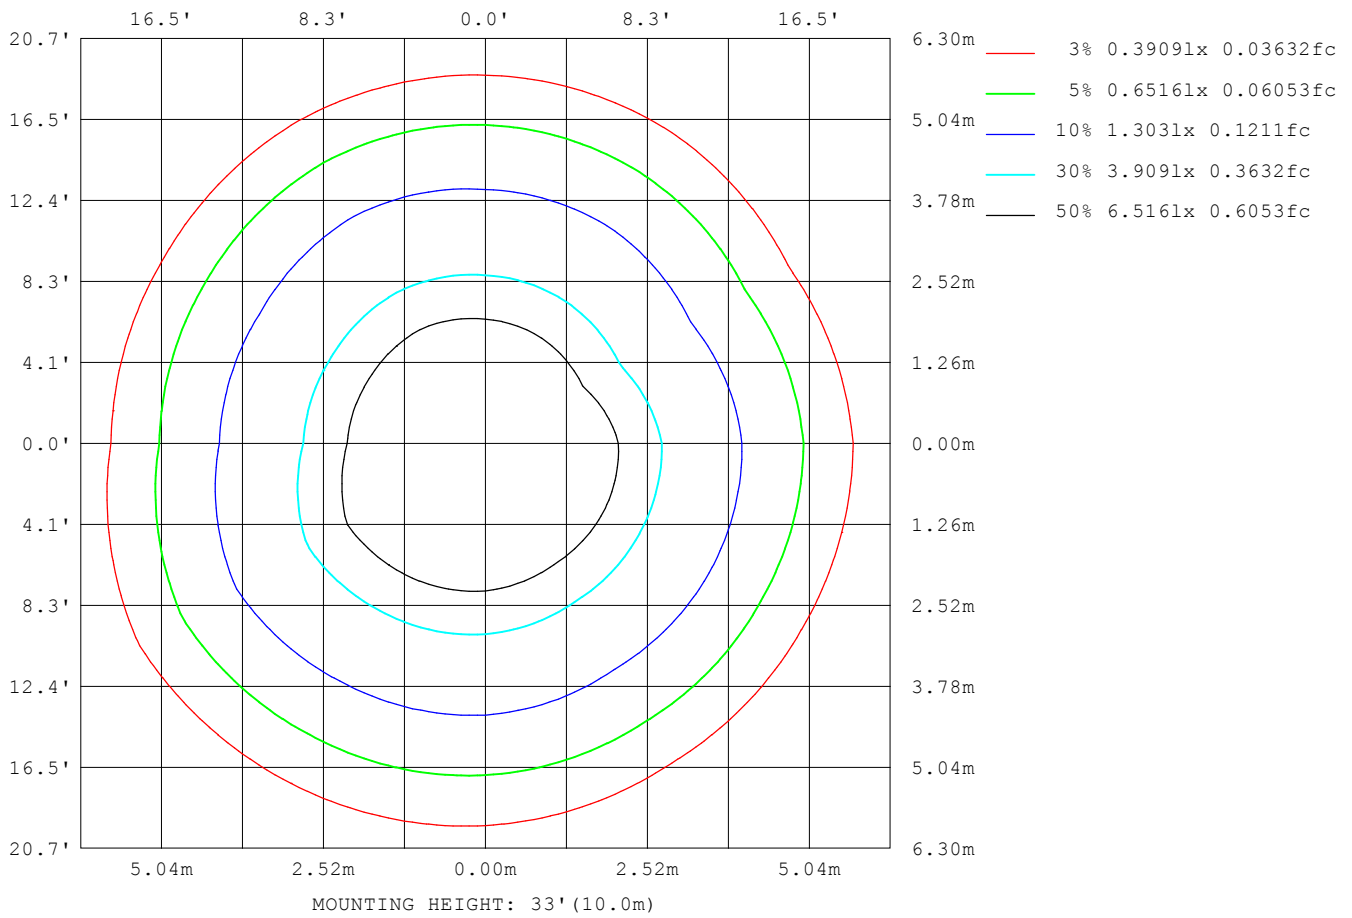

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

Planar Illuminance Curve

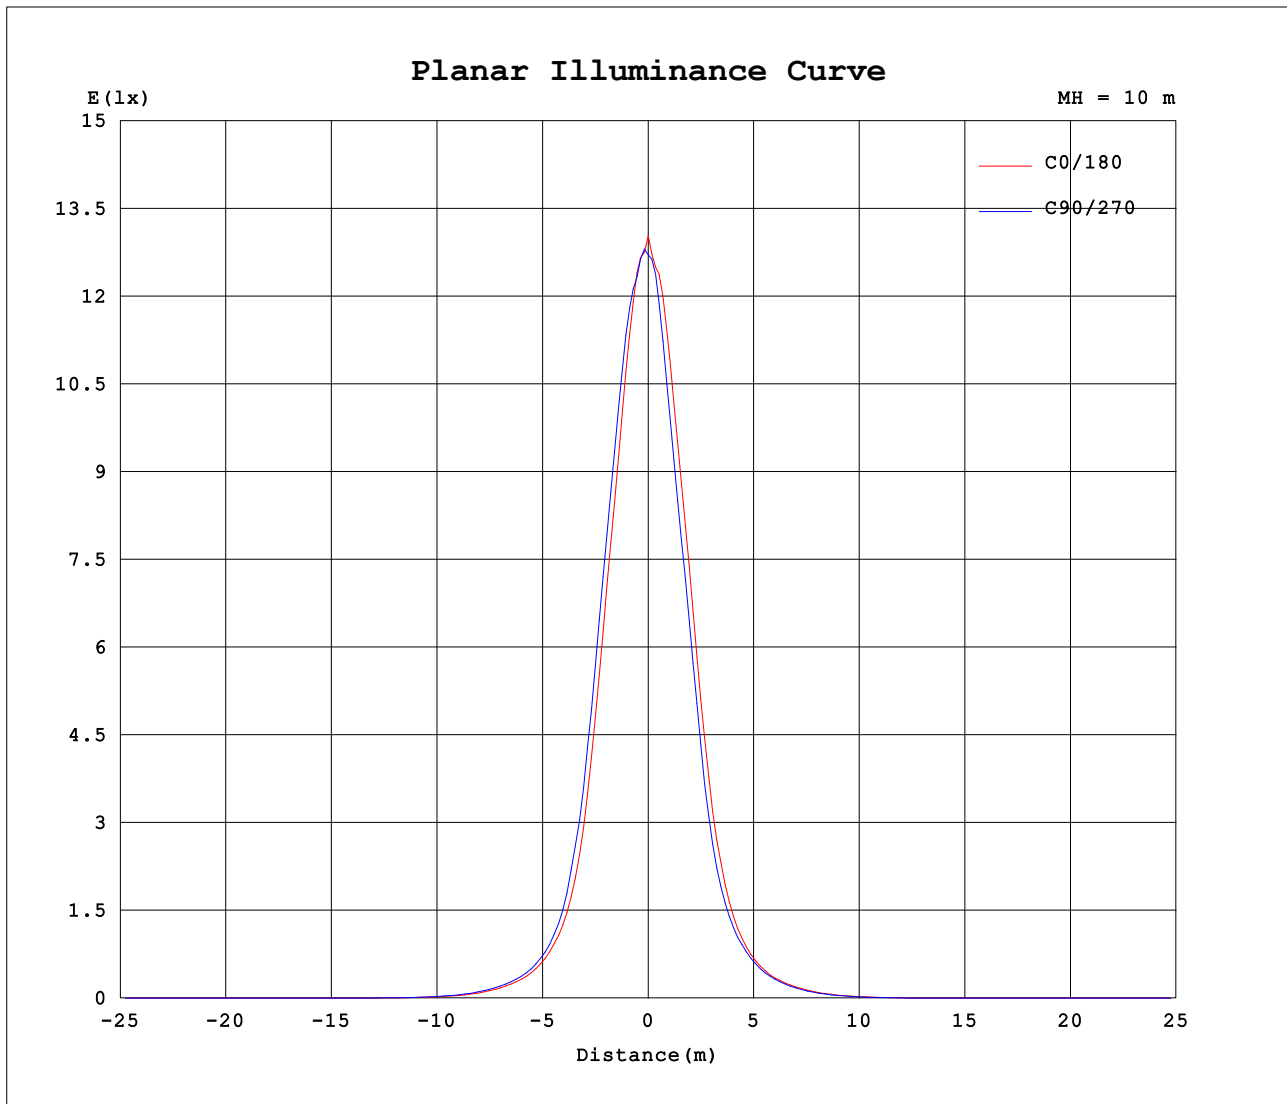


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.77V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:316.869x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-25D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

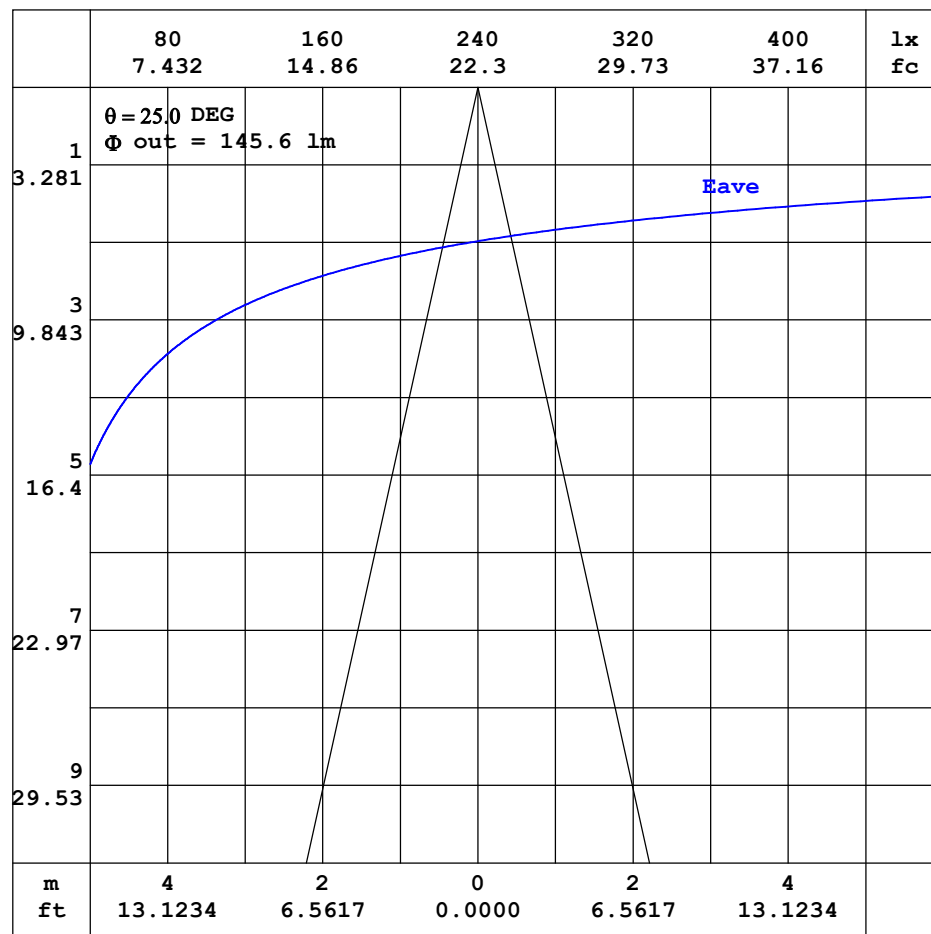

Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.77V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:316.869x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-25D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.04	0.03	0.03	0.03	0.03	0.04	0.04	0.06	0.08	0.14	0.22	0.41	0.71	1.13	1.55	1.83	1.88	1.88	1.88
-170	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.06	0.08	0.13	0.21	0.37	0.64	1.02	1.45	1.79	1.97	2.00	2.02
-160	0.04	0.04	0.05	0.05	0.04	0.04	0.05	0.05	0.07	0.11	0.17	0.26	0.43	0.66	0.95	1.25	1.49	1.66	1.75
-150	0.04	0.05	0.05	0.06	0.05	0.05	0.05	0.06	0.06	0.08	0.11	0.15	0.21	0.30	0.42	0.56	0.70	0.81	0.87
-140	0.04	0.05	0.06	0.07	0.06	0.05	0.05	0.06	0.06	0.06	0.07	0.08	0.09	0.11	0.14	0.18	0.23	0.27	0.29
-130	0.04	0.05	0.07	0.08	0.08	0.08	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.06	0.07	0.08	0.09	0.11
-120	0.04	0.06	0.08	0.09	0.10	0.10	0.10	0.08	0.07	0.06	0.06	0.06	0.05	0.05	0.05	0.05	0.04	0.04	0.04
-110	0.04	0.06	0.08	0.10	0.12	0.13	0.14	0.13	0.11	0.10	0.09	0.08	0.08	0.06	0.05	0.05	0.04	0.03	0.02
-100	0.04	0.06	0.09	0.11	0.14	0.16	0.18	0.16	0.14	0.13	0.12	0.11	0.09	0.08	0.07	0.05	0.04	0.03	0.02
-90	0.04	0.07	0.10	0.13	0.16	0.19	0.22	0.20	0.18	0.16	0.14	0.12	0.11	0.09	0.08	0.06	0.05	0.03	0.02
-80	0.04	0.07	0.11	0.15	0.19	0.24	0.28	0.27	0.26	0.24	0.23	0.21	0.20	0.18	0.16	0.14	0.12	0.10	0.08
-70	0.04	0.08	0.13	0.19	0.23	0.28	0.33	0.33	0.32	0.31	0.30	0.30	0.29	0.28	0.27	0.26	0.24	0.23	0.21
-60	0.04	0.09	0.15	0.20	0.26	0.31	0.35	0.37	0.37	0.42	0.51	0.60	0.69	0.75	0.79	0.83	0.84	0.85	0.83
-50	0.04	0.09	0.16	0.22	0.27	0.32	0.36	0.50	0.66	0.80	0.95	1.12	1.40	1.81	2.26	2.86	3.36	3.64	3.67
-40	0.04	0.10	0.17	0.23	0.28	0.33	0.50	0.73	0.97	1.31	2.07	3.65	5.77	8.31	11.2	14.5	17.3	19.1	19.5
-30	0.04	0.10	0.17	0.23	0.29	0.40	0.66	0.94	1.45	3.01	6.31	11.2	18.6	28.2	38.9	50.0	60.1	66.1	66.6
-20	0.04	0.10	0.17	0.24	0.29	0.48	0.77	1.16	2.35	5.75	12.3	24.3	42.1	65.3	98.6	144	196	246	264
-10	0.04	0.10	0.16	0.23	0.29	0.52	0.84	1.36	3.24	7.94	17.4	34.2	60.9	112	216	431	685	859	906
0	0.04	0.10	0.15	0.22	0.27	0.51	0.84	1.38	3.31	8.17	18.0	35.1	62.1	117	235	494	847	1159	1303
10	0.04	0.10	0.15	0.21	0.26	0.49	0.81	1.24	2.78	6.81	14.7	28.9	51.2	90.6	160	293	514	714	751
20	0.04	0.09	0.14	0.21	0.25	0.41	0.70	1.03	1.82	4.29	8.85	17.1	29.9	49.4	77.0	117	161	192	197
30	0.04	0.08	0.13	0.18	0.23	0.31	0.54	0.81	1.12	1.94	4.04	7.50	13.0	20.9	30.7	41.1	50.4	56.7	58.2
40	0.04	0.07	0.12	0.16	0.20	0.24	0.35	0.55	0.79	1.02	1.46	2.36	4.10	6.28	8.83	11.5	13.8	15.4	15.8
50	0.04	0.07	0.10	0.14	0.17	0.20	0.23	0.30	0.44	0.60	0.76	0.91	1.07	1.38	1.74	2.11	2.45	2.69	2.72
60	0.04	0.06	0.09	0.11	0.14	0.15	0.18	0.20	0.22	0.24	0.31	0.40	0.49	0.56	0.64	0.70	0.75	0.78	0.79
70	0.04	0.05	0.07	0.09	0.10	0.11	0.13	0.13	0.14	0.15	0.15	0.15	0.15	0.16	0.17	0.18	0.19	0.20	0.20
80	0.04	0.04	0.05	0.06	0.06	0.07	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.07	0.07	0.08	0.09	0.10	0.11
90	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.02	0.02
100	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01
110	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01
120	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01
130	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.03
140	0.04	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.04	0.07	0.10	0.14	0.17	0.18	0.20	0.20
150	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.05	0.09	0.16	0.25	0.37	0.50	0.63	0.71	0.75
160	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.06	0.11	0.19	0.33	0.56	0.86	1.16	1.41	1.56	1.61
170	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.06	0.11	0.18	0.33	0.58	0.95	1.34	1.65	1.85	1.90	1.91
180	0.04	0.03	0.03	0.03	0.03	0.04	0.04	0.06	0.08	0.14	0.22	0.41	0.71	1.13	1.55	1.83	1.88	1.88	1.90

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.77V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:316.869x1 lm																		
NAME:Nuit 100-100mm-RGBW 3000K-25D-REV1									TYPE:RGBW-3000K					WEIGHT:				
SPEC.:25 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.96	2.11	2.08	1.85	1.42	0.94	0.55	0.28	0.14	0.06	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-170	2.05	2.06	1.96	1.66	1.25	0.81	0.47	0.26	0.13	0.07	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-160	1.72	1.59	1.39	1.11	0.79	0.52	0.32	0.19	0.11	0.06	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-150	0.84	0.76	0.63	0.49	0.35	0.25	0.17	0.12	0.08	0.05	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-140	0.27	0.25	0.20	0.15	0.12	0.10	0.08	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-130	0.09	0.08	0.06	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-120	0.03	0.03	0.02	0.02	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-110	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-100	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-90	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02
-80	0.08	0.09	0.09	0.09	0.09	0.09	0.08	0.07	0.05	0.04	0.02	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02
-70	0.21	0.21	0.20	0.20	0.19	0.18	0.16	0.15	0.12	0.10	0.08	0.05	0.05	0.04	0.04	0.03	0.03	0.02	
-60	0.82	0.79	0.75	0.68	0.60	0.51	0.41	0.30	0.21	0.17	0.13	0.11	0.09	0.07	0.06	0.05	0.03	0.02	
-50	3.43	2.97	2.39	1.87	1.43	1.09	0.92	0.75	0.58	0.39	0.23	0.17	0.14	0.11	0.08	0.06	0.04	0.02	
-40	17.9	15.3	12.0	8.78	6.18	4.06	2.37	1.48	0.96	0.73	0.51	0.29	0.18	0.14	0.11	0.07	0.04	0.02	
-30	61.7	52.3	40.8	29.9	20.2	12.5	7.23	3.91	1.91	1.06	0.76	0.49	0.25	0.17	0.12	0.09	0.05	0.02	
-20	221	160	113	74.0	47.7	28.7	16.0	8.30	4.03	1.75	0.97	0.66	0.36	0.20	0.14	0.09	0.05	0.02	
-10	779	548	303	155	84.7	48.6	26.8	13.4	6.24	2.55	1.15	0.76	0.44	0.22	0.15	0.10	0.06	0.02	
0	1149	814	460	209	107	58.1	32.3	16.1	7.32	2.99	1.22	0.81	0.47	0.23	0.16	0.10	0.06	0.02	
10	643	414	220	129	76.0	44.7	25.0	12.6	5.84	2.38	1.13	0.75	0.43	0.22	0.16	0.10	0.06	0.02	
20	178	141	99.1	65.5	41.3	24.5	13.7	7.18	3.41	1.53	0.95	0.63	0.34	0.20	0.15	0.10	0.06	0.02	
30	54.8	47.0	37.0	26.7	17.5	10.5	5.92	2.94	1.56	1.01	0.72	0.46	0.25	0.18	0.13	0.09	0.05	0.02	
40	14.8	12.8	10.2	7.53	5.22	3.23	1.88	1.19	0.91	0.67	0.46	0.27	0.20	0.16	0.12	0.08	0.05	0.02	
50	2.57	2.25	1.91	1.58	1.20	1.01	0.85	0.68	0.50	0.33	0.24	0.19	0.16	0.13	0.09	0.07	0.04	0.02	
60	0.77	0.74	0.68	0.60	0.52	0.43	0.34	0.25	0.21	0.18	0.16	0.14	0.12	0.09	0.07	0.05	0.04	0.02	
70	0.19	0.19	0.17	0.16	0.16	0.14	0.14	0.13	0.12	0.11	0.10	0.08	0.07	0.06	0.05	0.04	0.03	0.02	
80	0.10	0.09	0.08	0.07	0.06	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	
90	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
110	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
120	0.01	0.02	0.03	0.02	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
130	0.05	0.06	0.06	0.06	0.05	0.05	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
140	0.21	0.21	0.19	0.17	0.13	0.09	0.06	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
150	0.75	0.70	0.60	0.47	0.33	0.21	0.13	0.07	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
160	1.62	1.54	1.33	1.04	0.74	0.46	0.26	0.15	0.07	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
170	1.95	1.96	1.83	1.55	1.19	0.78	0.44	0.23	0.11	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
180	1.96	2.11	2.08	1.85	1.42	0.94	0.55	0.28	0.14	0.06	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: