

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4072.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	47.7V x 47.8H
	At 50% of Imax	25.2V x 25.4H
	At 90% of Imax	9.1V x 10.4H
Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	814.6 lumens per klm.
	To 50% of Imax	453.5 lumens per klm.
	To 90% of Imax	90.1 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.74V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:925.876x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-25D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

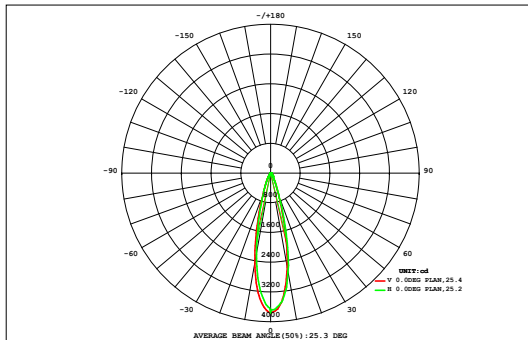

DATA OF LAMP		Eff:31.93lm/W	
MODEL		Imax(cd)	3771
NOMINAL POWER(W)	30	AVAILABILITY(%)	81.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	752.2
NOMINAL FLUX(lm)	925.876	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	925.9
TEST VOLTAGE(V)	220	θ @50% (H,V)	25,25DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.03	0.04	0.07	0.11	0.16	0.20	0.23	0.24	0.24	0.21	0.18	0.14	0.10	0.06	0.04	0.02	0.02	2.09	0.00
45	0.02	0.03	0.04	0.07	0.11	0.16	0.20	0.23	0.24	0.24	0.21	0.18	0.14	0.10	0.06	0.04	0.02	0.02	2.09	0.00
40	0.02	0.05	0.09	0.15	0.23	0.32	0.41	0.48	0.52	0.51	0.46	0.37	0.28	0.19	0.12	0.07	0.04	0.02	4.32	0.00
35	0.04	0.08	0.16	0.27	0.42	0.60	0.78	0.91	0.98	0.96	0.86	0.71	0.53	0.35	0.21	0.12	0.06	0.03	8.08	0.00
30	0.06	0.13	0.26	0.45	0.71	1.03	1.37	1.64	1.77	1.72	1.52	1.22	0.89	0.60	0.36	0.19	0.10	0.05	14.1	0.00
25	0.09	0.20	0.39	0.68	1.10	1.67	2.34	2.93	3.25	3.15	2.67	2.03	1.40	0.91	0.54	0.29	0.15	0.07	23.8	7.65
20	0.13	0.28	0.54	0.95	1.60	2.61	3.96	5.44	6.34	6.05	4.78	3.30	2.10	1.27	0.76	0.42	0.21	0.10	40.8	30.5
15	0.16	0.35	0.69	1.24	2.23	3.92	6.82	10.6	12.7	12.0	8.93	5.32	3.00	1.73	1.02	0.58	0.29	0.13	71.8	62.9
10	0.19	0.41	0.81	1.50	2.85	5.58	10.8	17.1	20.7	19.5	14.4	8.30	4.38	2.38	1.30	0.71	0.36	0.16	111	103
5	0.20	0.45	0.88	1.67	3.27	6.96	14.0	21.8	26.3	24.7	19.5	12.4	6.18	2.97	1.53	0.81	0.41	0.18	144	137
0	0.21	0.46	0.91	1.73	3.45	7.60	15.4	23.5	27.2	26.8	21.9	13.8	6.67	3.11	1.59	0.83	0.42	0.18	156	148
-5	0.20	0.45	0.88	1.66	3.26	7.06	14.0	20.5	23.6	22.7	18.1	11.2	5.45	2.72	1.44	0.77	0.38	0.17	134	127
-10	0.18	0.40	0.79	1.45	2.68	5.04	9.01	13.4	16.2	15.4	11.5	7.06	3.83	2.14	1.20	0.66	0.33	0.15	91.4	83.0
-15	0.15	0.34	0.65	1.14	1.90	3.07	4.80	6.83	8.16	7.78	5.94	3.96	2.51	1.55	0.93	0.51	0.26	0.12	50.6	40.5
-20	0.12	0.26	0.49	0.82	1.26	1.85	2.57	3.31	3.74	3.62	3.02	2.25	1.59	1.06	0.66	0.37	0.19	0.09	27.3	12.2
-25	0.09	0.18	0.33	0.55	0.82	1.12	1.45	1.75	1.92	1.88	1.65	1.32	0.99	0.69	0.43	0.25	0.13	0.06	15.6	0.00
-30	0.06	0.11	0.20	0.33	0.50	0.68	0.86	1.00	1.08	1.06	0.95	0.79	0.60	0.41	0.26	0.15	0.08	0.04	9.17	0.00
-35	0.04	0.07	0.12	0.18	0.27	0.37	0.47	0.55	0.59	0.58	0.52	0.43	0.32	0.23	0.15	0.09	0.05	0.03	5.03	0.00
-40	0.02	0.04	0.06	0.10	0.14	0.18	0.23	0.27	0.29	0.28	0.25	0.21	0.16	0.12	0.08	0.05	0.03	0.02	2.51	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	1.98	4.29	8.29	14.9	26.8	49.8	89.4	132	156	149	117	74.8	41.0	22.5	12.6	6.91	3.48	1.60	913	---
Φ a	0.00	0.00	0.00	0.00	12.2	39.6	80.3	124	147	140	108	65.0	29.5	7.37	0.00	0.00	0.00	0.00	---	752

one-half-peak spread: U:13.8,D:11.6 , L:13.0,R:12.6


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.74V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:925.876x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-25D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

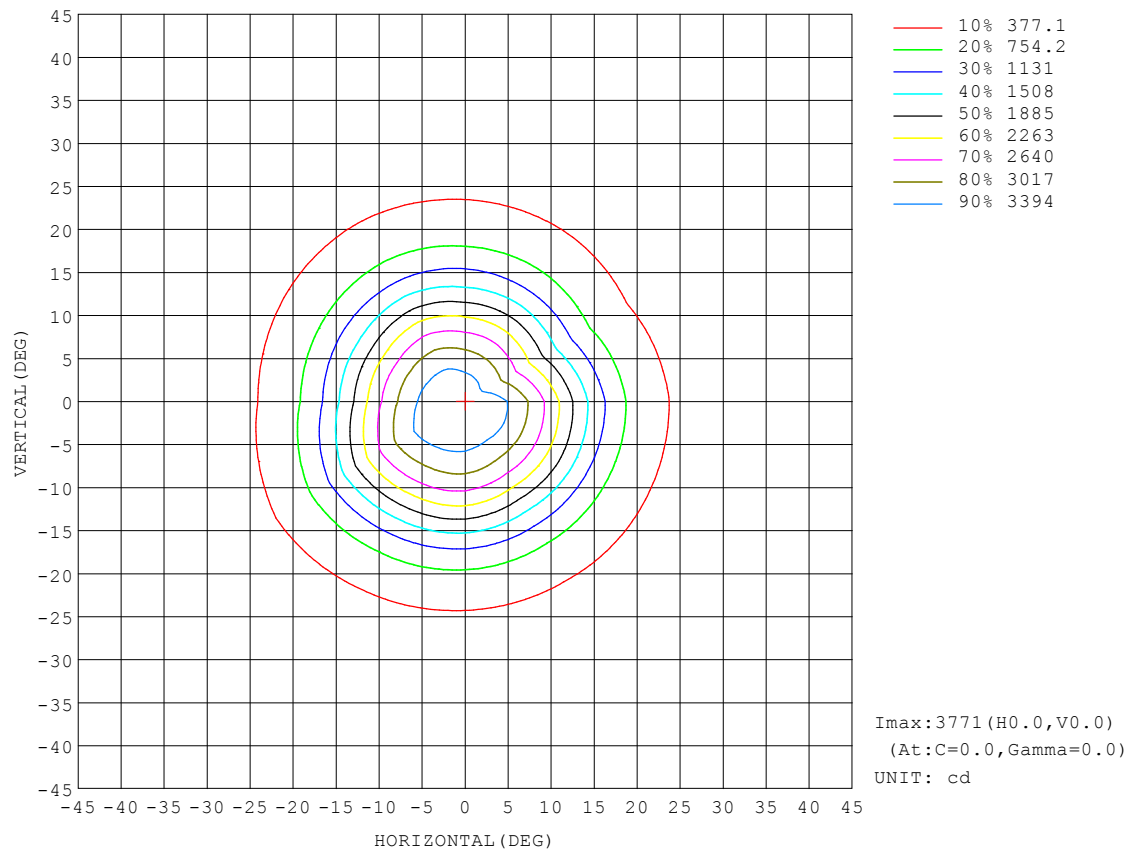


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.74V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:925.876x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-25D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

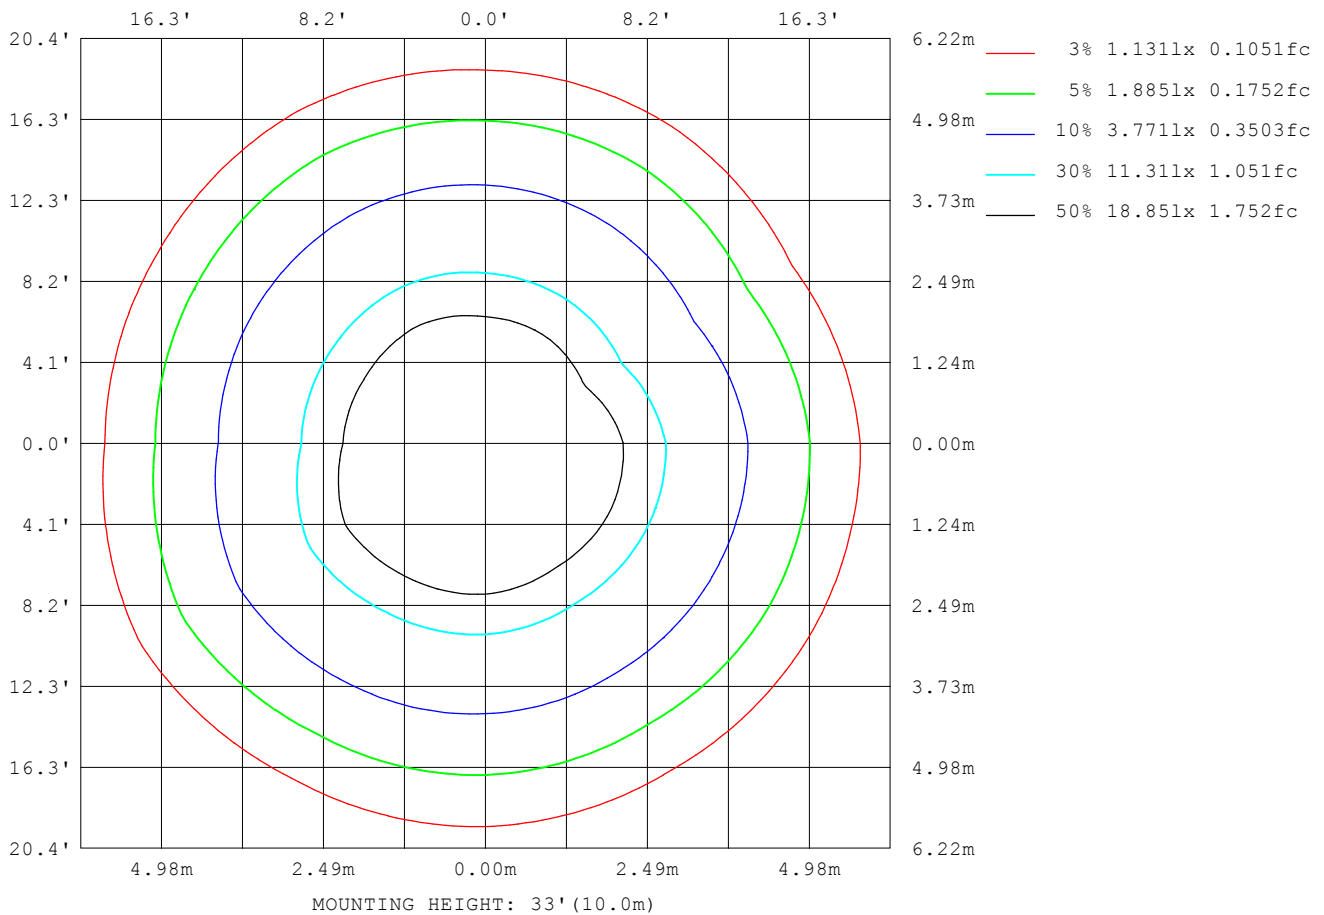

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

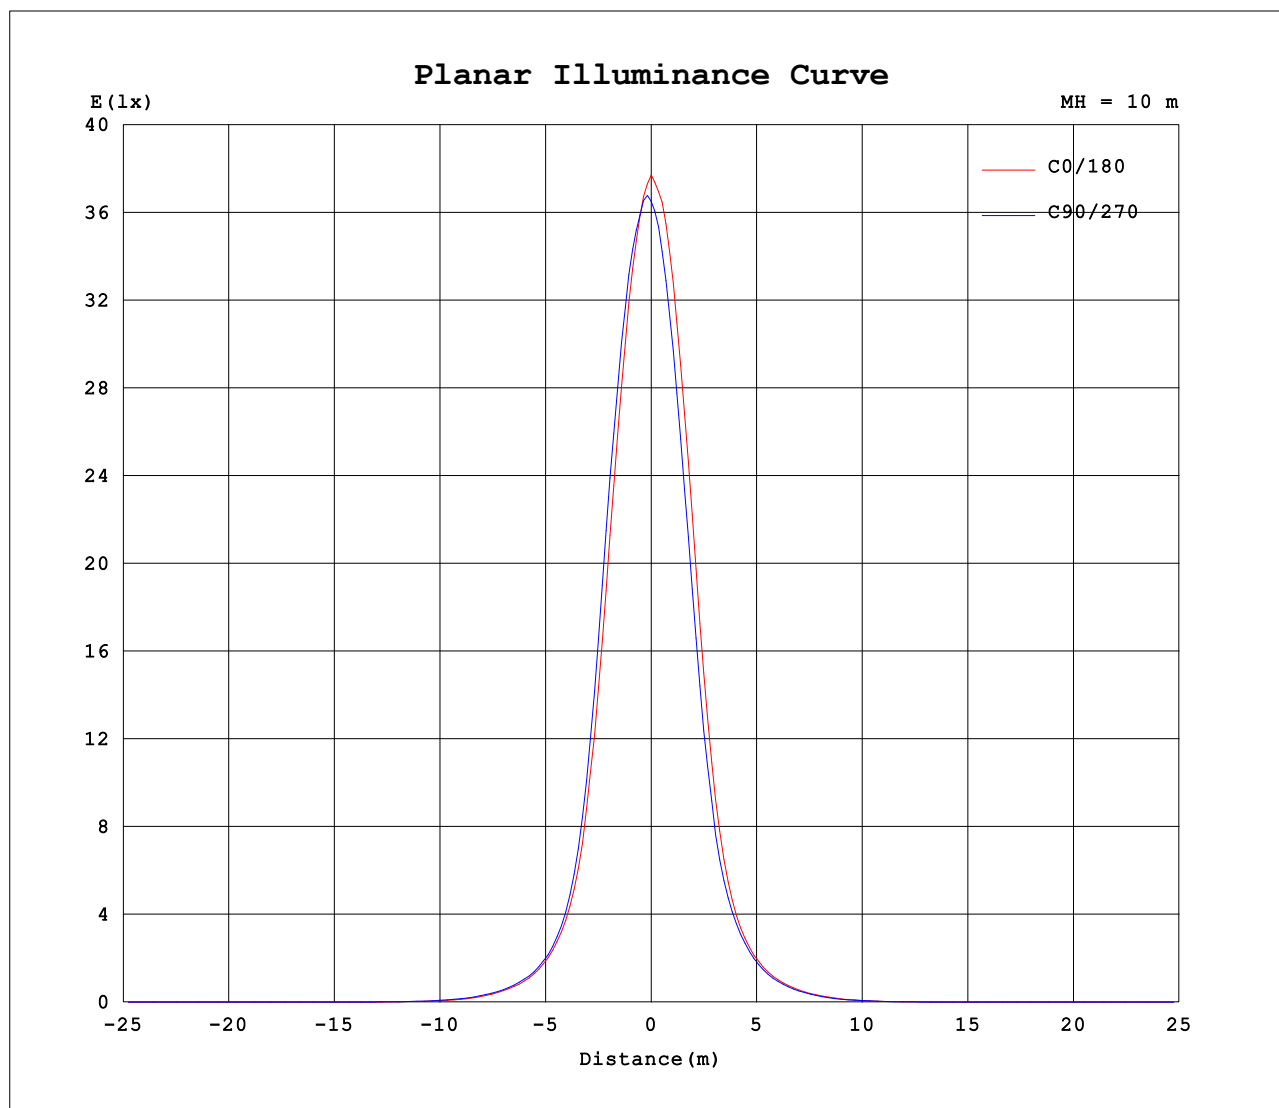


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.74V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:925.876x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-25D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

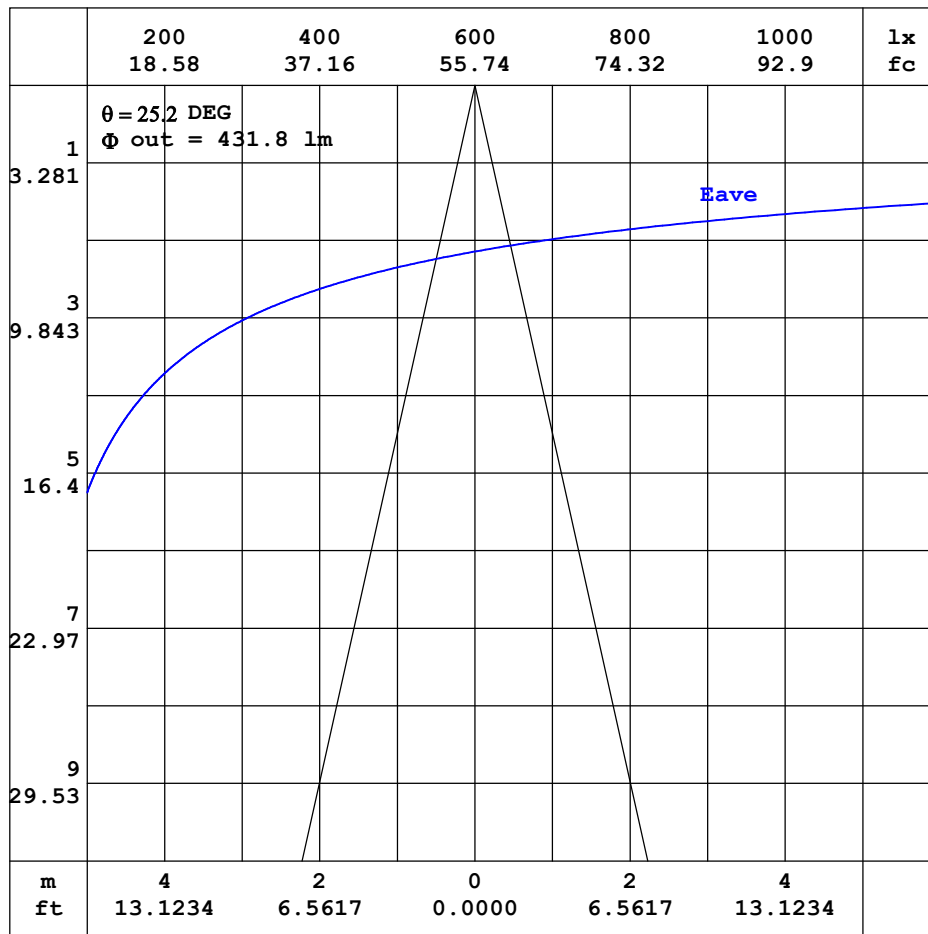

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.74V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:925.876x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-25D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.08	0.08	0.08	0.08	0.08	0.09	0.11	0.17	0.23	0.37	0.64	1.17	2.08	3.35	4.66	5.59	5.78	5.67	5.69
-170	0.08	0.09	0.09	0.09	0.09	0.09	0.11	0.17	0.22	0.36	0.60	1.06	1.85	2.98	4.24	5.30	5.89	6.01	6.07
-160	0.08	0.09	0.09	0.10	0.09	0.10	0.11	0.14	0.20	0.30	0.46	0.74	1.22	1.91	2.80	3.70	4.45	4.98	5.25
-150	0.08	0.09	0.10	0.10	0.10	0.10	0.11	0.13	0.17	0.22	0.31	0.43	0.63	0.91	1.28	1.69	2.09	2.40	2.56
-140	0.08	0.10	0.11	0.11	0.11	0.11	0.11	0.12	0.14	0.15	0.18	0.23	0.30	0.38	0.47	0.59	0.71	0.79	0.84
-130	0.08	0.10	0.11	0.12	0.12	0.12	0.12	0.12	0.13	0.12	0.13	0.13	0.14	0.15	0.19	0.23	0.26	0.28	0.30
-120	0.08	0.10	0.12	0.13	0.13	0.14	0.14	0.13	0.13	0.12	0.12	0.12	0.12	0.11	0.11	0.12	0.12	0.13	0.13
-110	0.08	0.11	0.13	0.14	0.16	0.16	0.17	0.17	0.15	0.14	0.13	0.13	0.12	0.11	0.11	0.10	0.09	0.09	0.08
-100	0.08	0.11	0.13	0.15	0.17	0.19	0.21	0.19	0.18	0.17	0.16	0.15	0.14	0.13	0.11	0.10	0.09	0.07	0.06
-90	0.08	0.11	0.14	0.17	0.21	0.24	0.27	0.25	0.23	0.22	0.20	0.19	0.17	0.15	0.13	0.11	0.09	0.08	0.06
-80	0.08	0.12	0.17	0.24	0.30	0.37	0.43	0.44	0.44	0.45	0.45	0.45	0.45	0.44	0.42	0.40	0.37	0.35	0.32
-70	0.08	0.14	0.22	0.31	0.40	0.49	0.58	0.63	0.66	0.68	0.71	0.73	0.75	0.76	0.76	0.76	0.76	0.75	0.72
-60	0.08	0.15	0.27	0.38	0.50	0.61	0.72	0.81	0.90	1.11	1.39	1.66	1.91	2.15	2.32	2.45	2.53	2.56	2.55
-50	0.08	0.17	0.31	0.45	0.58	0.72	0.88	1.31	1.81	2.29	2.74	3.25	4.12	5.39	6.70	8.30	9.71	10.6	10.7
-40	0.08	0.19	0.34	0.50	0.65	0.83	1.35	2.06	2.79	3.80	6.12	10.5	16.3	23.2	31.1	40.1	47.7	52.7	53.8
-30	0.08	0.20	0.37	0.53	0.71	1.09	1.87	2.74	4.30	8.71	17.6	30.8	50.9	76.8	106	133	162	181	186
-20	0.08	0.20	0.38	0.56	0.76	1.35	2.26	3.43	6.95	16.3	34.1	66.8	115	177	267	389	535	669	702
-10	0.08	0.20	0.38	0.56	0.78	1.51	2.51	4.06	9.53	22.7	49.4	96.6	171	307	584	1188	1965	2553	2716
0	0.08	0.20	0.38	0.55	0.77	1.52	2.55	4.12	9.91	23.9	52.3	103	182	336	663	1437	2580	3466	3771
10	0.08	0.20	0.37	0.54	0.75	1.44	2.42	3.73	8.38	20.4	44.1	86.9	153	268	475	862	1510	2131	2222
20	0.08	0.19	0.35	0.51	0.69	1.20	2.08	3.10	5.58	13.1	27.3	53.1	93.6	149	232	343	464	556	577
30	0.08	0.18	0.32	0.47	0.63	0.89	1.60	2.43	3.37	5.96	12.6	23.4	40.4	64.2	93.1	124	150	167	170
40	0.08	0.16	0.28	0.42	0.55	0.69	1.02	1.64	2.34	3.06	4.45	7.21	12.5	19.0	26.5	34.3	40.9	45.4	46.4
50	0.08	0.14	0.24	0.35	0.45	0.56	0.67	0.88	1.33	1.81	2.31	2.78	3.29	4.21	5.30	6.35	7.33	7.98	8.02
60	0.08	0.12	0.19	0.27	0.35	0.43	0.50	0.58	0.65	0.75	0.97	1.28	1.54	1.78	1.98	2.15	2.27	2.34	2.36
70	0.08	0.10	0.14	0.19	0.24	0.29	0.34	0.38	0.42	0.45	0.49	0.52	0.55	0.58	0.61	0.65	0.68	0.70	0.71
80	0.08	0.08	0.10	0.12	0.14	0.16	0.18	0.19	0.21	0.22	0.23	0.23	0.23	0.25	0.27	0.29	0.30	0.31	0.32
90	0.08	0.08	0.07	0.07	0.06	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
100	0.08	0.08	0.07	0.07	0.06	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03
110	0.08	0.08	0.07	0.06	0.06	0.05	0.05	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.03
120	0.08	0.08	0.07	0.07	0.06	0.05	0.05	0.04	0.05	0.05	0.05	0.06	0.07	0.08	0.07	0.07	0.07	0.06	0.05
130	0.08	0.08	0.07	0.07	0.06	0.06	0.05	0.05	0.05	0.05	0.06	0.09	0.12	0.14	0.16	0.17	0.18	0.19	0.18
140	0.08	0.08	0.07	0.07	0.07	0.06	0.06	0.05	0.05	0.07	0.11	0.17	0.24	0.32	0.40	0.49	0.57	0.62	0.64
150	0.08	0.08	0.08	0.07	0.07	0.07	0.06	0.07	0.10	0.13	0.21	0.33	0.51	0.77	1.10	1.48	1.83	2.11	2.25
160	0.08	0.08	0.08	0.08	0.07	0.07	0.08	0.10	0.15	0.23	0.37	0.62	1.07	1.73	2.57	3.43	4.14	4.64	4.87
170	0.08	0.08	0.08	0.08	0.08	0.08	0.10	0.15	0.19	0.33	0.55	1.00	1.75	2.86	4.07	5.05	5.59	5.71	5.73
180	0.08	0.08	0.08	0.08	0.08	0.09	0.11	0.17	0.23	0.37	0.64	1.17	2.08	3.35	4.66	5.59	5.78	5.67	5.69

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.74V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:925.876x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-25D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.86	6.33	6.33	5.63	4.32	2.86	1.66	0.91	0.49	0.27	0.16	0.10	0.05	0.05	0.05	0.05	0.05	0.05	
-170	6.17	6.23	5.90	4.99	3.73	2.44	1.45	0.80	0.46	0.27	0.16	0.10	0.06	0.05	0.05	0.05	0.05	0.05	
-160	5.18	4.83	4.18	3.31	2.37	1.55	0.96	0.57	0.35	0.22	0.14	0.09	0.06	0.05	0.05	0.05	0.05	0.05	
-150	2.51	2.29	1.93	1.50	1.10	0.76	0.53	0.36	0.24	0.17	0.12	0.08	0.06	0.05	0.05	0.05	0.05	0.05	
-140	0.82	0.76	0.66	0.54	0.43	0.34	0.26	0.20	0.16	0.13	0.09	0.07	0.06	0.05	0.05	0.05	0.05	0.05	
-130	0.29	0.27	0.23	0.20	0.17	0.14	0.13	0.11	0.10	0.09	0.08	0.06	0.06	0.05	0.05	0.05	0.05	0.05	
-120	0.12	0.11	0.10	0.08	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.05	0.05	0.05	
-110	0.07	0.06	0.06	0.05	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	
-100	0.06	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	
-90	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	
-80	0.32	0.32	0.31	0.30	0.29	0.28	0.26	0.23	0.20	0.18	0.15	0.11	0.11	0.09	0.08	0.07	0.06	0.05	
-70	0.71	0.69	0.66	0.63	0.60	0.56	0.52	0.47	0.42	0.37	0.32	0.26	0.23	0.19	0.15	0.11	0.07	0.05	
-60	2.51	2.41	2.25	2.05	1.80	1.54	1.25	0.95	0.72	0.59	0.50	0.42	0.35	0.28	0.22	0.16	0.09	0.05	
-50	10.1	8.79	7.18	5.69	4.35	3.31	2.80	2.33	1.82	1.30	0.80	0.59	0.48	0.38	0.29	0.20	0.11	0.05	
-40	50.7	44.1	35.7	26.8	19.0	12.6	7.28	4.53	3.01	2.33	1.63	0.94	0.61	0.47	0.35	0.24	0.13	0.05	
-30	175	152	122	91.4	62.3	38.9	22.5	12.3	5.94	3.29	2.39	1.55	0.79	0.55	0.40	0.27	0.15	0.05	
-20	616	466	328	222	146	89.8	49.9	25.5	12.4	5.40	2.97	2.03	1.12	0.62	0.45	0.30	0.16	0.05	
-10	2330	1608	870	457	259	147	81.6	40.4	18.8	7.65	3.49	2.33	1.35	0.67	0.47	0.31	0.17	0.05	
0	3384	2465	1351	619	319	173	95.8	47.0	21.5	8.85	3.70	2.44	1.43	0.68	0.49	0.32	0.18	0.05	
10	1883	1208	636	373	221	131	73.7	36.7	17.2	7.08	3.39	2.26	1.30	0.66	0.47	0.31	0.17	0.05	
20	516	405	287	189	122	71.7	40.0	21.0	10.1	4.64	2.84	1.89	1.04	0.62	0.45	0.30	0.16	0.05	
30	160	138	111	79.8	52.1	31.1	17.5	8.68	4.66	3.01	2.17	1.37	0.75	0.55	0.40	0.27	0.15	0.05	
40	43.7	37.9	30.5	22.7	15.6	9.64	5.61	3.54	2.72	2.00	1.36	0.82	0.61	0.47	0.35	0.24	0.13	0.05	
50	7.61	6.73	5.72	4.69	3.66	3.08	2.58	2.06	1.52	1.02	0.71	0.59	0.48	0.38	0.28	0.20	0.11	0.05	
60	2.32	2.23	2.08	1.89	1.65	1.38	1.07	0.80	0.66	0.58	0.50	0.42	0.36	0.28	0.22	0.15	0.09	0.05	
70	0.69	0.66	0.63	0.59	0.55	0.51	0.48	0.44	0.40	0.35	0.31	0.26	0.22	0.19	0.14	0.11	0.07	0.05	
80	0.30	0.29	0.27	0.25	0.23	0.21	0.20	0.18	0.17	0.15	0.13	0.11	0.10	0.09	0.08	0.07	0.06	0.05	
90	0.04	0.04	0.04	0.04	0.04	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05
100	0.04	0.04	0.04	0.04	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05
110	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05
120	0.06	0.07	0.07	0.08	0.07	0.06	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05
130	0.19	0.19	0.18	0.17	0.16	0.13	0.09	0.07	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05
140	0.65	0.61	0.54	0.46	0.36	0.27	0.20	0.14	0.09	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05
150	2.21	2.01	1.68	1.30	0.94	0.63	0.42	0.26	0.17	0.11	0.07	0.05	0.04	0.04	0.04	0.04	0.05	0.05	0.05
160	4.81	4.48	3.85	3.03	2.14	1.38	0.83	0.49	0.29	0.17	0.11	0.07	0.05	0.05	0.05	0.05	0.05	0.05	0.05
170	5.85	5.84	5.48	4.69	3.54	2.32	1.37	0.75	0.42	0.24	0.14	0.09	0.05	0.05	0.05	0.05	0.05	0.05	0.05
180	5.86	6.33	6.33	5.63	4.32	2.86	1.66	0.91	0.49	0.27	0.16	0.10	0.05	0.05	0.05	0.05	0.05	0.05	0.05

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: