

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3742.2 cd per klm.
(Luminaire orientation as tested.)		1.0 degrees vertical
		0.5 degrees horizontal
Beam Spread	At 10% of Imax	49.5V x 50.0H
	At 50% of Imax	26.6V x 27.1H
	At 90% of Imax	11.7V x 12.6H
Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	823.8 lumens per klm.
	To 50% of Imax	475.2 lumens per klm.
	To 90% of Imax	104.3 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.78V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.1519x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-25D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

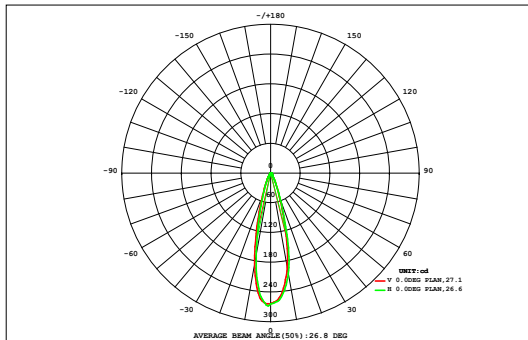

DATA OF LAMP		Eff:8.69lm/W	
MODEL		Imax(cd)	270.0
NOMINAL POWER(W)	30	AVAILABILITY(%)	82.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	59.35
NOMINAL FLUX(lm)	72.1519	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	72.15
TEST VOLTAGE(V)	220	θ @50% (H,V)	27,27DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.16	0.00
45	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.00	0.00	0.32	0.00
40	0.00	0.01	0.01	0.02	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.03	0.02	0.01	0.01	0.00	0.00	0.59	0.00
35	0.01	0.01	0.02	0.04	0.06	0.08	0.11	0.12	0.13	0.12	0.10	0.08	0.06	0.04	0.02	0.01	0.01	0.00	1.02	0.00
30	0.01	0.02	0.03	0.06	0.09	0.13	0.18	0.23	0.24	0.23	0.19	0.14	0.09	0.06	0.04	0.02	0.01	0.01	1.77	0.66
25	0.01	0.02	0.04	0.08	0.13	0.21	0.32	0.42	0.48	0.44	0.34	0.23	0.15	0.09	0.05	0.03	0.02	0.01	3.07	2.34
20	0.01	0.03	0.06	0.10	0.18	0.32	0.54	0.82	0.97	0.90	0.65	0.38	0.21	0.12	0.07	0.04	0.02	0.01	5.44	4.82
15	0.02	0.04	0.07	0.13	0.24	0.45	0.86	1.31	1.60	1.53	1.09	0.61	0.32	0.17	0.09	0.05	0.03	0.01	8.61	8.04
10	0.02	0.04	0.07	0.14	0.27	0.57	1.10	1.61	1.92	1.90	1.49	0.94	0.46	0.22	0.11	0.06	0.03	0.01	11.0	10.4
5	0.02	0.04	0.08	0.15	0.29	0.63	1.21	1.72	1.95	1.93	1.66	1.05	0.51	0.24	0.12	0.06	0.03	0.01	11.7	11.2
0	0.02	0.04	0.08	0.15	0.29	0.60	1.13	1.56	1.73	1.67	1.38	0.87	0.43	0.21	0.11	0.06	0.03	0.01	10.4	9.83
-5	0.02	0.04	0.07	0.13	0.24	0.45	0.77	1.08	1.27	1.21	0.91	0.56	0.31	0.17	0.10	0.05	0.03	0.01	7.41	6.83
-10	0.01	0.03	0.06	0.10	0.17	0.28	0.43	0.60	0.69	0.65	0.48	0.32	0.20	0.13	0.08	0.04	0.02	0.01	4.31	3.62
-15	0.01	0.02	0.05	0.08	0.12	0.17	0.23	0.30	0.33	0.31	0.25	0.19	0.13	0.09	0.05	0.03	0.02	0.01	2.38	1.46
-20	0.01	0.02	0.03	0.05	0.08	0.10	0.13	0.16	0.17	0.17	0.14	0.11	0.08	0.06	0.04	0.02	0.01	0.01	1.39	0.08
-25	0.01	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.10	0.09	0.08	0.07	0.05	0.03	0.02	0.01	0.01	0.00	0.82	0.00
-30	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.45	0.00
-35	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.23	0.00
-40	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.23	0.00
-45	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.23	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL (DEG) 10 15 20 25 30 35 40 45																				
Φ t	0.18	0.38	0.72	1.29	2.30	4.19	7.26	10.2	11.8	11.3	8.95	5.69	3.12	1.71	0.95	0.53	0.27	0.13	71	---
Φ a	0.00	0.00	0.00	0.06	1.41	3.47	6.60	9.61	11.2	10.7	8.30	4.99	2.33	0.66	0.00	0.00	0.00	0.00	---	59

one-half-peak spread: U:15.8,D:11.0 , L:14.1,R:11.2


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.78V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.1519x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-25D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

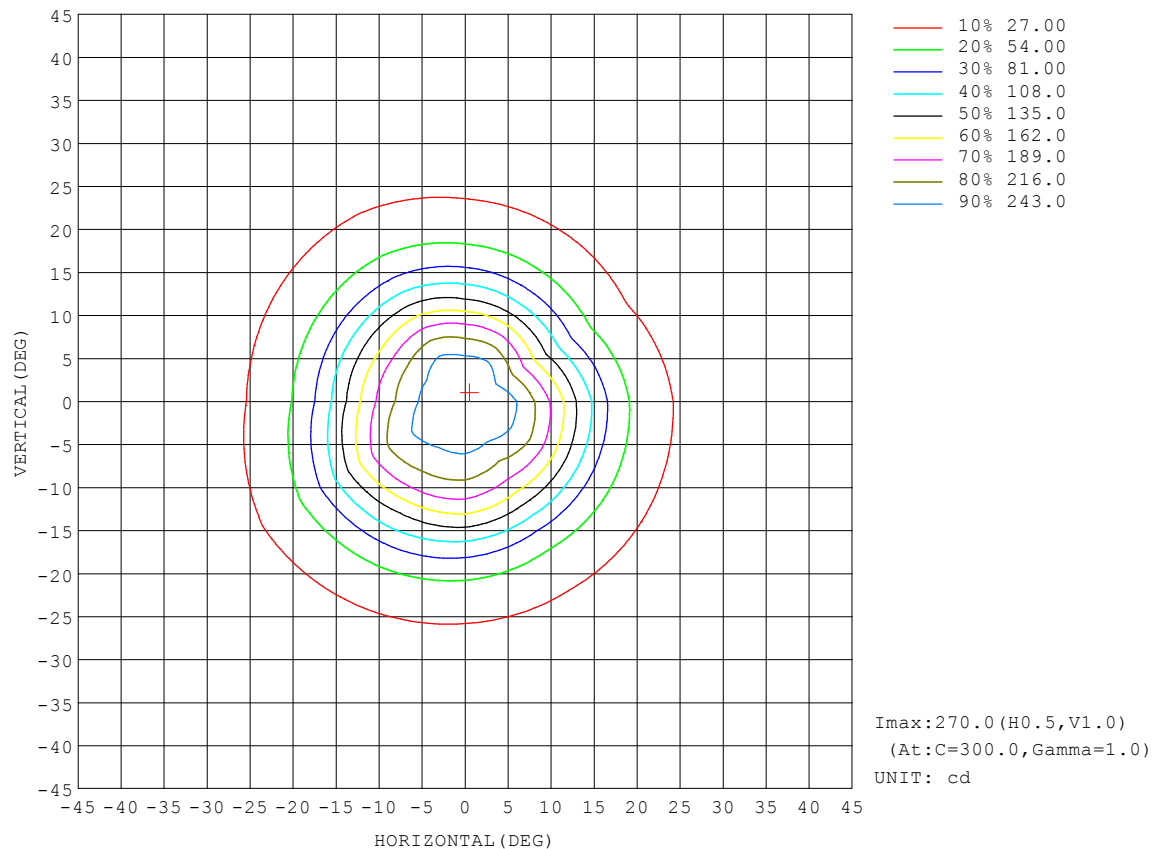


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.78V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.1519x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-25D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

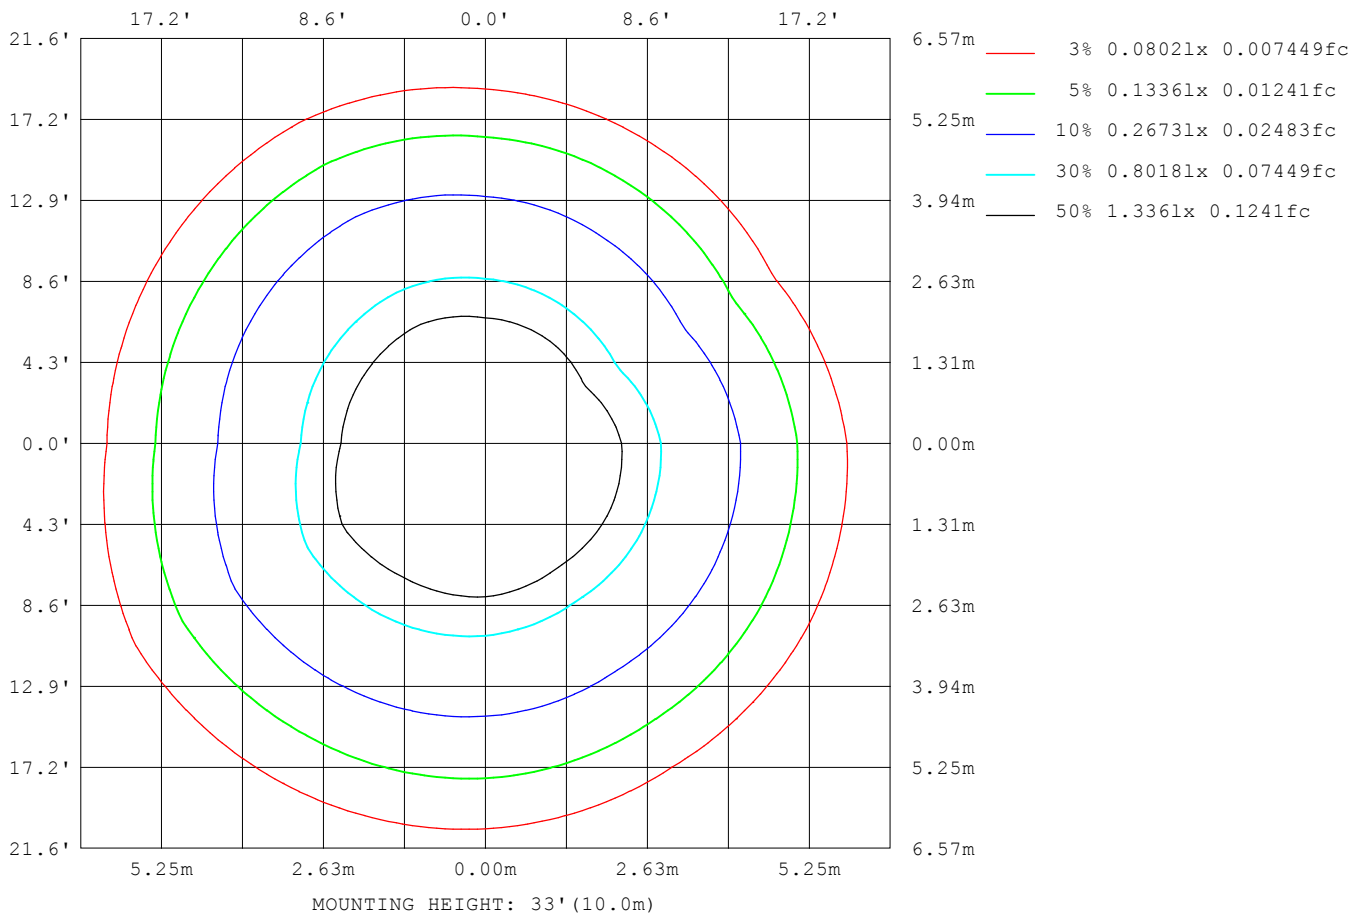

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

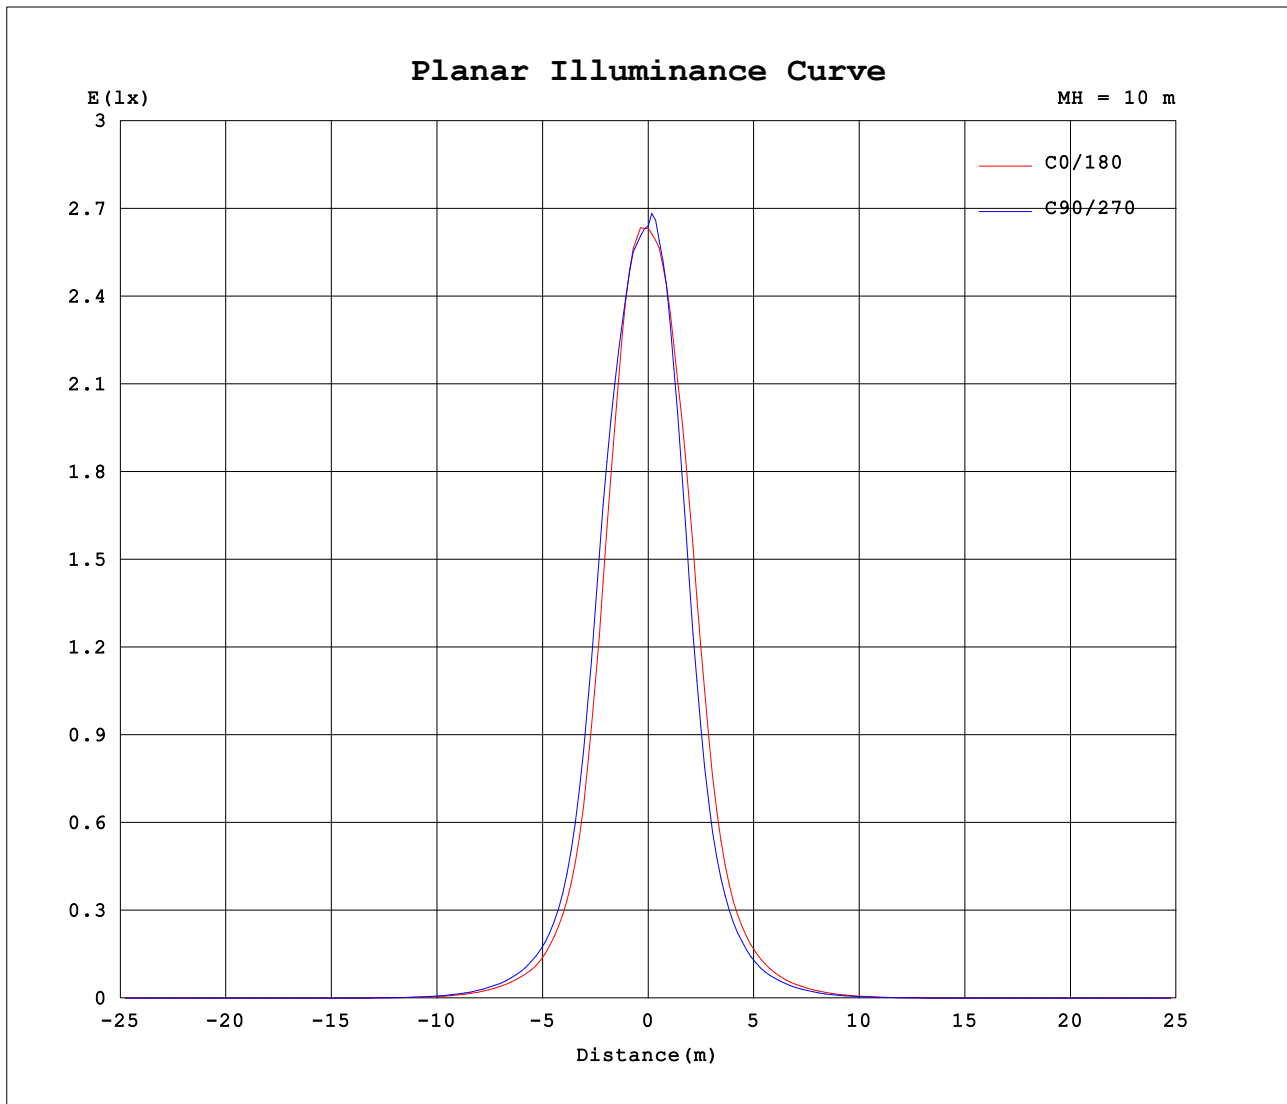


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.78V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.1519x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-25D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

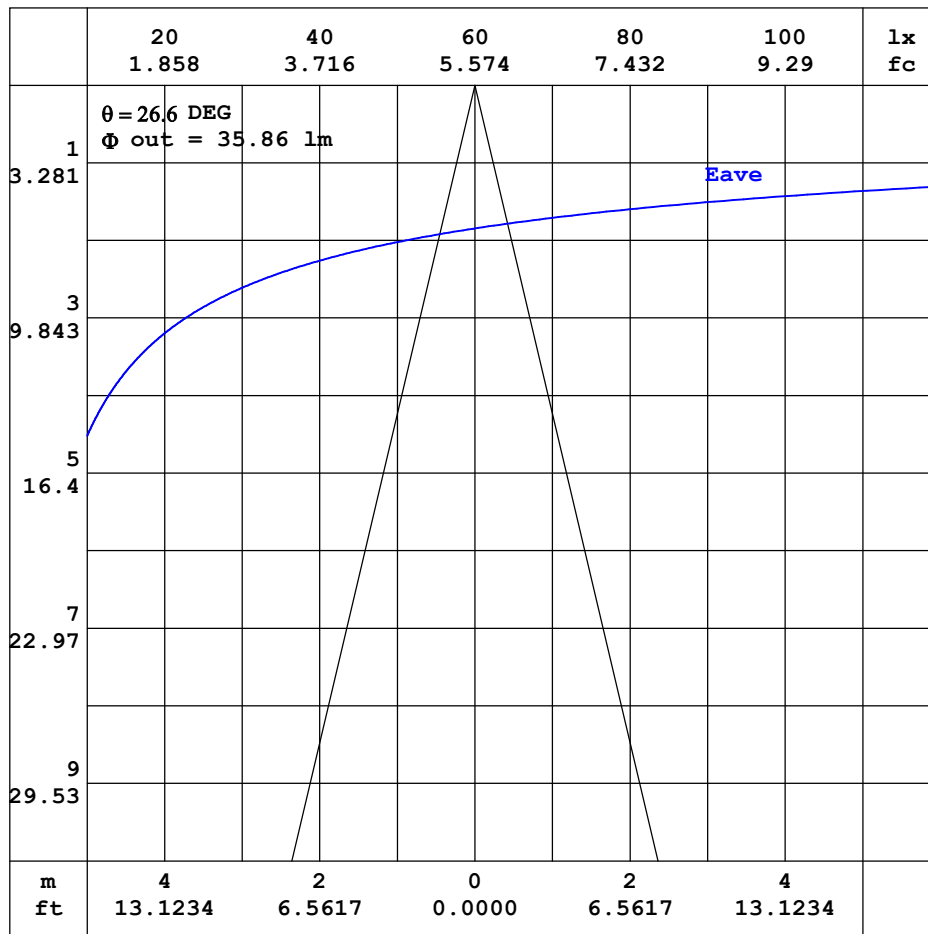

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: 01
 Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.78V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.1519x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-25D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.06	0.11	0.17	0.27	0.36	0.42	0.42	0.42	0.42
-170	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.06	0.10	0.16	0.25	0.34	0.41	0.43	0.44	0.44
-160	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.07	0.10	0.16	0.22	0.27	0.32	0.37	0.41
-150	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.05	0.08	0.10	0.14	0.17	0.20
-140	0.03	0.03	0.04	0.04	0.04	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.02	0.03	0.05	0.07
-130	0.03	0.04	0.04	0.05	0.05	0.05	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02
-120	0.03	0.05	0.06	0.06	0.06	0.07	0.07	0.05	0.04	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01
-110	0.03	0.05	0.06	0.07	0.08	0.09	0.09	0.09	0.07	0.07	0.06	0.05	0.04	0.04	0.03	0.02	0.01	0.01	0.00
-100	0.03	0.05	0.07	0.08	0.10	0.11	0.13	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00
-90	0.03	0.05	0.07	0.09	0.11	0.13	0.15	0.14	0.12	0.11	0.10	0.09	0.07	0.06	0.05	0.04	0.02	0.01	0.00
-80	0.03	0.05	0.08	0.10	0.12	0.15	0.17	0.16	0.15	0.14	0.13	0.11	0.10	0.08	0.07	0.05	0.03	0.02	0.00
-70	0.03	0.06	0.08	0.11	0.13	0.16	0.17	0.18	0.16	0.15	0.14	0.13	0.12	0.11	0.09	0.08	0.06	0.04	0.02
-60	0.03	0.05	0.08	0.11	0.13	0.16	0.17	0.18	0.17	0.17	0.17	0.19	0.21	0.21	0.22	0.22	0.21	0.20	0.18
-50	0.03	0.05	0.09	0.11	0.14	0.15	0.17	0.18	0.21	0.24	0.27	0.31	0.38	0.49	0.61	0.75	0.88	0.95	0.94
-40	0.03	0.06	0.09	0.11	0.13	0.15	0.17	0.22	0.26	0.35	0.55	0.98	1.54	2.22	3.02	3.86	4.49	4.86	4.86
-30	0.03	0.06	0.08	0.11	0.13	0.14	0.20	0.25	0.38	0.80	1.66	2.96	4.86	7.29	10.0	12.6	14.8	16.3	16.6
-20	0.03	0.05	0.08	0.11	0.12	0.15	0.21	0.30	0.62	1.51	3.20	6.20	10.6	16.1	24.1	35.3	48.4	59.1	60.8
-10	0.03	0.05	0.08	0.10	0.11	0.16	0.23	0.35	0.85	2.05	4.44	8.58	15.1	27.1	51.8	101	157	196	207
0	0.03	0.05	0.07	0.09	0.10	0.15	0.23	0.36	0.87	2.08	4.48	8.67	15.6	28.4	55.1	117	194	247	263
10	0.03	0.05	0.07	0.09	0.10	0.14	0.22	0.33	0.74	1.76	3.77	7.27	12.8	22.1	38.9	69.4	119	164	170
20	0.03	0.05	0.07	0.09	0.09	0.12	0.19	0.27	0.50	1.15	2.32	4.46	7.68	12.3	18.5	27.5	36.7	42.5	42.5
30	0.03	0.04	0.06	0.08	0.09	0.10	0.16	0.22	0.30	0.54	1.10	1.99	3.41	5.32	7.57	9.83	11.5	12.3	12.1
40	0.03	0.04	0.06	0.07	0.08	0.08	0.11	0.16	0.21	0.27	0.39	0.64	1.09	1.63	2.27	2.85	3.25	3.45	3.38
50	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.09	0.12	0.15	0.19	0.22	0.25	0.34	0.44	0.54	0.63	0.68	0.68
60	0.03	0.04	0.04	0.05	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.08	0.09	0.11	0.14	0.16	0.17	0.18	0.19
70	0.03	0.04	0.04	0.04	0.04	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.04	0.05	0.05
80	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.01	0.01	0.02	0.02	0.03
90	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.00	0.00	0.00	0.00
120	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.00	0.00
140	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.03	0.03	0.02
150	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.02	0.05	0.09	0.12	0.14	0.15	0.15
160	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.05	0.12	0.19	0.26	0.33	0.35	0.34
170	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.02	0.03	0.04	0.07	0.13	0.20	0.28	0.39	0.41	0.43	0.42
180	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.06	0.11	0.17	0.27	0.36	0.42	0.42	0.42	0.45

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.78V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.1519x1 lm																		
NAME: Nuit.100.TX4IN1.14(30).HKRG15°-B										TYPE:					WEIGHT:			
SPEC.:										DIM.:					SERIAL No.:			
MFR.: 001										SUR.:					Shielding Angle:			

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.46	0.46	0.46	0.40	0.30	0.19	0.10	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.45	0.45	0.45	0.39	0.28	0.18	0.09	0.04	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.38	0.34	0.30	0.24	0.18	0.12	0.07	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.18	0.15	0.12	0.09	0.07	0.05	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.05	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.03	0.03	0.04	0.04	0.04	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	
-60	0.19	0.19	0.19	0.18	0.16	0.13	0.10	0.06	0.04	0.02	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	
-50	0.88	0.77	0.63	0.50	0.38	0.28	0.23	0.18	0.13	0.07	0.03	0.02	0.02	0.01	0.01	0.02	0.01	0.00	
-40	4.51	3.86	3.04	2.24	1.60	1.07	0.62	0.37	0.22	0.16	0.11	0.05	0.03	0.02	0.02	0.02	0.01	0.00	
-30	15.3	13.0	10.2	7.58	5.22	3.29	1.91	1.04	0.49	0.25	0.18	0.11	0.05	0.03	0.02	0.02	0.01	0.00	
-20	51.8	38.4	27.1	18.3	12.0	7.44	4.17	2.15	1.05	0.45	0.23	0.15	0.08	0.04	0.03	0.02	0.01	0.00	
-10	177	127	69.1	36.5	20.0	11.7	6.54	3.30	1.57	0.66	0.29	0.19	0.11	0.05	0.04	0.02	0.01	0.00	
0	252	187	104	47.3	24.2	13.0	7.37	3.76	1.75	0.76	0.31	0.21	0.12	0.06	0.04	0.03	0.01	0.00	
10	141	87.4	45.9	26.9	15.6	9.44	5.44	2.81	1.40	0.61	0.29	0.19	0.11	0.06	0.04	0.03	0.01	0.00	
20	37.1	28.5	19.7	12.9	8.11	4.87	2.84	1.61	0.84	0.40	0.24	0.16	0.09	0.05	0.03	0.02	0.01	0.00	
30	11.1	9.29	7.12	5.17	3.47	2.15	1.30	0.71	0.40	0.25	0.18	0.12	0.06	0.05	0.03	0.02	0.01	0.00	
40	3.12	2.65	2.11	1.56	1.13	0.75	0.47	0.29	0.22	0.16	0.12	0.07	0.05	0.04	0.03	0.02	0.01	0.00	
50	0.64	0.56	0.47	0.37	0.26	0.22	0.18	0.14	0.11	0.08	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.00	
60	0.18	0.16	0.14	0.12	0.09	0.08	0.06	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	
70	0.05	0.04	0.03	0.02	0.01	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	
80	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.03	0.04	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.16	0.16	0.14	0.11	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.36	0.36	0.31	0.23	0.15	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.44	0.44	0.40	0.33	0.24	0.15	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.46	0.46	0.46	0.40	0.30	0.19	0.10	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks: