

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3753.3 cd per klm.
(Luminaire orientation as tested.)	-2.5 degrees vertical
	-4.0 degrees horizontal

Beam Spread	At 10% of Imax	49.5V x 49.5H
	At 50% of Imax	26.7V x 26.9H
	At 90% of Imax	11.3V x 11.9H

Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	826.3 lumens per klm.
	To 50% of Imax	474.3 lumens per klm.
	To 90% of Imax	115.4 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.5 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.76V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:336.633x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-25D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

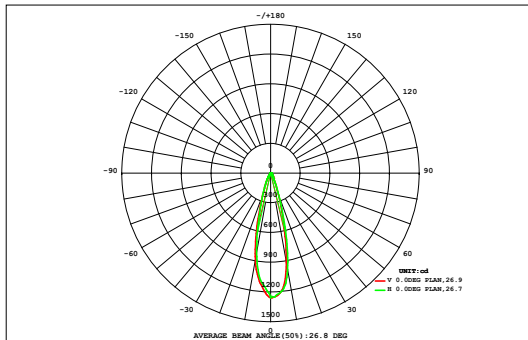

DATA OF LAMP		Eff:43.16lm/W	
MODEL		Imax(cd)	1263
NOMINAL POWER(W)	30	AVAILABILITY(%)	82.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	278.1
NOMINAL FLUX(lm)	336.633	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	336.6
TEST VOLTAGE(V)	220	θ @50% (H,V)	27,27DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT: lm			Φ t	Φ a
	0.01	0.01	0.02	0.03	0.04	0.06	0.08	0.09	0.10	0.09	0.09	0.07	0.05	0.04	0.02	0.01	0.01	0.01	Φ t	Φ a
45	0.01	0.01	0.02	0.03	0.04	0.06	0.08	0.09	0.10	0.09	0.09	0.07	0.05	0.04	0.02	0.01	0.01	0.01	0.82	0.00
40	0.01	0.02	0.03	0.06	0.09	0.12	0.16	0.19	0.21	0.20	0.18	0.15	0.11	0.08	0.05	0.03	0.01	0.01	1.70	0.00
35	0.01	0.03	0.06	0.10	0.16	0.23	0.30	0.36	0.39	0.39	0.35	0.29	0.22	0.14	0.09	0.05	0.02	0.01	3.20	0.00
30	0.02	0.05	0.10	0.17	0.27	0.40	0.53	0.65	0.71	0.69	0.61	0.49	0.36	0.24	0.14	0.08	0.04	0.02	5.58	0.00
25	0.04	0.08	0.15	0.26	0.42	0.65	0.91	1.14	1.28	1.25	1.07	0.81	0.56	0.36	0.22	0.12	0.06	0.03	9.39	4.84
20	0.05	0.10	0.20	0.36	0.62	1.00	1.52	2.10	2.44	2.37	1.93	1.34	0.84	0.51	0.30	0.17	0.08	0.04	16.0	12.7
15	0.06	0.13	0.26	0.46	0.84	1.47	2.56	3.96	4.76	4.55	3.46	2.12	1.20	0.70	0.41	0.22	0.11	0.05	27.3	24.5
10	0.07	0.15	0.29	0.55	1.05	2.07	3.97	6.16	7.35	7.10	5.38	3.19	1.71	0.93	0.52	0.27	0.14	0.06	41.0	38.4
5	0.07	0.16	0.31	0.59	1.19	2.53	5.02	7.74	8.91	8.51	7.02	4.66	2.35	1.14	0.60	0.31	0.15	0.07	51.3	48.9
0	0.07	0.16	0.31	0.60	1.24	2.72	5.51	8.46	9.46	9.04	7.59	5.11	2.51	1.19	0.62	0.32	0.16	0.07	55.1	52.8
-5	0.07	0.15	0.30	0.56	1.15	2.51	5.00	7.46	8.50	8.09	6.51	4.14	2.07	1.04	0.55	0.29	0.14	0.06	48.6	46.1
-10	0.06	0.14	0.26	0.48	0.92	1.77	3.16	4.82	5.84	5.59	4.25	2.63	1.47	0.81	0.45	0.25	0.12	0.06	33.1	30.4
-15	0.05	0.11	0.21	0.37	0.63	1.05	1.64	2.37	2.91	2.83	2.19	1.48	0.94	0.58	0.35	0.19	0.10	0.04	18.0	14.9
-20	0.04	0.09	0.16	0.26	0.41	0.61	0.86	1.13	1.31	1.29	1.09	0.83	0.59	0.40	0.25	0.14	0.07	0.03	9.54	4.71
-25	0.03	0.06	0.11	0.17	0.26	0.36	0.47	0.58	0.64	0.64	0.58	0.48	0.37	0.26	0.16	0.09	0.05	0.02	5.33	0.00
-30	0.02	0.04	0.07	0.11	0.16	0.21	0.27	0.32	0.36	0.36	0.34	0.29	0.22	0.16	0.10	0.06	0.03	0.01	3.11	0.00
-35	0.01	0.02	0.04	0.06	0.09	0.12	0.15	0.18	0.20	0.20	0.18	0.16	0.12	0.09	0.06	0.03	0.02	0.01	1.72	0.00
-40	0.01	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.10	0.10	0.09	0.08	0.06	0.04	0.03	0.02	0.01	0.01	0.87	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45
Φ t	0.71	1.52	2.91	5.23	9.57	17.9	32.2	47.8	55.5	53.3	42.9	28.3	15.8	8.71	4.91	2.65	1.33	0.60	332	---
Φ a	0.00	0.00	0.00	0.00	5.23	14.5	29.2	44.9	52.7	50.4	39.9	25.1	12.2	3.99	0.00	0.00	0.00	0.00	---	278

one-half-peak spread: U:12.3,D:12.6 , L:13.4,R:13.6


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.76V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:336.633x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-25D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

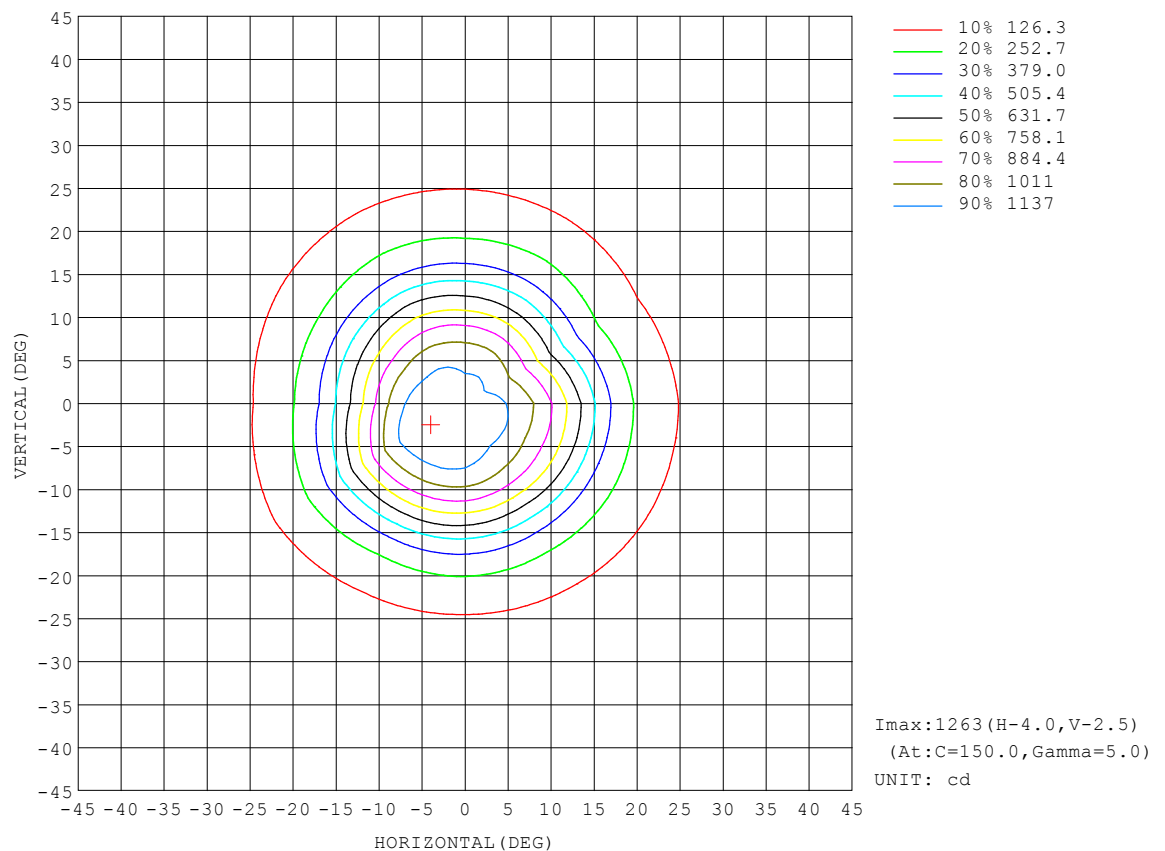


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.76V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:336.633x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-25D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

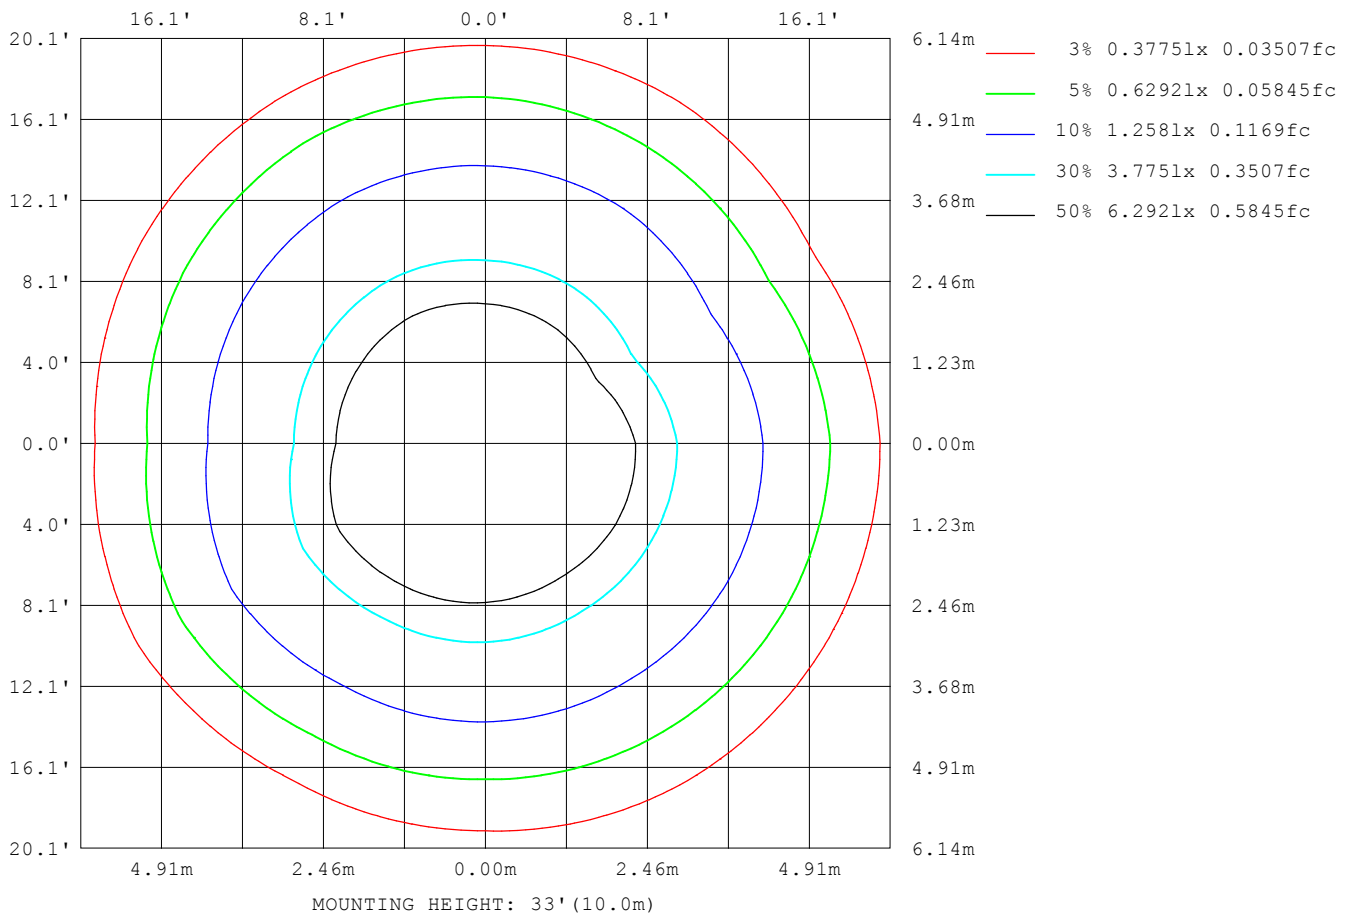

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

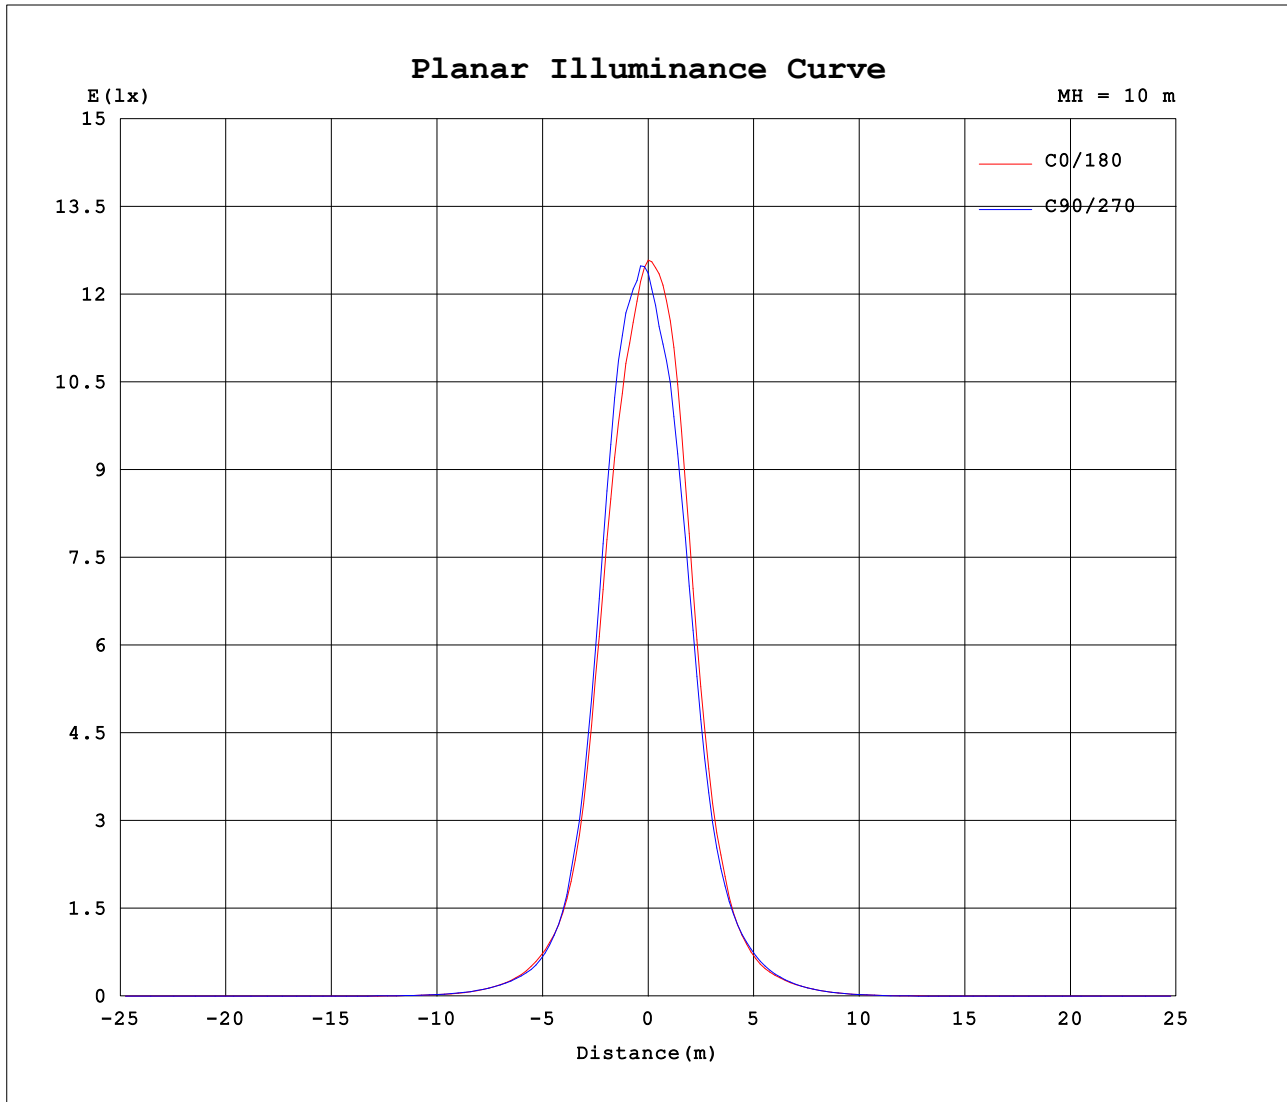


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.76V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:336.633x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-25D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

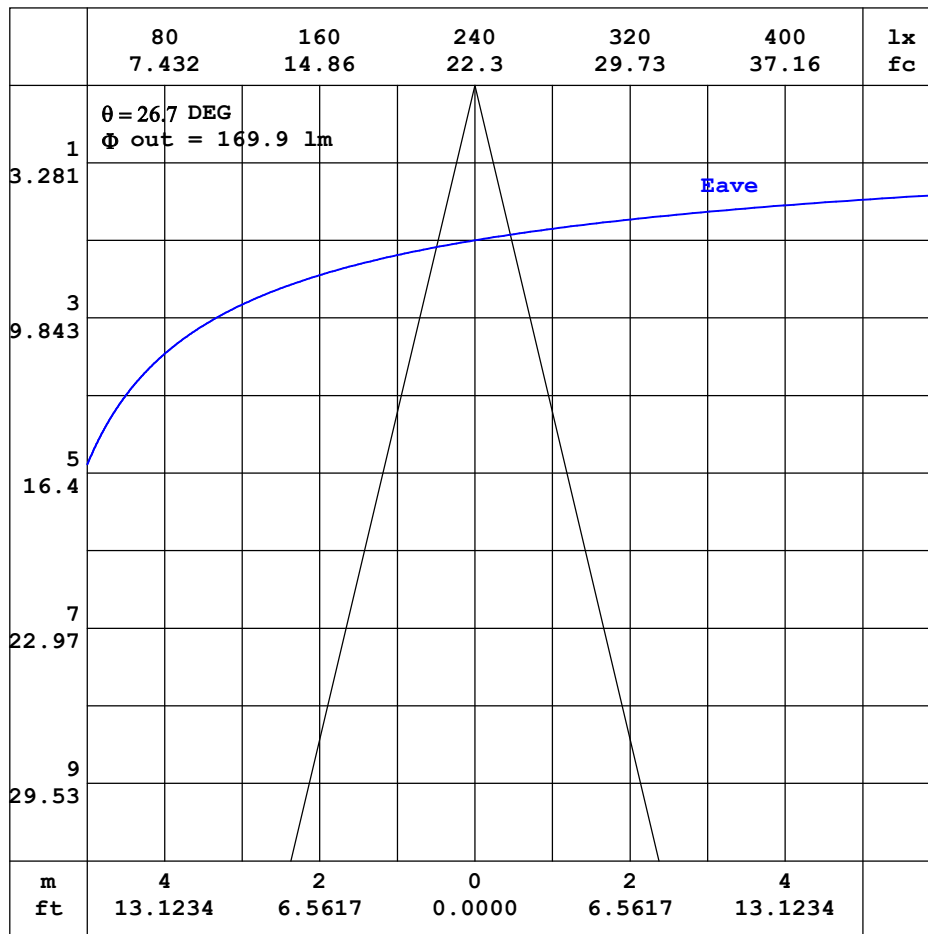

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.76V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:336.633x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-25D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.06	0.09	0.14	0.25	0.45	0.79	1.23	1.66	1.98	2.04	2.03	2.03
-170	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.06	0.09	0.14	0.24	0.42	0.73	1.14	1.58	1.95	2.14	2.17	2.19
-160	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.06	0.08	0.12	0.19	0.31	0.50	0.76	1.07	1.38	1.61	1.81	1.92
-150	0.04	0.05	0.05	0.06	0.05	0.05	0.05	0.06	0.07	0.10	0.13	0.18	0.25	0.36	0.49	0.65	0.81	0.93	0.99
-140	0.04	0.05	0.06	0.07	0.06	0.06	0.06	0.06	0.07	0.08	0.08	0.09	0.11	0.13	0.17	0.22	0.28	0.31	0.34
-130	0.04	0.06	0.07	0.08	0.08	0.08	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.05	0.06	0.08	0.10	0.11	0.12
-120	0.04	0.06	0.08	0.09	0.10	0.10	0.10	0.09	0.07	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.06	0.06
-110	0.04	0.06	0.08	0.10	0.12	0.13	0.14	0.13	0.11	0.08	0.07	0.06	0.05	0.05	0.04	0.04	0.04	0.03	0.03
-100	0.04	0.06	0.09	0.11	0.14	0.16	0.18	0.17	0.15	0.14	0.13	0.12	0.11	0.10	0.08	0.07	0.05	0.04	0.03
-90	0.04	0.07	0.10	0.13	0.16	0.19	0.22	0.21	0.19	0.18	0.16	0.15	0.13	0.11	0.10	0.08	0.06	0.04	0.03
-80	0.04	0.07	0.11	0.16	0.20	0.24	0.29	0.28	0.28	0.27	0.25	0.24	0.23	0.21	0.19	0.17	0.15	0.13	0.10
-70	0.04	0.08	0.13	0.18	0.23	0.29	0.34	0.35	0.35	0.34	0.34	0.33	0.33	0.32	0.31	0.29	0.28	0.25	0.23
-60	0.04	0.09	0.15	0.20	0.27	0.32	0.37	0.40	0.41	0.46	0.55	0.63	0.72	0.79	0.84	0.88	0.90	0.90	0.89
-50	0.04	0.09	0.14	0.23	0.29	0.34	0.40	0.54	0.69	0.86	1.01	1.19	1.51	1.98	2.43	2.98	3.45	3.74	3.80
-40	0.04	0.10	0.16	0.24	0.30	0.36	0.53	0.78	1.03	1.42	2.28	3.67	5.50	7.62	9.90	12.8	15.5	17.4	18.2
-30	0.04	0.10	0.17	0.24	0.31	0.43	0.70	1.01	1.60	3.10	6.03	10.2	16.4	24.2	32.9	41.9	52.2	59.4	61.5
-20	0.04	0.10	0.17	0.25	0.32	0.51	0.83	1.26	2.54	5.69	11.4	21.9	37.2	57.2	87.1	131	181	234	259
-10	0.04	0.09	0.17	0.24	0.32	0.56	0.91	1.49	3.44	7.99	17.0	32.7	57.3	105	204	415	705	933	987
0	0.04	0.09	0.16	0.23	0.31	0.55	0.92	1.52	3.63	8.65	18.7	36.3	63.2	120	247	509	919	1203	1258
10	0.04	0.09	0.15	0.23	0.30	0.53	0.88	1.37	3.10	7.52	16.3	32.0	56.3	99.9	177	322	563	773	821
20	0.04	0.08	0.15	0.21	0.27	0.45	0.77	1.14	2.06	4.90	10.3	20.3	35.8	57.4	89.6	133	179	217	228
30	0.04	0.08	0.14	0.19	0.25	0.34	0.59	0.90	1.26	2.21	4.80	8.94	15.5	24.6	35.6	47.5	58.9	66.5	68.5
40	0.04	0.08	0.11	0.17	0.22	0.27	0.39	0.62	0.88	1.15	1.65	2.70	4.74	7.17	10.1	13.2	15.9	17.9	18.5
50	0.04	0.07	0.09	0.15	0.18	0.22	0.26	0.33	0.50	0.68	0.86	1.03	1.21	1.55	1.94	2.34	2.72	2.99	3.02
60	0.04	0.06	0.08	0.11	0.15	0.17	0.20	0.22	0.24	0.28	0.35	0.46	0.56	0.64	0.72	0.80	0.85	0.89	0.90
70	0.04	0.05	0.07	0.08	0.10	0.12	0.14	0.15	0.16	0.16	0.17	0.17	0.17	0.19	0.21	0.23	0.24	0.25	0.26
80	0.04	0.04	0.05	0.06	0.06	0.07	0.08	0.08	0.08	0.07	0.07	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12
90	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
100	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
110	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
120	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01
130	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.05	0.06	0.05	0.05	0.04	0.03
140	0.04	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.05	0.08	0.11	0.15	0.17	0.19	0.20	0.20
150	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.05	0.10	0.18	0.28	0.40	0.54	0.67	0.75	0.78
160	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.05	0.07	0.13	0.21	0.38	0.63	0.93	1.23	1.49	1.63	1.70
170	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.12	0.20	0.37	0.65	1.04	1.45	1.78	1.97	2.04	2.02
180	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.06	0.09	0.14	0.25	0.45	0.79	1.23	1.66	1.98	2.04	2.03	2.06

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.76V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:336.633x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-25D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.11	2.24	2.20	1.95	1.51	1.01	0.58	0.31	0.14	0.07	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-170	2.21	2.21	2.10	1.78	1.35	0.89	0.52	0.28	0.15	0.08	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.02	
-160	1.87	1.73	1.52	1.21	0.88	0.59	0.36	0.21	0.12	0.07	0.04	0.02	0.02	0.02	0.01	0.01	0.01	0.02	
-150	0.96	0.86	0.72	0.56	0.40	0.28	0.20	0.14	0.09	0.05	0.04	0.03	0.02	0.02	0.02	0.01	0.01	0.02	
-140	0.32	0.29	0.24	0.18	0.15	0.11	0.09	0.07	0.06	0.05	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.02	
-130	0.11	0.10	0.08	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.02	
-120	0.05	0.04	0.03	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.02	
-110	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02	
-100	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.02	
-90	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	
-80	0.11	0.11	0.11	0.11	0.11	0.10	0.09	0.08	0.07	0.05	0.04	0.02	0.02	0.03	0.03	0.03	0.02	0.02	
-70	0.23	0.23	0.23	0.23	0.22	0.21	0.19	0.17	0.14	0.12	0.10	0.08	0.06	0.06	0.05	0.04	0.03	0.02	
-60	0.88	0.86	0.81	0.74	0.67	0.57	0.46	0.34	0.25	0.20	0.16	0.13	0.11	0.09	0.07	0.05	0.04	0.02	
-50	3.64	3.25	2.68	2.11	1.60	1.23	1.03	0.84	0.66	0.46	0.27	0.20	0.16	0.13	0.10	0.07	0.04	0.02	
-40	17.7	15.9	13.2	10.2	7.26	4.76	2.76	1.66	1.10	0.83	0.59	0.33	0.21	0.17	0.13	0.09	0.04	0.02	
-30	60.3	54.5	45.2	34.2	23.6	14.8	8.56	4.64	2.19	1.21	0.87	0.57	0.29	0.20	0.15	0.10	0.05	0.02	
-20	226	172	123	82.7	54.9	33.8	18.9	9.64	4.65	1.97	1.10	0.75	0.41	0.23	0.16	0.11	0.06	0.02	
-10	851	594	324	175	97.8	55.8	30.7	15.2	7.05	2.86	1.29	0.87	0.51	0.25	0.18	0.12	0.06	0.02	
0	1129	890	514	236	124	66.9	35.9	17.6	8.02	3.29	1.37	0.91	0.54	0.26	0.18	0.12	0.07	0.02	
10	704	464	252	147	88.1	51.4	28.5	14.1	6.52	2.63	1.27	0.86	0.50	0.25	0.18	0.12	0.06	0.02	
20	206	164	115	75.5	48.7	28.8	15.9	8.18	3.81	1.71	1.07	0.72	0.39	0.23	0.17	0.11	0.06	0.02	
30	64.4	55.9	44.9	32.5	21.2	12.6	6.93	3.33	1.72	1.15	0.83	0.53	0.29	0.21	0.15	0.11	0.05	0.02	
40	17.5	15.3	12.3	9.19	6.22	3.74	2.09	1.34	1.04	0.77	0.52	0.31	0.23	0.18	0.14	0.09	0.05	0.02	
50	2.86	2.51	2.11	1.72	1.36	1.15	0.97	0.78	0.58	0.38	0.27	0.23	0.18	0.15	0.11	0.08	0.05	0.02	
60	0.88	0.84	0.78	0.70	0.60	0.49	0.38	0.28	0.24	0.22	0.19	0.16	0.14	0.11	0.08	0.06	0.04	0.02	
70	0.25	0.24	0.22	0.21	0.18	0.17	0.16	0.15	0.14	0.13	0.11	0.10	0.09	0.07	0.06	0.04	0.03	0.02	
80	0.11	0.10	0.09	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.03	0.02	0.02	
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
110	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
120	0.02	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
130	0.04	0.05	0.05	0.05	0.05	0.04	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
140	0.20	0.19	0.18	0.15	0.11	0.08	0.05	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
150	0.78	0.71	0.60	0.45	0.31	0.20	0.12	0.07	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
160	1.69	1.58	1.38	1.07	0.75	0.46	0.26	0.14	0.07	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
170	2.07	2.07	1.93	1.64	1.25	0.81	0.46	0.23	0.12	0.06	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
180	2.11	2.24	2.20	1.95	1.51	1.01	0.58	0.31	0.14	0.07	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.02	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: