

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		4537.4 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		-1.0 degrees horizontal
Beam Spread	At 10% of Imax	45.1V x 45.1H
	At 50% of Imax	23.5V x 23.6H
	At 90% of Imax	9.7V x 10.1H
Beam Flux	Total	1000.7 lumens per klm.
	To 10% of Imax	801.6 lumens per klm.
	To 50% of Imax	448.2 lumens per klm.
	To 90% of Imax	101.4 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.77V I:0.0440A P:8.4000W PF:0.9000 Freq:49.38Hz Lamp Flux:272.747x1 lm		
NAME:Nuit 100-100mm-RGBW RED-25D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

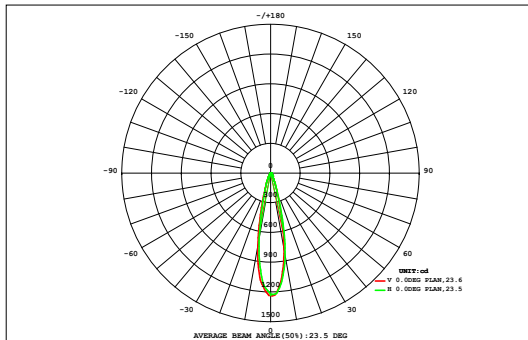

DATA OF LAMP		Eff:32.47lm/W	
MODEL		Imax(cd)	1238
NOMINAL POWER(W)	30	AVAILABILITY(%)	80.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	218.3
NOMINAL FLUX(lm)	272.747	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	272.7
TEST VOLTAGE(V)	220	θ @50% (H,V)	24,23DEG

VERTICAL(°)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.06	0.08	0.11	0.13	0.16	0.18	0.20	0.21	0.22	0.21	0.20	0.18	0.16	0.13	0.11	0.09	0.07	0.05	2.54	0.00
27	0.06	0.08	0.11	0.13	0.16	0.18	0.20	0.21	0.22	0.21	0.20	0.18	0.16	0.13	0.11	0.09	0.07	0.05	2.54	0.00
24	0.08	0.11	0.14	0.17	0.21	0.25	0.29	0.31	0.31	0.31	0.29	0.26	0.22	0.18	0.14	0.11	0.09	0.06	3.53	0.31
21	0.10	0.14	0.18	0.23	0.29	0.35	0.40	0.44	0.45	0.44	0.41	0.36	0.30	0.24	0.19	0.14	0.11	0.08	4.85	2.67
18	0.12	0.17	0.23	0.31	0.39	0.50	0.60	0.67	0.69	0.67	0.61	0.51	0.41	0.32	0.24	0.18	0.13	0.10	6.85	5.29
15	0.15	0.21	0.29	0.39	0.53	0.72	0.91	1.06	1.12	1.08	0.95	0.77	0.57	0.41	0.30	0.22	0.16	0.12	9.96	8.63
12	0.17	0.25	0.35	0.49	0.72	1.02	1.37	1.65	1.74	1.67	1.44	1.11	0.79	0.53	0.37	0.27	0.19	0.14	14.3	13.1
9	0.20	0.28	0.41	0.62	0.95	1.39	1.89	2.28	2.42	2.30	1.97	1.52	1.04	0.68	0.46	0.33	0.23	0.16	19.1	18.2
6	0.21	0.31	0.46	0.74	1.17	1.74	2.32	2.76	2.94	2.83	2.41	1.89	1.38	0.93	0.59	0.39	0.27	0.18	23.5	22.7
3	0.22	0.33	0.50	0.82	1.32	1.95	2.57	3.05	3.27	3.14	2.83	2.38	1.76	1.16	0.71	0.44	0.30	0.20	26.9	26.2
0	0.23	0.34	0.53	0.88	1.42	2.08	2.72	3.17	3.34	3.31	3.04	2.58	1.90	1.24	0.75	0.46	0.31	0.20	28.5	27.8
-3	0.23	0.35	0.55	0.89	1.44	2.13	2.73	3.05	3.17	3.12	2.87	2.39	1.76	1.15	0.71	0.44	0.29	0.20	27.5	26.7
-6	0.22	0.33	0.52	0.83	1.31	1.89	2.36	2.67	2.78	2.72	2.46	2.01	1.46	0.97	0.62	0.39	0.27	0.18	24.0	23.2
-9	0.21	0.31	0.46	0.70	1.01	1.41	1.80	2.09	2.22	2.15	1.89	1.50	1.10	0.76	0.50	0.34	0.24	0.16	18.8	18.0
-12	0.19	0.27	0.37	0.52	0.73	0.97	1.23	1.45	1.55	1.49	1.29	1.01	0.76	0.55	0.39	0.28	0.20	0.14	13.4	12.3
-15	0.16	0.22	0.29	0.38	0.50	0.64	0.78	0.90	0.95	0.92	0.81	0.66	0.51	0.39	0.30	0.22	0.16	0.12	8.93	7.53
-18	0.13	0.17	0.22	0.29	0.36	0.43	0.50	0.56	0.59	0.57	0.51	0.44	0.36	0.29	0.23	0.18	0.13	0.10	6.05	4.25
-21	0.11	0.13	0.17	0.21	0.26	0.30	0.34	0.37	0.38	0.37	0.35	0.31	0.26	0.21	0.17	0.14	0.11	0.08	4.26	1.36
-24	0.08	0.11	0.13	0.16	0.18	0.21	0.24	0.25	0.26	0.25	0.24	0.21	0.19	0.16	0.13	0.11	0.08	0.06	3.06	0.00
-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(°)	6	9	12	15	18	21	24	27				
Φ t	2.88	4.10	5.91	8.77	12.9	18.2	23.2	26.9	28.4	27.5	24.6	20.1	14.9	10.3	6.91	4.70	3.33	2.34	246	---
Φ a	0.00	1.36	4.13	7.39	11.8	17.2	22.4	26.2	27.6	26.7	23.7	19.1	13.8	8.90	5.21	2.54	0.34	0.00	---	218

one-half-peak spread: U:12.9,D:10.7 , L:11.1,R:12.6


NEMA Beam Type: Type 3

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.77V I:0.0440A P:8.4000W PF:0.9000 Freq:49.38Hz Lamp Flux:272.747x1 lm		
NAME:Nuit 100-100mm-RGBW RED-25D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

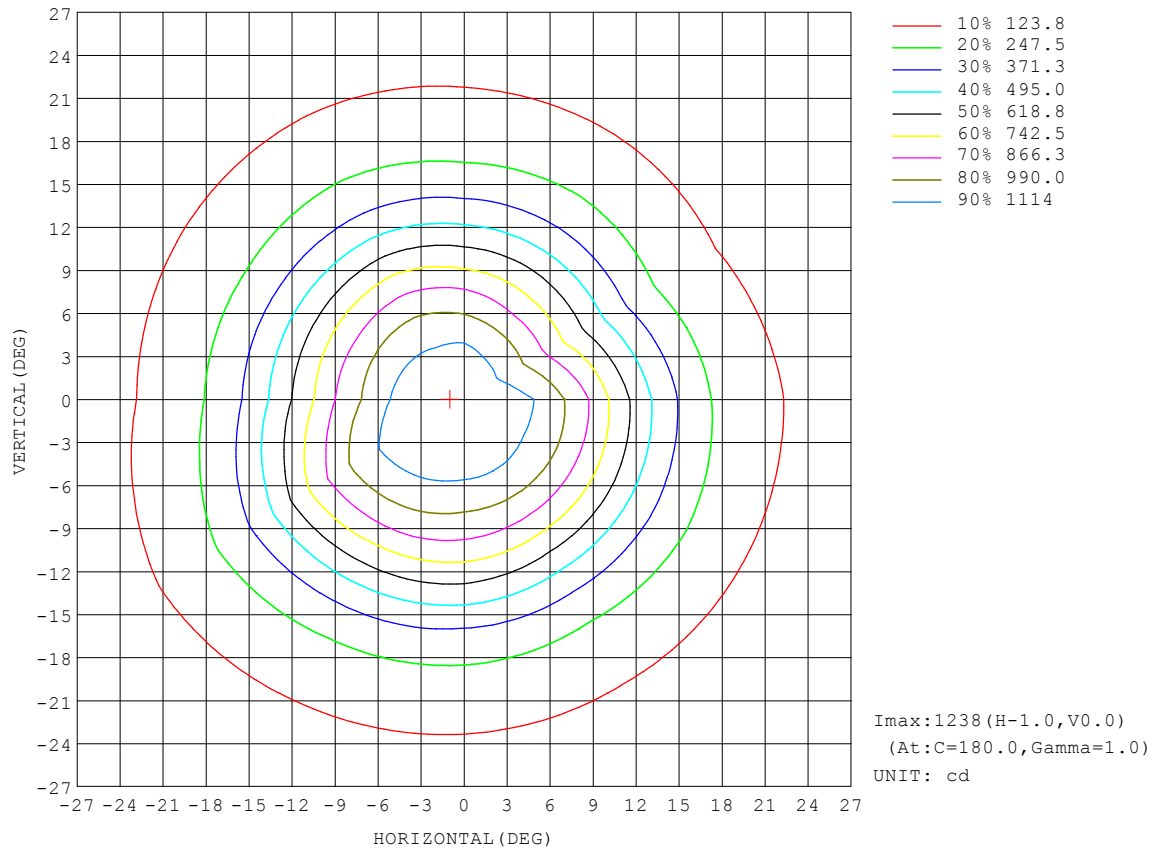


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.77V I:0.0440A P:8.4000W PF:0.9000 Freq:49.38Hz Lamp Flux:272.747x1 lm		
NAME:Nuit 100-100mm-RGBW RED-25D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

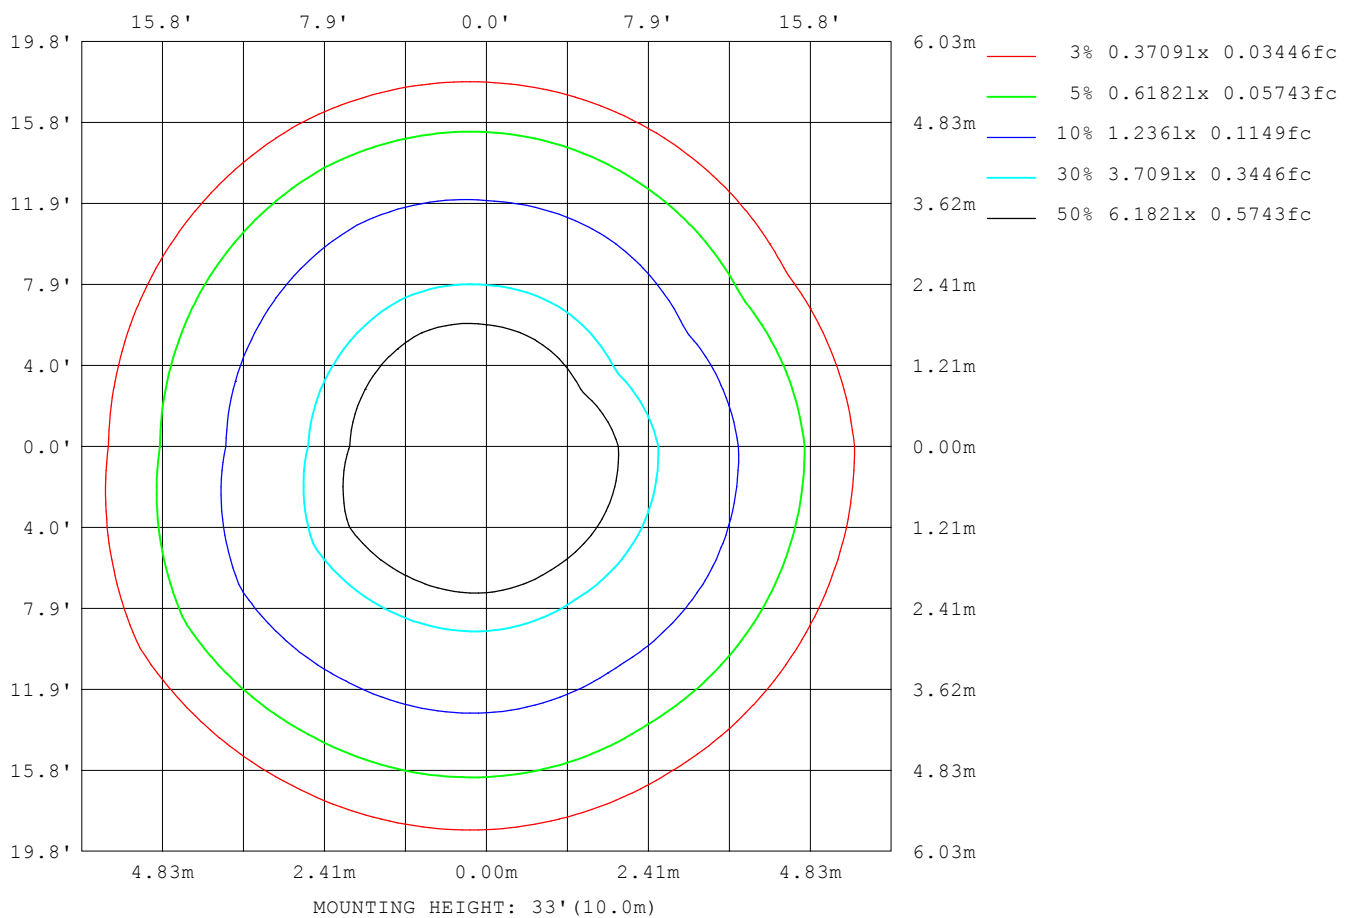

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

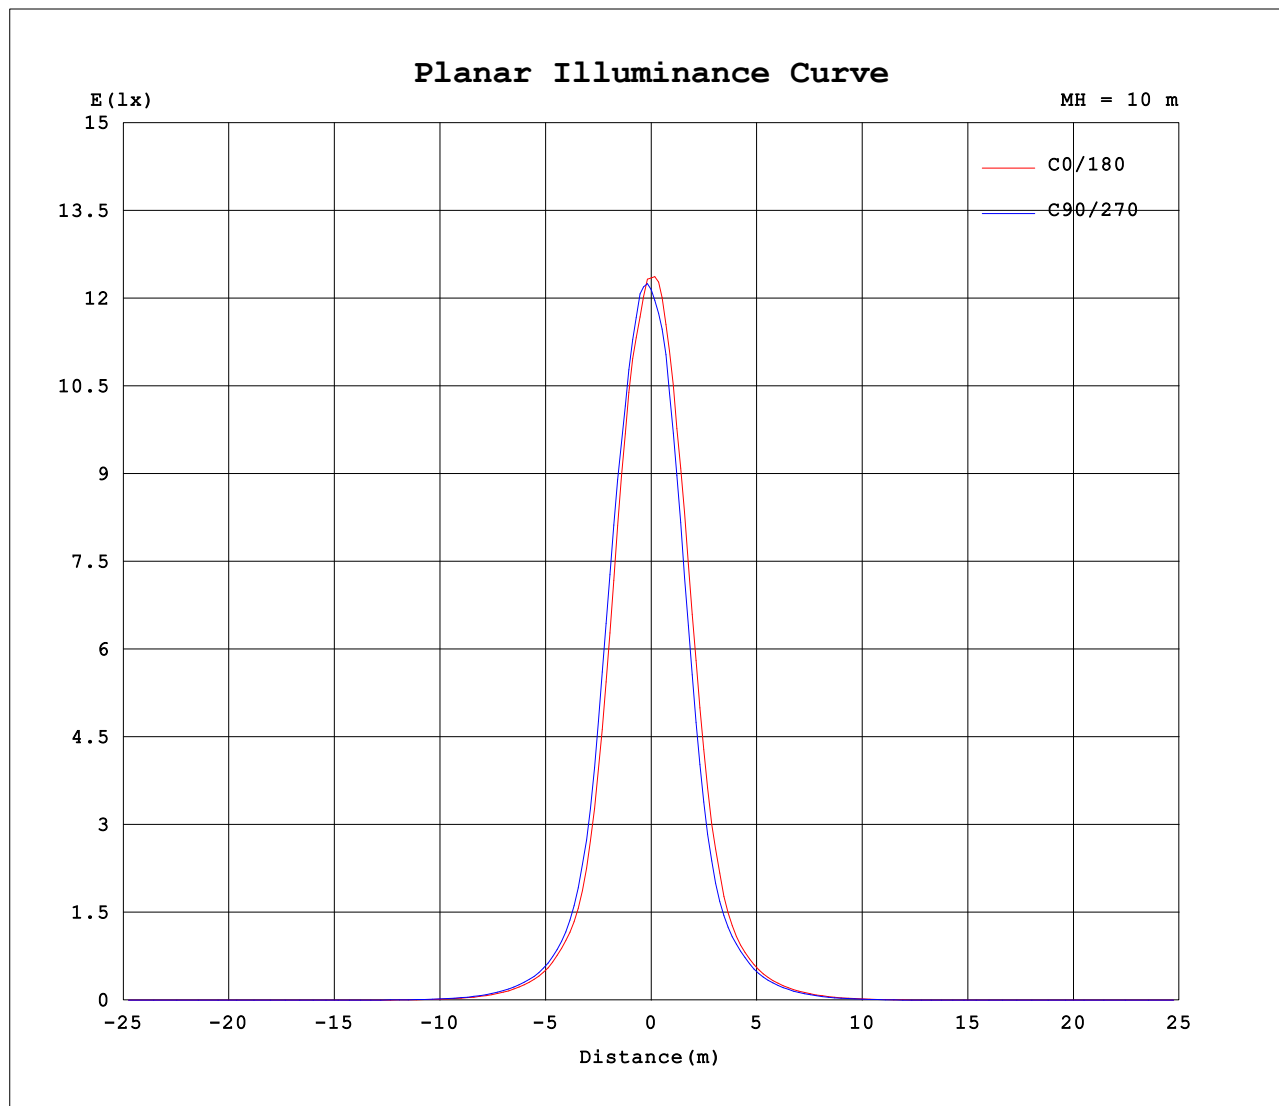


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.77V I:0.0440A P:8.4000W PF:0.9000 Freq:49.38Hz Lamp Flux:272.747x1 lm		
NAME:Nuit 100-100mm-RGBW RED-25D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

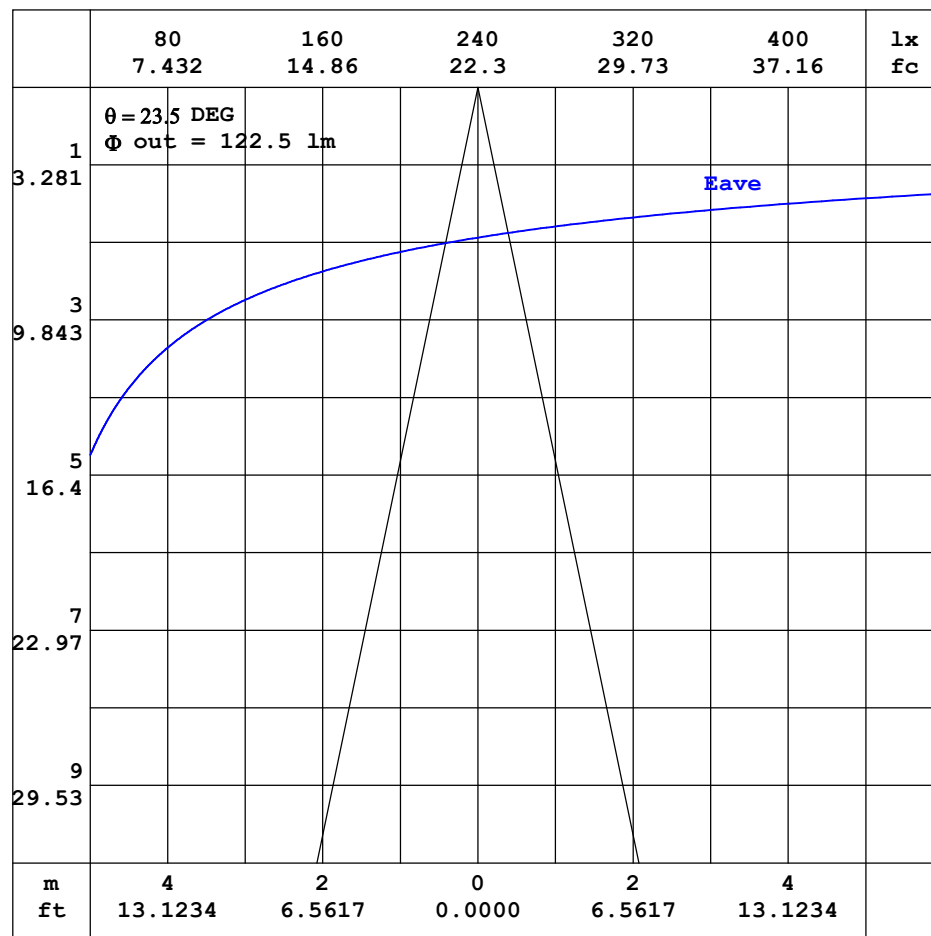

Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.77V I:0.0440A P:8.4000W PF:0.9000 Freq:49.38Hz Lamp Flux:272.747x1 lm		
NAME:Nuit 100-100mm-RGBW RED-25D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:25 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.05	0.04	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.11	0.18	0.32	0.59	0.97	1.38	1.64	1.62	1.57	1.57
-170	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.05	0.07	0.10	0.17	0.29	0.52	0.86	1.26	1.58	1.72	1.73	1.73
-160	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.05	0.06	0.08	0.13	0.21	0.33	0.53	0.79	1.06	1.29	1.46	1.56
-150	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.05	0.05	0.07	0.09	0.12	0.16	0.23	0.32	0.43	0.56	0.66	0.72
-140	0.05	0.05	0.05	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.06	0.06	0.07	0.08	0.10	0.14	0.17	0.20	0.22
-130	0.05	0.06	0.06	0.06	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.05	0.05	0.06	0.07	0.08
-120	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.07	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.03	0.03
-110	0.05	0.06	0.08	0.08	0.10	0.10	0.11	0.10	0.09	0.07	0.07	0.06	0.06	0.05	0.04	0.04	0.03	0.02	0.02
-100	0.05	0.07	0.08	0.09	0.11	0.12	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01
-90	0.05	0.07	0.09	0.11	0.13	0.15	0.17	0.15	0.14	0.12	0.11	0.09	0.08	0.07	0.06	0.04	0.03	0.02	0.01
-80	0.05	0.08	0.10	0.13	0.15	0.18	0.21	0.20	0.19	0.18	0.17	0.16	0.15	0.13	0.12	0.10	0.08	0.06	0.04
-70	0.05	0.08	0.11	0.15	0.18	0.21	0.24	0.24	0.23	0.23	0.23	0.22	0.22	0.21	0.19	0.18	0.17	0.15	0.14
-60	0.05	0.09	0.13	0.17	0.20	0.23	0.26	0.27	0.27	0.32	0.40	0.47	0.54	0.60	0.63	0.65	0.67	0.67	0.65
-50	0.05	0.09	0.13	0.18	0.21	0.25	0.27	0.38	0.51	0.63	0.75	0.89	1.11	1.44	1.78	2.25	2.62	2.83	2.82
-40	0.05	0.10	0.14	0.19	0.22	0.25	0.38	0.58	0.76	1.03	1.62	2.89	4.65	6.81	9.26	11.8	13.8	15.0	14.9
-30	0.05	0.10	0.15	0.19	0.22	0.31	0.52	0.74	1.15	2.37	4.96	8.92	15.0	23.1	32.2	41.0	48.7	54.0	54.9
-20	0.05	0.10	0.15	0.19	0.23	0.37	0.62	0.91	1.85	4.49	9.66	19.5	34.5	52.9	79.0	114	152	187	195
-10	0.05	0.10	0.15	0.19	0.23	0.42	0.68	1.08	2.54	6.17	13.8	27.7	49.9	90.0	167	330	582	792	850
0	0.05	0.10	0.14	0.18	0.22	0.42	0.69	1.10	2.61	6.29	14.0	28.3	52.1	95.3	181	403	780	1122	1235
10	0.05	0.09	0.14	0.18	0.22	0.39	0.65	0.99	2.20	5.41	11.9	23.9	43.1	75.4	131	232	422	633	671
20	0.05	0.09	0.13	0.17	0.20	0.32	0.57	0.82	1.46	3.48	7.35	14.5	26.0	41.6	64.0	94.0	127	149	151
30	0.05	0.09	0.12	0.15	0.18	0.24	0.43	0.66	0.90	1.57	3.39	6.30	10.9	17.3	25.2	33.4	40.4	45.0	45.7
40	0.05	0.08	0.11	0.14	0.17	0.19	0.27	0.44	0.64	0.82	1.17	1.88	3.30	4.99	6.93	8.90	10.5	11.5	11.6
50	0.05	0.07	0.10	0.12	0.14	0.16	0.18	0.23	0.34	0.48	0.61	0.72	0.85	1.08	1.37	1.64	1.89	2.03	2.02
60	0.05	0.07	0.09	0.10	0.12	0.13	0.14	0.15	0.16	0.18	0.23	0.30	0.37	0.44	0.50	0.55	0.58	0.61	0.62
70	0.05	0.06	0.07	0.08	0.09	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.11	0.12	0.14	0.15	0.16	0.17
80	0.05	0.05	0.05	0.06	0.06	0.06	0.07	0.06	0.06	0.05	0.04	0.04	0.03	0.04	0.05	0.05	0.06	0.06	0.07
90	0.05	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
100	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00
110	0.05	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.02	0.01	0.01	0.01	0.01	0.00
120	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00
130	0.05	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.02
140	0.05	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.04	0.06	0.09	0.12	0.13	0.15	0.15	0.15
150	0.05	0.04	0.03	0.03	0.03	0.03	0.03	0.02	0.03	0.02	0.03	0.07	0.12	0.20	0.30	0.41	0.51	0.58	0.61
160	0.05	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.08	0.15	0.26	0.46	0.72	1.00	1.22	1.37	1.43
170	0.05	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.08	0.14	0.26	0.47	0.80	1.16	1.46	1.62	1.64	1.66
180	0.05	0.04	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.11	0.18	0.32	0.59	0.97	1.38	1.64	1.62	1.57	1.57

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.77V I:0.0440A P:8.4000W PF:0.9000 Freq:49.38Hz Lamp Flux:272.747x1 lm																		
NAME:Nuit 100-100mm-RGBW RED-25D-REV1									TYPE:RGBW-RED					WEIGHT:				
SPEC.:25 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.64	1.83	1.84	1.62	1.23	0.79	0.43	0.22	0.10	0.05	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-170	1.78	1.80	1.74	1.47	1.07	0.67	0.38	0.20	0.10	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-160	1.52	1.40	1.20	0.93	0.66	0.43	0.25	0.15	0.09	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-150	0.69	0.61	0.50	0.38	0.27	0.19	0.13	0.10	0.06	0.03	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	
-140	0.21	0.18	0.15	0.11	0.09	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-130	0.07	0.06	0.04	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-120	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-110	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01	
-100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-90	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-80	0.05	0.05	0.06	0.06	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.02	0.02	0.02	0.01	0.01	
-70	0.14	0.14	0.14	0.14	0.14	0.14	0.12	0.10	0.09	0.07	0.05	0.03	0.03	0.03	0.03	0.03	0.02	0.01	
-60	0.65	0.63	0.59	0.53	0.48	0.40	0.31	0.22	0.15	0.11	0.09	0.07	0.06	0.05	0.04	0.04	0.03	0.01	
-50	2.64	2.28	1.84	1.47	1.14	0.88	0.73	0.60	0.45	0.30	0.16	0.11	0.09	0.08	0.06	0.04	0.03	0.01	
-40	13.9	12.0	9.64	7.15	5.04	3.31	1.87	1.17	0.76	0.58	0.40	0.21	0.13	0.10	0.08	0.05	0.04	0.01	
-30	51.2	43.6	34.3	25.4	17.2	10.6	6.09	3.25	1.52	0.84	0.61	0.38	0.17	0.12	0.09	0.06	0.04	0.01	
-20	170	131	92.4	62.4	41.0	25.2	13.6	6.80	3.22	1.39	0.77	0.52	0.27	0.14	0.11	0.07	0.04	0.01	
-10	710	453	246	126	70.9	40.7	22.0	10.6	4.84	1.94	0.91	0.61	0.34	0.16	0.11	0.08	0.05	0.01	
0	1110	752	364	162	88.1	47.5	25.2	12.0	5.42	2.20	0.97	0.64	0.37	0.17	0.11	0.08	0.05	0.01	
10	542	324	168	102	60.2	35.5	19.3	9.36	4.36	1.79	0.89	0.60	0.33	0.16	0.11	0.08	0.05	0.01	
20	137	108	75.8	50.8	32.5	18.8	10.3	5.36	2.57	1.20	0.75	0.50	0.26	0.15	0.11	0.07	0.04	0.01	
30	42.8	36.9	29.4	21.1	13.6	8.03	4.49	2.23	1.21	0.80	0.57	0.35	0.18	0.13	0.10	0.06	0.04	0.01	
40	11.1	9.69	7.86	5.93	4.05	2.50	1.46	0.93	0.71	0.53	0.34	0.20	0.14	0.11	0.09	0.06	0.04	0.01	
50	1.93	1.73	1.48	1.22	0.94	0.79	0.66	0.53	0.38	0.25	0.17	0.14	0.11	0.09	0.07	0.05	0.03	0.01	
60	0.60	0.57	0.53	0.47	0.39	0.32	0.25	0.18	0.14	0.13	0.11	0.10	0.09	0.07	0.05	0.04	0.03	0.01	
70	0.16	0.14	0.13	0.12	0.10	0.09	0.09	0.09	0.08	0.08	0.07	0.06	0.05	0.05	0.04	0.03	0.02	0.01	
80	0.06	0.06	0.05	0.04	0.03	0.02	0.02	0.02	0.03	0.03	0.03	0.04	0.03	0.03	0.02	0.02	0.01	0.01	
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	
110	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	
120	0.01	0.02	0.02	0.02	0.03	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	
130	0.03	0.04	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	
140	0.16	0.16	0.15	0.14	0.10	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	
150	0.62	0.57	0.49	0.37	0.25	0.16	0.10	0.04	0.02	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	
160	1.43	1.34	1.13	0.87	0.59	0.35	0.20	0.10	0.05	0.02	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
170	1.69	1.71	1.61	1.37	1.00	0.63	0.34	0.17	0.08	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
180	1.64	1.83	1.84	1.62	1.23	0.79	0.43	0.22	0.10	0.05	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: