

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	3016.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	53.4V x 53.3H
	At 50% of Imax	30.7V x 30.7H
	At 90% of Imax	14.2V x 15.0H

Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	822.0 lumens per klm.
	To 50% of Imax	510.6 lumens per klm.
	To 90% of Imax	144.8 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.5 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.84V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:313.23x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-30D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

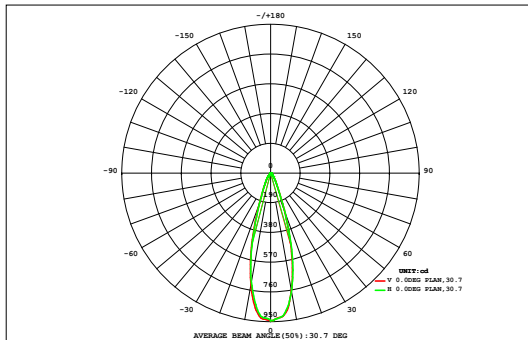

DATA OF LAMP		Eff:39.65lm/W	
MODEL		Imax(cd)	944.7
NOMINAL POWER(W)	30	AVAILABILITY(%)	82.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	257.4
NOMINAL FLUX(lm)	313.23	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	313.2
TEST VOLTAGE(V)	220	θ @50% (H,V)	31,31DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.01	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.13	0.12	0.10	0.08	0.05	0.03	0.02	0.01	0.00	1.15	0.00
45	0.01	0.01	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.13	0.12	0.10	0.08	0.05	0.03	0.02	0.01	0.00	1.15	0.00
40	0.01	0.03	0.05	0.09	0.12	0.16	0.20	0.23	0.24	0.24	0.22	0.18	0.14	0.10	0.07	0.04	0.02	0.01	2.16	0.00
35	0.03	0.05	0.09	0.14	0.20	0.28	0.34	0.38	0.40	0.40	0.36	0.31	0.24	0.17	0.11	0.07	0.04	0.02	3.62	0.00
30	0.04	0.08	0.13	0.21	0.31	0.42	0.52	0.60	0.64	0.63	0.57	0.47	0.37	0.26	0.17	0.10	0.06	0.03	5.62	0.40
25	0.06	0.11	0.19	0.30	0.44	0.61	0.83	1.04	1.16	1.12	0.94	0.71	0.52	0.37	0.24	0.15	0.08	0.04	8.90	5.47
20	0.07	0.14	0.24	0.39	0.59	0.93	1.51	2.16	2.48	2.35	1.85	1.20	0.74	0.48	0.31	0.20	0.11	0.06	15.8	13.1
15	0.09	0.17	0.30	0.48	0.80	1.48	2.67	3.83	4.42	4.24	3.33	2.06	1.08	0.62	0.39	0.25	0.14	0.07	26.4	24.0
10	0.10	0.19	0.34	0.57	1.05	2.19	3.86	5.41	6.14	5.88	4.69	3.05	1.62	0.83	0.47	0.29	0.17	0.09	36.9	34.8
5	0.11	0.21	0.37	0.62	1.26	2.71	4.64	6.34	7.00	6.80	5.74	4.08	2.25	1.03	0.53	0.32	0.18	0.09	44.3	42.2
0	0.11	0.21	0.38	0.65	1.36	2.92	4.92	6.53	7.04	7.00	6.14	4.36	2.41	1.07	0.55	0.33	0.19	0.10	46.2	44.3
-5	0.11	0.21	0.37	0.63	1.29	2.77	4.60	5.93	6.47	6.27	5.31	3.70	1.99	0.92	0.50	0.31	0.18	0.09	41.7	39.5
-10	0.10	0.19	0.34	0.56	1.04	2.06	3.35	4.42	4.96	4.77	3.85	2.55	1.37	0.71	0.43	0.27	0.15	0.08	31.2	28.9
-15	0.09	0.17	0.29	0.47	0.73	1.20	1.91	2.63	3.02	2.86	2.20	1.41	0.85	0.54	0.36	0.22	0.13	0.07	19.1	16.6
-20	0.07	0.14	0.24	0.36	0.52	0.72	0.98	1.25	1.41	1.33	1.06	0.78	0.56	0.40	0.27	0.17	0.10	0.05	10.4	7.06
-25	0.05	0.10	0.17	0.26	0.36	0.48	0.59	0.67	0.71	0.69	0.60	0.49	0.39	0.29	0.20	0.12	0.07	0.04	6.28	1.08
-30	0.04	0.07	0.11	0.17	0.24	0.31	0.38	0.42	0.44	0.43	0.38	0.32	0.25	0.19	0.13	0.08	0.05	0.02	4.04	0.00
-35	0.02	0.04	0.07	0.10	0.15	0.19	0.23	0.26	0.27	0.26	0.23	0.20	0.15	0.11	0.08	0.05	0.03	0.01	2.46	0.00
-40	0.01	0.02	0.04	0.06	0.08	0.10	0.13	0.14	0.15	0.14	0.13	0.11	0.09	0.06	0.04	0.03	0.01	0.01	1.35	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	1.10	2.15	3.74	6.12	10.6	19.6	31.7	42.4	47.1	45.5	37.7	26.1	15.1	8.20	4.90	3.01	1.71	0.87	308	---
Φ a	0.00	0.00	0.00	1.25	7.42	16.8	29.2	39.9	44.6	43.1	35.1	23.4	12.0	4.41	0.22	0.00	0.00	0.00	---	257

one-half-peak spread: U:16.2,D:14.7 , L:15.9,R:15.0


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.84V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:313.23x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-30D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

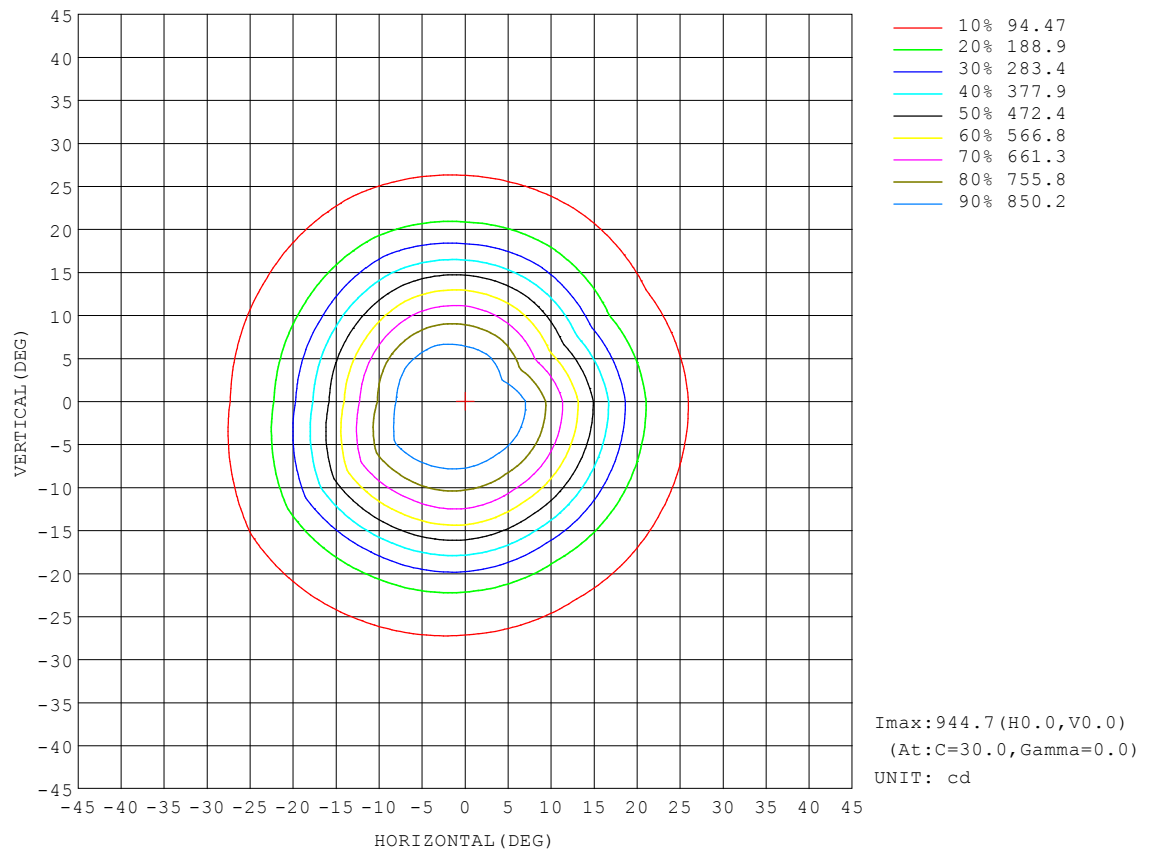


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.84V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:313.23x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-30D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

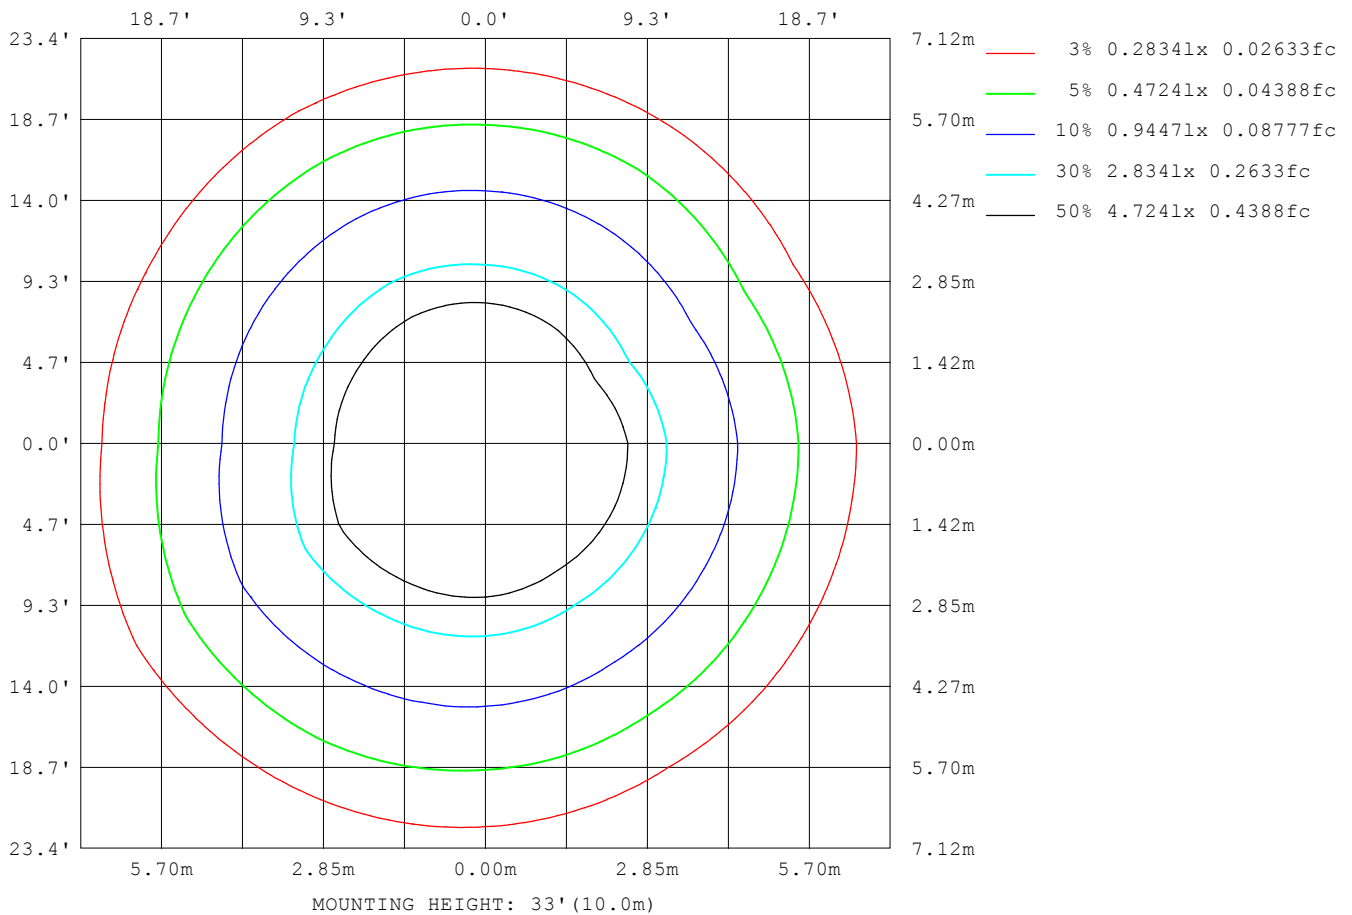

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

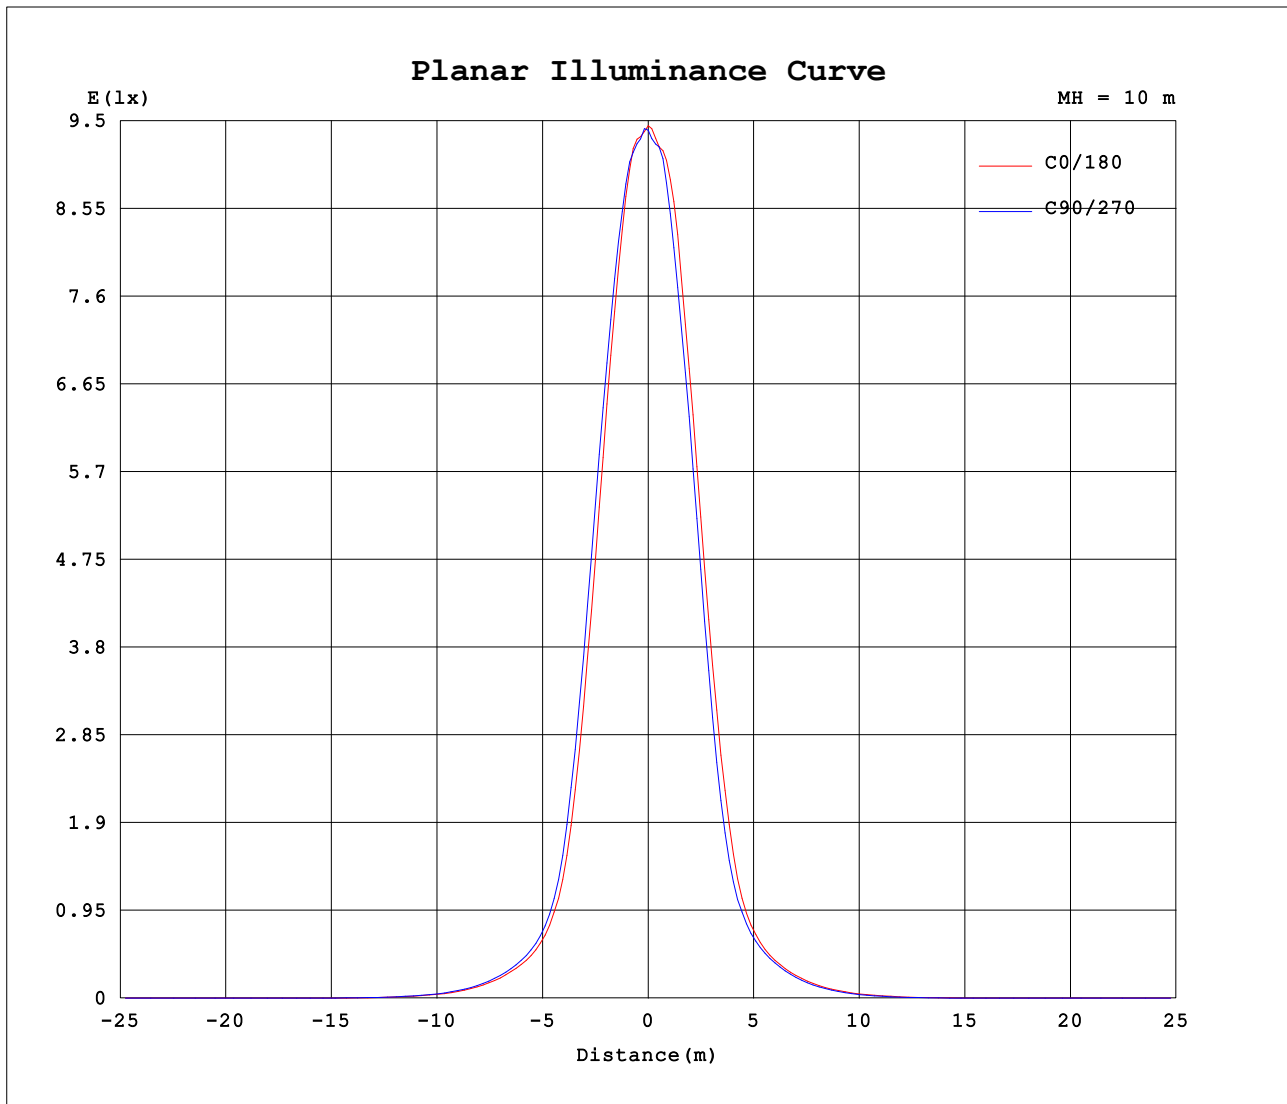


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.84V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:313.23x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-30D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

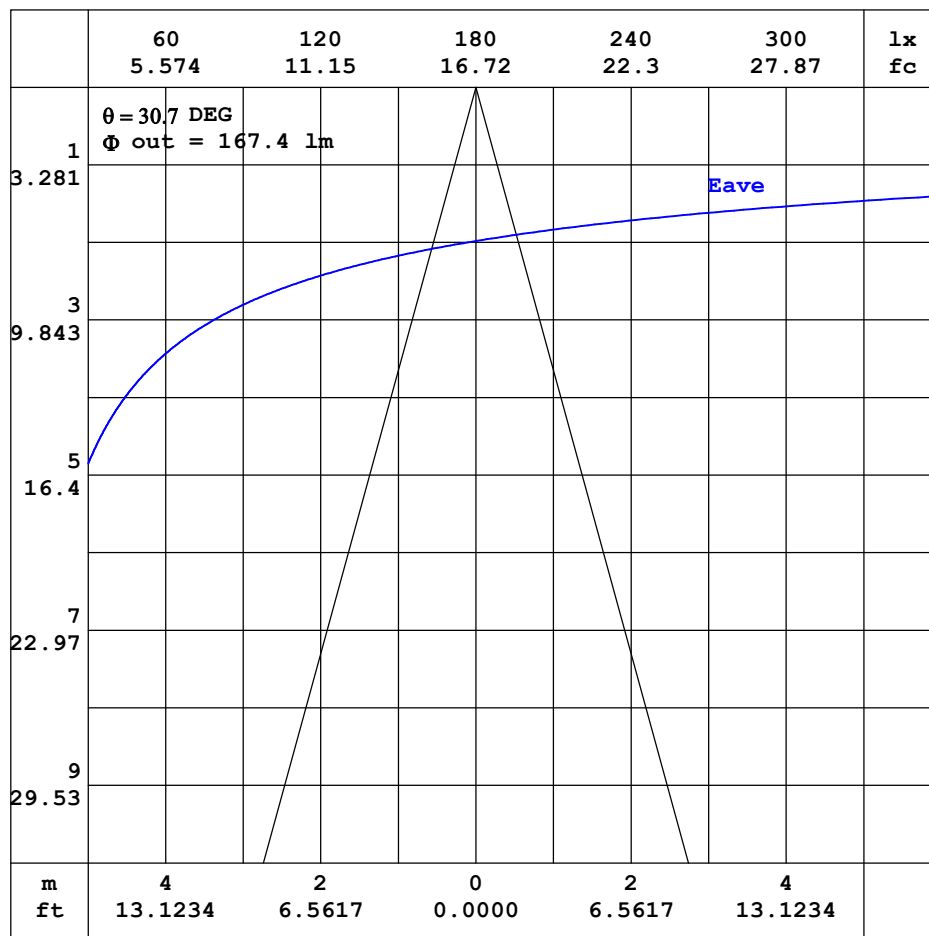

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.84V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:313.23x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-30D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.15	0.13	0.09	0.05	0.05	0.05	0.06	0.08	0.11	0.15	0.25	0.42	0.71	1.08	1.43	1.67	1.78	1.83	1.86
-170	0.15	0.13	0.09	0.06	0.05	0.05	0.06	0.07	0.10	0.15	0.24	0.40	0.66	1.01	1.36	1.64	1.80	1.85	1.87
-160	0.15	0.13	0.10	0.07	0.06	0.05	0.05	0.07	0.09	0.13	0.18	0.29	0.46	0.68	0.95	1.19	1.40	1.56	1.64
-150	0.15	0.13	0.11	0.08	0.06	0.06	0.06	0.06	0.08	0.10	0.13	0.17	0.23	0.33	0.45	0.59	0.73	0.84	0.90
-140	0.15	0.14	0.12	0.09	0.07	0.07	0.06	0.06	0.07	0.08	0.08	0.09	0.11	0.13	0.16	0.21	0.26	0.30	0.32
-130	0.15	0.15	0.13	0.11	0.10	0.08	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.08	0.10	0.11	0.12
-120	0.15	0.15	0.14	0.13	0.12	0.11	0.11	0.09	0.08	0.07	0.06	0.06	0.06	0.06	0.05	0.05	0.05	0.05	0.05
-110	0.15	0.15	0.15	0.15	0.15	0.15	0.14	0.13	0.11	0.10	0.08	0.07	0.07	0.06	0.05	0.05	0.04	0.04	0.03
-100	0.15	0.16	0.16	0.17	0.17	0.17	0.18	0.16	0.14	0.13	0.11	0.09	0.08	0.06	0.05	0.04	0.03	0.02	0.01
-90	0.15	0.16	0.17	0.19	0.20	0.21	0.22	0.20	0.18	0.16	0.13	0.11	0.09	0.08	0.07	0.05	0.04	0.03	0.01
-80	0.15	0.17	0.19	0.21	0.24	0.26	0.28	0.28	0.26	0.24	0.22	0.20	0.18	0.17	0.15	0.13	0.11	0.09	0.07
-70	0.15	0.18	0.21	0.24	0.27	0.30	0.32	0.33	0.32	0.30	0.29	0.29	0.27	0.28	0.27	0.25	0.24	0.22	0.21
-60	0.15	0.19	0.23	0.26	0.30	0.33	0.35	0.37	0.37	0.41	0.47	0.54	0.62	0.69	0.74	0.77	0.79	0.79	0.77
-50	0.15	0.19	0.24	0.28	0.31	0.34	0.37	0.47	0.61	0.76	0.91	1.10	2.03	2.96	3.97	5.02	5.83	6.25	6.27
-40	0.15	0.20	0.25	0.29	0.32	0.36	0.48	0.70	0.94	1.71	3.71	6.35	9.77	13.5	17.5	21.4	24.4	26.1	26.1
-30	0.15	0.20	0.25	0.29	0.33	0.41	0.64	0.92	2.16	5.43	10.6	17.2	26.2	36.8	48.0	59.2	67.6	71.8	71.3
-20	0.15	0.21	0.25	0.29	0.34	0.48	0.77	1.32	4.34	9.83	18.7	32.6	51.2	72.9	102	147	210	263	275
-10	0.15	0.21	0.26	0.29	0.34	0.52	0.84	1.91	5.98	13.1	25.1	43.6	69.4	116	244	452	633	748	769
0	0.15	0.21	0.25	0.29	0.34	0.52	0.84	2.11	6.25	13.6	26.1	45.0	71.7	123	271	517	764	918	945
10	0.15	0.20	0.25	0.28	0.33	0.49	0.80	1.59	5.41	11.9	22.7	39.1	62.1	97.0	175	341	540	684	709
20	0.15	0.20	0.23	0.26	0.31	0.43	0.70	1.04	3.47	8.06	15.3	26.2	41.2	60.9	85.2	121	170	211	216
30	0.15	0.19	0.22	0.25	0.28	0.34	0.54	0.81	1.18	3.86	7.85	13.4	21.0	30.7	41.6	52.2	60.4	65.5	66.3
40	0.15	0.18	0.21	0.23	0.25	0.28	0.36	0.55	0.78	1.03	2.50	4.73	7.69	11.2	14.9	18.4	21.2	23.0	23.2
50	0.15	0.17	0.19	0.21	0.22	0.24	0.26	0.31	0.43	0.59	0.75	0.91	1.11	2.20	3.12	3.95	4.56	4.88	4.84
60	0.15	0.16	0.17	0.18	0.19	0.19	0.21	0.21	0.23	0.26	0.30	0.38	0.46	0.54	0.62	0.68	0.72	0.74	0.75
70	0.15	0.15	0.15	0.16	0.16	0.15	0.15	0.15	0.15	0.16	0.16	0.16	0.16	0.17	0.19	0.20	0.21	0.22	0.23
80	0.15	0.14	0.13	0.13	0.12	0.11	0.10	0.09	0.09	0.08	0.07	0.07	0.06	0.06	0.07	0.08	0.09	0.10	0.11
90	0.15	0.14	0.12	0.10	0.08	0.07	0.05	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00
100	0.15	0.13	0.11	0.10	0.08	0.06	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00
110	0.15	0.13	0.11	0.09	0.07	0.05	0.04	0.04	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00
120	0.15	0.13	0.10	0.08	0.06	0.05	0.03	0.03	0.03	0.01	0.01	0.02	0.02	0.03	0.03	0.02	0.02	0.01	0.00
130	0.15	0.13	0.10	0.07	0.05	0.04	0.04	0.00	0.00	0.01	0.02	0.03	0.04	0.06	0.07	0.07	0.06	0.06	0.05
140	0.15	0.12	0.09	0.06	0.04	0.04	0.02	0.01	0.00	0.01	0.04	0.06	0.09	0.12	0.15	0.18	0.20	0.22	0.21
150	0.15	0.12	0.09	0.06	0.04	0.03	0.02	0.02	0.03	0.04	0.06	0.11	0.18	0.27	0.39	0.52	0.63	0.71	0.74
160	0.15	0.12	0.08	0.05	0.04	0.03	0.03	0.04	0.05	0.08	0.13	0.21	0.35	0.57	0.83	1.08	1.28	1.41	1.46
170	0.15	0.12	0.09	0.05	0.04	0.04	0.04	0.06	0.08	0.12	0.20	0.35	0.59	0.91	1.23	1.51	1.67	1.78	1.78
180	0.15	0.13	0.09	0.05	0.05	0.05	0.06	0.08	0.11	0.15	0.25	0.42	0.71	1.08	1.43	1.67	1.78	1.83	1.89

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.84V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:313.23x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-30D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.91	1.96	1.92	1.71	1.36	0.95	0.60	0.32	0.17	0.09	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-170	1.89	1.90	1.81	1.57	1.22	0.84	0.52	0.29	0.16	0.09	0.05	0.02	0.02	0.01	0.01	0.01	0.01	0.02	
-160	1.60	1.51	1.34	1.10	0.83	0.57	0.36	0.22	0.13	0.08	0.05	0.02	0.02	0.01	0.01	0.01	0.01	0.02	
-150	0.87	0.79	0.67	0.53	0.40	0.28	0.20	0.14	0.10	0.07	0.04	0.02	0.02	0.02	0.01	0.01	0.01	0.02	
-140	0.31	0.28	0.23	0.18	0.15	0.12	0.10	0.08	0.07	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.02	
-130	0.11	0.10	0.08	0.06	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.02	
-120	0.04	0.03	0.03	0.02	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-110	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-90	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-80	0.08	0.08	0.09	0.09	0.09	0.09	0.08	0.07	0.06	0.04	0.03	0.01	0.02	0.02	0.02	0.02	0.02	0.02	
-70	0.21	0.21	0.20	0.20	0.19	0.19	0.16	0.14	0.12	0.10	0.07	0.05	0.05	0.05	0.04	0.03	0.03	0.02	
-60	0.76	0.73	0.69	0.63	0.55	0.46	0.37	0.28	0.21	0.16	0.13	0.11	0.09	0.07	0.06	0.05	0.03	0.02	
-50	5.91	5.21	4.23	3.17	2.18	1.14	0.84	0.68	0.51	0.33	0.21	0.17	0.14	0.11	0.08	0.06	0.03	0.02	
-40	24.6	21.7	18.0	14.0	10.4	7.20	4.40	2.27	0.90	0.66	0.43	0.26	0.18	0.14	0.11	0.07	0.04	0.02	
-30	67.0	58.9	48.5	38.2	28.3	19.4	12.3	7.19	3.47	1.11	0.69	0.42	0.24	0.17	0.13	0.08	0.05	0.02	
-20	232	162	111	77.2	55.8	38.1	24.0	13.9	7.28	3.04	0.91	0.59	0.31	0.20	0.15	0.09	0.06	0.02	
-10	691	530	319	158	86.1	56.1	35.5	20.4	10.7	4.76	1.37	0.69	0.38	0.22	0.16	0.10	0.06	0.02	
0	908	729	467	225	107	63.2	40.3	23.3	12.1	5.46	1.77	0.74	0.40	0.23	0.16	0.11	0.07	0.02	
10	625	448	244	132	78.6	52.0	33.0	19.0	9.90	4.35	1.28	0.69	0.38	0.22	0.16	0.11	0.06	0.02	
20	191	144	100.0	70.8	49.6	32.6	20.5	11.9	6.08	2.49	0.89	0.57	0.32	0.21	0.15	0.10	0.06	0.02	
30	63.1	56.0	46.2	35.6	25.4	16.6	10.0	5.29	2.46	0.97	0.67	0.41	0.25	0.19	0.14	0.09	0.05	0.02	
40	22.1	19.6	16.4	12.7	8.96	5.73	3.17	1.34	0.85	0.63	0.42	0.27	0.20	0.16	0.12	0.08	0.04	0.02	
50	4.59	4.02	3.25	2.41	1.49	0.97	0.79	0.63	0.46	0.32	0.24	0.20	0.16	0.13	0.10	0.07	0.04	0.02	
60	0.73	0.69	0.64	0.56	0.47	0.39	0.31	0.25	0.21	0.19	0.17	0.14	0.12	0.10	0.08	0.06	0.03	0.02	
70	0.22	0.21	0.19	0.18	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.05	0.03	0.03	0.02	
80	0.10	0.09	0.08	0.07	0.06	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
110	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
120	0.01	0.02	0.02	0.03	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
130	0.06	0.07	0.07	0.08	0.07	0.06	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
140	0.23	0.23	0.21	0.18	0.15	0.11	0.07	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
150	0.75	0.70	0.61	0.49	0.35	0.24	0.15	0.09	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
160	1.48	1.41	1.24	1.00	0.74	0.49	0.30	0.17	0.09	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
170	1.84	1.79	1.66	1.45	1.14	0.79	0.48	0.26	0.14	0.07	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
180	1.91	1.96	1.92	1.71	1.36	0.95	0.60	0.32	0.17	0.09	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.02	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: