

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3088.2 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		-1.0 degrees horizontal
Beam Spread	At 10% of Imax	52.4V x 53.0H
	At 50% of Imax	30.1V x 30.6H
	At 90% of Imax	13.5V x 14.9H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	816.5 lumens per klm.
	To 50% of Imax	503.9 lumens per klm.
	To 90% of Imax	138.6 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.80V I:0.1350A P:29.100W PF:0.9000 Freq:49.37Hz Lamp Flux:916.419x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-30D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

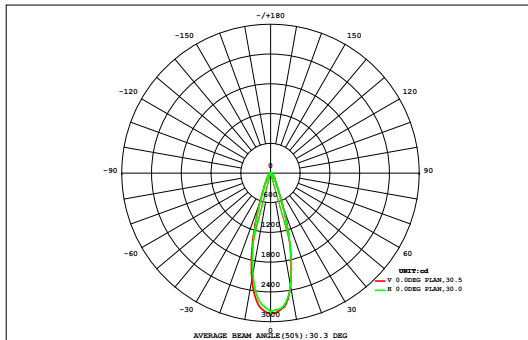

DATA OF LAMP		Eff:31.49lm/W	
MODEL		Imax(cd)	2830
NOMINAL POWER(W)	30	AVAILABILITY(%)	81.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	747.9
NOMINAL FLUX(lm)	916.419	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	916.4
TEST VOLTAGE(V)	220	θ @50% (H,V)	31,30DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.04	0.08	0.14	0.20	0.27	0.33	0.37	0.38	0.38	0.34	0.29	0.23	0.16	0.10	0.06	0.03	0.02	3.43	0.00
45	0.02	0.04	0.08	0.14	0.20	0.27	0.33	0.37	0.38	0.38	0.34	0.29	0.23	0.16	0.10	0.06	0.03	0.02	3.43	0.00
40	0.04	0.09	0.16	0.26	0.37	0.49	0.60	0.68	0.72	0.70	0.64	0.54	0.42	0.30	0.20	0.12	0.06	0.02	6.41	0.00
35	0.07	0.15	0.27	0.42	0.62	0.83	1.01	1.14	1.18	1.16	1.06	0.90	0.70	0.51	0.33	0.20	0.11	0.05	10.7	0.00
30	0.12	0.23	0.40	0.64	0.94	1.26	1.57	1.78	1.87	1.82	1.64	1.37	1.07	0.77	0.51	0.30	0.17	0.08	16.5	0.89
25	0.17	0.32	0.57	0.90	1.31	1.82	2.42	3.02	3.36	3.22	2.69	2.05	1.51	1.06	0.71	0.43	0.24	0.12	25.9	15.3
20	0.22	0.42	0.73	1.16	1.75	2.70	4.34	6.25	7.24	6.84	5.28	3.42	2.11	1.38	0.91	0.58	0.33	0.17	45.8	37.6
15	0.26	0.51	0.89	1.43	2.32	4.32	7.85	11.4	13.0	12.3	9.64	5.89	3.08	1.78	1.16	0.74	0.42	0.22	77.2	69.8
10	0.30	0.58	1.01	1.67	3.02	6.42	11.4	16.0	18.2	17.3	13.8	8.78	4.71	2.40	1.40	0.87	0.50	0.26	109	102
5	0.32	0.62	1.08	1.82	3.58	7.89	13.8	18.8	20.7	19.9	17.0	12.1	6.66	3.04	1.60	0.97	0.56	0.29	131	125
0	0.33	0.63	1.11	1.87	3.82	8.41	14.6	19.4	20.8	20.7	18.4	13.2	7.17	3.19	1.65	0.99	0.57	0.29	137	131
-5	0.32	0.62	1.07	1.80	3.57	7.81	13.4	17.4	19.1	18.7	15.9	11.1	5.89	2.73	1.52	0.93	0.54	0.27	123	116
-10	0.29	0.56	0.98	1.59	2.84	5.68	9.46	12.7	14.6	14.0	11.3	7.49	3.98	2.13	1.31	0.82	0.47	0.24	90.4	83.6
-15	0.25	0.48	0.84	1.33	2.00	3.28	5.32	7.38	8.55	8.15	6.31	4.08	2.48	1.61	1.08	0.68	0.39	0.20	54.4	46.3
-20	0.20	0.39	0.66	1.01	1.44	1.96	2.68	3.48	3.93	3.74	3.03	2.23	1.64	1.20	0.83	0.52	0.30	0.15	29.4	18.8
-25	0.15	0.29	0.48	0.73	1.01	1.31	1.61	1.86	1.99	1.93	1.72	1.43	1.13	0.85	0.59	0.37	0.21	0.11	17.8	1.85
-30	0.11	0.20	0.32	0.49	0.68	0.87	1.05	1.18	1.25	1.22	1.12	0.95	0.76	0.56	0.39	0.25	0.14	0.07	11.6	0.00
-35	0.06	0.12	0.20	0.30	0.42	0.54	0.65	0.73	0.77	0.75	0.69	0.58	0.46	0.34	0.24	0.15	0.08	0.04	7.12	0.00
-40	0.03	0.07	0.11	0.17	0.24	0.30	0.37	0.41	0.43	0.42	0.38	0.33	0.26	0.19	0.13	0.08	0.04	0.02	3.97	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	3.25	6.32	11.0	17.7	30.1	56.2	92.4	124	138	133	111	76.7	44.3	24.2	14.7	9.05	5.16	2.62	900	---
Φ a	0.00	0.00	0.00	2.97	19.9	47.5	84.5	116	131	126	103	68.4	35.1	12.9	0.65	0.00	0.00	0.00	---	748

one-half-peak spread: U:15.8,D:14.4 , L:14.7,R:16.0


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.80V I:0.1350A P:29.100W PF:0.9000 Freq:49.37Hz Lamp Flux:916.419x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-30D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

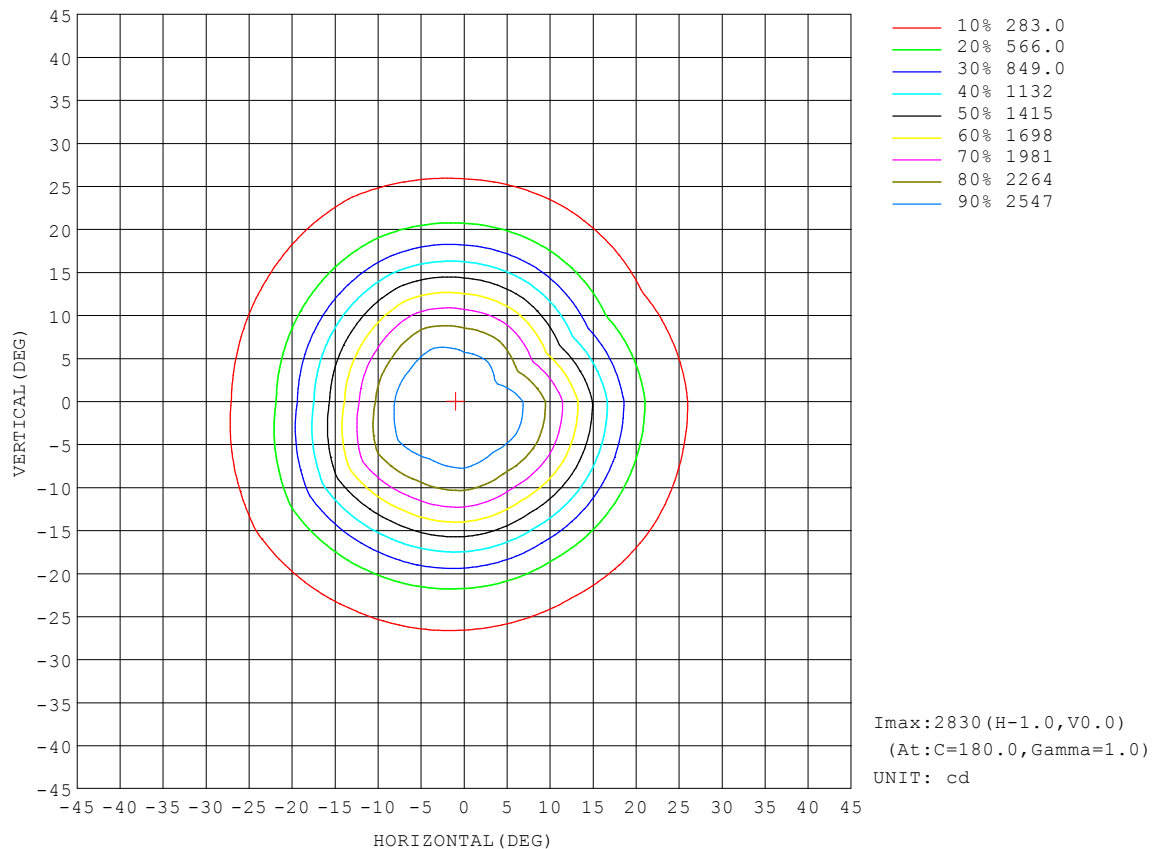


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.80V I:0.1350A P:29.100W PF:0.9000 Freq:49.37Hz Lamp Flux:916.419x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-30D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

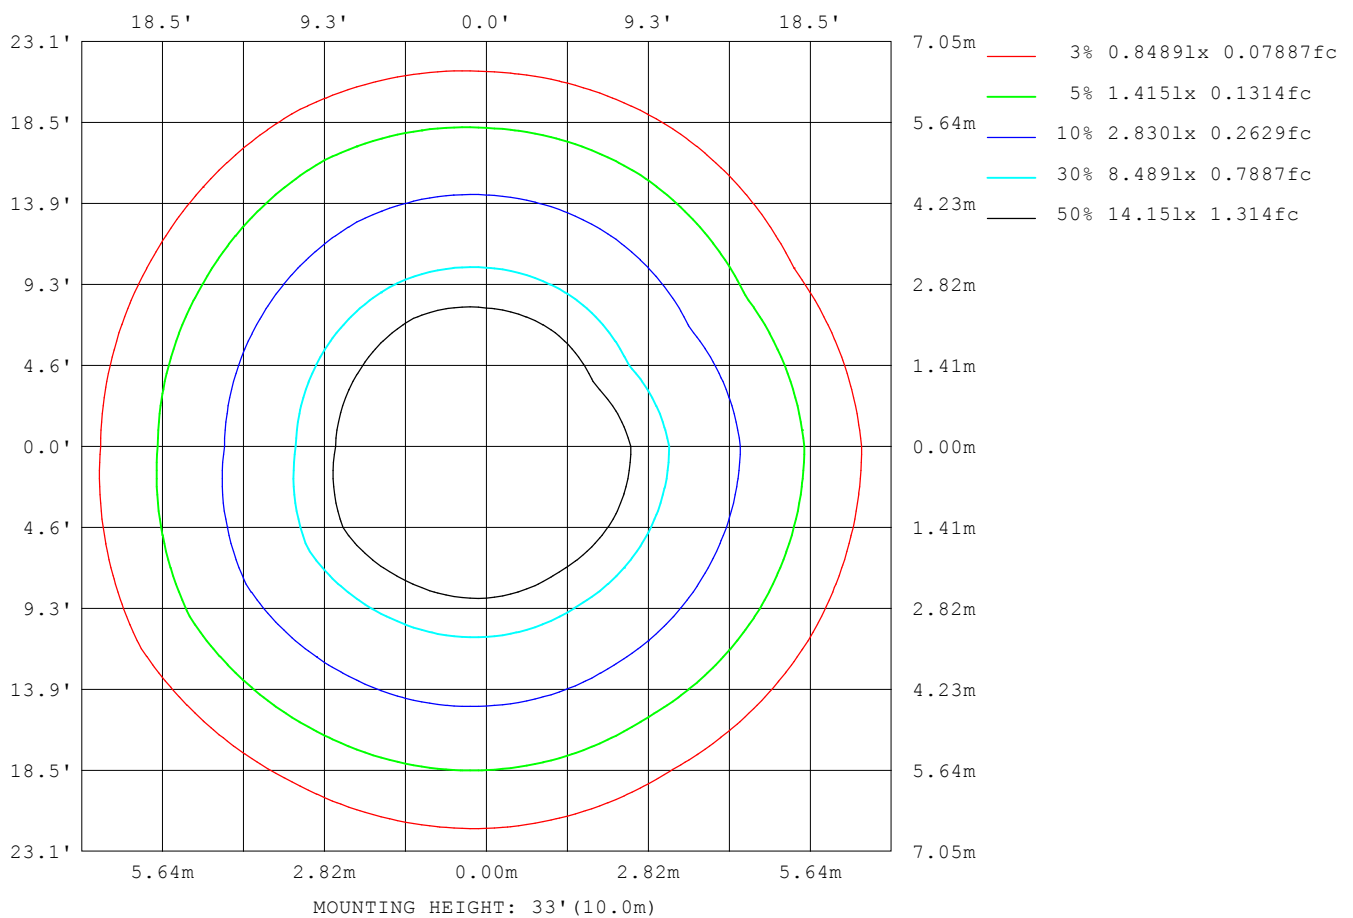

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

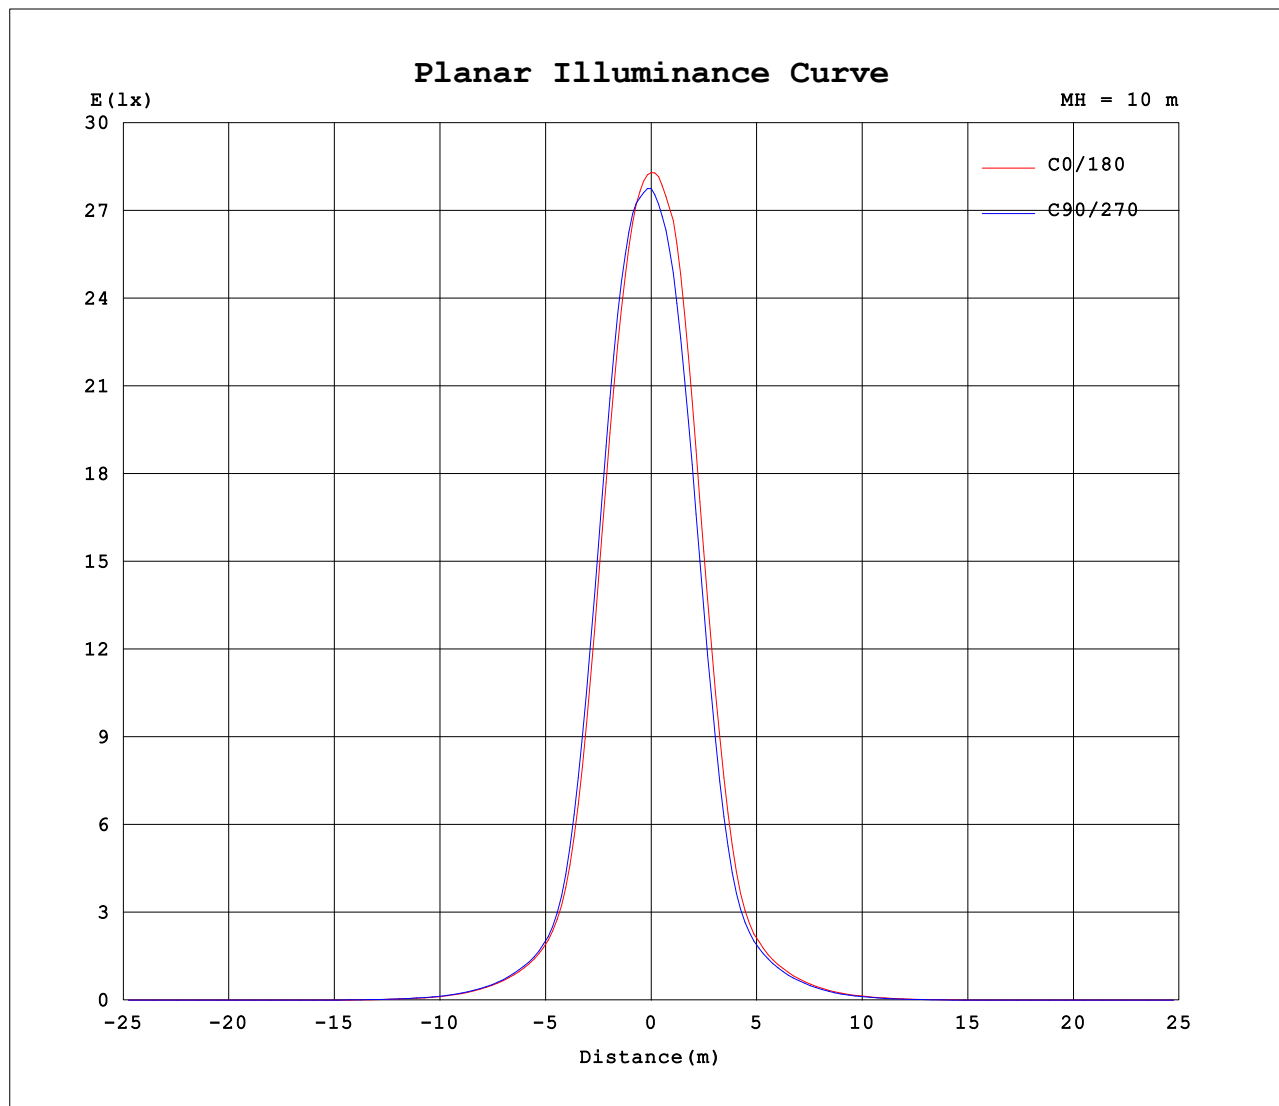


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.80V I:0.1350A P:29.100W PF:0.9000 Freq:49.37Hz Lamp Flux:916.419x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-30D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

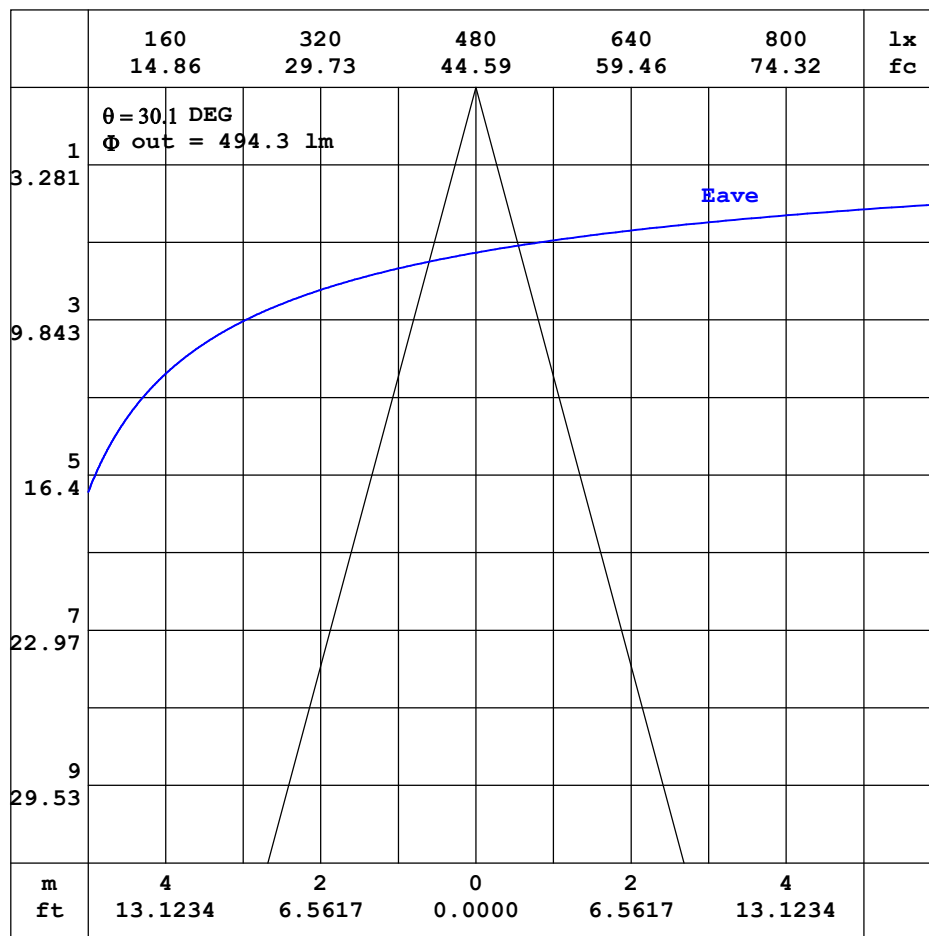

Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.80V I:0.1350A P:29.100W PF:0.9000 Freq:49.37Hz Lamp Flux:916.419x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-30D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.09	0.09	0.09	0.09	0.09	0.10	0.13	0.18	0.28	0.43	0.71	1.25	2.11	3.22	4.29	5.07	5.42	5.55	5.68
-170	0.09	0.10	0.10	0.10	0.10	0.10	0.13	0.18	0.26	0.41	0.66	1.14	1.90	2.92	3.96	4.83	5.36	5.54	5.65
-160	0.09	0.10	0.10	0.10	0.10	0.11	0.13	0.16	0.23	0.34	0.51	0.81	1.30	1.97	2.77	3.54	4.16	4.62	4.85
-150	0.09	0.10	0.11	0.11	0.11	0.11	0.12	0.15	0.19	0.24	0.35	0.48	0.69	0.99	1.37	1.77	2.16	2.46	2.61
-140	0.09	0.11	0.11	0.12	0.11	0.12	0.12	0.13	0.15	0.18	0.22	0.25	0.34	0.43	0.53	0.66	0.78	0.88	0.94
-130	0.09	0.11	0.12	0.12	0.13	0.12	0.13	0.13	0.14	0.13	0.13	0.15	0.17	0.19	0.23	0.27	0.31	0.34	0.35
-120	0.09	0.11	0.13	0.14	0.14	0.15	0.14	0.13	0.13	0.12	0.12	0.11	0.11	0.10	0.11	0.12	0.13	0.14	0.15
-110	0.09	0.11	0.13	0.15	0.16	0.17	0.17	0.17	0.15	0.13	0.12	0.11	0.11	0.10	0.10	0.09	0.09	0.08	0.08
-100	0.09	0.12	0.14	0.16	0.18	0.19	0.21	0.19	0.17	0.15	0.14	0.12	0.11	0.10	0.09	0.08	0.07	0.07	0.06
-90	0.09	0.12	0.15	0.18	0.21	0.24	0.27	0.25	0.22	0.20	0.18	0.15	0.13	0.12	0.11	0.09	0.08	0.07	0.06
-80	0.09	0.13	0.19	0.26	0.33	0.40	0.46	0.46	0.45	0.45	0.44	0.43	0.42	0.41	0.40	0.39	0.37	0.35	0.33
-70	0.09	0.16	0.25	0.35	0.44	0.52	0.61	0.65	0.67	0.69	0.71	0.73	0.75	0.76	0.78	0.79	0.79	0.78	0.76
-60	0.09	0.18	0.31	0.42	0.53	0.64	0.75	0.84	0.93	1.09	1.32	1.55	1.80	2.02	2.22	2.36	2.45	2.49	2.49
-50	0.09	0.20	0.35	0.48	0.62	0.75	0.91	1.26	1.74	2.24	2.71	3.27	6.24	9.25	12.3	15.3	17.5	18.8	18.8
-40	0.09	0.22	0.38	0.54	0.69	0.87	1.31	2.02	2.79	5.21	11.1	19.0	28.6	39.1	50.2	61.1	69.6	74.9	75.7
-30	0.09	0.24	0.41	0.57	0.75	1.08	1.82	2.74	6.54	16.0	30.6	49.5	74.3	104	133	161	186	201	203
-20	0.09	0.25	0.42	0.60	0.80	1.32	2.24	3.99	12.9	28.6	53.7	92.4	144	204	277	406	583	734	765
-10	0.09	0.25	0.42	0.61	0.83	1.47	2.49	5.72	17.6	38.4	73.0	126	200	322	662	1276	1841	2196	2311
0	0.09	0.25	0.42	0.60	0.82	1.48	2.52	6.39	18.4	40.3	77.3	134	213	352	768	1522	2308	2739	2830
10	0.09	0.24	0.41	0.59	0.80	1.40	2.40	4.77	15.9	35.3	67.5	117	184	284	509	1017	1609	2044	2075
20	0.09	0.23	0.39	0.56	0.75	1.20	2.07	3.15	10.3	23.8	45.5	79.1	125	181	253	349	489	610	633
30	0.09	0.21	0.37	0.51	0.68	0.93	1.57	2.43	3.58	11.4	23.2	40.1	63.4	92.8	126	157	180	193	193
40	0.09	0.19	0.33	0.46	0.59	0.74	1.05	1.64	2.36	3.12	7.46	14.0	22.9	33.5	44.8	55.3	63.6	68.5	69.0
50	0.09	0.17	0.28	0.39	0.50	0.61	0.73	0.93	1.33	1.81	2.33	2.83	3.47	6.74	9.36	11.8	13.7	14.7	14.6
60	0.09	0.14	0.23	0.31	0.39	0.47	0.54	0.63	0.71	0.81	0.99	1.24	1.50	1.74	1.97	2.14	2.25	2.31	2.32
70	0.09	0.12	0.17	0.23	0.28	0.33	0.37	0.42	0.46	0.49	0.53	0.56	0.58	0.62	0.66	0.70	0.72	0.74	0.75
80	0.09	0.10	0.11	0.14	0.16	0.19	0.20	0.22	0.23	0.24	0.25	0.26	0.26	0.28	0.29	0.31	0.32	0.33	0.34
90	0.09	0.09	0.08	0.08	0.07	0.07	0.07	0.06	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.04	0.04	0.04	0.04
100	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03
110	0.09	0.09	0.08	0.08	0.07	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.03
120	0.09	0.09	0.08	0.08	0.07	0.06	0.06	0.05	0.05	0.06	0.06	0.07	0.08	0.08	0.09	0.09	0.08	0.08	0.07
130	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.05	0.05	0.06	0.09	0.12	0.14	0.18	0.20	0.22	0.24	0.24	0.24
140	0.09	0.09	0.08	0.08	0.07	0.07	0.07	0.06	0.07	0.11	0.15	0.22	0.29	0.37	0.46	0.54	0.62	0.68	0.71
150	0.09	0.09	0.09	0.08	0.08	0.07	0.07	0.09	0.13	0.18	0.27	0.39	0.57	0.83	1.16	1.52	1.84	2.10	2.21
160	0.09	0.09	0.09	0.08	0.08	0.08	0.09	0.13	0.19	0.28	0.43	0.69	1.13	1.75	2.49	3.20	3.77	4.19	4.38
170	0.09	0.09	0.09	0.09	0.09	0.09	0.11	0.16	0.24	0.38	0.62	1.07	1.79	2.75	3.74	4.55	5.07	5.30	5.35
180	0.09	0.09	0.09	0.09	0.09	0.10	0.13	0.18	0.28	0.43	0.71	1.25	2.11	3.22	4.29	5.07	5.42	5.55	5.67

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.80V I:0.1350A P:29.100W PF:0.9000 Freq:49.37Hz Lamp Flux:916.419x1 lm																		
NAME:Nuit 100-100mm-RGBW ALL-30D-REV1									TYPE:RGBW W=3000K					WEIGHT:				
SPEC.:30 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.71	5.96	5.85	5.19	4.11	2.89	1.80	1.03	0.57	0.34	0.21	0.12	0.07	0.04	0.04	0.04	0.04	0.04	
-170	5.72	5.75	5.43	4.68	3.64	2.53	1.57	0.92	0.53	0.33	0.20	0.12	0.07	0.04	0.04	0.04	0.04	0.04	
-160	4.81	4.53	4.01	3.29	2.47	1.69	1.08	0.67	0.42	0.28	0.18	0.11	0.07	0.05	0.04	0.04	0.04	0.04	
-150	2.58	2.38	2.05	1.64	1.23	0.87	0.60	0.43	0.30	0.21	0.15	0.10	0.06	0.05	0.04	0.04	0.04	0.04	
-140	0.93	0.85	0.75	0.61	0.50	0.40	0.32	0.25	0.20	0.16	0.11	0.08	0.06	0.05	0.05	0.04	0.04	0.04	
-130	0.34	0.32	0.29	0.25	0.21	0.18	0.16	0.14	0.11	0.10	0.08	0.06	0.06	0.05	0.04	0.04	0.04	0.04	
-120	0.14	0.13	0.11	0.10	0.08	0.07	0.07	0.07	0.07	0.06	0.07	0.06	0.05	0.05	0.04	0.04	0.04	0.04	
-110	0.07	0.06	0.05	0.05	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	
-100	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	
-90	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	
-80	0.33	0.33	0.32	0.31	0.30	0.29	0.27	0.24	0.21	0.19	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.04	
-70	0.75	0.73	0.69	0.66	0.62	0.58	0.53	0.49	0.43	0.38	0.33	0.29	0.24	0.20	0.16	0.12	0.07	0.04	
-60	2.42	2.31	2.14	1.94	1.67	1.42	1.16	0.92	0.73	0.61	0.51	0.43	0.36	0.30	0.23	0.17	0.09	0.04	
-50	17.7	15.6	12.7	9.53	6.61	3.52	2.61	2.15	1.67	1.14	0.79	0.61	0.50	0.40	0.30	0.21	0.12	0.04	
-40	71.7	63.7	53.2	41.6	31.2	21.6	13.1	7.07	2.85	2.13	1.48	0.89	0.63	0.49	0.36	0.25	0.14	0.04	
-30	192	171	142	114	85.0	58.5	37.2	21.8	10.5	3.51	2.19	1.39	0.80	0.57	0.42	0.28	0.16	0.04	
-20	655	469	322	229	167	116	73.0	42.1	22.2	9.28	2.83	1.86	1.02	0.65	0.46	0.30	0.17	0.04	
-10	2049	1576	946	462	263	170	108	62.2	32.4	14.5	4.33	2.15	1.20	0.70	0.49	0.32	0.18	0.04	
0	2690	2192	1402	672	318	193	123	70.9	36.8	16.7	5.55	2.25	1.27	0.73	0.51	0.33	0.18	0.04	
10	1842	1284	698	374	231	154	99.2	57.2	29.8	13.2	4.00	2.11	1.18	0.70	0.50	0.32	0.18	0.04	
20	550	409	286	205	144	95.8	60.6	35.4	18.2	7.51	2.73	1.77	1.00	0.65	0.47	0.31	0.17	0.04	
30	184	163	135	104	74.5	48.8	29.5	15.6	7.33	2.98	2.06	1.29	0.80	0.58	0.43	0.28	0.16	0.04	
40	65.4	57.9	48.2	37.2	26.3	16.9	9.43	4.03	2.64	1.94	1.30	0.87	0.65	0.50	0.37	0.25	0.14	0.04	
50	13.8	12.1	9.77	7.27	4.52	3.03	2.50	2.00	1.46	1.03	0.78	0.64	0.52	0.41	0.30	0.21	0.12	0.04	
60	2.27	2.17	2.01	1.80	1.55	1.31	1.05	0.85	0.73	0.63	0.54	0.46	0.38	0.31	0.23	0.17	0.09	0.04	
70	0.73	0.71	0.68	0.64	0.60	0.56	0.52	0.48	0.43	0.38	0.34	0.29	0.25	0.20	0.16	0.11	0.07	0.04	
80	0.32	0.31	0.29	0.27	0.25	0.23	0.21	0.20	0.18	0.16	0.15	0.13	0.11	0.09	0.08	0.07	0.06	0.04	
90	0.04	0.04	0.04	0.04	0.04	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	
100	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	
110	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	
120	0.08	0.09	0.09	0.10	0.09	0.08	0.07	0.06	0.04	0.04	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	
130	0.25	0.25	0.24	0.23	0.21	0.17	0.13	0.10	0.07	0.05	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	
140	0.72	0.68	0.61	0.53	0.43	0.34	0.28	0.19	0.13	0.09	0.06	0.04	0.03	0.04	0.04	0.04	0.04	0.04	
150	2.19	2.03	1.74	1.39	1.04	0.73	0.50	0.34	0.25	0.15	0.10	0.06	0.04	0.04	0.04	0.04	0.04	0.04	
160	4.36	4.11	3.62	2.94	2.18	1.48	0.93	0.57	0.36	0.25	0.14	0.08	0.05	0.04	0.04	0.04	0.04	0.04	
170	5.45	5.33	4.97	4.34	3.41	2.37	1.48	0.86	0.49	0.31	0.18	0.11	0.06	0.04	0.04	0.04	0.04	0.04	
180	5.71	5.96	5.85	5.19	4.11	2.89	1.80	1.03	0.57	0.34	0.21	0.12	0.07	0.04	0.04	0.04	0.04	0.04	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: