

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2945.4 cd per klm.
(Luminaire orientation as tested.)	-0.5 degrees vertical
	-1.0 degrees horizontal

Beam Spread	At 10% of Imax	53.5V x 53.9H
	At 50% of Imax	31.0V x 31.5H
	At 90% of Imax	15.7V x 15.8H

Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	823.4 lumens per klm.
	To 50% of Imax	525.4 lumens per klm.
	To 90% of Imax	166.2 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.5 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.88V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:331.377x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-30D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

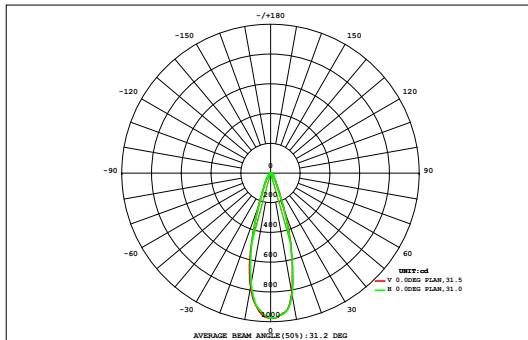

DATA OF LAMP		Eff:42.48lm/W	
MODEL		Imax(cd)	976.0
NOMINAL POWER(W)	30	AVAILABILITY(%)	82.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	273.4
NOMINAL FLUX(lm)	331.377	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	331.4
TEST VOLTAGE(V)	220	θ @50%(H,V)	31,31DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.02	0.03	0.05	0.08	0.10	0.12	0.14	0.15	0.14	0.13	0.11	0.08	0.06	0.04	0.02	0.01	0.01	1.27	0.00
45	0.01	0.03	0.06	0.10	0.14	0.19	0.23	0.26	0.27	0.26	0.24	0.20	0.16	0.11	0.07	0.04	0.02	0.01	2.39	0.00
40	0.03	0.06	0.10	0.16	0.23	0.31	0.38	0.43	0.45	0.44	0.40	0.34	0.26	0.19	0.12	0.07	0.04	0.02	4.02	0.00
35	0.04	0.08	0.15	0.24	0.35	0.48	0.60	0.68	0.72	0.70	0.62	0.51	0.40	0.29	0.19	0.11	0.06	0.03	6.26	0.99
30	0.06	0.12	0.21	0.34	0.50	0.70	0.93	1.16	1.28	1.22	1.02	0.78	0.57	0.40	0.26	0.16	0.09	0.04	9.84	6.45
25	0.08	0.15	0.27	0.44	0.67	1.03	1.66	2.37	2.73	2.57	2.00	1.30	0.81	0.53	0.34	0.21	0.12	0.06	17.4	14.6
20	0.10	0.19	0.33	0.53	0.88	1.63	2.96	4.24	4.78	4.53	3.56	2.20	1.15	0.68	0.44	0.27	0.15	0.08	28.7	26.3
15	0.11	0.21	0.37	0.61	1.13	2.41	4.23	5.77	6.48	6.26	5.06	3.27	1.73	0.90	0.53	0.32	0.18	0.09	39.7	37.4
10	0.12	0.23	0.39	0.65	1.34	2.92	4.95	6.65	7.25	7.03	6.11	4.45	2.41	1.11	0.60	0.36	0.20	0.10	46.8	44.7
5	0.12	0.23	0.39	0.66	1.42	3.08	5.23	6.85	7.34	7.23	6.42	4.76	2.58	1.15	0.61	0.36	0.20	0.10	48.7	46.6
0	0.11	0.22	0.38	0.63	1.32	2.85	4.88	6.33	6.85	6.66	5.66	4.01	2.13	0.99	0.56	0.34	0.19	0.10	44.2	42.0
-5	0.10	0.20	0.34	0.55	1.03	2.08	3.42	4.64	5.25	5.02	4.04	2.69	1.44	0.77	0.48	0.30	0.17	0.09	32.6	30.2
-10	0.09	0.17	0.29	0.45	0.70	1.19	1.90	2.63	3.03	2.89	2.24	1.46	0.89	0.57	0.39	0.24	0.14	0.07	19.3	16.7
-15	0.07	0.14	0.23	0.35	0.49	0.68	0.95	1.23	1.40	1.33	1.08	0.80	0.58	0.43	0.29	0.18	0.11	0.05	10.4	6.80
-20	0.06	0.10	0.17	0.25	0.34	0.45	0.55	0.64	0.68	0.66	0.59	0.50	0.40	0.30	0.21	0.13	0.08	0.04	6.12	0.64
-25	0.04	0.07	0.11	0.17	0.23	0.29	0.35	0.40	0.42	0.41	0.38	0.33	0.26	0.20	0.14	0.09	0.05	0.02	3.95	0.00
-30	0.02	0.04	0.07	0.10	0.14	0.18	0.22	0.24	0.26	0.25	0.23	0.20	0.16	0.12	0.08	0.05	0.03	0.01	2.43	0.00
-35	0.01	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.15	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.01	0.01	1.37	0.00
-40	0.01	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.15	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.01	0.01	1.37	0.00
-45	0.01	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.15	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.01	0.01	1.37	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL(DEG) 10 15 20 25 30 35 40 45																				
Φ t	1.18	2.28	3.94	6.34	11.1	20.7	33.7	44.8	49.5	47.8	39.9	28.0	16.1	8.85	5.39	3.28	1.84	0.92	326	---
Φ a	0.00	0.00	0.00	1.20	7.77	17.8	31.1	42.2	47.0	45.2	37.3	25.2	13.0	5.09	0.54	0.00	0.00	0.00	---	273

one-half-peak spread: U:15.5,D:15.7 , L:14.2,R:17.5


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.88V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:331.377x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-30D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

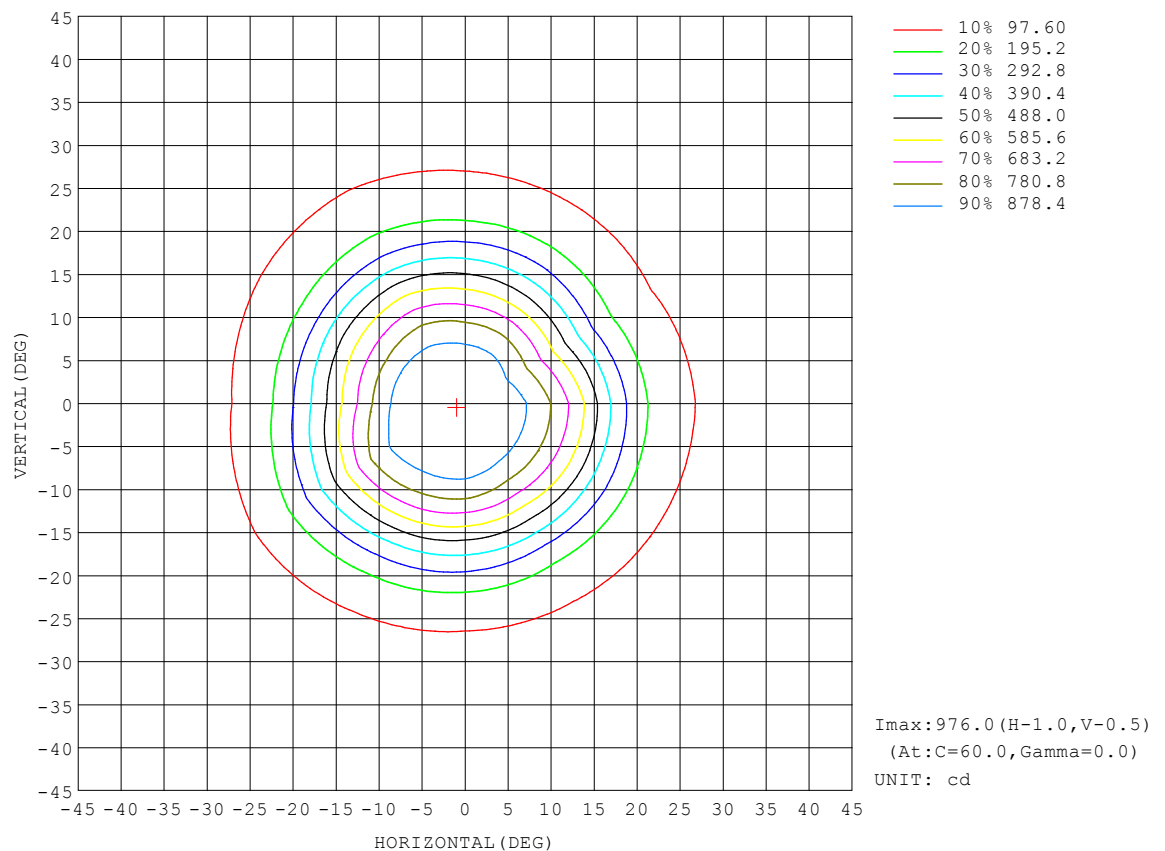


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.88V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:331.377x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-30D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

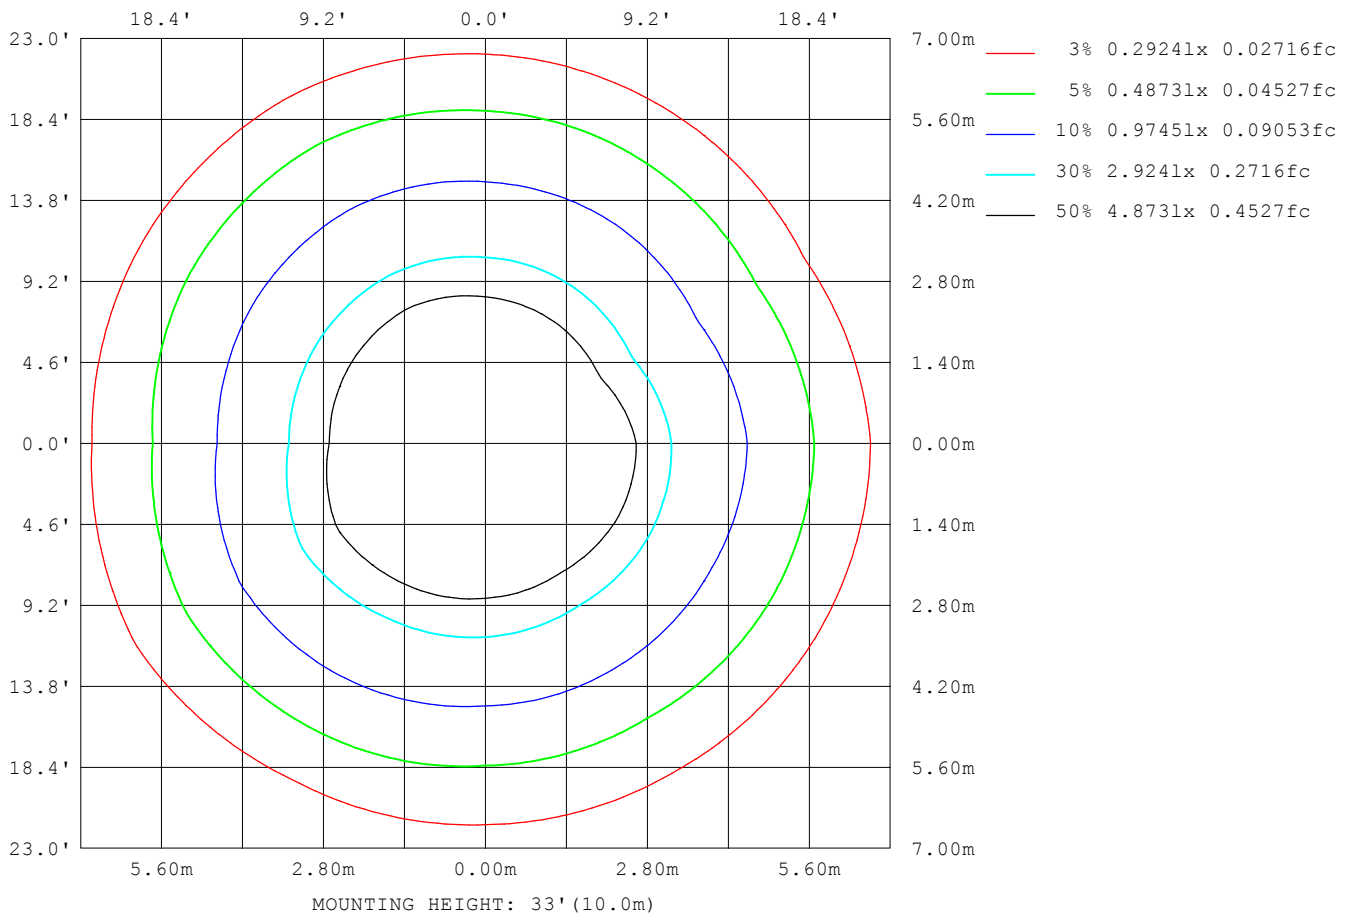

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

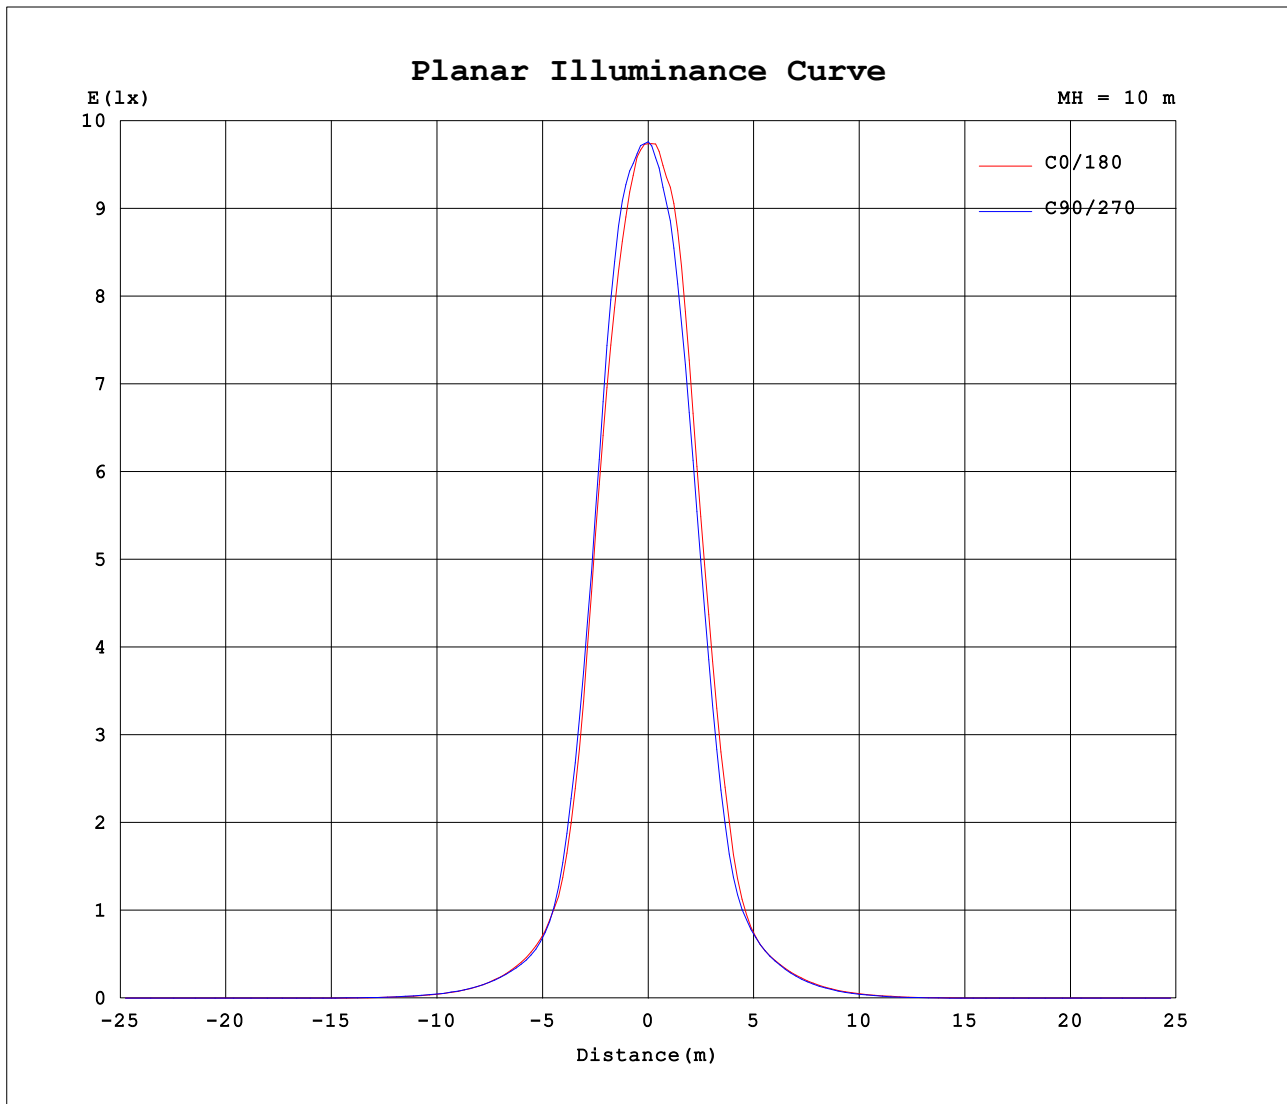


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.88V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:331.377x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-30D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

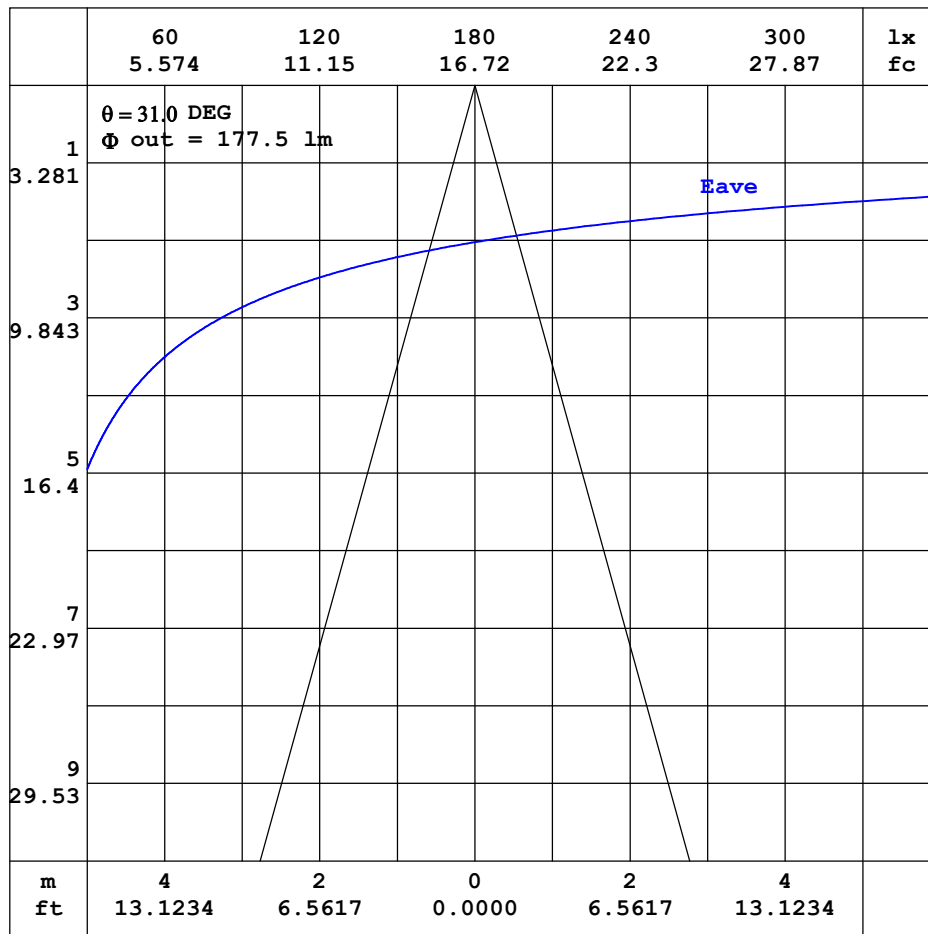

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.88V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:331.377x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-30D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.10	0.09	0.07	0.05	0.05	0.05	0.06	0.07	0.11	0.16	0.26	0.46	0.78	1.16	1.53	1.78	1.91	1.96	2.00
-170	0.10	0.09	0.07	0.05	0.05	0.05	0.06	0.08	0.11	0.16	0.25	0.43	0.72	1.09	1.47	1.79	1.96	2.01	2.04
-160	0.10	0.09	0.08	0.06	0.05	0.05	0.06	0.07	0.09	0.13	0.20	0.31	0.50	0.75	1.04	1.30	1.52	1.68	1.77
-150	0.10	0.10	0.08	0.06	0.06	0.06	0.06	0.07	0.08	0.10	0.14	0.18	0.26	0.37	0.50	0.66	0.80	0.92	0.98
-140	0.10	0.10	0.09	0.07	0.07	0.06	0.06	0.07	0.07	0.08	0.09	0.10	0.12	0.15	0.18	0.23	0.29	0.34	0.36
-130	0.10	0.11	0.10	0.09	0.08	0.08	0.07	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.07	0.09	0.10	0.12	0.14
-120	0.10	0.11	0.11	0.11	0.10	0.10	0.09	0.08	0.07	0.06	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.06	0.06
-110	0.10	0.11	0.12	0.12	0.12	0.13	0.13	0.11	0.10	0.08	0.07	0.06	0.05	0.05	0.04	0.04	0.04	0.03	0.03
-100	0.10	0.11	0.13	0.14	0.15	0.15	0.16	0.14	0.12	0.10	0.09	0.07	0.06	0.05	0.04	0.04	0.03	0.02	0.02
-90	0.10	0.12	0.13	0.15	0.16	0.18	0.19	0.17	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.04	0.03	0.02
-80	0.10	0.13	0.15	0.18	0.20	0.22	0.25	0.24	0.22	0.21	0.19	0.17	0.16	0.15	0.14	0.12	0.11	0.09	0.08
-70	0.10	0.13	0.17	0.20	0.23	0.26	0.30	0.30	0.29	0.28	0.27	0.27	0.27	0.26	0.25	0.25	0.24	0.22	0.21
-60	0.10	0.14	0.18	0.22	0.26	0.30	0.33	0.34	0.35	0.39	0.46	0.53	0.61	0.69	0.74	0.78	0.80	0.81	0.80
-50	0.10	0.15	0.19	0.24	0.28	0.32	0.36	0.46	0.61	0.78	0.94	1.14	2.28	3.47	4.56	5.55	6.29	6.65	6.60
-40	0.10	0.15	0.20	0.25	0.29	0.34	0.47	0.71	0.97	1.88	4.20	6.91	10.2	13.6	17.0	20.6	23.4	25.2	25.5
-30	0.10	0.15	0.21	0.26	0.30	0.40	0.64	0.96	2.44	5.92	11.0	17.4	25.6	35.1	44.8	54.0	62.8	67.4	67.4
-20	0.10	0.15	0.21	0.26	0.32	0.48	0.79	1.42	4.75	10.3	19.0	32.4	49.9	69.6	97.3	147	207	262	274
-10	0.10	0.15	0.21	0.26	0.33	0.53	0.88	2.13	6.39	13.8	26.1	44.5	69.3	114	247	461	674	801	833
0	0.10	0.15	0.21	0.25	0.32	0.53	0.89	2.36	6.63	14.6	27.9	48.1	74.2	128	290	548	819	947	974
10	0.10	0.15	0.20	0.25	0.31	0.50	0.85	1.76	5.78	12.8	24.7	43.1	68.1	106	191	384	598	740	756
20	0.10	0.15	0.19	0.23	0.29	0.43	0.74	1.12	3.72	8.64	16.7	29.3	47.2	69.2	96.4	135	189	233	240
30	0.10	0.14	0.18	0.22	0.26	0.34	0.57	0.87	1.29	4.10	8.43	14.8	23.7	35.0	47.4	59.4	68.7	73.9	74.0
40	0.10	0.13	0.17	0.20	0.23	0.28	0.38	0.59	0.84	1.12	2.69	5.10	8.42	12.5	16.9	20.9	24.1	25.9	26.1
50	0.10	0.13	0.15	0.18	0.20	0.23	0.26	0.33	0.47	0.65	0.82	1.00	1.23	2.36	3.31	4.22	4.89	5.25	5.23
60	0.10	0.12	0.13	0.15	0.17	0.18	0.20	0.22	0.24	0.27	0.33	0.42	0.51	0.60	0.68	0.75	0.79	0.81	0.81
70	0.10	0.11	0.12	0.12	0.13	0.14	0.14	0.15	0.15	0.16	0.16	0.17	0.17	0.18	0.20	0.22	0.23	0.24	0.25
80	0.10	0.10	0.10	0.10	0.09	0.09	0.09	0.08	0.08	0.07	0.07	0.06	0.06	0.07	0.08	0.08	0.09	0.10	0.10
90	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01
100	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00
110	0.10	0.09	0.08	0.07	0.05	0.05	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00
120	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.00
130	0.10	0.09	0.07	0.06	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.07	0.07	0.07	0.06	0.06
140	0.10	0.08	0.07	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.04	0.06	0.09	0.12	0.17	0.18	0.20	0.22	0.21
150	0.10	0.08	0.07	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.07	0.12	0.19	0.28	0.41	0.54	0.65	0.73	0.76
160	0.10	0.09	0.07	0.05	0.04	0.04	0.05	0.05	0.05	0.09	0.14	0.23	0.38	0.61	0.88	1.14	1.35	1.48	1.53
170	0.10	0.09	0.07	0.05	0.05	0.04	0.05	0.06	0.09	0.13	0.22	0.37	0.64	0.97	1.30	1.56	1.76	1.86	1.89
180	0.10	0.09	0.07	0.05	0.05	0.05	0.06	0.07	0.11	0.16	0.26	0.46	0.78	1.16	1.53	1.78	1.91	1.96	2.03

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.88V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:331.377x1 lm																		
NAME:Nuit 100-100mm-RGBW GREEN-30D-REV1									TYPE:RGBW-GREEN					WEIGHT:				
SPEC.:30 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.03	2.09	2.05	1.81	1.46	1.02	0.63	0.35	0.18	0.09	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.03	
-170	2.05	2.05	1.94	1.68	1.33	0.92	0.57	0.32	0.17	0.10	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.03	
-160	1.74	1.63	1.46	1.21	0.92	0.63	0.40	0.24	0.15	0.09	0.05	0.02	0.02	0.01	0.01	0.01	0.01	0.03	
-150	0.96	0.88	0.75	0.60	0.45	0.32	0.22	0.16	0.11	0.07	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.03	
-140	0.35	0.32	0.27	0.21	0.17	0.14	0.11	0.09	0.07	0.05	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.03	
-130	0.13	0.11	0.10	0.07	0.06	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.02	0.03	
-120	0.05	0.04	0.03	0.02	0.01	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.03	
-110	0.03	0.02	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.03	
-100	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.03	
-90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.03	
-80	0.08	0.09	0.09	0.09	0.09	0.09	0.08	0.07	0.05	0.04	0.02	0.01	0.02	0.02	0.02	0.02	0.02	0.03	
-70	0.21	0.21	0.21	0.20	0.20	0.19	0.17	0.15	0.12	0.10	0.07	0.05	0.05	0.04	0.03	0.03	0.03	0.03	
-60	0.78	0.76	0.71	0.65	0.56	0.47	0.38	0.29	0.22	0.17	0.13	0.11	0.10	0.07	0.06	0.04	0.03	0.03	
-50	6.21	5.47	4.44	3.33	2.30	1.15	0.89	0.72	0.53	0.35	0.23	0.17	0.14	0.11	0.08	0.06	0.04	0.03	
-40	24.5	22.0	18.6	14.6	10.9	7.45	4.49	2.35	0.95	0.70	0.47	0.27	0.19	0.15	0.11	0.08	0.05	0.03	
-30	64.8	58.8	50.1	40.1	29.9	20.6	13.1	7.40	3.50	1.11	0.74	0.45	0.25	0.18	0.13	0.09	0.05	0.03	
-20	233	167	117	81.0	59.8	41.2	25.8	14.8	7.60	3.09	0.96	0.63	0.33	0.21	0.15	0.10	0.05	0.03	
-10	736	569	340	168	94.1	61.6	38.7	22.0	11.4	4.96	1.40	0.74	0.40	0.23	0.16	0.10	0.05	0.03	
0	929	779	514	240	120	71.5	44.4	25.1	13.0	5.80	1.81	0.79	0.43	0.24	0.18	0.11	0.05	0.03	
10	672	477	259	139	88.4	57.7	36.1	20.5	10.6	4.54	1.32	0.73	0.40	0.23	0.17	0.10	0.05	0.03	
20	208	155	109	77.8	54.5	35.6	22.0	12.7	6.39	2.50	0.94	0.61	0.33	0.21	0.15	0.10	0.05	0.03	
30	69.8	61.5	50.5	38.9	27.5	17.9	10.7	5.50	2.46	1.01	0.71	0.43	0.26	0.19	0.14	0.09	0.05	0.03	
40	24.6	21.6	17.8	13.5	9.47	5.98	3.22	1.30	0.90	0.66	0.43	0.28	0.21	0.16	0.12	0.08	0.05	0.03	
50	4.90	4.22	3.36	2.42	1.44	1.02	0.84	0.67	0.47	0.33	0.24	0.20	0.16	0.13	0.10	0.07	0.04	0.03	
60	0.79	0.75	0.68	0.60	0.49	0.40	0.32	0.25	0.21	0.19	0.17	0.14	0.12	0.10	0.08	0.05	0.03	0.03	
70	0.23	0.22	0.20	0.18	0.16	0.15	0.13	0.13	0.12	0.11	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.03	
80	0.09	0.09	0.08	0.07	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.03	
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.03	
100	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.03	
110	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	
120	0.01	0.02	0.03	0.03	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	
130	0.07	0.07	0.07	0.08	0.07	0.05	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	
140	0.23	0.22	0.21	0.18	0.15	0.11	0.07	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	
150	0.77	0.72	0.63	0.49	0.35	0.24	0.15	0.09	0.05	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.03	
160	1.55	1.49	1.31	1.06	0.77	0.51	0.31	0.18	0.10	0.05	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.03	
170	1.96	1.90	1.77	1.55	1.22	0.84	0.51	0.28	0.15	0.08	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.03	
180	2.03	2.09	2.05	1.81	1.46	1.02	0.63	0.35	0.18	0.09	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.03	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: