

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3404.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		-1.0 degrees horizontal
Beam Spread	At 10% of Imax	50.2V x 50.5H
	At 50% of Imax	28.1V x 28.4H
	At 90% of Imax	12.0V x 12.0H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	806.9 lumens per klm.
	To 50% of Imax	489.6 lumens per klm.
	To 90% of Imax	116.5 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.88V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.965x1 lm		
NAME:Nuit 100-100mm-RGBW RED-30D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

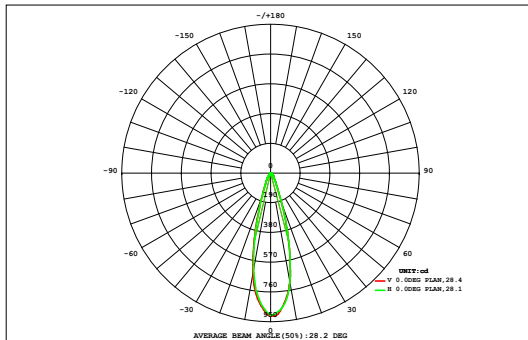

DATA OF LAMP		Eff:31.90lm/W	
MODEL		Imax (cd)	912.3
NOMINAL POWER (W)	30	AVAILABILITY (%)	80.5
RATED VOLTAGE (V)	220	Avai. FLUX (lm)	215.7
NOMINAL FLUX (lm)	267.965	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	268.0
TEST VOLTAGE (V)	220	θ @50% (H,V)	28,28DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.01	0.02	0.04	0.05	0.07	0.09	0.10	0.10	0.10	0.09	0.08	0.06	0.04	0.03	0.02	0.01	0.00	0.91	0.00
45	0.01	0.02	0.04	0.07	0.10	0.13	0.16	0.18	0.19	0.19	0.17	0.14	0.11	0.08	0.05	0.03	0.02	0.01	1.72	0.00
40	0.02	0.04	0.07	0.12	0.17	0.23	0.28	0.31	0.33	0.32	0.29	0.24	0.19	0.13	0.09	0.05	0.03	0.01	2.92	0.00
35	0.03	0.06	0.11	0.18	0.26	0.35	0.43	0.49	0.52	0.50	0.45	0.37	0.29	0.21	0.14	0.08	0.04	0.02	4.53	0.00
30	0.05	0.09	0.16	0.25	0.37	0.51	0.66	0.82	0.91	0.86	0.72	0.55	0.41	0.29	0.19	0.11	0.06	0.03	7.05	2.99
25	0.06	0.12	0.21	0.33	0.50	0.75	1.19	1.70	1.96	1.83	1.40	0.91	0.57	0.38	0.25	0.16	0.09	0.04	12.5	9.66
20	0.07	0.15	0.26	0.41	0.66	1.19	2.19	3.27	3.79	3.53	2.65	1.55	0.82	0.49	0.32	0.20	0.11	0.06	21.7	19.3
15	0.08	0.17	0.30	0.49	0.86	1.80	3.38	4.91	5.61	5.25	4.03	2.40	1.22	0.64	0.39	0.24	0.13	0.07	32.0	29.8
10	0.09	0.18	0.32	0.53	1.02	2.26	4.17	5.80	6.59	6.28	5.18	3.44	1.73	0.80	0.43	0.26	0.15	0.08	39.3	37.3
5	0.09	0.18	0.33	0.55	1.10	2.44	4.42	6.10	6.76	6.56	5.61	3.75	1.88	0.83	0.45	0.27	0.15	0.08	41.6	39.5
0	0.09	0.18	0.32	0.54	1.04	2.29	4.05	5.46	6.04	5.83	4.79	3.09	1.57	0.73	0.41	0.25	0.14	0.07	36.9	34.8
-5	0.08	0.17	0.29	0.48	0.84	1.66	2.80	3.86	4.40	4.17	3.22	2.03	1.07	0.58	0.36	0.23	0.13	0.06	26.4	24.2
-10	0.07	0.14	0.25	0.41	0.61	0.97	1.53	2.13	2.47	2.31	1.72	1.11	0.69	0.45	0.30	0.19	0.10	0.05	15.5	12.9
-15	0.06	0.11	0.20	0.31	0.44	0.60	0.81	1.02	1.13	1.06	0.86	0.64	0.47	0.34	0.23	0.14	0.08	0.04	8.55	5.02
-20	0.04	0.08	0.14	0.22	0.31	0.40	0.49	0.56	0.60	0.58	0.51	0.43	0.33	0.24	0.16	0.10	0.06	0.03	5.30	0.29
-25	0.03	0.06	0.10	0.15	0.21	0.27	0.32	0.36	0.38	0.37	0.33	0.28	0.22	0.16	0.11	0.07	0.04	0.02	3.44	0.00
-30	0.02	0.03	0.06	0.09	0.13	0.16	0.20	0.22	0.23	0.22	0.20	0.17	0.13	0.10	0.06	0.04	0.02	0.01	2.08	0.00
-35	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.12	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.00	1.14	0.00
-40	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.12	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.00	1.14	0.00
-45	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.12	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.00	1.14	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.92	1.83	3.22	5.22	8.74	16.2	27.3	37.4	42.1	40.1	32.3	21.3	11.8	6.55	4.01	2.46	1.38	0.69	264	---
Φ a	0.00	0.00	0.00	0.40	5.43	13.4	24.7	35.0	39.7	37.7	29.8	18.5	8.75	2.47	0.00	0.00	0.00	0.00	---	216

one-half-peak spread: U:14.9,D:13.3 , L:13.9,R:14.6


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.88V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.965x1 lm		
NAME:Nuit 100-100mm-RGBW RED-30D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

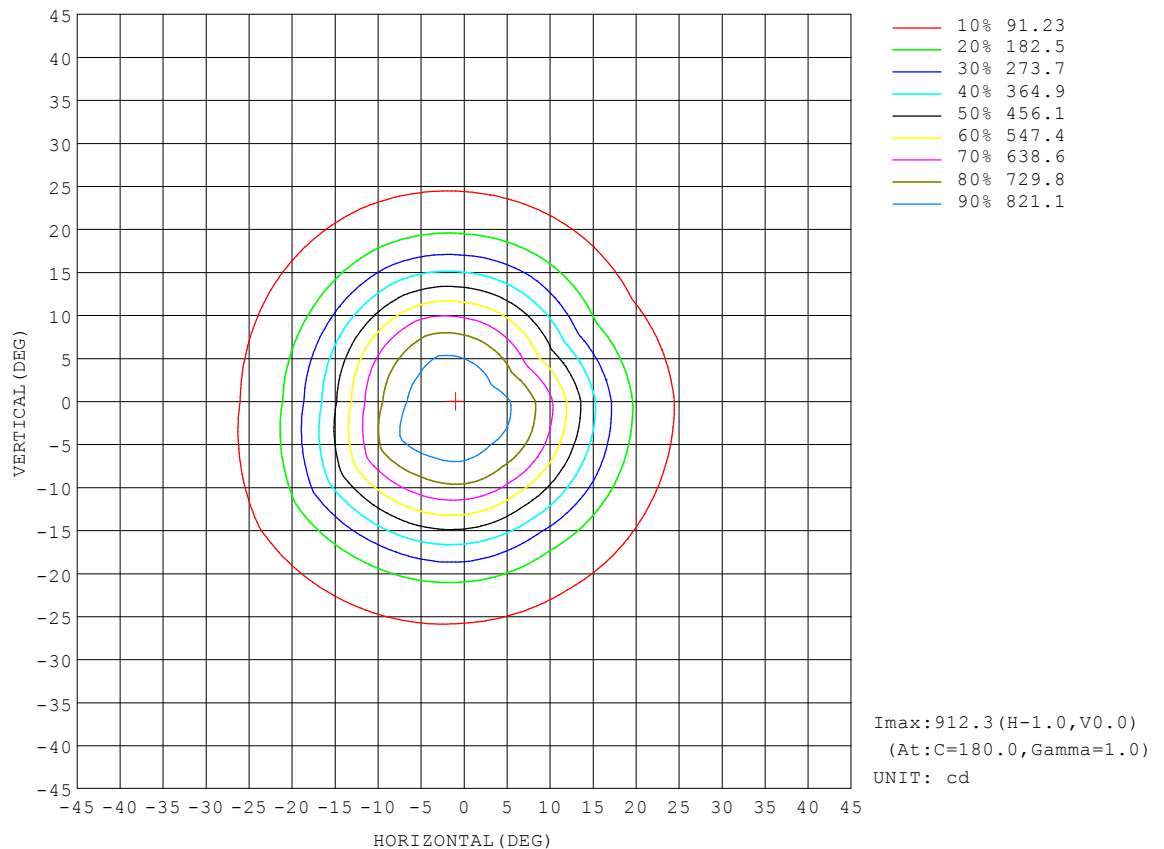


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.88V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.965x1 lm		
NAME:Nuit 100-100mm-RGBW RED-30D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

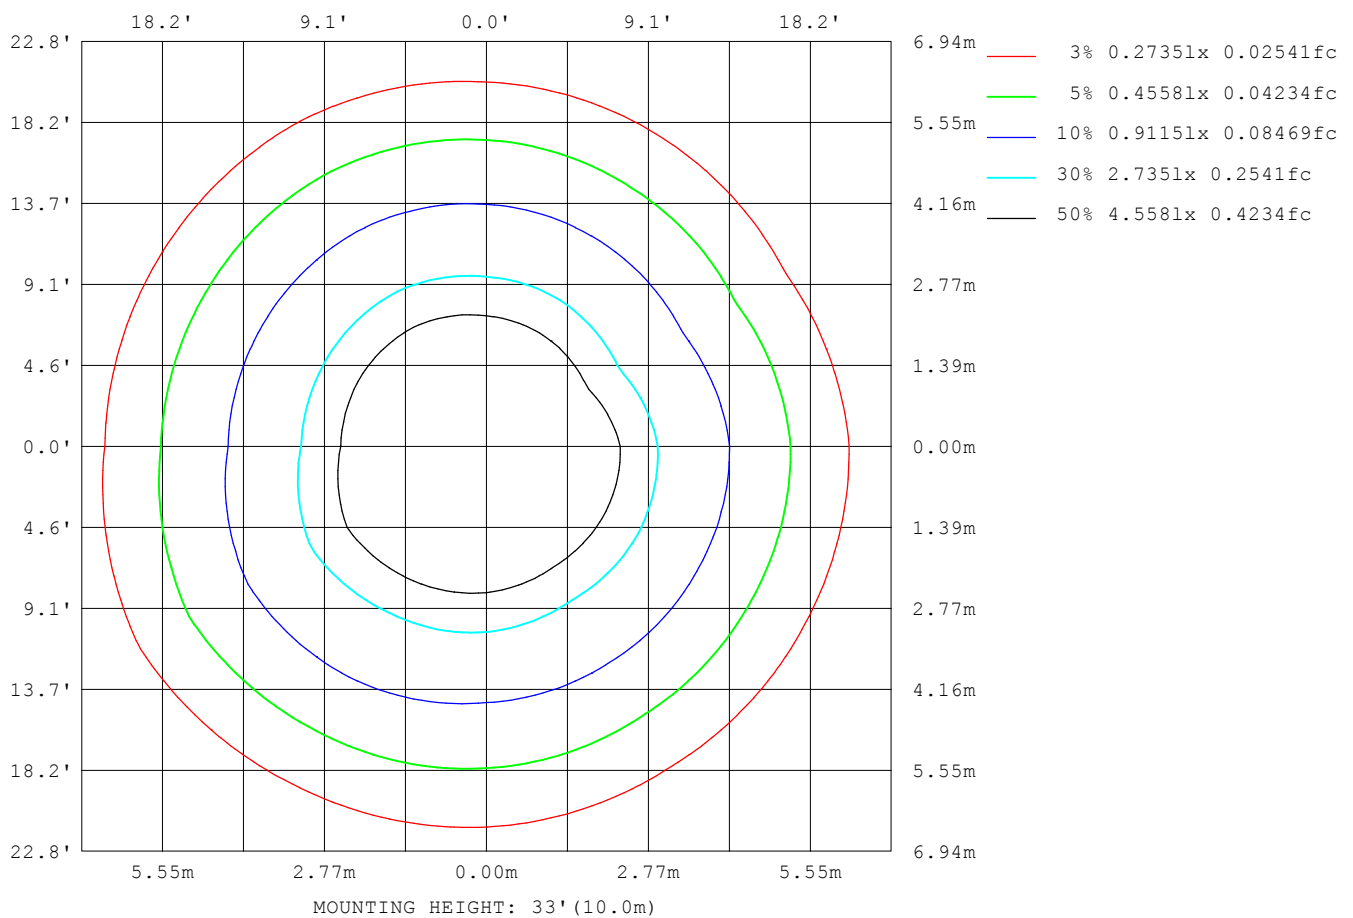

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

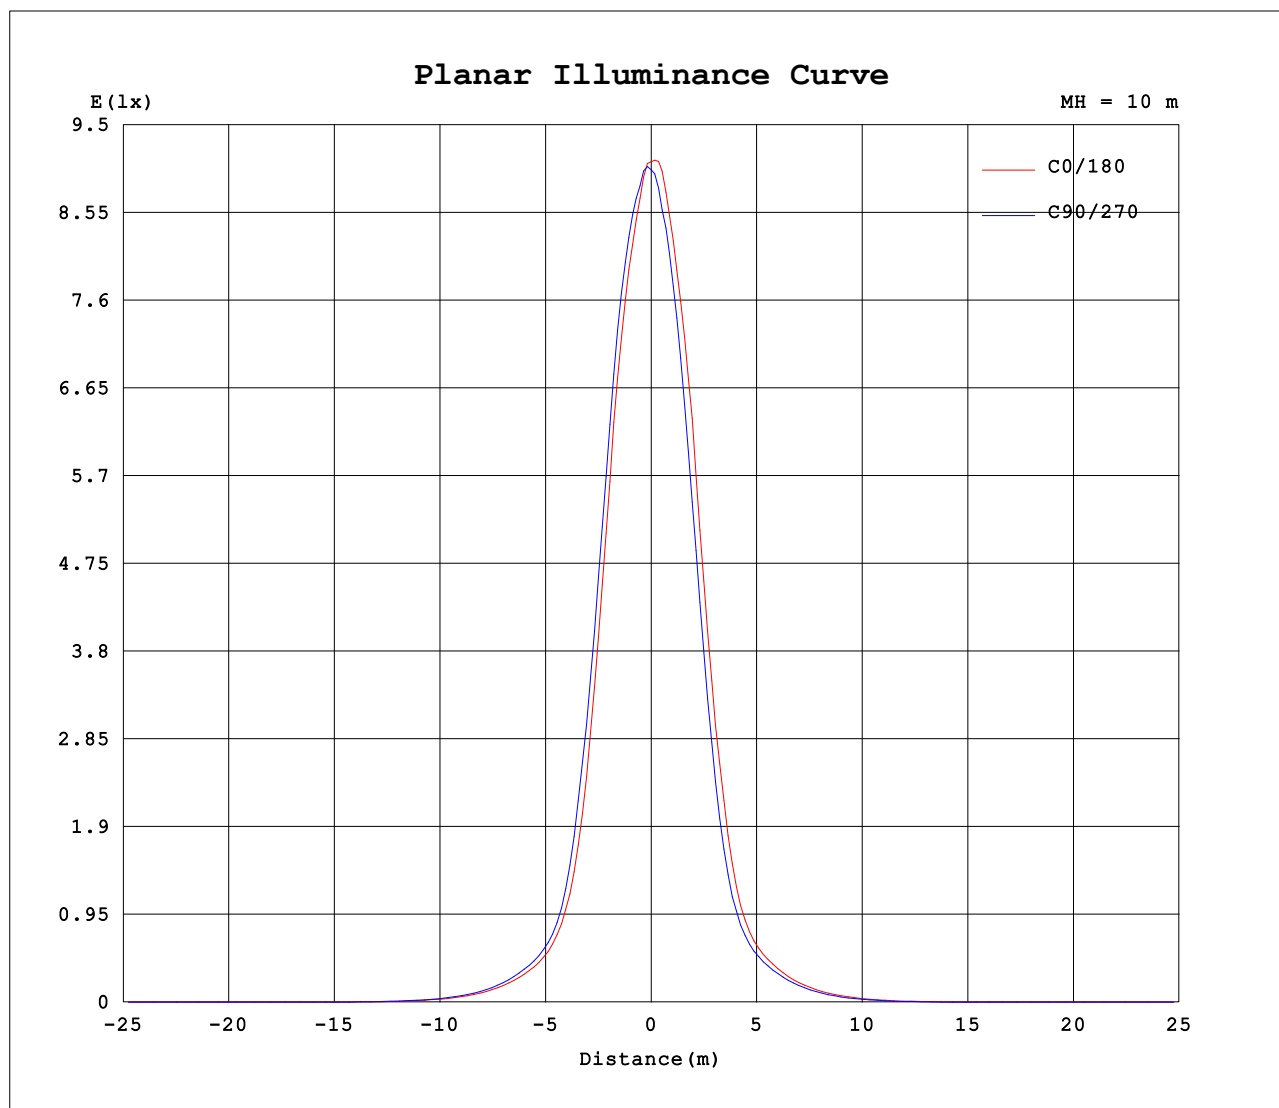


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.88V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.965x1 lm		
NAME:Nuit 100-100mm-RGBW RED-30D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:30 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

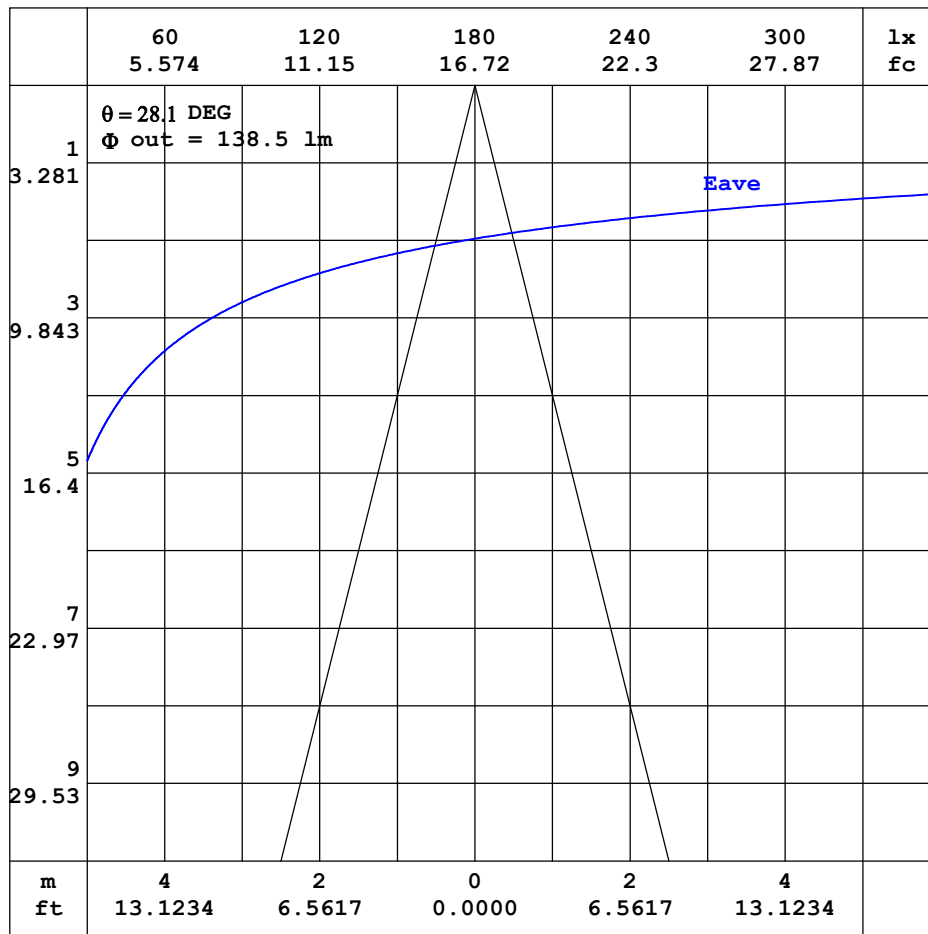

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.88V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.965x1 lm																	
NAME:Nuit 100-100mm-RGBW RED-30D-REV1									TYPE:RGBW-RED						WEIGHT:		
SPEC.:30 DEG									DIA.:100mm						SERIAL No.:		
MFR.: 001									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.15	0.13	0.09	0.05	0.05	0.05	0.06	0.06	0.08	0.13	0.20	0.34	0.58	0.91	1.24	1.47	1.53	1.54	1.56
-170	0.15	0.13	0.09	0.05	0.05	0.05	0.05	0.06	0.08	0.12	0.19	0.32	0.53	0.83	1.16	1.44	1.57	1.59	1.61
-160	0.15	0.13	0.10	0.07	0.05	0.05	0.05	0.06	0.08	0.10	0.15	0.23	0.36	0.55	0.78	1.00	1.19	1.34	1.43
-150	0.15	0.13	0.11	0.08	0.06	0.05	0.06	0.06	0.06	0.09	0.11	0.14	0.18	0.25	0.35	0.46	0.59	0.68	0.74
-140	0.15	0.13	0.12	0.09	0.07	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.08	0.10	0.12	0.16	0.19	0.23	0.25
-130	0.15	0.13	0.12	0.11	0.09	0.07	0.06	0.06	0.06	0.06	0.05	0.05	0.05	0.04	0.04	0.06	0.07	0.09	0.10
-120	0.15	0.14	0.14	0.12	0.11	0.10	0.09	0.08	0.06	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04
-110	0.15	0.14	0.14	0.14	0.13	0.13	0.13	0.11	0.09	0.07	0.06	0.06	0.05	0.04	0.03	0.03	0.03	0.02	0.02
-100	0.15	0.15	0.15	0.15	0.15	0.16	0.16	0.14	0.12	0.10	0.09	0.07	0.06	0.05	0.04	0.03	0.03	0.02	0.01
-90	0.15	0.15	0.16	0.17	0.17	0.18	0.18	0.16	0.14	0.12	0.11	0.09	0.07	0.06	0.05	0.04	0.03	0.02	0.01
-80	0.15	0.16	0.17	0.19	0.20	0.21	0.23	0.22	0.20	0.18	0.16	0.14	0.13	0.12	0.10	0.08	0.07	0.05	0.03
-70	0.15	0.16	0.18	0.20	0.22	0.24	0.26	0.26	0.24	0.23	0.21	0.20	0.19	0.18	0.17	0.17	0.16	0.15	0.13
-60	0.15	0.17	0.19	0.22	0.24	0.26	0.27	0.28	0.27	0.29	0.35	0.41	0.47	0.52	0.56	0.58	0.59	0.59	0.57
-50	0.15	0.17	0.20	0.22	0.25	0.26	0.28	0.35	0.46	0.58	0.69	0.85	1.65	2.52	3.39	4.22	4.88	5.22	5.21
-40	0.15	0.17	0.21	0.23	0.25	0.27	0.36	0.53	0.72	1.41	3.07	5.40	8.29	11.6	15.0	18.3	20.8	22.2	22.2
-30	0.15	0.18	0.20	0.24	0.25	0.31	0.48	0.70	1.79	4.54	8.88	14.6	22.2	31.3	40.7	49.5	56.7	61.4	61.9
-20	0.15	0.18	0.21	0.23	0.26	0.36	0.59	1.05	3.58	8.21	15.7	27.5	44.0	62.8	84.8	123	167	209	216
-10	0.15	0.18	0.21	0.23	0.26	0.39	0.64	1.56	4.96	11.0	21.3	37.5	60.6	95.8	191	375	561	681	712
0	0.15	0.18	0.21	0.23	0.25	0.39	0.64	1.73	5.15	11.4	22.3	39.0	63.6	103	217	446	707	862	910
10	0.15	0.18	0.20	0.22	0.25	0.37	0.61	1.29	4.41	9.93	19.2	33.8	53.8	82.4	142	282	471	615	624
20	0.15	0.17	0.19	0.21	0.23	0.32	0.54	0.79	2.80	6.62	12.7	22.3	35.6	51.9	71.1	97.3	134	163	167
30	0.15	0.16	0.18	0.20	0.21	0.26	0.41	0.62	0.91	3.10	6.39	11.1	17.5	25.6	34.6	43.3	50.0	53.7	53.7
40	0.15	0.16	0.17	0.18	0.19	0.21	0.27	0.42	0.60	0.78	1.99	3.76	6.22	9.04	12.1	14.9	17.0	18.3	18.4
50	0.15	0.15	0.16	0.16	0.17	0.18	0.19	0.23	0.33	0.45	0.57	0.68	0.84	1.75	2.45	3.09	3.59	3.85	3.82
60	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.16	0.18	0.21	0.27	0.33	0.39	0.46	0.50	0.53	0.56	0.56
70	0.15	0.14	0.14	0.13	0.12	0.12	0.11	0.11	0.11	0.10	0.10	0.11	0.11	0.11	0.12	0.13	0.14	0.15	0.16
80	0.15	0.13	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.04	0.03	0.04	0.04	0.05	0.06	0.06	0.07
90	0.15	0.13	0.11	0.10	0.08	0.06	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
100	0.15	0.13	0.11	0.09	0.07	0.06	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
110	0.15	0.12	0.10	0.09	0.07	0.05	0.04	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00
120	0.15	0.12	0.10	0.08	0.06	0.05	0.04	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00
130	0.15	0.12	0.10	0.07	0.05	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.06	0.06	0.05	0.05	0.04	0.03
140	0.15	0.12	0.09	0.06	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.07	0.10	0.13	0.14	0.16	0.17	0.17
150	0.15	0.12	0.09	0.06	0.04	0.04	0.04	0.04	0.03	0.03	0.04	0.08	0.14	0.21	0.33	0.43	0.51	0.57	0.60
160	0.15	0.12	0.09	0.06	0.04	0.04	0.04	0.04	0.05	0.06	0.09	0.16	0.27	0.45	0.68	0.91	1.09	1.21	1.26
170	0.15	0.12	0.09	0.05	0.05	0.04	0.05	0.05	0.06	0.10	0.16	0.27	0.47	0.74	1.04	1.27	1.44	1.51	1.51
180	0.15	0.13	0.09	0.05	0.05	0.05	0.06	0.06	0.08	0.13	0.20	0.34	0.58	0.91	1.24	1.47	1.53	1.54	1.57

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.88V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.965x1 lm																		
NAME:Nuit 100-100mm-RGBW RED-30D-REV1									TYPE:RGBW-RED					WEIGHT:				
SPEC.:30 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.60	1.69	1.67	1.51	1.18	0.81	0.48	0.25	0.14	0.07	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-170	1.64	1.64	1.60	1.37	1.05	0.71	0.43	0.24	0.13	0.07	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.02	
-160	1.40	1.30	1.15	0.93	0.70	0.48	0.29	0.18	0.11	0.07	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.02	
-150	0.72	0.65	0.54	0.43	0.32	0.23	0.16	0.12	0.08	0.05	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.02	
-140	0.24	0.21	0.18	0.14	0.11	0.10	0.08	0.07	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.02	
-130	0.09	0.08	0.06	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02	
-120	0.04	0.03	0.02	0.02	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-110	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-90	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	
-80	0.04	0.05	0.05	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.02	0.02	0.02	0.03	0.02	
-70	0.14	0.14	0.13	0.13	0.13	0.13	0.11	0.09	0.08	0.06	0.04	0.02	0.03	0.03	0.03	0.03	0.02	0.02	
-60	0.57	0.55	0.51	0.48	0.41	0.33	0.26	0.19	0.13	0.10	0.07	0.06	0.05	0.04	0.04	0.03	0.03	0.02	
-50	4.86	4.22	3.36	2.44	1.62	0.81	0.63	0.50	0.37	0.22	0.14	0.10	0.08	0.07	0.05	0.04	0.03	0.02	
-40	20.9	18.3	15.1	11.6	8.55	5.75	3.39	1.73	0.66	0.48	0.31	0.17	0.12	0.09	0.07	0.05	0.04	0.02	
-30	58.1	51.1	41.9	32.7	23.7	16.1	10.1	5.65	2.61	0.79	0.51	0.30	0.16	0.11	0.08	0.06	0.04	0.02	
-20	181	133	90.7	65.2	46.9	31.8	19.8	11.2	5.71	2.30	0.67	0.43	0.22	0.13	0.09	0.07	0.04	0.02	
-10	622	444	258	124	70.9	46.7	29.3	16.6	8.51	3.66	1.00	0.51	0.27	0.15	0.11	0.07	0.04	0.02	
0	830	657	380	170	85.0	52.9	33.0	18.8	9.63	4.22	1.29	0.55	0.28	0.16	0.11	0.07	0.04	0.02	
10	534	353	181	100	63.4	42.5	26.7	15.2	7.81	3.33	0.93	0.51	0.26	0.15	0.11	0.07	0.04	0.02	
20	145	109	77.1	56.1	39.8	26.0	16.1	9.34	4.68	1.86	0.65	0.42	0.22	0.14	0.10	0.07	0.04	0.02	
30	50.5	44.5	36.5	28.0	19.9	13.0	7.83	4.04	1.82	0.71	0.49	0.29	0.17	0.13	0.09	0.06	0.04	0.02	
40	17.4	15.4	12.8	9.92	6.97	4.44	2.45	0.96	0.62	0.45	0.29	0.18	0.14	0.11	0.08	0.06	0.04	0.02	
50	3.61	3.16	2.58	1.91	1.10	0.70	0.58	0.45	0.32	0.22	0.16	0.13	0.11	0.09	0.07	0.05	0.03	0.02	
60	0.54	0.51	0.45	0.39	0.32	0.25	0.20	0.16	0.14	0.12	0.11	0.10	0.08	0.06	0.05	0.04	0.03	0.02	
70	0.15	0.14	0.12	0.11	0.10	0.08	0.08	0.08	0.08	0.07	0.06	0.06	0.05	0.05	0.04	0.03	0.02	0.02	
80	0.06	0.05	0.05	0.04	0.03	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.02	
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.02	
110	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	
120	0.01	0.02	0.02	0.02	0.03	0.02	0.02	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
130	0.05	0.05	0.06	0.06	0.06	0.04	0.03	0.02	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
140	0.18	0.18	0.17	0.15	0.12	0.09	0.06	0.03	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
150	0.61	0.58	0.51	0.39	0.28	0.19	0.12	0.07	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
160	1.28	1.22	1.07	0.85	0.61	0.39	0.23	0.13	0.07	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
170	1.54	1.55	1.47	1.27	0.98	0.66	0.39	0.22	0.11	0.06	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
180	1.60	1.69	1.67	1.51	1.18	0.81	0.48	0.25	0.14	0.07	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.02	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: