

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2028.5 cd per klm.
(Luminaire orientation as tested.)	-0.5 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	66.9V x 66.7H
	At 50% of Imax	39.8V x 39.4H
	At 90% of Imax	16.6V x 16.2H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	899.1 lumens per klm.
	To 50% of Imax	559.3 lumens per klm.
	To 90% of Imax	116.5 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.5 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.89V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:304.133x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-40D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

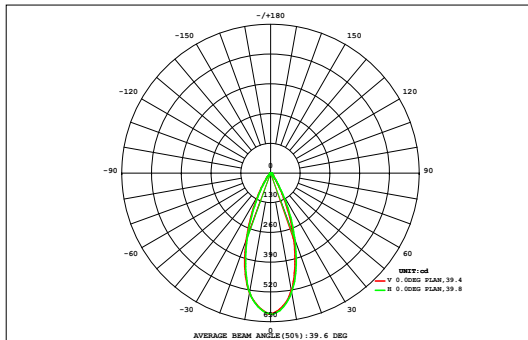

DATA OF LAMP		Eff:38.50lm/W	
MODEL		Imax(cd)	616.9
NOMINAL POWER(W)	30	AVAILABILITY(%)	89.9
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	273.3
NOMINAL FLUX(lm)	304.133	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	304.1
TEST VOLTAGE(V)	220	θ @50% (H,V)	39,40DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.01	0.02	0.04	0.06	0.08	0.10	0.11	0.12	0.12	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.01	1.06	0.00
45	0.01	0.01	0.02	0.04	0.06	0.08	0.10	0.11	0.12	0.12	0.11	0.09	0.07	0.05	0.03	0.02	0.01	0.01	1.06	0.00
40	0.01	0.02	0.04	0.07	0.11	0.15	0.19	0.23	0.25	0.25	0.22	0.18	0.14	0.10	0.06	0.04	0.02	0.01	2.10	0.00
35	0.02	0.04	0.07	0.12	0.19	0.28	0.38	0.46	0.51	0.51	0.45	0.36	0.26	0.18	0.11	0.07	0.04	0.02	4.07	1.36
30	0.03	0.06	0.11	0.20	0.33	0.52	0.74	0.92	1.03	1.02	0.90	0.71	0.49	0.31	0.18	0.10	0.06	0.03	7.73	6.11
25	0.04	0.09	0.16	0.31	0.55	0.90	1.30	1.63	1.80	1.80	1.61	1.26	0.86	0.52	0.29	0.15	0.08	0.04	13.4	12.1
20	0.06	0.12	0.23	0.45	0.84	1.38	1.97	2.44	2.71	2.71	2.44	1.95	1.33	0.80	0.43	0.23	0.12	0.06	20.3	19.1
15	0.07	0.15	0.31	0.63	1.15	1.86	2.62	3.25	3.60	3.61	3.26	2.59	1.81	1.11	0.63	0.32	0.15	0.07	27.2	26.2
10	0.08	0.17	0.37	0.78	1.44	2.27	3.14	3.84	4.22	4.25	3.85	3.10	2.27	1.46	0.82	0.41	0.19	0.09	32.8	31.9
5	0.09	0.19	0.42	0.88	1.61	2.51	3.44	4.13	4.52	4.52	4.15	3.50	2.62	1.71	0.97	0.48	0.22	0.10	36.1	35.2
0	0.09	0.20	0.43	0.92	1.68	2.61	3.56	4.26	4.59	4.53	4.16	3.54	2.67	1.75	0.99	0.49	0.22	0.10	36.8	36.0
-5	0.09	0.19	0.42	0.89	1.64	2.55	3.44	4.04	4.28	4.19	3.83	3.22	2.41	1.58	0.89	0.44	0.20	0.09	34.4	33.5
-10	0.08	0.18	0.37	0.77	1.43	2.19	2.90	3.42	3.66	3.59	3.23	2.67	1.98	1.28	0.71	0.35	0.17	0.08	29.1	28.2
-15	0.07	0.15	0.30	0.60	1.05	1.63	2.18	2.61	2.82	2.76	2.45	1.99	1.46	0.93	0.52	0.27	0.14	0.07	22.0	20.9
-20	0.06	0.12	0.22	0.40	0.68	1.04	1.43	1.77	1.93	1.90	1.67	1.32	0.95	0.60	0.34	0.19	0.10	0.05	14.8	13.5
-25	0.04	0.08	0.15	0.25	0.40	0.60	0.82	1.02	1.13	1.12	0.98	0.77	0.55	0.36	0.22	0.13	0.07	0.04	8.73	7.11
-30	0.03	0.06	0.09	0.15	0.23	0.32	0.43	0.53	0.58	0.57	0.50	0.40	0.30	0.21	0.13	0.08	0.05	0.03	4.69	2.03
-35	0.02	0.03	0.06	0.09	0.13	0.17	0.22	0.26	0.28	0.28	0.25	0.21	0.16	0.12	0.08	0.05	0.03	0.02	2.46	0.00
-40	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.13	0.14	0.14	0.13	0.11	0.08	0.06	0.04	0.03	0.02	0.01	1.27	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	0.90	1.88	3.83	7.59	13.6	21.2	29.0	35.0	38.2	37.9	34.2	28.0	20.4	13.1	7.45	3.83	1.89	0.91	299	---
Φ a	0.00	0.00	1.27	5.97	12.2	19.9	27.8	34.0	37.1	36.8	33.1	26.8	19.2	11.7	5.82	1.54	0.00	0.00	---	273

one-half-peak spread: U:19.8,D:20.3 , L:19.4,R:20.3


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.89V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:304.133x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-40D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

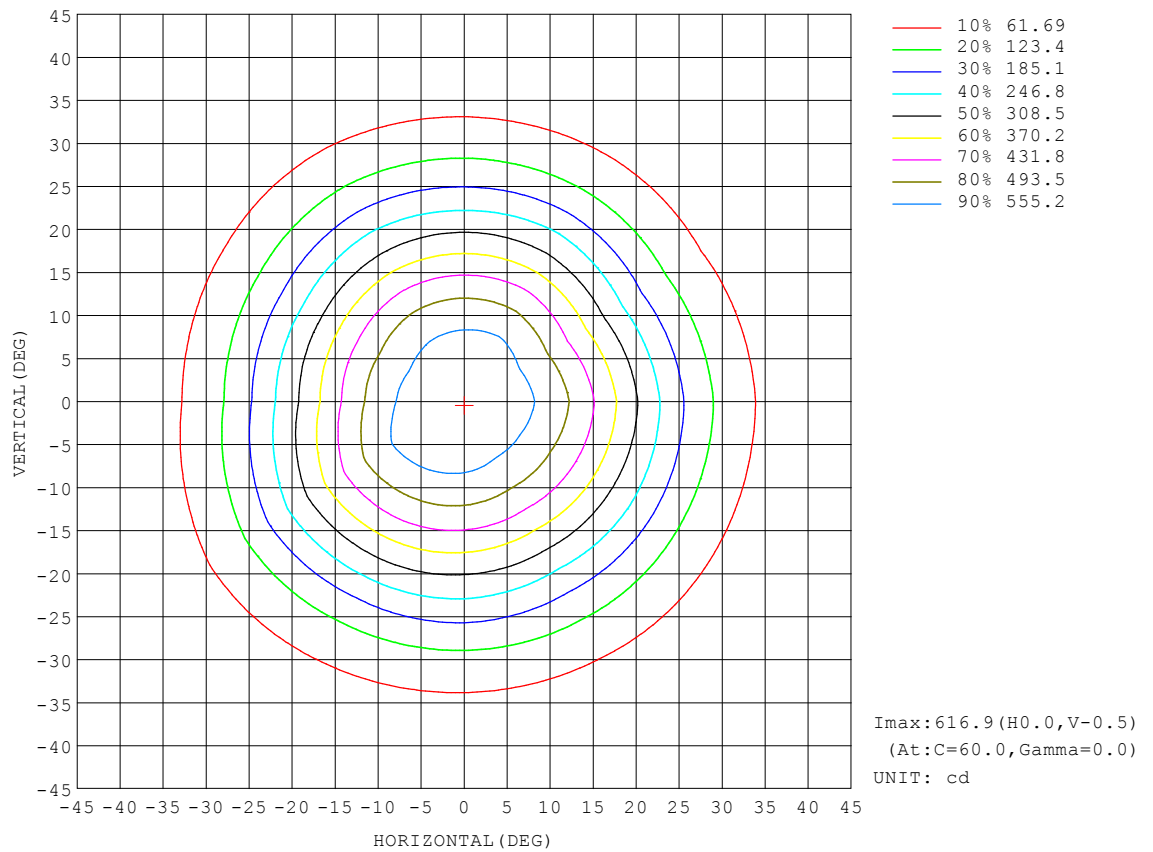


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.89V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:304.133x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-40D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

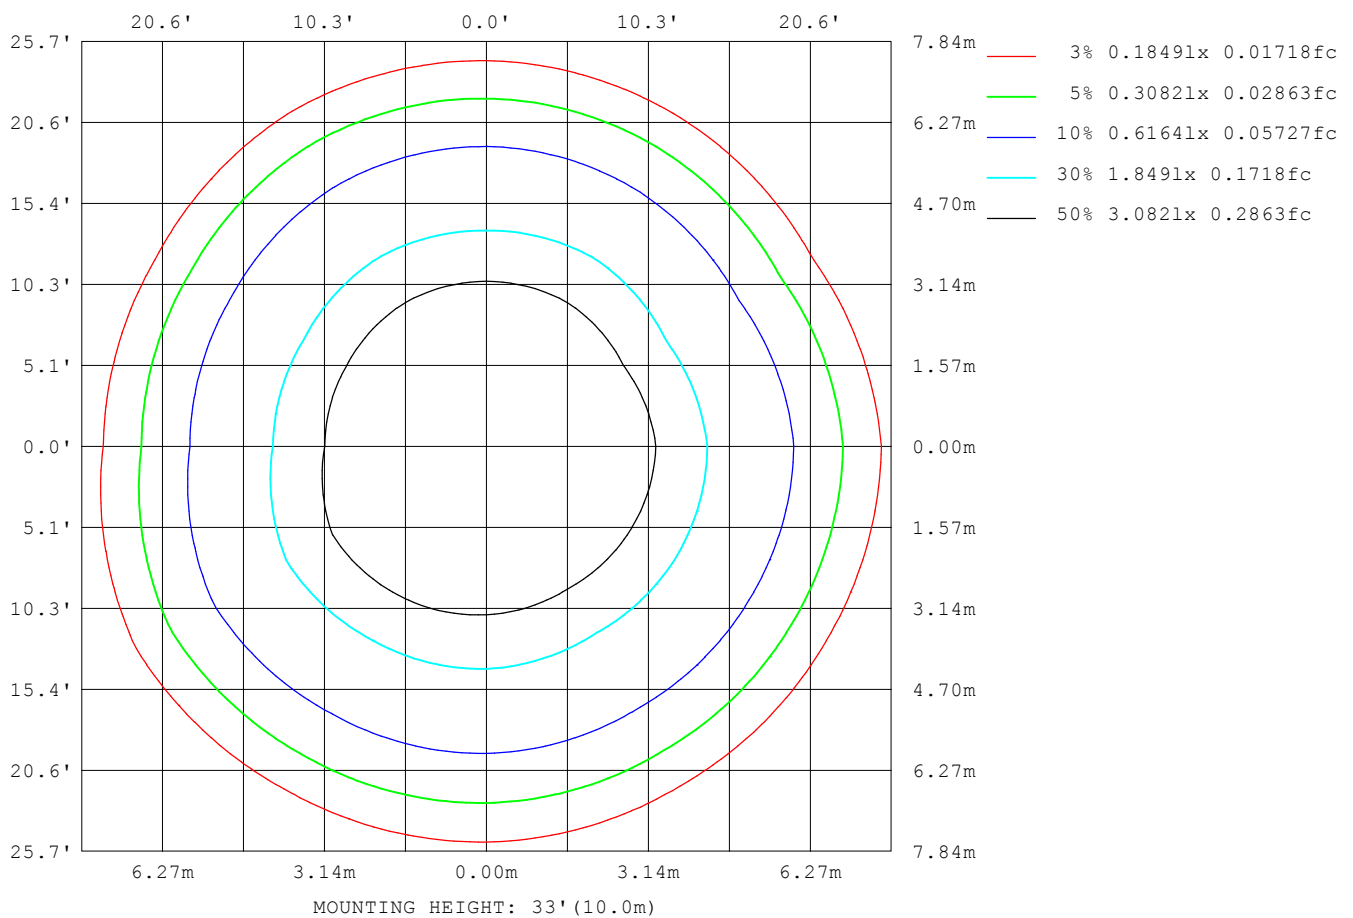

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

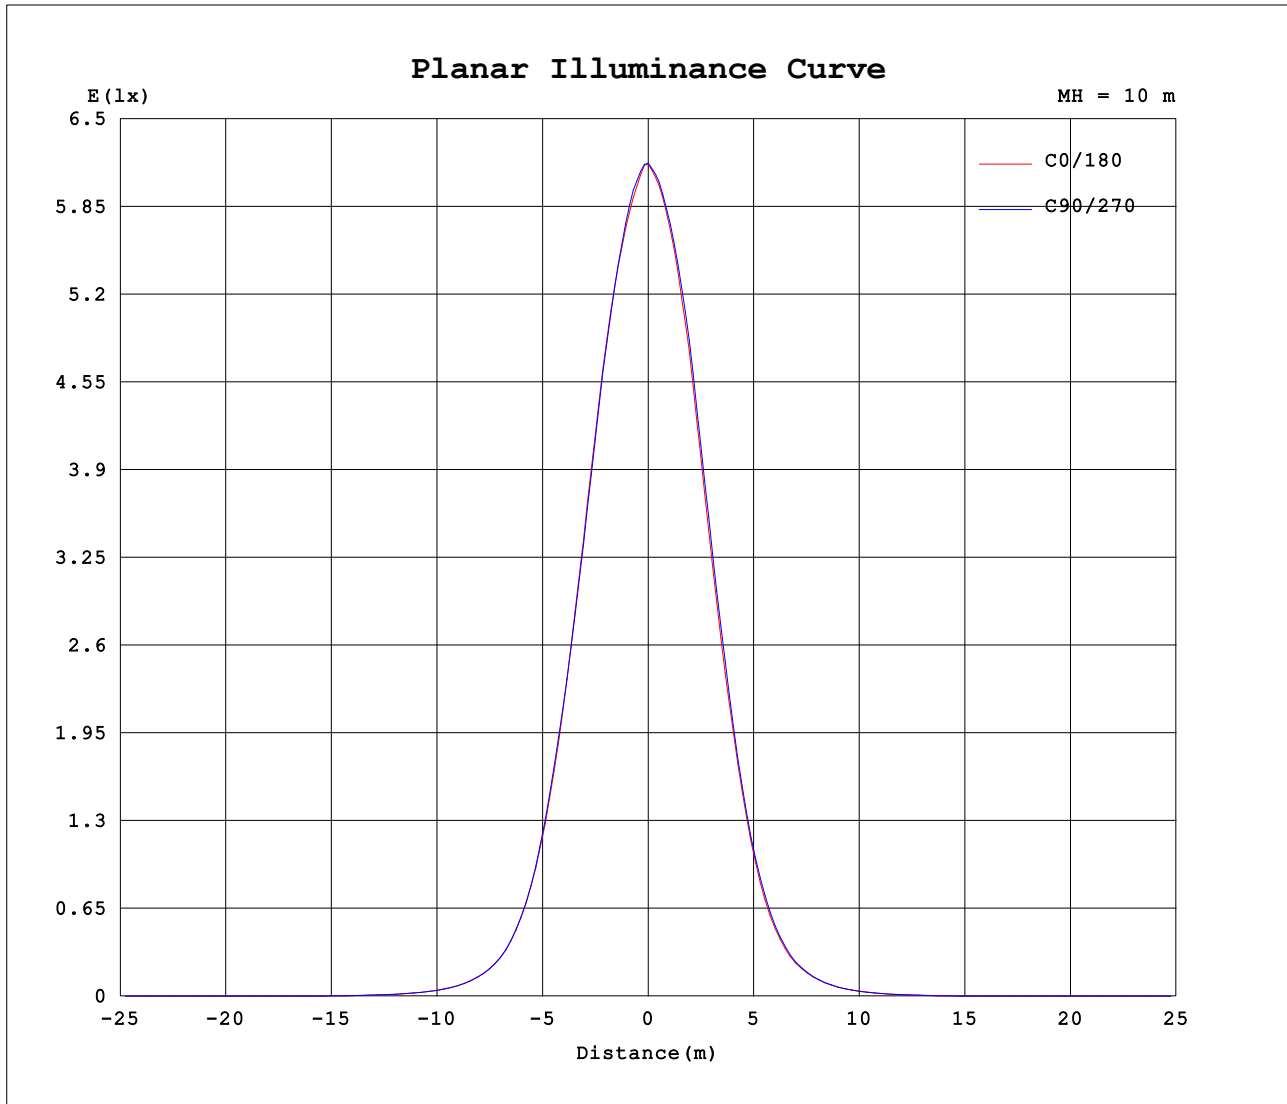


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.89V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:304.133x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-40D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

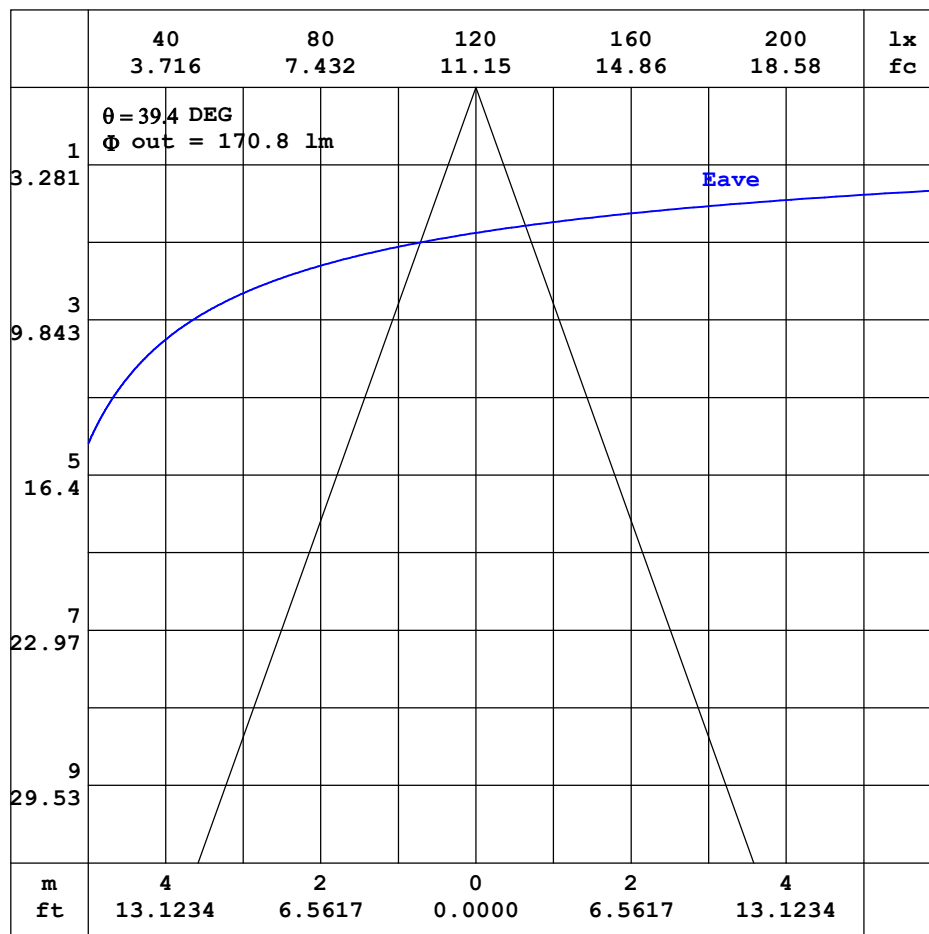

Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.89V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:304.133x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-40D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.12	0.21	0.35	0.56	0.80	1.06	1.29	1.49	1.63	1.79	1.85
-170	0.03	0.04	0.04	0.04	0.04	0.04	0.05	0.07	0.12	0.20	0.34	0.53	0.77	1.02	1.25	1.45	1.55	1.60	1.69
-160	0.03	0.04	0.05	0.05	0.04	0.04	0.05	0.07	0.10	0.16	0.25	0.41	0.59	0.79	0.98	1.14	1.26	1.36	1.42
-150	0.03	0.05	0.05	0.06	0.05	0.05	0.05	0.06	0.08	0.11	0.16	0.24	0.34	0.46	0.58	0.69	0.80	0.88	0.92
-140	0.03	0.05	0.06	0.06	0.06	0.05	0.05	0.06	0.06	0.08	0.08	0.11	0.14	0.19	0.24	0.30	0.36	0.40	0.42
-130	0.03	0.05	0.07	0.08	0.08	0.07	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.06	0.07	0.09	0.11	0.13	0.14
-120	0.03	0.06	0.08	0.09	0.09	0.10	0.09	0.08	0.07	0.07	0.07	0.07	0.07	0.06	0.06	0.05	0.05	0.05	0.05
-110	0.03	0.06	0.08	0.10	0.11	0.13	0.13	0.12	0.11	0.10	0.10	0.09	0.09	0.08	0.07	0.06	0.05	0.04	0.03
-100	0.03	0.06	0.08	0.11	0.13	0.15	0.17	0.16	0.15	0.14	0.14	0.13	0.13	0.11	0.09	0.07	0.06	0.04	0.03
-90	0.03	0.06	0.09	0.12	0.15	0.18	0.21	0.20	0.19	0.18	0.18	0.17	0.16	0.14	0.11	0.09	0.07	0.05	0.03
-80	0.03	0.07	0.10	0.14	0.18	0.22	0.26	0.26	0.26	0.25	0.25	0.24	0.24	0.21	0.19	0.16	0.14	0.11	0.08
-70	0.03	0.07	0.11	0.16	0.21	0.26	0.30	0.31	0.31	0.31	0.30	0.30	0.30	0.29	0.28	0.27	0.25	0.23	0.21
-60	0.03	0.07	0.12	0.18	0.23	0.28	0.32	0.34	0.35	0.38	0.44	0.52	0.61	0.69	0.77	0.83	0.87	0.89	0.88
-50	0.03	0.08	0.13	0.19	0.24	0.29	0.33	0.42	0.55	0.75	0.96	1.21	1.94	2.86	3.70	4.52	5.25	5.73	5.86
-40	0.03	0.08	0.14	0.20	0.25	0.29	0.41	0.64	0.96	1.54	3.23	5.31	8.14	11.4	15.2	19.2	22.7	25.1	25.8
-30	0.03	0.08	0.14	0.20	0.25	0.33	0.55	0.92	1.92	4.40	8.61	14.4	23.1	35.1	51.0	70.2	89.1	103	107
-20	0.03	0.08	0.14	0.20	0.25	0.38	0.70	1.25	3.51	7.86	15.5	29.3	54.4	94.6	150	214	269	304	312
-10	0.03	0.07	0.13	0.19	0.25	0.42	0.79	1.65	4.64	10.5	21.4	42.9	87.8	169	277	388	472	521	529
0	0.03	0.07	0.12	0.17	0.24	0.41	0.79	1.68	4.76	10.7	22.0	44.5	92.6	178	289	414	522	587	616
10	0.03	0.07	0.12	0.17	0.23	0.39	0.75	1.40	4.12	9.33	18.7	36.9	74.3	140	234	340	439	509	531
20	0.03	0.06	0.12	0.17	0.22	0.33	0.62	1.06	2.80	6.20	12.1	22.3	40.2	73.5	124	188	248	285	300
30	0.03	0.06	0.11	0.15	0.20	0.26	0.45	0.78	1.21	3.11	6.04	10.7	17.8	28.4	43.0	61.2	78.9	92.3	96.9
40	0.03	0.06	0.09	0.13	0.17	0.22	0.30	0.48	0.76	1.09	2.18	3.88	6.32	9.42	12.9	16.5	19.6	21.8	22.4
50	0.03	0.05	0.08	0.11	0.15	0.18	0.22	0.26	0.38	0.54	0.76	0.98	1.24	2.14	2.96	3.64	4.19	4.53	4.58
60	0.03	0.05	0.06	0.09	0.11	0.14	0.16	0.18	0.21	0.23	0.28	0.35	0.44	0.53	0.62	0.70	0.76	0.79	0.80
70	0.03	0.04	0.05	0.06	0.08	0.09	0.11	0.12	0.13	0.13	0.14	0.14	0.15	0.17	0.19	0.20	0.22	0.23	0.24
80	0.03	0.04	0.04	0.04	0.05	0.06	0.06	0.06	0.06	0.05	0.05	0.05	0.05	0.06	0.07	0.08	0.09	0.09	0.10
90	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
100	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
110	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00
120	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00
130	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.02	0.02	0.03	0.05	0.07	0.07	0.07	0.08	0.07	0.07
140	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.02	0.04	0.07	0.11	0.17	0.22	0.25	0.28	0.30	0.30
150	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.08	0.16	0.26	0.37	0.50	0.60	0.68	0.73	0.74
160	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.06	0.11	0.19	0.31	0.47	0.66	0.85	1.02	1.16	1.23	1.25
170	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.06	0.09	0.17	0.30	0.48	0.69	0.92	1.13	1.32	1.48	1.59	1.60
180	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.12	0.21	0.35	0.56	0.80	1.06	1.29	1.49	1.63	1.79	1.84

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.89V I:0.0420A P:7.9000W PF:0.9000 Freq:49.37Hz Lamp Flux:304.133x1 lm																		
NAME:Nuit 100-100mm-RGBW 3000K-40D-REV1									TYPE:RGBW-3000K					WEIGHT:				
SPEC.:40 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.78	1.69	1.57	1.39	1.14	0.86	0.59	0.37	0.20	0.09	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-170	1.64	1.59	1.49	1.31	1.06	0.80	0.55	0.34	0.19	0.09	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-160	1.37	1.29	1.17	1.01	0.80	0.61	0.41	0.26	0.15	0.08	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-150	0.88	0.81	0.70	0.59	0.46	0.34	0.24	0.16	0.09	0.06	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.02
-140	0.40	0.36	0.31	0.24	0.19	0.14	0.10	0.08	0.06	0.04	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-130	0.13	0.12	0.09	0.07	0.05	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-120	0.04	0.03	0.03	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-110	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-100	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02
-90	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02
-80	0.09	0.09	0.09	0.10	0.10	0.10	0.08	0.07	0.06	0.04	0.03	0.01	0.02	0.02	0.03	0.02	0.02	0.02	0.02
-70	0.22	0.22	0.22	0.22	0.21	0.21	0.18	0.16	0.14	0.11	0.09	0.07	0.06	0.05	0.04	0.04	0.03	0.02	0.02
-60	0.87	0.84	0.78	0.71	0.62	0.51	0.41	0.31	0.24	0.20	0.15	0.13	0.11	0.08	0.06	0.05	0.04	0.02	0.02
-50	5.61	5.05	4.29	3.48	2.56	1.42	1.10	0.85	0.61	0.40	0.26	0.20	0.16	0.12	0.09	0.06	0.04	0.02	0.02
-40	24.5	21.6	17.8	13.7	10.3	7.23	4.73	2.88	1.25	0.85	0.53	0.31	0.21	0.16	0.12	0.08	0.05	0.02	0.02
-30	100	84.1	64.1	45.8	31.2	19.9	12.4	7.35	4.01	1.44	0.88	0.50	0.28	0.20	0.14	0.09	0.05	0.02	0.02
-20	292	248	193	134	82.0	46.1	25.9	14.1	7.51	3.65	1.23	0.71	0.37	0.22	0.16	0.10	0.06	0.02	0.02
-10	500	441	355	255	158	85.8	42.7	21.6	10.9	5.20	1.76	0.86	0.44	0.25	0.17	0.11	0.06	0.02	0.02
0	588	531	435	314	197	108	52.2	25.5	12.5	5.84	2.20	0.91	0.47	0.26	0.18	0.11	0.07	0.02	0.02
10	512	437	334	230	142	77.6	39.3	20.1	10.2	4.78	1.62	0.82	0.43	0.25	0.18	0.11	0.06	0.02	0.02
20	286	247	182	119	69.1	38.0	21.6	12.0	6.29	2.97	1.12	0.65	0.36	0.23	0.16	0.11	0.06	0.02	0.02
30	90.7	76.1	57.5	40.1	26.4	16.5	9.89	5.44	2.89	1.19	0.76	0.46	0.27	0.20	0.14	0.10	0.05	0.02	0.02
40	21.3	18.7	15.4	11.8	8.51	5.66	3.48	1.56	1.00	0.68	0.45	0.29	0.22	0.17	0.13	0.08	0.05	0.02	0.02
50	4.41	3.96	3.37	2.66	1.70	1.15	0.90	0.68	0.49	0.33	0.25	0.21	0.17	0.13	0.10	0.07	0.05	0.02	0.02
60	0.78	0.73	0.67	0.58	0.50	0.40	0.32	0.26	0.22	0.19	0.17	0.15	0.12	0.10	0.08	0.06	0.04	0.02	0.02
70	0.23	0.21	0.20	0.18	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.06	0.05	0.04	0.03	0.02	0.02
80	0.09	0.08	0.07	0.06	0.05	0.04	0.04	0.04	0.04	0.04	0.03	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02
90	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02
110	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
120	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
130	0.07	0.08	0.08	0.08	0.07	0.05	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
140	0.30	0.29	0.27	0.24	0.18	0.13	0.08	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
150	0.75	0.71	0.64	0.54	0.41	0.29	0.18	0.11	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
160	1.25	1.20	1.08	0.91	0.72	0.52	0.34	0.21	0.11	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
170	1.62	1.52	1.36	1.20	0.99	0.75	0.51	0.31	0.17	0.08	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
180	1.78	1.69	1.57	1.39	1.14	0.86	0.59	0.37	0.20	0.09	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: