

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2055.4 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		1.0 degrees horizontal
Beam Spread	At 10% of Imax	66.3V x 66.5H
	At 50% of Imax	39.3V x 39.7H
	At 90% of Imax	15.6V x 16.8H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	896.1 lumens per klm.
	To 50% of Imax	559.7 lumens per klm.
	To 90% of Imax	112.2 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.4 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: 01
 Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.92V I:0.1350A P:29.000W PF:0.0000 Freq:49.37Hz Lamp Flux:893.395x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-40D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

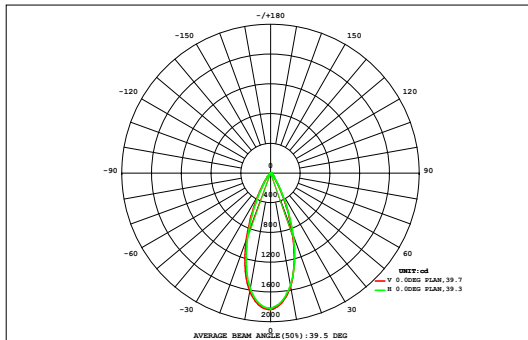

DATA OF LAMP		Eff:30.81lm/W	
MODEL		Imax(cd)	1836
NOMINAL POWER(W)	30	AVAILABILITY(%)	89.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	800.8
NOMINAL FLUX(lm)	893.395	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	893.4
TEST VOLTAGE(V)	220	θ @50% (H,V)	40,39DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.04	0.07	0.12	0.17	0.23	0.29	0.33	0.35	0.35	0.32	0.27	0.21	0.15	0.10	0.06	0.03	0.02	3.13	0.00
45	0.02	0.04	0.07	0.12	0.17	0.23	0.29	0.33	0.35	0.35	0.32	0.27	0.21	0.15	0.10	0.06	0.03	0.02	3.13	0.00
40	0.04	0.07	0.13	0.21	0.32	0.45	0.57	0.67	0.73	0.72	0.65	0.54	0.41	0.29	0.19	0.12	0.06	0.03	6.21	0.00
35	0.06	0.12	0.22	0.37	0.57	0.84	1.12	1.36	1.49	1.48	1.32	1.06	0.78	0.52	0.33	0.20	0.11	0.05	12.0	3.87
30	0.09	0.19	0.34	0.60	0.99	1.55	2.17	2.70	3.00	2.98	2.63	2.07	1.44	0.91	0.54	0.31	0.16	0.08	22.8	17.9
25	0.13	0.27	0.51	0.93	1.64	2.66	3.82	4.80	5.34	5.30	4.70	3.68	2.49	1.50	0.84	0.45	0.24	0.12	39.4	35.6
20	0.17	0.36	0.71	1.36	2.51	4.12	5.88	7.34	8.11	8.05	7.18	5.67	3.88	2.31	1.23	0.66	0.34	0.17	60.1	56.7
15	0.21	0.45	0.92	1.86	3.48	5.62	7.89	9.80	10.8	10.7	9.59	7.60	5.31	3.27	1.81	0.92	0.46	0.22	80.9	77.9
10	0.24	0.52	1.11	2.30	4.30	6.83	9.45	11.6	12.7	12.6	11.3	9.17	6.75	4.36	2.41	1.18	0.57	0.26	97.6	94.9
5	0.26	0.57	1.23	2.56	4.75	7.49	10.3	12.4	13.6	13.4	12.4	10.5	7.94	5.19	2.88	1.39	0.65	0.30	108	105
0	0.27	0.58	1.27	2.63	4.87	7.64	10.4	12.4	13.4	13.5	12.6	10.8	8.13	5.34	2.97	1.43	0.66	0.30	109	107
-5	0.26	0.56	1.22	2.51	4.64	7.27	9.78	11.5	12.3	12.3	11.5	9.74	7.31	4.77	2.65	1.30	0.61	0.28	101	98.0
-10	0.24	0.50	1.06	2.16	3.96	6.14	8.18	9.71	10.5	10.5	9.60	8.01	5.95	3.84	2.14	1.07	0.52	0.25	84.4	81.6
-15	0.20	0.42	0.84	1.66	2.90	4.49	6.08	7.36	8.06	8.01	7.22	5.90	4.32	2.76	1.57	0.82	0.41	0.20	63.2	60.1
-20	0.16	0.33	0.62	1.11	1.87	2.87	3.96	4.90	5.42	5.38	4.81	3.85	2.76	1.78	1.04	0.58	0.31	0.16	41.9	38.1
-25	0.12	0.24	0.42	0.70	1.11	1.65	2.26	2.81	3.12	3.10	2.76	2.20	1.58	1.06	0.66	0.39	0.22	0.11	24.5	19.5
-30	0.09	0.16	0.27	0.43	0.64	0.90	1.19	1.45	1.61	1.60	1.43	1.16	0.87	0.61	0.40	0.25	0.14	0.08	13.3	4.65
-35	0.05	0.10	0.16	0.25	0.36	0.49	0.62	0.73	0.79	0.79	0.72	0.61	0.47	0.34	0.24	0.15	0.09	0.05	7.02	0.00
-40	0.03	0.06	0.09	0.14	0.20	0.26	0.32	0.37	0.40	0.39	0.36	0.31	0.25	0.19	0.13	0.09	0.05	0.02	3.66	0.00
-45	0.03	0.06	0.09	0.14	0.20	0.26	0.32	0.37	0.40	0.39	0.36	0.31	0.25	0.19	0.13	0.09	0.05	0.02	3.66	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL(DEG) 10 15 20 25 30 35 40 45																				
Φ t	2.65	5.52	11.2	21.9	39.3	61.5	84.2	102	112	111	101	83.1	60.9	39.2	22.1	11.3	5.64	2.71	877	---
Φ a	0.00	0.00	3.56	17.0	35.1	57.8	80.9	98.9	108	108	97.8	79.7	57.1	35.0	17.2	4.39	0.00	0.00	---	801

one-half-peak spread: U:19.8,D:19.8 , L:20.3,R:19.7


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.92V I:0.1350A P:29.000W PF:0.0000 Freq:49.37Hz Lamp Flux:893.395x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-40D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

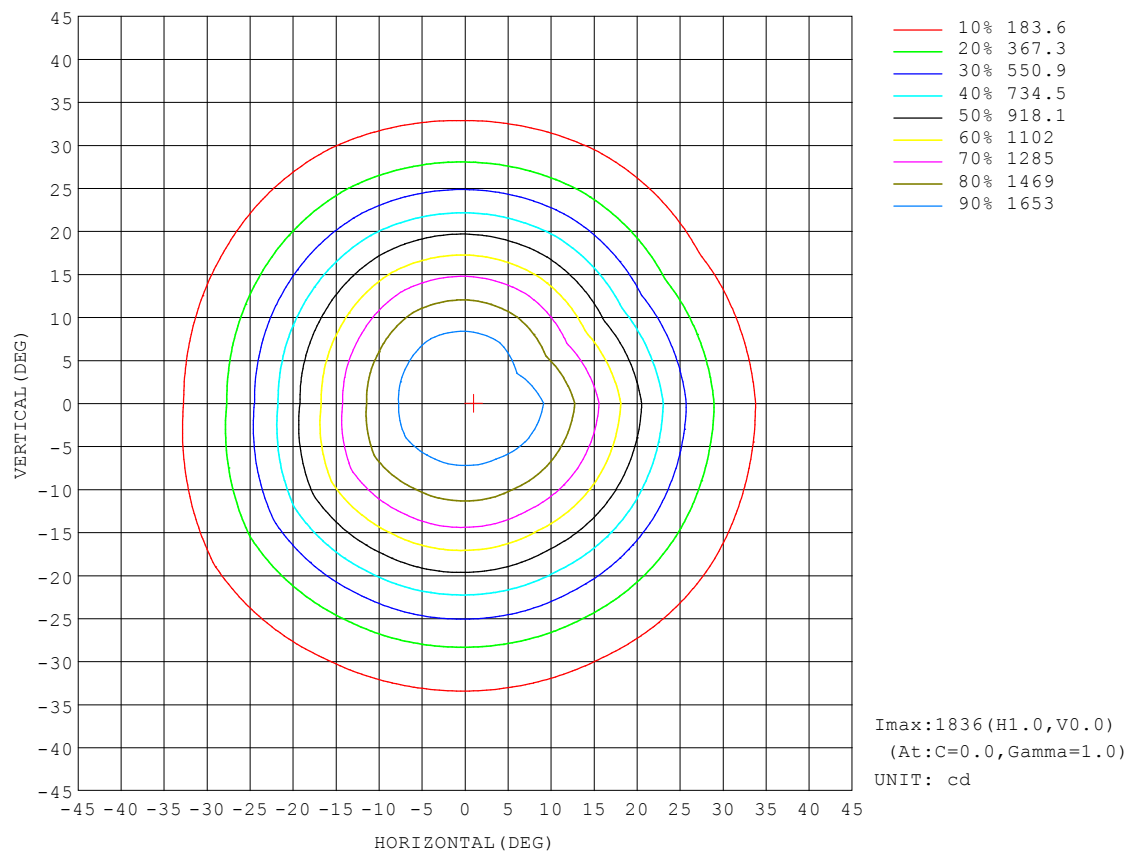


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.92V I:0.1350A P:29.000W PF:0.0000 Freq:49.37Hz Lamp Flux:893.395x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-40D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

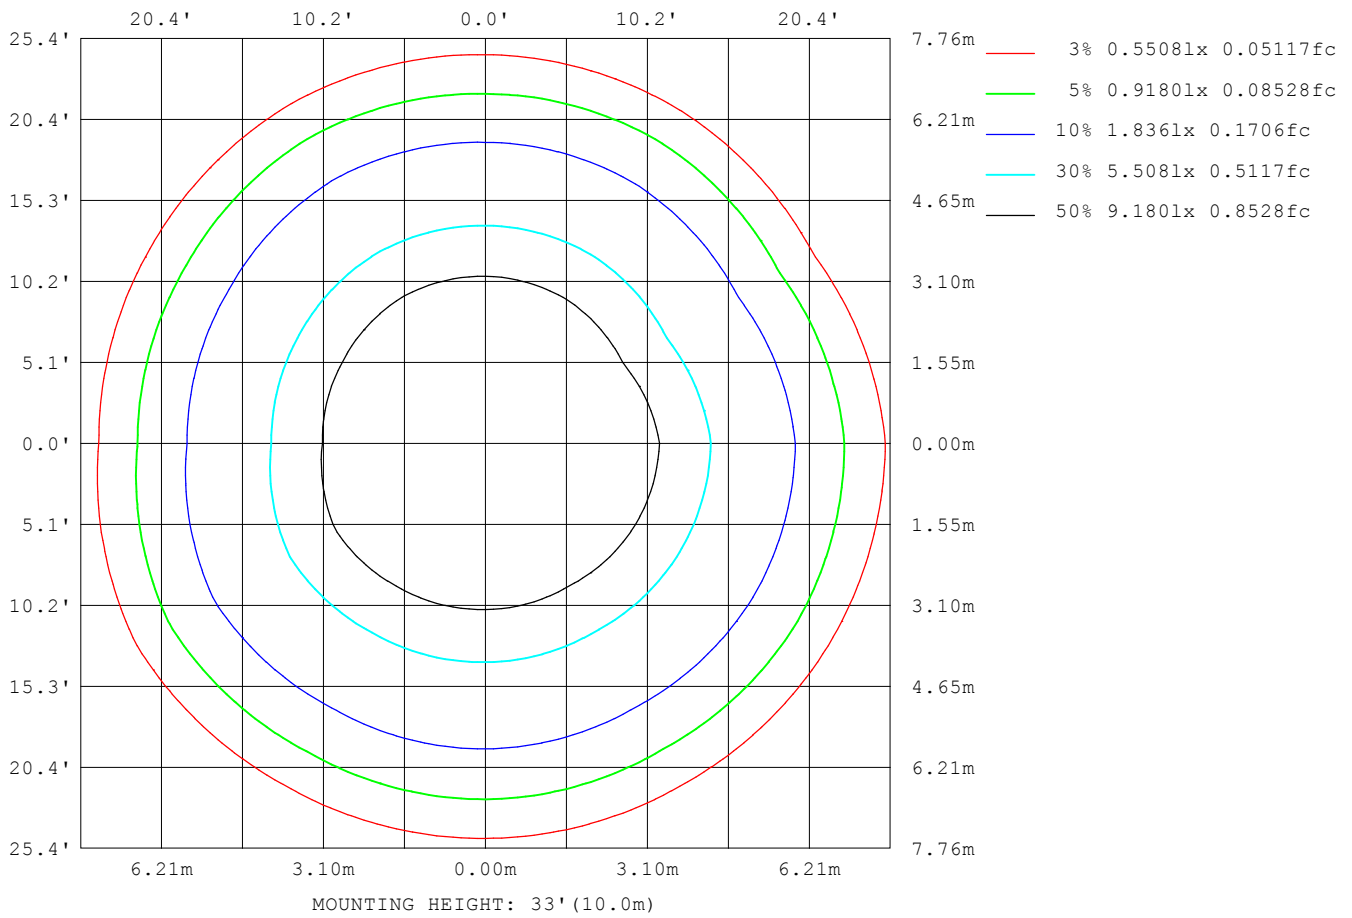

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

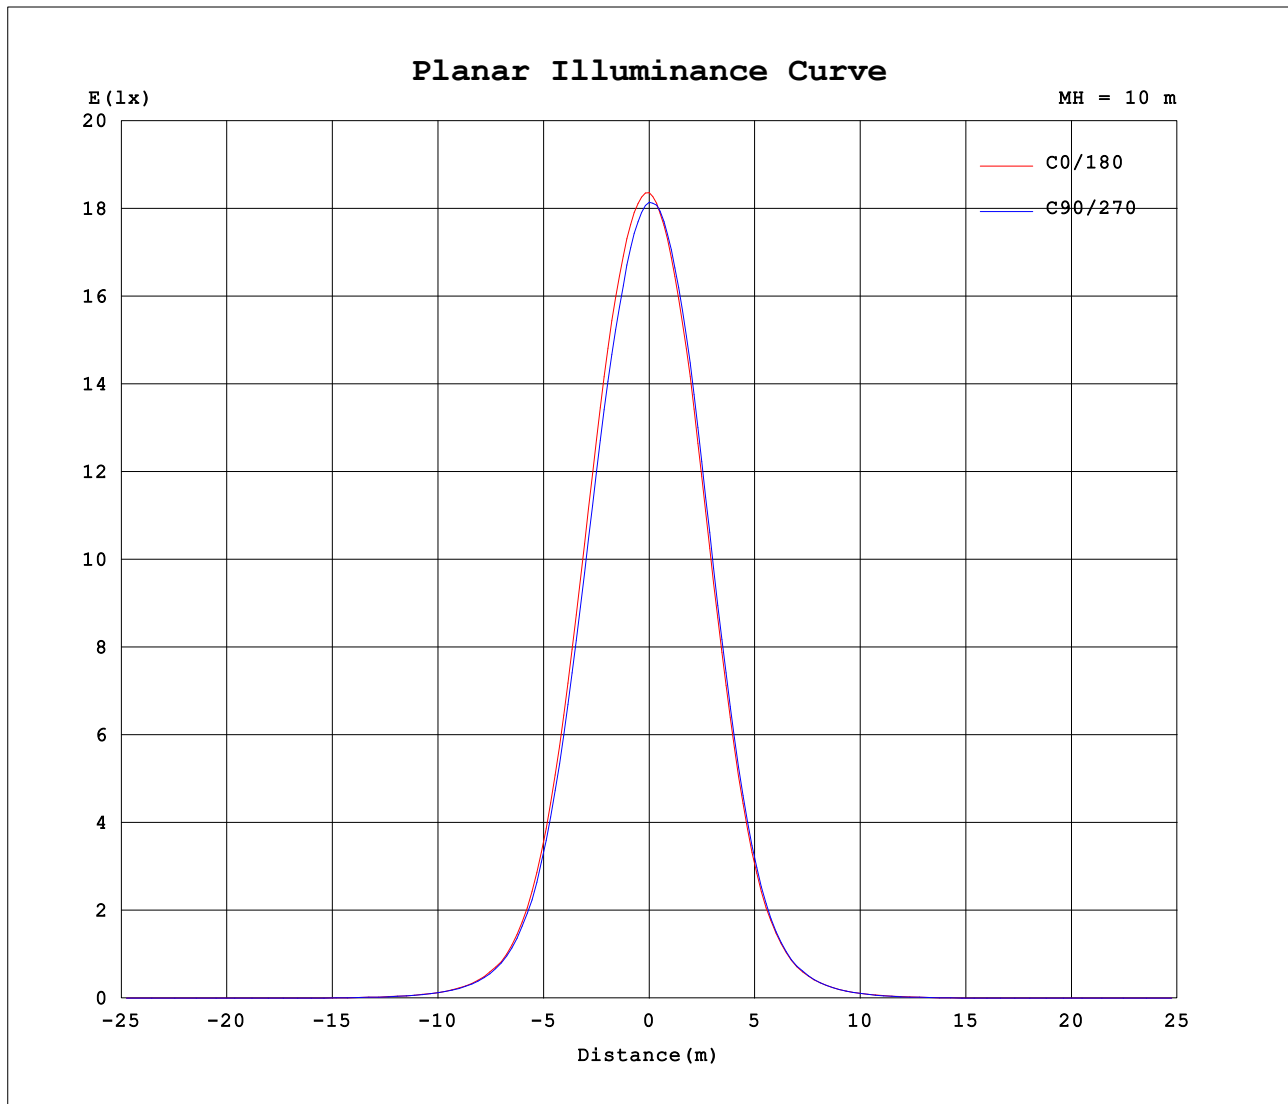


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.92V I:0.1350A P:29.000W PF:0.0000 Freq:49.37Hz Lamp Flux:893.395x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-40D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

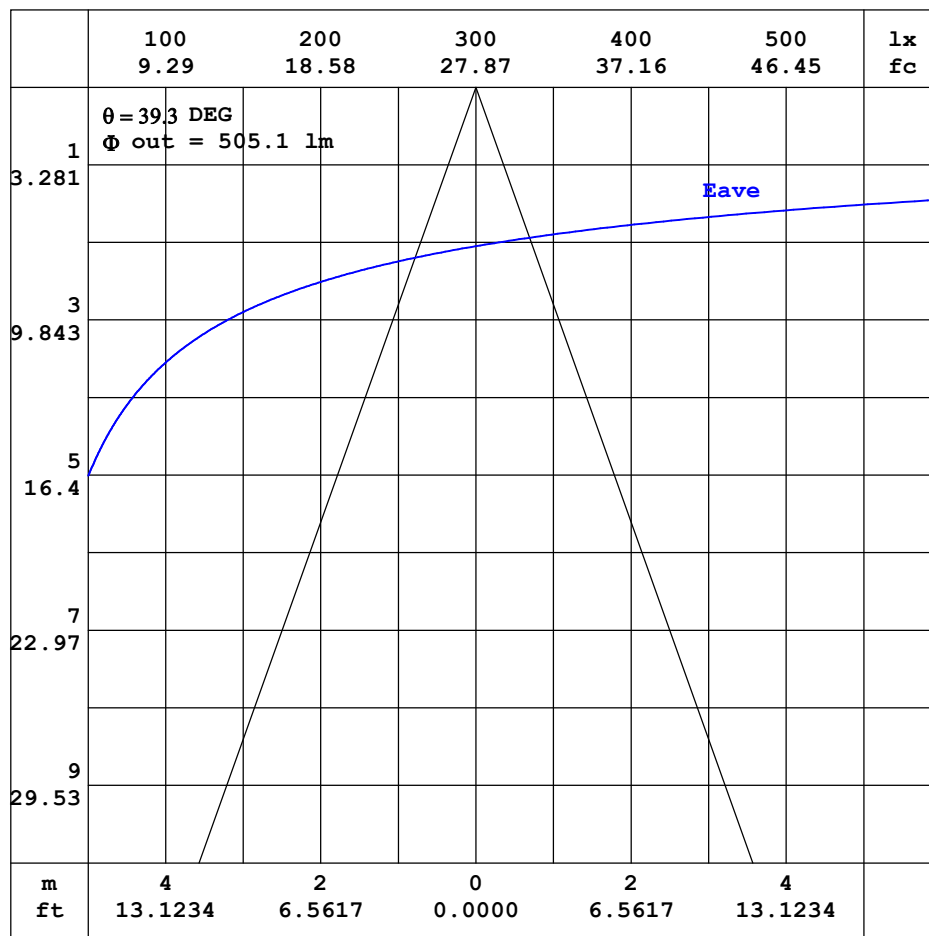

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.1350A P:29.000W PF:0.0000 Freq:49.37Hz Lamp Flux:893.395x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-40D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.07	0.07	0.07	0.07	0.07	0.09	0.12	0.20	0.34	0.60	1.05	1.64	2.39	3.16	3.86	4.44	4.91	5.36	5.62
-170	0.07	0.08	0.08	0.08	0.08	0.10	0.13	0.19	0.32	0.57	0.98	1.55	2.24	2.99	3.68	4.22	4.59	4.82	5.03
-160	0.07	0.08	0.09	0.09	0.09	0.10	0.12	0.17	0.26	0.44	0.74	1.17	1.70	2.29	2.88	3.38	3.77	4.06	4.20
-150	0.07	0.09	0.09	0.09	0.10	0.11	0.12	0.14	0.20	0.29	0.46	0.69	1.00	1.37	1.73	2.10	2.40	2.61	2.70
-140	0.07	0.09	0.10	0.10	0.10	0.11	0.12	0.13	0.15	0.19	0.24	0.33	0.45	0.60	0.77	0.94	1.09	1.20	1.24
-130	0.07	0.09	0.10	0.11	0.12	0.12	0.12	0.13	0.13	0.13	0.14	0.15	0.17	0.21	0.27	0.32	0.36	0.40	0.42
-120	0.07	0.10	0.11	0.12	0.13	0.13	0.13	0.14	0.13	0.13	0.13	0.12	0.12	0.12	0.12	0.13	0.13	0.14	0.15
-110	0.07	0.10	0.12	0.13	0.15	0.16	0.17	0.16	0.15	0.14	0.14	0.13	0.13	0.12	0.11	0.11	0.10	0.09	0.08
-100	0.07	0.10	0.12	0.15	0.17	0.19	0.20	0.19	0.19	0.18	0.17	0.16	0.16	0.14	0.13	0.11	0.10	0.08	0.07
-90	0.07	0.10	0.13	0.16	0.19	0.22	0.25	0.24	0.24	0.23	0.22	0.21	0.20	0.18	0.16	0.13	0.11	0.09	0.07
-80	0.07	0.11	0.15	0.21	0.27	0.34	0.40	0.41	0.42	0.42	0.43	0.43	0.43	0.42	0.40	0.38	0.36	0.34	0.31
-70	0.07	0.11	0.19	0.28	0.36	0.46	0.54	0.59	0.61	0.63	0.66	0.69	0.71	0.73	0.74	0.74	0.75	0.74	0.72
-60	0.07	0.13	0.23	0.34	0.45	0.56	0.66	0.75	0.83	0.98	1.18	1.40	1.65	1.92	2.18	2.40	2.57	2.66	2.68
-50	0.07	0.14	0.26	0.40	0.52	0.65	0.80	1.10	1.51	2.09	2.75	3.49	5.66	8.56	11.1	13.5	15.5	16.8	17.1
-40	0.07	0.16	0.29	0.44	0.59	0.76	1.12	1.79	2.80	4.45	9.60	15.6	23.5	32.8	43.1	54.1	63.9	70.8	72.9
-30	0.07	0.17	0.31	0.47	0.64	0.92	1.58	2.70	5.67	13.0	24.5	40.7	64.6	97.6	140	191	245	285	299
-20	0.07	0.17	0.33	0.49	0.68	1.10	2.06	3.70	10.4	22.7	44.1	82.5	151	263	413	590	747	859	894
-10	0.07	0.17	0.33	0.50	0.70	1.23	2.35	5.00	13.8	30.6	61.8	123	250	470	779	1097	1339	1486	1536
0	0.07	0.17	0.32	0.49	0.68	1.22	2.38	5.21	14.2	31.9	65.2	131	272	518	859	1232	1550	1750	1836
10	0.07	0.16	0.32	0.48	0.67	1.17	2.24	4.29	12.4	28.0	56.6	112	221	419	707	1026	1324	1525	1580
20	0.07	0.16	0.30	0.46	0.63	0.99	1.87	3.20	8.45	18.8	36.9	68.6	125	220	368	556	734	853	894
30	0.07	0.14	0.27	0.42	0.57	0.78	1.35	2.34	3.66	9.38	18.4	32.8	54.4	85.6	129	182	234	270	280
40	0.07	0.13	0.24	0.36	0.50	0.64	0.88	1.44	2.27	3.30	6.69	11.6	18.9	28.1	38.3	48.7	57.7	63.9	65.6
50	0.07	0.11	0.20	0.30	0.41	0.52	0.64	0.80	1.15	1.66	2.32	3.02	3.82	6.54	8.86	10.8	12.4	13.4	13.6
60	0.07	0.09	0.16	0.23	0.31	0.39	0.47	0.55	0.64	0.73	0.90	1.15	1.42	1.69	1.95	2.16	2.31	2.39	2.39
70	0.07	0.08	0.12	0.16	0.20	0.25	0.30	0.35	0.39	0.43	0.47	0.51	0.55	0.59	0.63	0.66	0.69	0.71	0.73
80	0.07	0.07	0.08	0.09	0.12	0.13	0.15	0.17	0.18	0.18	0.20	0.21	0.21	0.23	0.25	0.27	0.29	0.30	0.31
90	0.07	0.07	0.07	0.06	0.06	0.06	0.05	0.05	0.05	0.04	0.04	0.04	0.03	0.04	0.04	0.04	0.04	0.04	0.04
100	0.07	0.07	0.06	0.06	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03
110	0.07	0.07	0.06	0.06	0.05	0.05	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.03
120	0.07	0.07	0.07	0.06	0.05	0.05	0.04	0.04	0.04	0.04	0.05	0.06	0.07	0.09	0.08	0.08	0.08	0.07	0.07
130	0.07	0.07	0.07	0.06	0.06	0.05	0.05	0.04	0.04	0.05	0.08	0.11	0.15	0.19	0.21	0.24	0.26	0.27	0.27
140	0.07	0.07	0.07	0.06	0.06	0.05	0.05	0.05	0.07	0.10	0.17	0.25	0.36	0.49	0.62	0.75	0.84	0.91	0.93
150	0.07	0.07	0.07	0.07	0.06	0.06	0.07	0.09	0.13	0.21	0.35	0.55	0.83	1.14	1.47	1.75	2.00	2.16	2.21
160	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.13	0.22	0.37	0.63	1.01	1.49	2.02	2.56	3.02	3.38	3.60	3.71
170	0.07	0.07	0.07	0.07	0.07	0.08	0.11	0.17	0.29	0.52	0.91	1.46	2.10	2.80	3.43	3.97	4.39	4.68	4.80
180	0.07	0.07	0.07	0.07	0.07	0.09	0.12	0.20	0.34	0.60	1.05	1.64	2.39	3.16	3.86	4.44	4.91	5.36	5.59

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.1350A P:29.000W PF:0.0000 Freq:49.37Hz Lamp Flux:893.395x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-40D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.41	5.16	4.78	4.22	3.47	2.62	1.82	1.17	0.68	0.36	0.19	0.10	0.06	0.04	0.04	0.04	0.04	0.05	
-170	4.95	4.77	4.43	3.89	3.19	2.41	1.68	1.07	0.63	0.34	0.19	0.11	0.06	0.05	0.05	0.04	0.04	0.05	
-160	4.12	3.89	3.53	3.02	2.42	1.80	1.25	0.80	0.48	0.27	0.16	0.10	0.06	0.05	0.05	0.04	0.04	0.05	
-150	2.64	2.46	2.17	1.81	1.44	1.06	0.73	0.49	0.31	0.19	0.13	0.09	0.06	0.05	0.05	0.04	0.04	0.05	
-140	1.21	1.11	0.97	0.80	0.64	0.48	0.35	0.25	0.18	0.14	0.10	0.07	0.06	0.05	0.05	0.05	0.04	0.05	
-130	0.40	0.37	0.32	0.27	0.22	0.18	0.14	0.12	0.11	0.10	0.08	0.06	0.06	0.05	0.05	0.04	0.04	0.05	
-120	0.14	0.12	0.11	0.09	0.08	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.05	0.04	0.05	0.05	
-110	0.08	0.07	0.06	0.05	0.05	0.04	0.05	0.05	0.06	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.05	0.05	
-100	0.06	0.06	0.05	0.05	0.05	0.04	0.04	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05	
-90	0.06	0.06	0.06	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.05	
-80	0.32	0.32	0.32	0.31	0.30	0.29	0.27	0.25	0.22	0.19	0.16	0.13	0.12	0.10	0.09	0.07	0.06	0.05	
-70	0.72	0.72	0.70	0.68	0.65	0.63	0.59	0.54	0.48	0.42	0.35	0.29	0.25	0.21	0.16	0.12	0.08	0.05	
-60	2.65	2.54	2.36	2.12	1.84	1.54	1.25	1.00	0.81	0.68	0.58	0.48	0.40	0.31	0.24	0.17	0.10	0.05	
-50	16.5	15.0	12.8	10.4	7.75	4.31	3.39	2.66	1.94	1.32	0.90	0.68	0.55	0.42	0.31	0.21	0.12	0.05	
-40	70.1	62.5	52.1	40.6	30.8	21.6	14.3	8.76	3.87	2.72	1.68	1.02	0.70	0.53	0.38	0.25	0.14	0.05	
-30	282	240	184	135	93.1	60.3	37.7	22.1	12.3	4.39	2.76	1.58	0.89	0.63	0.45	0.29	0.16	0.05	
-20	847	728	570	394	247	142	78.9	42.7	22.5	11.0	3.77	2.18	1.16	0.70	0.49	0.32	0.17	0.05	
-10	1483	1326	1073	768	474	257	130	65.2	32.8	15.5	5.37	2.61	1.36	0.76	0.53	0.34	0.18	0.05	
0	1784	1617	1327	959	599	318	152	75.8	37.1	17.4	6.66	2.74	1.43	0.78	0.54	0.35	0.18	0.05	
10	1505	1286	980	681	416	225	117	59.4	30.0	14.2	4.92	2.47	1.32	0.75	0.53	0.34	0.18	0.05	
20	841	715	530	342	199	111	63.0	35.1	18.5	8.74	3.36	1.96	1.09	0.69	0.49	0.32	0.17	0.05	
30	264	224	171	119	78.0	48.6	28.9	15.9	8.48	3.59	2.29	1.38	0.84	0.61	0.44	0.29	0.16	0.05	
40	62.6	55.3	45.7	35.1	25.3	16.7	10.3	4.65	2.98	2.05	1.37	0.89	0.67	0.51	0.37	0.25	0.14	0.05	
50	13.1	11.8	10.0	7.86	5.05	3.52	2.75	2.08	1.50	1.04	0.77	0.64	0.51	0.41	0.30	0.20	0.12	0.05	
60	2.35	2.23	2.05	1.83	1.57	1.32	1.05	0.84	0.70	0.61	0.52	0.44	0.37	0.30	0.23	0.16	0.10	0.05	
70	0.71	0.68	0.65	0.61	0.57	0.50	0.46	0.44	0.40	0.36	0.32	0.28	0.23	0.19	0.15	0.12	0.08	0.05	
80	0.29	0.28	0.26	0.24	0.22	0.19	0.18	0.17	0.16	0.15	0.13	0.12	0.11	0.09	0.08	0.07	0.06	0.05	
90	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.05	0.05	0.05	
100	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	
110	0.04	0.04	0.04	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	
120	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
130	0.27	0.26	0.25	0.22	0.19	0.15	0.12	0.09	0.06	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
140	0.92	0.86	0.76	0.64	0.51	0.38	0.27	0.18	0.11	0.07	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
150	2.18	2.05	1.80	1.52	1.19	0.87	0.59	0.37	0.22	0.13	0.08	0.05	0.04	0.04	0.04	0.04	0.04	0.05	
160	3.66	3.45	3.10	2.64	2.10	1.56	1.07	0.68	0.40	0.22	0.13	0.07	0.05	0.04	0.04	0.04	0.04	0.05	
170	4.78	4.47	4.05	3.56	2.95	2.24	1.57	1.00	0.58	0.31	0.17	0.10	0.05	0.04	0.04	0.04	0.04	0.05	
180	5.41	5.16	4.78	4.22	3.47	2.62	1.82	1.17	0.68	0.36	0.19	0.10	0.06	0.04	0.04	0.04	0.04	0.05	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: