

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1976.5 cd per klm.
(Luminaire orientation as tested.)	-2.5 degrees vertical
	-1.5 degrees horizontal

Beam Spread	At 10% of Imax	67.2V x 67.6H
	At 50% of Imax	40.1V x 40.4H
	At 90% of Imax	16.7V x 17.3H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	897.4 lumens per klm.
	To 50% of Imax	556.2 lumens per klm.
	To 90% of Imax	136.7 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.91V I:0.0430A P:8.3000W PF:0.9000 Freq:49.38Hz Lamp Flux:69.0941x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-40D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

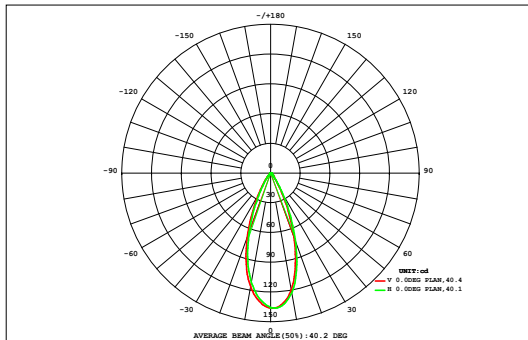

DATA OF LAMP		Eff:8.32lm/W	
MODEL		Imax(cd)	136.6
NOMINAL POWER(W)	30	AVAILABILITY(%)	89.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	61.95
NOMINAL FLUX(lm)	69.0941	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	69.09
TEST VOLTAGE(V)	220	θ @50% (H,V)	40,40DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.24	0.00
45	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.00	0.46	0.00
40	0.01	0.01	0.02	0.03	0.05	0.07	0.09	0.10	0.11	0.10	0.09	0.07	0.05	0.04	0.02	0.01	0.01	0.00	0.88	0.25
35	0.01	0.02	0.03	0.05	0.08	0.12	0.17	0.20	0.22	0.21	0.18	0.14	0.10	0.06	0.04	0.02	0.01	0.01	1.65	1.26
30	0.01	0.02	0.04	0.08	0.13	0.21	0.29	0.35	0.38	0.37	0.32	0.25	0.17	0.10	0.06	0.03	0.02	0.01	2.85	2.56
25	0.01	0.03	0.06	0.11	0.20	0.32	0.44	0.54	0.58	0.57	0.50	0.39	0.27	0.16	0.09	0.05	0.03	0.01	4.35	4.10
20	0.02	0.04	0.08	0.15	0.28	0.44	0.59	0.72	0.77	0.75	0.67	0.53	0.37	0.23	0.13	0.07	0.03	0.02	5.90	5.67
15	0.02	0.04	0.09	0.19	0.34	0.53	0.72	0.87	0.92	0.89	0.80	0.65	0.48	0.31	0.18	0.09	0.04	0.02	7.19	6.99
10	0.02	0.05	0.10	0.21	0.38	0.59	0.80	0.94	1.01	0.98	0.89	0.75	0.57	0.38	0.21	0.11	0.05	0.02	8.07	7.87
5	0.02	0.05	0.11	0.22	0.40	0.62	0.83	0.98	1.03	1.02	0.93	0.79	0.59	0.39	0.22	0.11	0.05	0.02	8.38	8.20
0	0.02	0.05	0.10	0.22	0.39	0.60	0.80	0.93	0.98	0.96	0.88	0.73	0.55	0.36	0.20	0.10	0.05	0.02	7.95	7.76
-5	0.02	0.04	0.09	0.19	0.34	0.52	0.68	0.80	0.86	0.84	0.75	0.62	0.46	0.30	0.17	0.09	0.04	0.02	6.81	6.61
-10	0.02	0.04	0.07	0.15	0.26	0.39	0.51	0.61	0.66	0.65	0.58	0.47	0.34	0.22	0.13	0.07	0.03	0.02	5.21	4.99
-15	0.01	0.03	0.06	0.10	0.17	0.26	0.35	0.42	0.46	0.45	0.40	0.31	0.22	0.14	0.09	0.05	0.03	0.01	3.55	3.28
-20	0.01	0.02	0.04	0.06	0.10	0.15	0.21	0.25	0.27	0.27	0.23	0.18	0.13	0.09	0.05	0.03	0.02	0.01	2.13	1.79
-25	0.01	0.01	0.02	0.04	0.06	0.08	0.11	0.13	0.14	0.14	0.12	0.10	0.07	0.05	0.03	0.02	0.01	0.01	1.16	0.61
-30	0.00	0.01	0.01	0.02	0.03	0.04	0.06	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.62	0.00
-35	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.32	0.00
-40	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.32	0.00
-45	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.32	0.00
HORIZONTAL(DEG)																				
Φ t	0.22	0.47	0.95	1.85	3.26	5.01	6.74	8.02	8.58	8.38	7.51	6.12	4.48	2.91	1.68	0.88	0.45	0.22	68	---
Φ a	0.00	0.00	0.40	1.49	2.96	4.74	6.48	7.78	8.36	8.14	7.26	5.86	4.19	2.59	1.31	0.38	0.00	0.00	---	62

one-half-peak spread: U:19.1,D:19.2 , L:18.3,R:20.4


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.91V I:0.0430A P:8.3000W PF:0.9000 Freq:49.38Hz Lamp Flux:69.0941x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-40D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

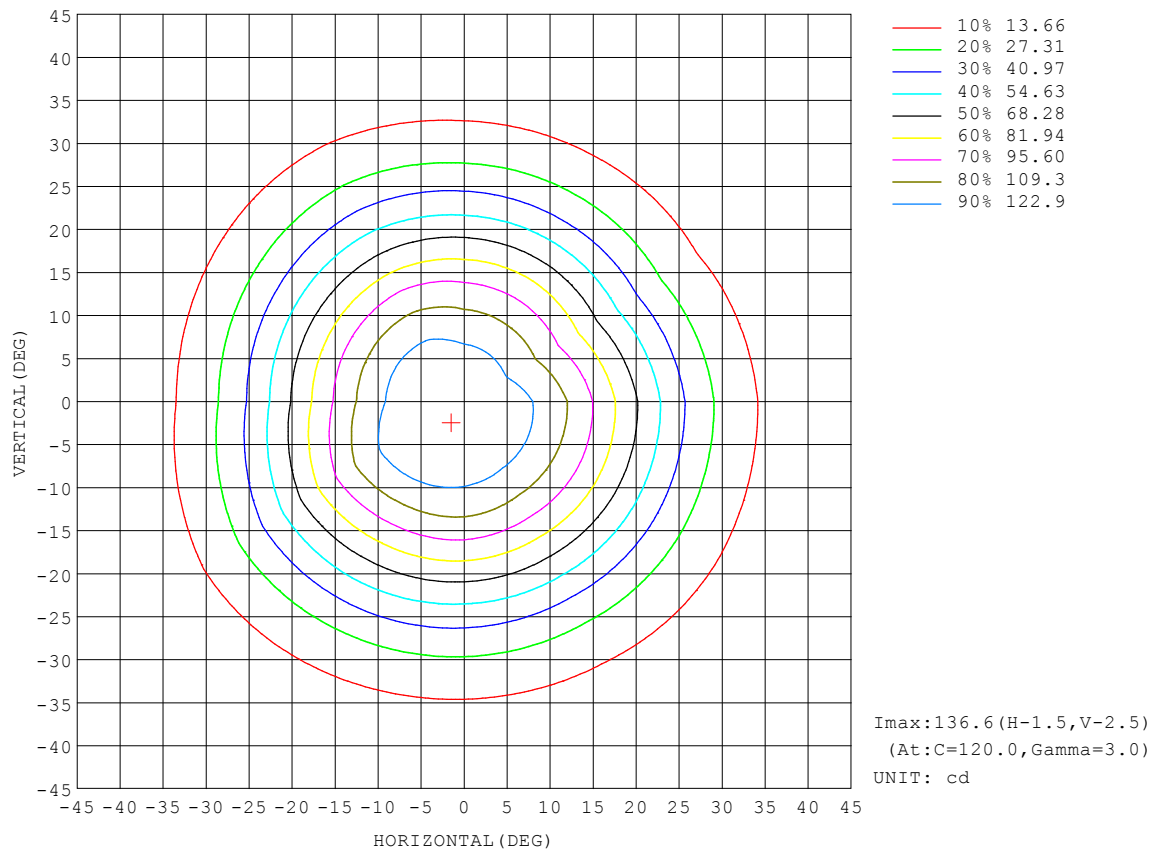


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.91V I:0.0430A P:8.3000W PF:0.9000 Freq:49.38Hz Lamp Flux:69.0941x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-40D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

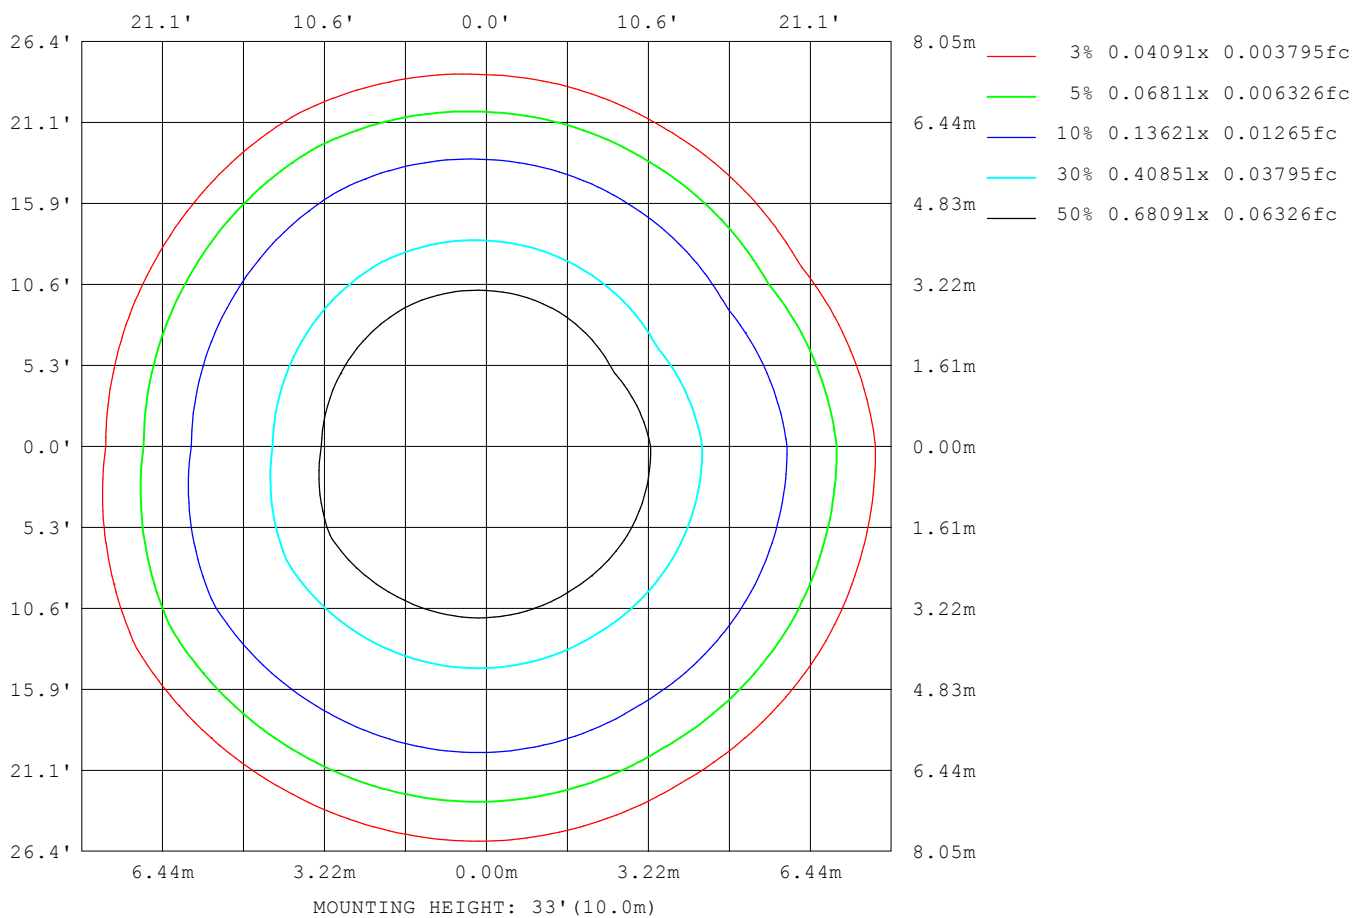

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

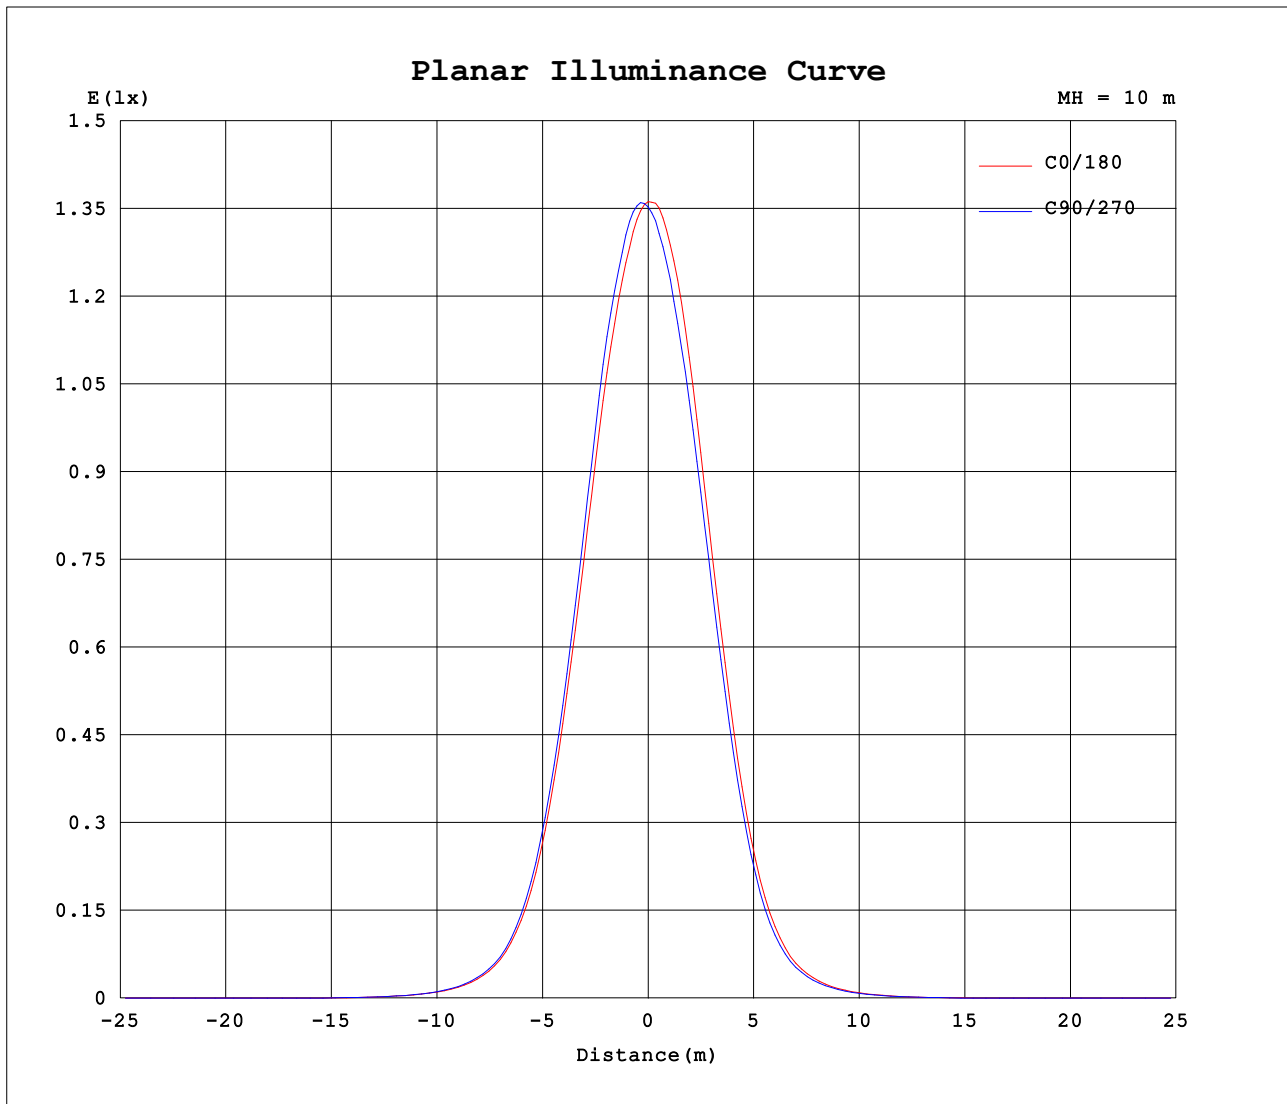


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.91V I:0.0430A P:8.3000W PF:0.9000 Freq:49.38Hz Lamp Flux:69.0941x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-40D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

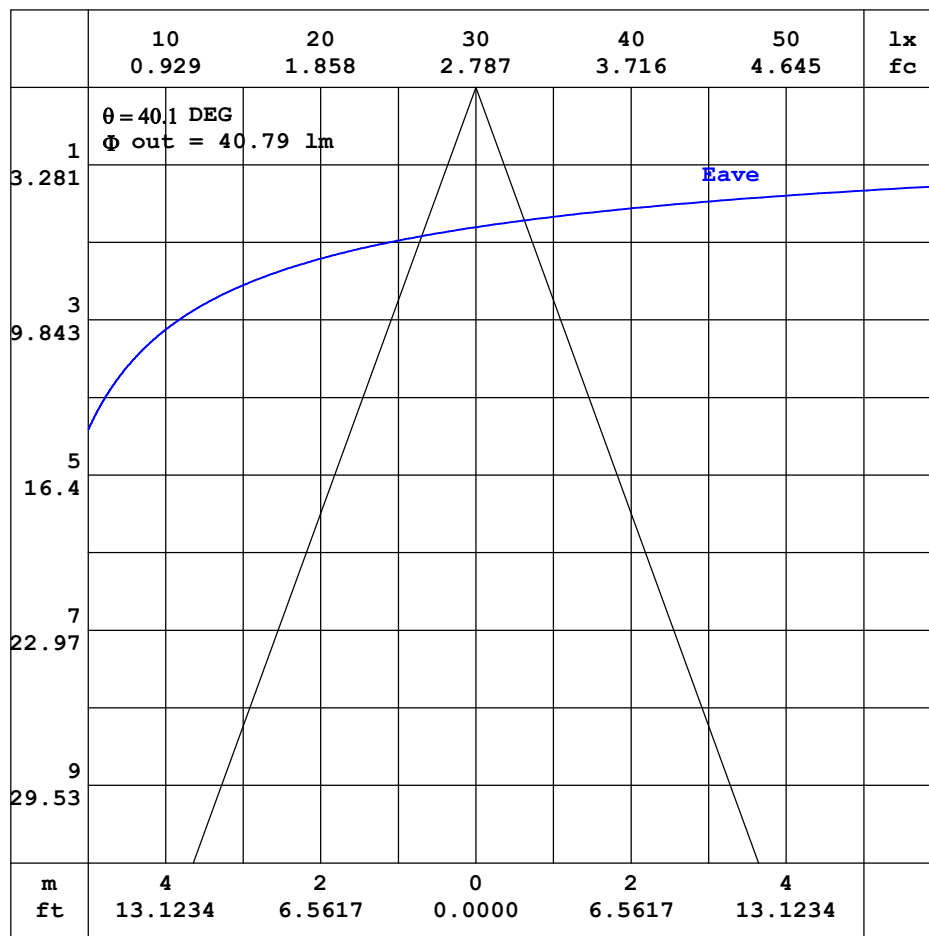

Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.91V I:0.0430A P:8.3000W PF:0.9000 Freq:49.38Hz Lamp Flux:69.0941x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-40D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.05	0.09	0.13	0.19	0.25	0.29	0.34	0.38	0.39	0.39
-170	0.02	0.01	0.02	0.02	0.01	0.01	0.01	0.02	0.03	0.05	0.08	0.13	0.18	0.23	0.29	0.32	0.34	0.35	0.39
-160	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.07	0.10	0.15	0.18	0.22	0.23	0.25	0.29	0.33
-150	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.03	0.03	0.05	0.06	0.07	0.09	0.11	0.12	0.16	0.19	0.21
-140	0.02	0.03	0.04	0.04	0.04	0.03	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.04	0.07	0.08	0.10
-130	0.02	0.03	0.05	0.06	0.06	0.05	0.04	0.03	0.03	0.03	0.03	0.03	0.02	0.00	0.00	0.01	0.02	0.03	0.04
-120	0.02	0.04	0.05	0.07	0.08	0.08	0.08	0.07	0.05	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.02
-110	0.02	0.04	0.06	0.08	0.10	0.11	0.13	0.11	0.10	0.09	0.08	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01
-100	0.02	0.05	0.07	0.10	0.12	0.14	0.16	0.15	0.15	0.14	0.13	0.12	0.11	0.09	0.08	0.06	0.04	0.03	0.01
-90	0.02	0.05	0.08	0.11	0.14	0.17	0.20	0.19	0.18	0.17	0.16	0.15	0.14	0.12	0.10	0.08	0.05	0.03	0.01
-80	0.02	0.05	0.08	0.11	0.15	0.18	0.22	0.21	0.20	0.19	0.18	0.16	0.15	0.13	0.10	0.08	0.06	0.03	0.01
-70	0.02	0.05	0.08	0.12	0.16	0.19	0.23	0.23	0.22	0.20	0.18	0.17	0.15	0.13	0.11	0.10	0.07	0.05	0.03
-60	0.02	0.05	0.08	0.12	0.16	0.19	0.22	0.24	0.22	0.21	0.20	0.20	0.21	0.23	0.24	0.23	0.24	0.23	0.22
-50	0.02	0.05	0.09	0.12	0.15	0.18	0.21	0.22	0.22	0.24	0.29	0.36	0.52	0.76	0.97	1.17	1.35	1.46	1.49
-40	0.02	0.04	0.08	0.12	0.14	0.17	0.18	0.21	0.28	0.44	0.84	1.38	2.08	2.92	3.92	4.91	5.77	6.34	6.48
-30	0.02	0.04	0.08	0.10	0.13	0.15	0.18	0.25	0.52	1.13	2.19	3.69	5.85	8.89	12.9	17.6	22.2	25.4	26.2
-20	0.02	0.04	0.07	0.10	0.11	0.14	0.20	0.35	0.89	1.98	3.92	7.39	13.6	23.6	37.0	51.6	63.6	71.6	73.8
-10	0.02	0.03	0.06	0.08	0.10	0.13	0.19	0.44	1.17	2.62	5.31	10.6	21.7	40.5	65.5	91.2	110	121	123
0	0.02	0.03	0.05	0.07	0.08	0.11	0.17	0.45	1.19	2.65	5.41	10.9	22.5	42.4	69.2	96.9	120	133	136
10	0.02	0.03	0.05	0.07	0.08	0.11	0.18	0.37	1.04	2.31	4.65	9.12	18.1	33.8	55.7	78.8	99.7	112	112
20	0.02	0.02	0.05	0.06	0.07	0.10	0.17	0.29	0.72	1.56	3.02	5.61	10.0	17.7	29.0	42.8	54.7	61.7	63.2
30	0.02	0.02	0.04	0.05	0.07	0.08	0.13	0.20	0.33	0.81	1.53	2.68	4.44	6.91	10.2	14.2	17.5	19.7	19.8
40	0.02	0.02	0.04	0.05	0.06	0.07	0.09	0.13	0.21	0.30	0.59	0.97	1.57	2.31	3.15	3.90	4.49	4.83	4.81
50	0.02	0.02	0.03	0.04	0.05	0.06	0.06	0.08	0.11	0.14	0.19	0.24	0.30	0.54	0.74	0.91	1.04	1.12	1.13
60	0.02	0.02	0.02	0.04	0.04	0.05	0.05	0.06	0.05	0.06	0.06	0.07	0.08	0.10	0.13	0.16	0.18	0.19	0.20
70	0.02	0.02	0.02	0.02	0.03	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.02	0.04	0.05	0.06	0.07
80	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.02	0.02	0.03
90	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.00
140	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.02	0.03	0.05	0.05	0.05	0.05	0.05
150	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.04	0.07	0.11	0.15	0.15	0.15	0.15
160	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.05	0.08	0.13	0.18	0.23	0.26	0.27	0.27
170	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.06	0.10	0.14	0.19	0.23	0.27	0.32	0.36	0.34
180	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.05	0.09	0.13	0.19	0.25	0.29	0.34	0.38	0.39	0.40

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.91V I:0.0430A P:8.3000W PF:0.9000 Freq:49.38Hz Lamp Flux:69.0941x1 lm																		
NAME:Nuit 100-100mm-RGBW BLUE-40D-REV1									TYPE:RGBW-BLUE					WEIGHT:				
SPEC.:40 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.38	0.38	0.34	0.29	0.24	0.17	0.11	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.35	0.35	0.34	0.30	0.24	0.18	0.12	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.30	0.26	0.24	0.21	0.18	0.15	0.10	0.06	0.03	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.19	0.16	0.13	0.11	0.10	0.07	0.05	0.04	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.08	0.07	0.04	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.03	0.02	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
-90	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	
-70	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	
-60	0.22	0.21	0.20	0.19	0.17	0.13	0.10	0.07	0.05	0.03	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.00	
-50	1.43	1.29	1.10	0.89	0.66	0.38	0.29	0.21	0.15	0.08	0.04	0.03	0.02	0.02	0.02	0.01	0.01	0.00	
-40	6.13	5.39	4.43	3.38	2.56	1.81	1.20	0.74	0.31	0.20	0.11	0.06	0.04	0.03	0.03	0.01	0.01	0.00	
-30	24.4	20.4	15.5	11.2	7.74	5.00	3.15	1.85	1.03	0.37	0.22	0.11	0.06	0.04	0.03	0.02	0.01	0.00	
-20	69.2	59.0	45.7	31.6	19.8	11.5	6.49	3.55	1.88	0.94	0.31	0.18	0.09	0.05	0.04	0.03	0.02	0.00	
-10	116	102	81.6	58.3	36.4	20.1	10.3	5.28	2.70	1.31	0.46	0.22	0.11	0.06	0.04	0.03	0.02	0.00	
0	130	117	95.3	69.3	44.2	24.2	12.1	6.03	3.02	1.47	0.57	0.24	0.12	0.07	0.04	0.03	0.02	0.00	
10	105	90.3	68.7	48.2	29.8	16.7	8.78	4.64	2.43	1.21	0.43	0.22	0.12	0.06	0.04	0.03	0.02	0.00	
20	58.7	48.9	35.9	23.5	14.0	7.93	4.72	2.74	1.53	0.76	0.29	0.17	0.10	0.06	0.04	0.03	0.02	0.00	
30	18.3	15.2	11.4	8.09	5.47	3.56	2.21	1.32	0.74	0.31	0.20	0.12	0.07	0.05	0.04	0.03	0.02	0.00	
40	4.54	4.00	3.30	2.56	1.90	1.34	0.87	0.38	0.25	0.18	0.12	0.08	0.06	0.05	0.04	0.02	0.01	0.00	
50	1.08	0.98	0.83	0.64	0.39	0.26	0.20	0.15	0.12	0.09	0.07	0.06	0.04	0.04	0.03	0.02	0.01	0.00	
60	0.18	0.17	0.14	0.11	0.08	0.06	0.06	0.05	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.00	
70	0.06	0.05	0.03	0.02	0.01	0.00	0.01	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.00	
80	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.01	0.01	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.06	0.06	0.06	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.16	0.16	0.15	0.12	0.09	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.28	0.28	0.25	0.20	0.15	0.10	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.37	0.34	0.30	0.25	0.21	0.15	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.38	0.38	0.34	0.29	0.24	0.17	0.11	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks: