

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	2035.0 cd per klm.
(Luminaire orientation as tested.)	2.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	66.5V x 67.1H
	At 50% of Imax	39.4V x 40.2H
	At 90% of Imax	15.6V x 17.4H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	898.4 lumens per klm.
	To 50% of Imax	548.7 lumens per klm.
	To 90% of Imax	122.2 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.82V I:0.0410A P:7.8000W PF:0.9000 Freq:49.38Hz Lamp Flux:321.705x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-40D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

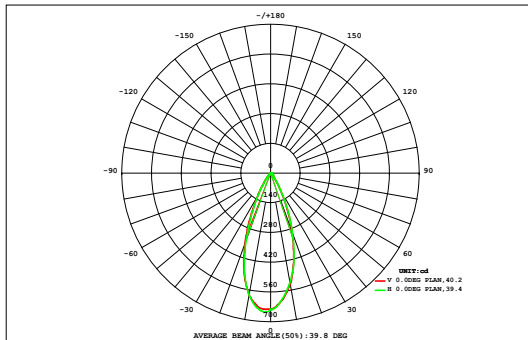

DATA OF LAMP		Eff:41.24lm/W	
MODEL		Imax(cd)	654.7
NOMINAL POWER(W)	30	AVAILABILITY(%)	89.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	288.6
NOMINAL FLUX(lm)	321.705	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	321.7
TEST VOLTAGE(V)	220	θ @50% (H,V)	40,39DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.01	0.03	0.04	0.06	0.09	0.11	0.13	0.13	0.13	0.12	0.10	0.08	0.06	0.04	0.02	0.01	0.01	1.19	0.00
45	0.01	0.01	0.03	0.04	0.06	0.09	0.11	0.13	0.13	0.13	0.12	0.10	0.08	0.06	0.04	0.02	0.01	0.01	1.19	0.00
40	0.01	0.03	0.05	0.08	0.12	0.17	0.22	0.26	0.28	0.28	0.26	0.21	0.16	0.11	0.07	0.04	0.02	0.01	2.39	0.00
35	0.02	0.05	0.08	0.14	0.22	0.32	0.43	0.53	0.59	0.59	0.53	0.43	0.31	0.21	0.13	0.07	0.04	0.02	4.70	1.92
30	0.03	0.07	0.13	0.23	0.37	0.59	0.83	1.04	1.17	1.16	1.04	0.83	0.58	0.36	0.21	0.12	0.06	0.03	8.86	7.19
25	0.05	0.10	0.19	0.35	0.62	1.01	1.46	1.83	2.03	2.03	1.82	1.45	1.00	0.60	0.33	0.18	0.09	0.05	15.2	13.8
20	0.06	0.13	0.26	0.52	0.94	1.54	2.20	2.75	3.05	3.04	2.71	2.17	1.51	0.91	0.49	0.26	0.13	0.06	22.7	21.6
15	0.08	0.17	0.34	0.69	1.27	2.05	2.88	3.61	4.00	3.99	3.58	2.87	2.03	1.26	0.71	0.36	0.17	0.08	30.1	29.1
10	0.09	0.19	0.41	0.84	1.55	2.44	3.38	4.18	4.63	4.64	4.21	3.44	2.54	1.65	0.92	0.46	0.21	0.10	35.9	34.9
5	0.10	0.20	0.44	0.92	1.69	2.60	3.58	4.35	4.84	4.89	4.52	3.87	2.94	1.94	1.08	0.53	0.24	0.11	38.8	38.0
0	0.10	0.21	0.44	0.93	1.70	2.61	3.55	4.28	4.71	4.76	4.51	3.89	2.97	1.98	1.11	0.54	0.25	0.11	38.6	37.8
-5	0.09	0.20	0.42	0.87	1.60	2.47	3.33	3.91	4.23	4.31	4.09	3.50	2.66	1.77	0.99	0.49	0.23	0.10	35.2	34.3
-10	0.08	0.17	0.36	0.74	1.36	2.07	2.76	3.27	3.57	3.63	3.39	2.85	2.16	1.43	0.80	0.40	0.19	0.09	29.3	28.3
-15	0.07	0.14	0.28	0.55	0.98	1.50	2.01	2.46	2.73	2.75	2.51	2.09	1.57	1.02	0.58	0.30	0.15	0.07	21.8	20.7
-20	0.06	0.11	0.21	0.37	0.62	0.95	1.29	1.62	1.83	1.85	1.68	1.36	1.00	0.66	0.39	0.21	0.11	0.06	14.4	13.0
-25	0.04	0.08	0.14	0.23	0.36	0.54	0.74	0.92	1.04	1.06	0.96	0.79	0.58	0.39	0.24	0.14	0.08	0.04	8.38	6.56
-30	0.03	0.06	0.09	0.14	0.21	0.29	0.39	0.48	0.53	0.54	0.50	0.41	0.32	0.22	0.15	0.09	0.05	0.03	4.53	1.41
-35	0.02	0.04	0.06	0.09	0.12	0.16	0.20	0.24	0.27	0.27	0.25	0.22	0.17	0.13	0.09	0.06	0.03	0.02	2.42	0.00
-40	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.13	0.13	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.02	0.01	1.28	0.00
-45	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.13	0.13	0.14	0.13	0.11	0.09	0.07	0.05	0.03	0.02	0.01	1.28	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL(DEG) 10 15 20 25 30 35 40 45																				
Φ t	0.96	1.98	3.97	7.78	13.9	21.5	29.4	36.0	39.8	40.0	36.8	30.6	22.7	14.8	8.38	4.30	2.10	1.00	316	---
Φ a	0.00	0.00	1.22	6.03	12.3	20.1	28.2	34.8	38.7	38.9	35.6	29.4	21.4	13.3	6.66	1.91	0.00	0.00	---	289

one-half-peak spread: U:21.1,D:18.5 , L:21.1,R:19.4


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.82V I:0.0410A P:7.8000W PF:0.9000 Freq:49.38Hz Lamp Flux:321.705x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-40D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

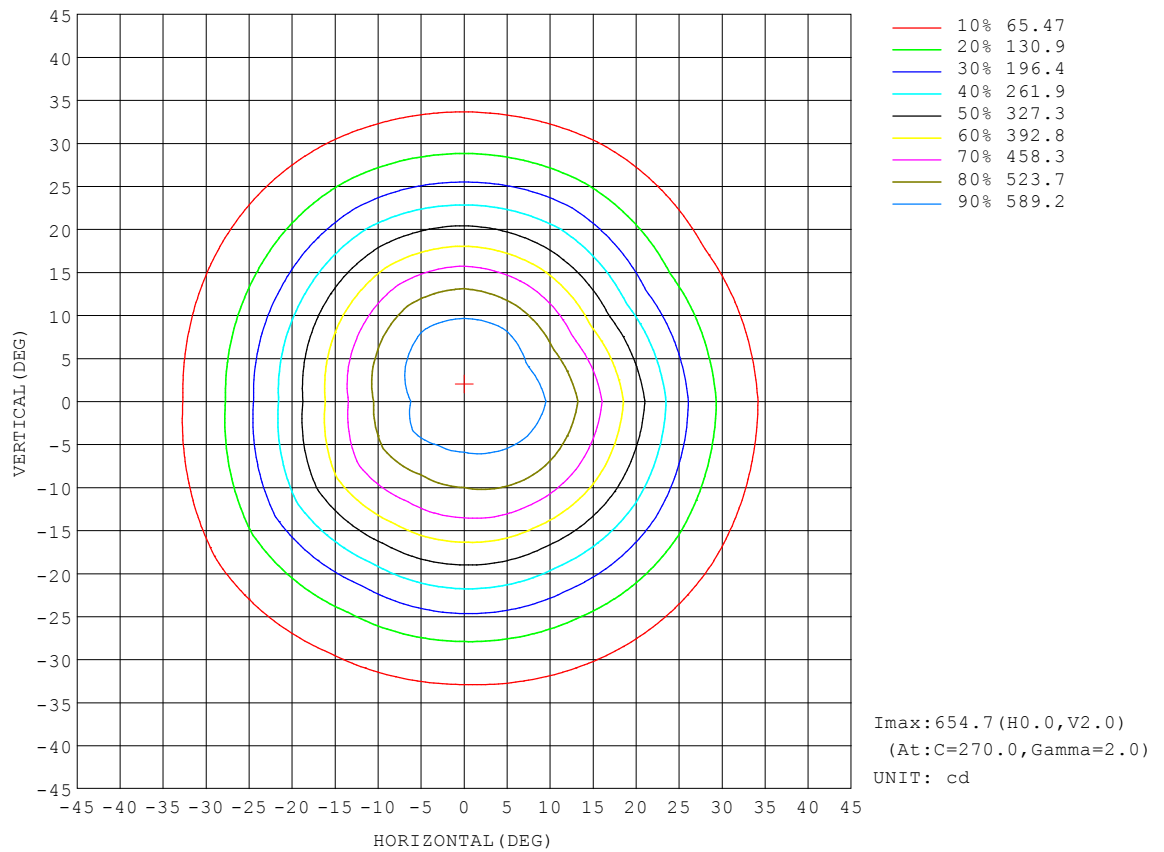


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.82V I:0.0410A P:7.8000W PF:0.9000 Freq:49.38Hz Lamp Flux:321.705x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-40D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

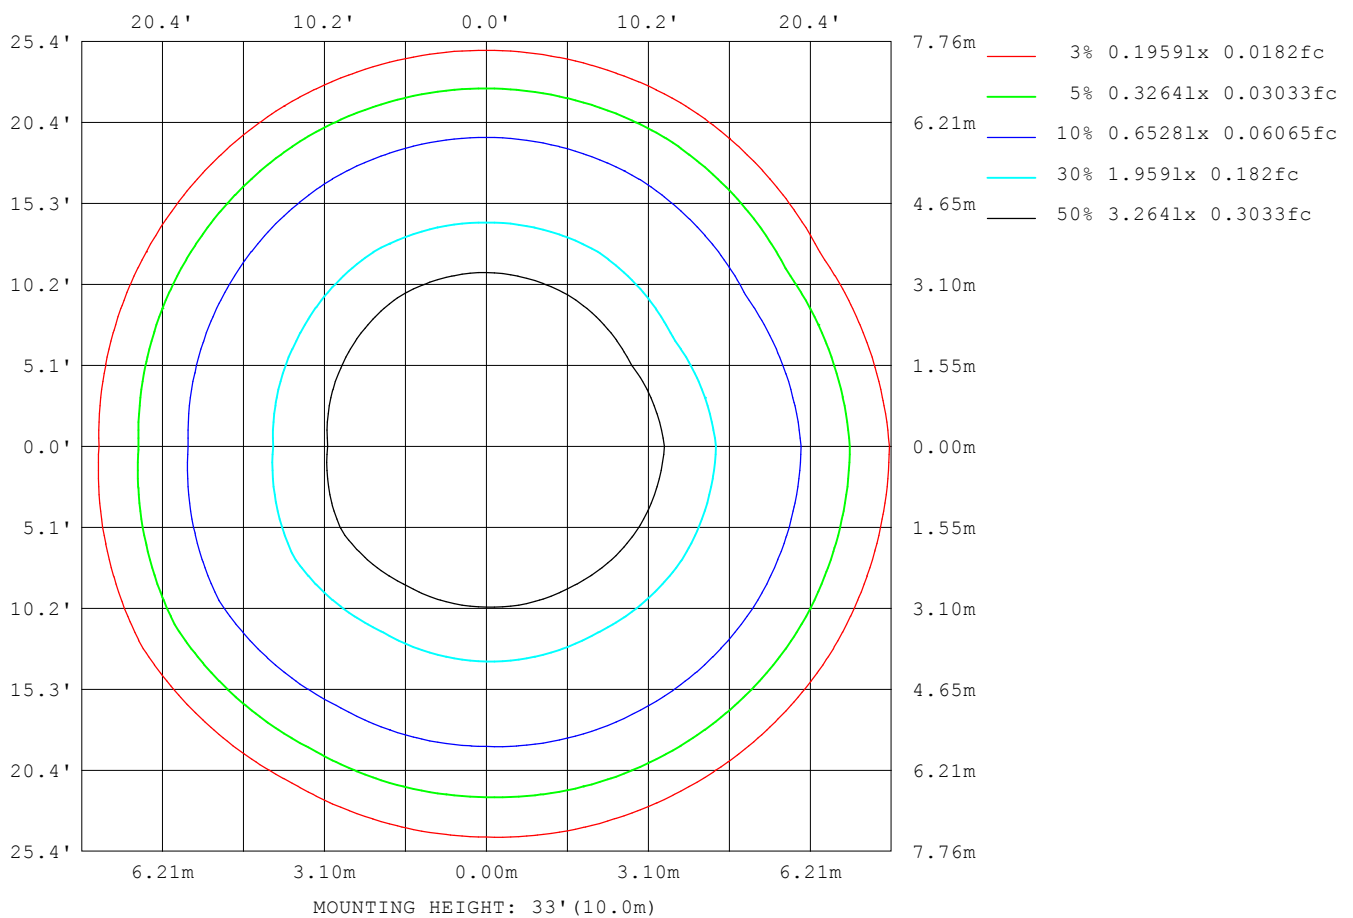

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

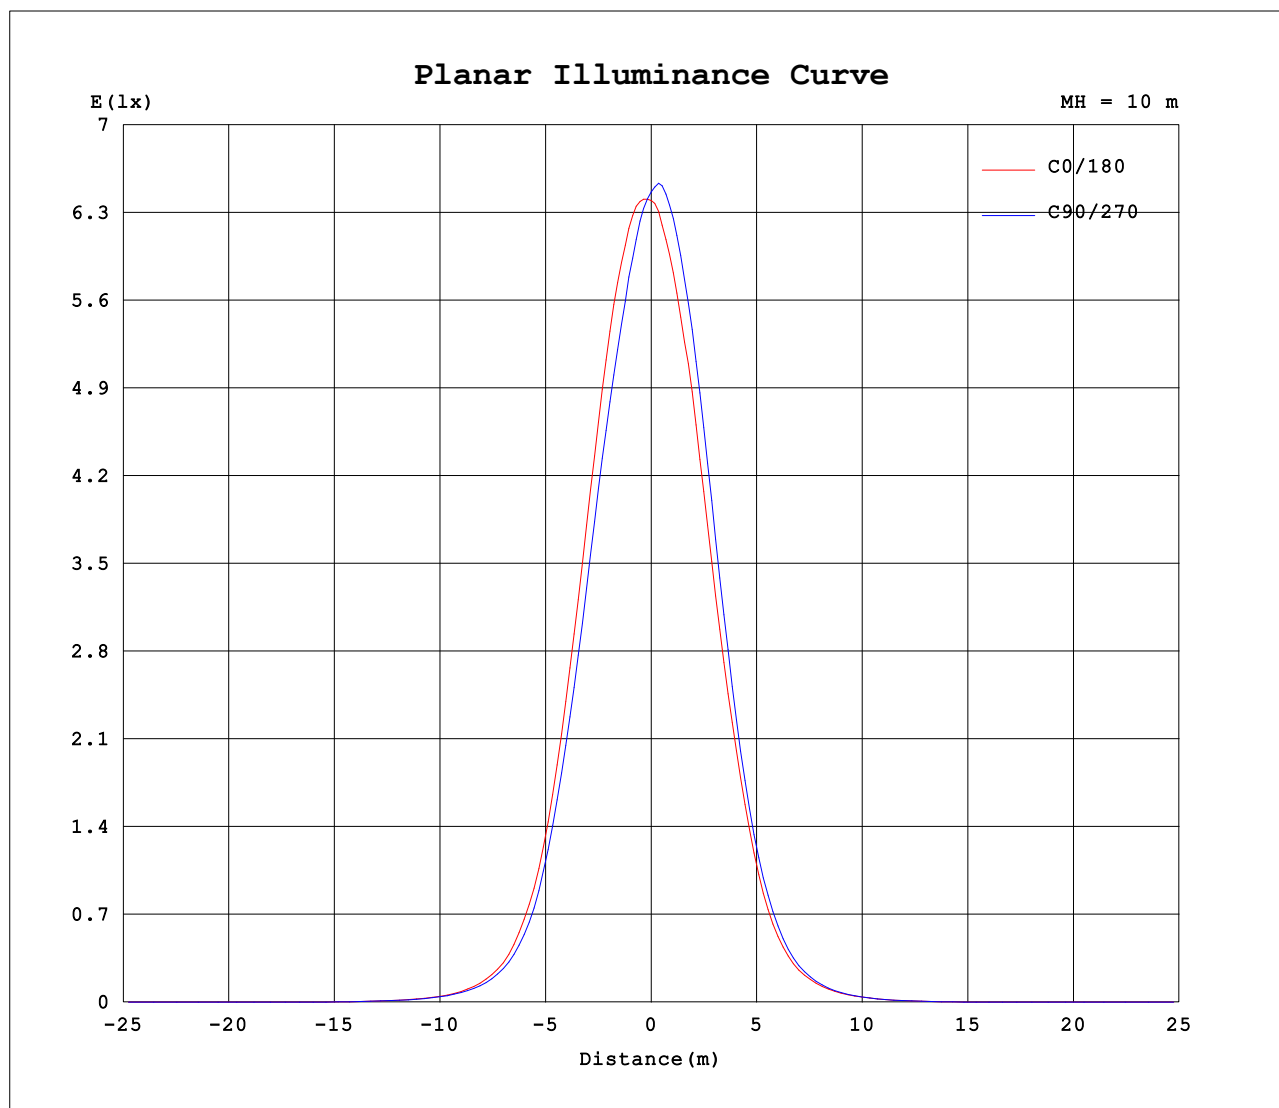


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.82V I:0.0410A P:7.8000W PF:0.9000 Freq:49.38Hz Lamp Flux:321.705x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-40D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

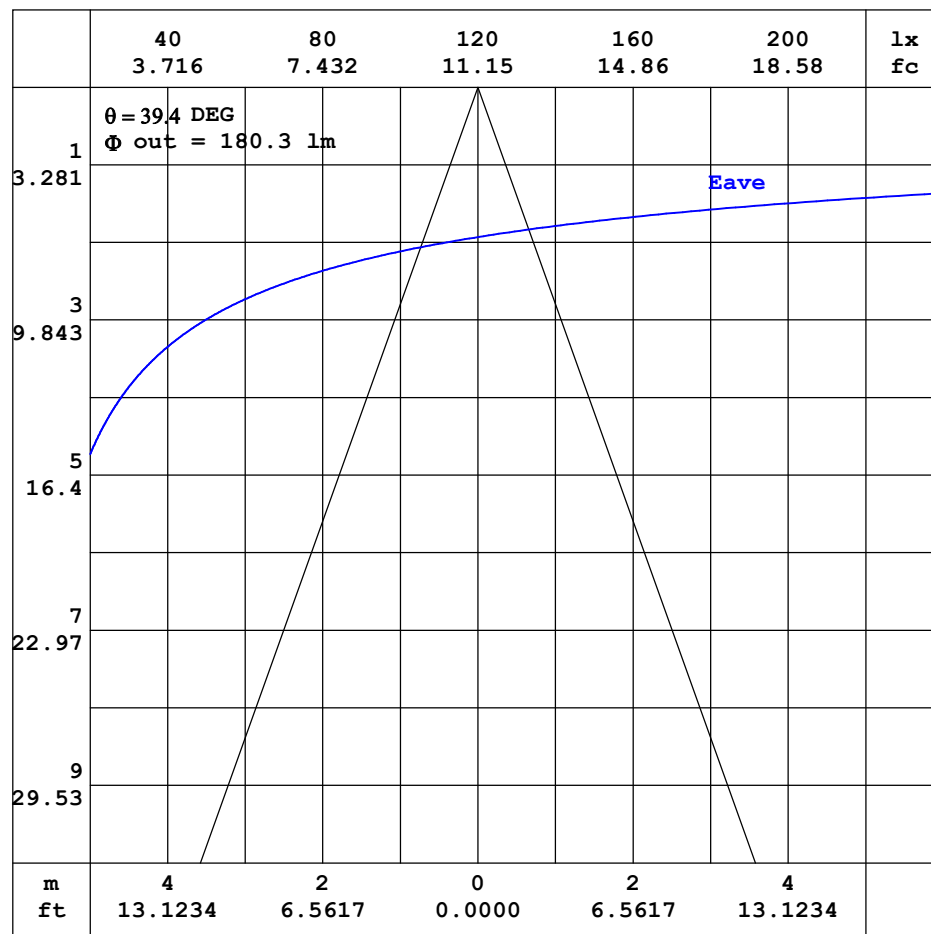

Note: The Curves indicate the illuminated area and the average illuminance when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.82V I:0.0410A P:7.8000W PF:0.9000 Freq:49.38Hz Lamp Flux:321.705x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-40D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.08	0.13	0.23	0.40	0.62	0.88	1.17	1.40	1.60	1.74	1.90	1.96
-170	0.03	0.04	0.04	0.04	0.04	0.04	0.05	0.08	0.13	0.22	0.38	0.60	0.85	1.14	1.39	1.58	1.69	1.74	1.82
-160	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.07	0.11	0.18	0.29	0.46	0.67	0.89	1.10	1.27	1.40	1.51	1.57
-150	0.03	0.05	0.06	0.06	0.05	0.05	0.06	0.07	0.09	0.12	0.19	0.27	0.39	0.52	0.66	0.79	0.91	0.99	1.04
-140	0.03	0.05	0.06	0.07	0.06	0.06	0.06	0.06	0.08	0.08	0.10	0.13	0.17	0.22	0.28	0.34	0.41	0.46	0.48
-130	0.03	0.06	0.07	0.08	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.11	0.14	0.16	0.18
-120	0.03	0.06	0.08	0.09	0.10	0.10	0.10	0.09	0.08	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06
-110	0.03	0.06	0.08	0.10	0.12	0.13	0.14	0.13	0.12	0.11	0.10	0.09	0.08	0.08	0.06	0.06	0.05	0.04	0.04
-100	0.03	0.06	0.09	0.11	0.14	0.16	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.10	0.09	0.07	0.06	0.04	0.03
-90	0.03	0.07	0.10	0.13	0.16	0.19	0.22	0.21	0.20	0.19	0.18	0.17	0.16	0.14	0.12	0.09	0.07	0.05	0.03
-80	0.03	0.07	0.10	0.14	0.19	0.23	0.27	0.28	0.27	0.26	0.25	0.24	0.23	0.21	0.19	0.17	0.15	0.12	0.10
-70	0.03	0.07	0.12	0.17	0.22	0.27	0.32	0.33	0.33	0.32	0.32	0.32	0.32	0.31	0.30	0.29	0.27	0.26	0.24
-60	0.03	0.07	0.13	0.19	0.25	0.29	0.34	0.36	0.37	0.41	0.47	0.54	0.62	0.71	0.79	0.86	0.91	0.94	0.94
-50	0.03	0.08	0.14	0.21	0.26	0.31	0.36	0.45	0.58	0.77	1.00	1.28	2.08	3.18	4.11	4.94	5.63	6.06	6.18
-40	0.03	0.08	0.14	0.21	0.27	0.32	0.44	0.68	1.01	1.68	3.53	5.66	8.25	11.2	14.5	18.0	21.3	23.8	24.7
-30	0.03	0.08	0.15	0.22	0.28	0.37	0.60	0.98	2.12	4.73	8.66	14.1	21.7	32.1	45.7	62.0	80.0	93.5	98.7
-20	0.03	0.08	0.15	0.21	0.28	0.42	0.75	1.37	3.82	8.08	15.4	28.0	50.5	86.8	138	194	245	287	303
-10	0.03	0.08	0.14	0.21	0.27	0.46	0.85	1.83	5.02	11.0	21.8	42.6	85.1	162	266	372	453	501	524
0	0.03	0.07	0.14	0.20	0.26	0.46	0.86	1.88	5.20	11.6	23.7	46.9	96.2	185	297	422	533	604	640
10	0.03	0.07	0.13	0.20	0.26	0.44	0.83	1.57	4.53	10.3	20.8	40.9	81.4	153	256	370	480	559	584
20	0.03	0.07	0.12	0.18	0.24	0.37	0.70	1.19	3.11	6.93	13.8	25.8	46.7	83.8	139	210	278	322	339
30	0.03	0.06	0.11	0.17	0.23	0.30	0.51	0.88	1.37	3.44	6.85	12.3	20.5	32.3	48.6	69.3	90.1	106	111
40	0.03	0.06	0.10	0.15	0.20	0.25	0.34	0.55	0.87	1.25	2.46	4.24	6.99	10.4	14.3	18.3	22.0	24.6	25.5
50	0.03	0.05	0.08	0.12	0.17	0.20	0.24	0.31	0.44	0.63	0.88	1.14	1.43	2.37	3.21	3.94	4.56	4.96	5.03
60	0.03	0.04	0.07	0.10	0.13	0.16	0.18	0.21	0.23	0.27	0.32	0.41	0.51	0.61	0.72	0.81	0.88	0.92	0.93
70	0.03	0.04	0.05	0.07	0.09	0.11	0.12	0.14	0.15	0.15	0.16	0.17	0.18	0.19	0.21	0.23	0.25	0.26	0.27
80	0.03	0.03	0.04	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.06	0.06	0.05	0.06	0.07	0.09	0.10	0.11	0.12
90	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.02	0.02
100	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
110	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01
120	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.01
130	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.05	0.07	0.08	0.08	0.08	0.07	0.06
140	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.05	0.08	0.12	0.17	0.23	0.26	0.29	0.29	0.28
150	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.06	0.10	0.19	0.29	0.40	0.52	0.62	0.70	0.75	0.75
160	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.06	0.12	0.22	0.35	0.52	0.71	0.90	1.07	1.20	1.27	1.29
170	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.06	0.11	0.19	0.33	0.53	0.76	1.00	1.22	1.40	1.55	1.66	1.68
180	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.08	0.13	0.23	0.40	0.62	0.88	1.17	1.40	1.60	1.74	1.90	1.96

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.82V I:0.0410A P:7.8000W PF:0.9000 Freq:49.38Hz Lamp Flux:321.705x1 lm																		
NAME:Nuit 100-100mm-RGBW GREEN-40D-REV1									TYPE:RGBW-GREEN					WEIGHT:				
SPEC.:40 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.89	1.79	1.65	1.46	1.19	0.89	0.62	0.38	0.21	0.10	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
-170	1.76	1.70	1.59	1.40	1.14	0.85	0.59	0.37	0.21	0.10	0.05	0.02	0.02	0.02	0.01	0.01	0.01	0.02	
-160	1.51	1.41	1.28	1.10	0.88	0.67	0.46	0.29	0.17	0.09	0.05	0.03	0.02	0.02	0.02	0.01	0.01	0.02	
-150	1.00	0.91	0.80	0.66	0.52	0.39	0.28	0.19	0.12	0.07	0.04	0.03	0.02	0.02	0.02	0.01	0.01	0.02	
-140	0.46	0.41	0.35	0.28	0.22	0.17	0.12	0.09	0.07	0.05	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.02	
-130	0.16	0.14	0.11	0.08	0.06	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.02	
-120	0.05	0.04	0.03	0.01	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.02	
-110	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.02	
-100	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02	
-90	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	
-80	0.10	0.11	0.11	0.11	0.11	0.10	0.09	0.08	0.07	0.05	0.04	0.02	0.02	0.03	0.03	0.02	0.02	0.02	
-70	0.25	0.25	0.25	0.24	0.24	0.23	0.20	0.18	0.15	0.13	0.11	0.08	0.07	0.06	0.04	0.04	0.03	0.02	
-60	0.94	0.91	0.85	0.77	0.68	0.57	0.45	0.36	0.28	0.23	0.19	0.15	0.13	0.10	0.08	0.05	0.04	0.02	
-50	5.99	5.47	4.71	3.84	2.87	1.59	1.25	0.97	0.70	0.47	0.31	0.24	0.19	0.14	0.11	0.07	0.04	0.02	
-40	24.2	22.0	18.8	14.9	11.3	7.93	5.19	3.16	1.44	0.98	0.62	0.36	0.25	0.18	0.14	0.09	0.05	0.02	
-30	96.2	84.6	67.4	49.6	34.2	22.3	13.9	8.11	4.40	1.64	1.02	0.58	0.32	0.23	0.16	0.10	0.05	0.02	
-20	292	255	204	144	91.3	52.5	29.3	15.8	8.22	3.95	1.42	0.82	0.43	0.26	0.18	0.11	0.06	0.02	
-10	521	472	387	282	177	96.3	48.1	24.2	12.0	5.61	1.98	0.98	0.51	0.28	0.19	0.12	0.06	0.02	
0	635	583	483	354	223	120	57.5	28.2	13.6	6.30	2.44	1.05	0.53	0.29	0.20	0.13	0.06	0.02	
10	558	481	371	259	159	87.6	44.0	22.3	11.1	5.12	1.83	0.94	0.49	0.28	0.20	0.12	0.06	0.02	
20	319	275	208	137	79.5	43.2	24.2	13.2	6.82	3.17	1.29	0.75	0.41	0.26	0.18	0.12	0.06	0.02	
30	105	89.3	68.6	47.4	30.7	18.9	11.0	5.92	3.09	1.37	0.88	0.52	0.31	0.23	0.16	0.11	0.05	0.02	
40	24.4	21.6	17.8	13.7	9.67	6.27	3.75	1.72	1.15	0.78	0.52	0.33	0.25	0.19	0.14	0.10	0.05	0.02	
50	4.84	4.35	3.68	2.86	1.84	1.32	1.04	0.79	0.56	0.39	0.29	0.24	0.20	0.15	0.11	0.08	0.05	0.02	
60	0.90	0.85	0.78	0.68	0.57	0.47	0.37	0.29	0.25	0.23	0.20	0.17	0.14	0.11	0.09	0.06	0.04	0.02	
70	0.26	0.24	0.23	0.21	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.10	0.09	0.07	0.05	0.04	0.03	0.02	
80	0.11	0.10	0.08	0.07	0.06	0.04	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	
90	0.02	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
100	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
110	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
120	0.02	0.02	0.03	0.02	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
130	0.07	0.07	0.08	0.07	0.07	0.05	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
140	0.29	0.28	0.25	0.21	0.17	0.12	0.08	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
150	0.74	0.70	0.62	0.51	0.40	0.28	0.18	0.10	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
160	1.28	1.21	1.08	0.91	0.71	0.51	0.35	0.21	0.11	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
170	1.71	1.59	1.43	1.24	1.01	0.76	0.52	0.32	0.18	0.08	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.02	
180	1.89	1.79	1.65	1.46	1.19	0.89	0.62	0.38	0.21	0.10	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.02	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: