

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2116.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	65.0V x 65.1H
	At 50% of Imax	38.6V x 39.0H
	At 90% of Imax	16.0V x 16.5H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	895.5 lumens per klm.
	To 50% of Imax	556.3 lumens per klm.
	To 90% of Imax	128.2 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.83V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.447x1 lm		
NAME:Nuit 100-100mm-RGBW RED-40D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

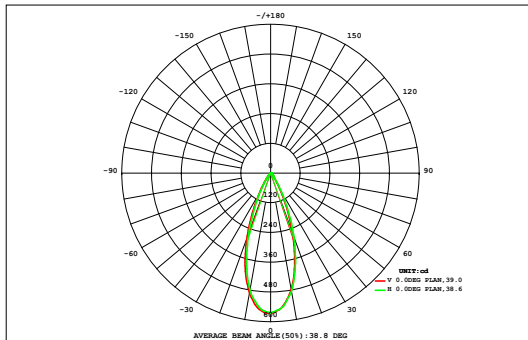

DATA OF LAMP		Eff:31.84lm/W	
MODEL		Imax(cd)	566.0
NOMINAL POWER(W)	30	AVAILABILITY(%)	89.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	239.7
NOMINAL FLUX(lm)	267.447	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	267.4
TEST VOLTAGE(V)	220	θ @50%(H,V)	39,39DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.09	0.09	0.09	0.07	0.06	0.04	0.03	0.02	0.01	0.00	0.85	0.00
45	0.01	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.09	0.09	0.09	0.07	0.06	0.04	0.03	0.02	0.01	0.00	1.68	0.00
40	0.02	0.03	0.06	0.10	0.16	0.23	0.30	0.37	0.40	0.40	0.36	0.29	0.21	0.14	0.09	0.05	0.03	0.01	3.26	0.65
35	0.03	0.05	0.10	0.17	0.27	0.42	0.60	0.75	0.83	0.83	0.73	0.57	0.39	0.25	0.15	0.08	0.04	0.02	6.29	4.71
30	0.04	0.07	0.14	0.26	0.46	0.75	1.10	1.38	1.53	1.52	1.35	1.05	0.70	0.41	0.23	0.12	0.07	0.03	11.2	10.0
25	0.05	0.10	0.20	0.39	0.72	1.20	1.74	2.17	2.39	2.36	2.11	1.66	1.11	0.64	0.34	0.18	0.09	0.05	17.5	16.4
20	0.06	0.13	0.26	0.54	1.01	1.66	2.36	2.94	3.23	3.21	2.86	2.24	1.54	0.92	0.50	0.25	0.12	0.06	23.9	23.0
15	0.07	0.15	0.31	0.67	1.27	2.05	2.88	3.53	3.86	3.84	3.42	2.73	1.98	1.25	0.68	0.33	0.15	0.07	29.2	28.4
10	0.07	0.16	0.35	0.74	1.42	2.28	3.16	3.83	4.19	4.14	3.78	3.17	2.36	1.51	0.82	0.39	0.18	0.08	32.6	31.8
5	0.07	0.16	0.36	0.77	1.48	2.34	3.22	3.86	4.18	4.19	3.90	3.27	2.43	1.56	0.85	0.40	0.18	0.08	33.3	32.5
0	0.07	0.16	0.35	0.75	1.42	2.24	3.05	3.61	3.88	3.86	3.56	2.98	2.20	1.41	0.76	0.36	0.17	0.08	30.9	30.1
-5	0.07	0.14	0.31	0.64	1.22	1.90	2.54	3.04	3.30	3.27	2.96	2.44	1.80	1.14	0.62	0.30	0.14	0.07	25.9	25.1
-10	0.06	0.12	0.25	0.49	0.89	1.39	1.88	2.28	2.50	2.48	2.21	1.79	1.29	0.81	0.45	0.23	0.12	0.06	19.3	18.3
-15	0.05	0.09	0.18	0.33	0.57	0.89	1.22	1.51	1.67	1.65	1.45	1.14	0.81	0.51	0.30	0.16	0.09	0.04	12.7	11.5
-20	0.04	0.07	0.12	0.21	0.34	0.51	0.70	0.86	0.95	0.93	0.82	0.64	0.46	0.30	0.19	0.11	0.06	0.03	7.34	5.81
-25	0.02	0.05	0.08	0.13	0.19	0.27	0.36	0.44	0.48	0.47	0.42	0.33	0.25	0.17	0.11	0.07	0.04	0.02	3.90	1.31
-30	0.02	0.03	0.05	0.07	0.11	0.15	0.19	0.22	0.23	0.23	0.21	0.17	0.13	0.10	0.07	0.04	0.02	0.01	2.03	0.00
-35	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.11	0.11	0.11	0.10	0.09	0.07	0.05	0.04	0.02	0.01	0.01	1.05	0.00
-40	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.11	0.11	0.11	0.10	0.09	0.07	0.05	0.04	0.02	0.01	0.01	1.05	0.00
-45	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.11	0.11	0.11	0.10	0.09	0.07	0.05	0.04	0.02	0.01	0.01	1.05	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL(DEG) 10 15 20 25 30 35 40 45																				
Φ t	0.75	1.56	3.19	6.39	11.7	18.5	25.6	31.2	34.0	33.8	30.5	24.8	17.9	11.3	6.26	3.16	1.55	0.75	263	---
Φ a	0.00	0.00	0.75	4.84	10.5	17.4	24.6	30.2	33.1	32.8	29.5	23.7	16.7	10.0	4.71	0.95	0.00	0.00	---	240

one-half-peak spread: U:19.8,D:19.1 , L:19.1,R:20.1


NEMA Beam Type: Type 4

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.83V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.447x1 lm		
NAME:Nuit 100-100mm-RGBW RED-40D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

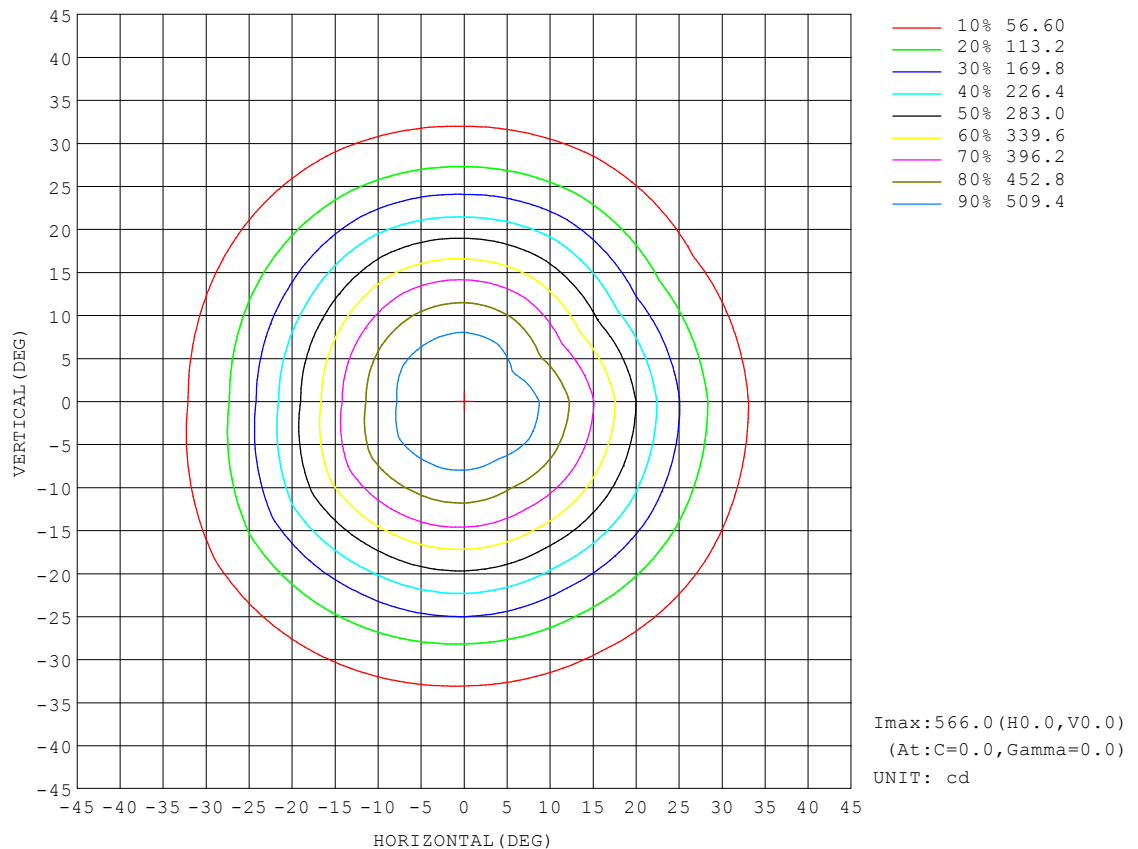


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.83V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.447x1 lm		
NAME:Nuit 100-100mm-RGBW RED-40D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

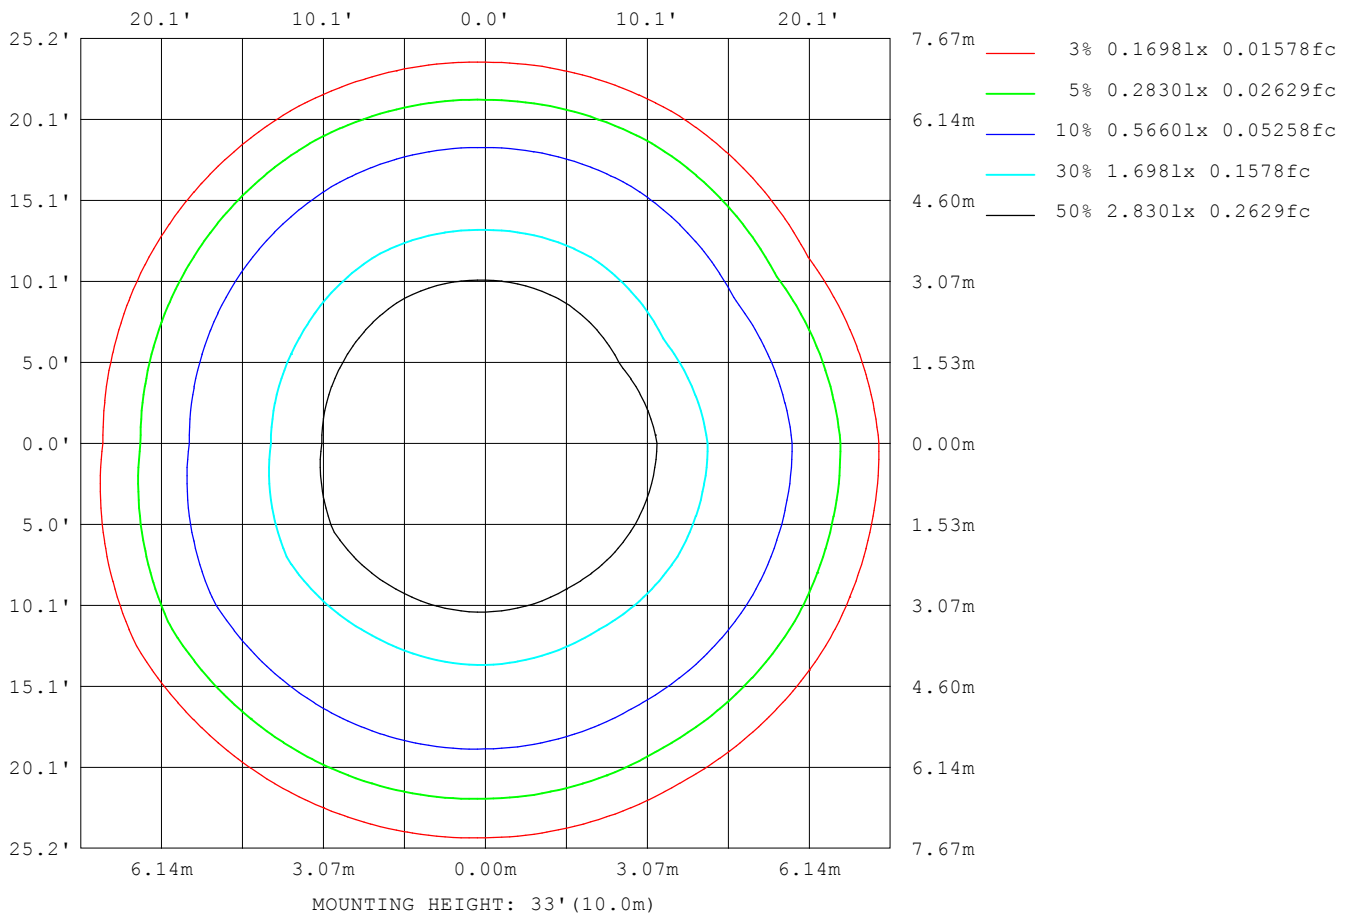

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

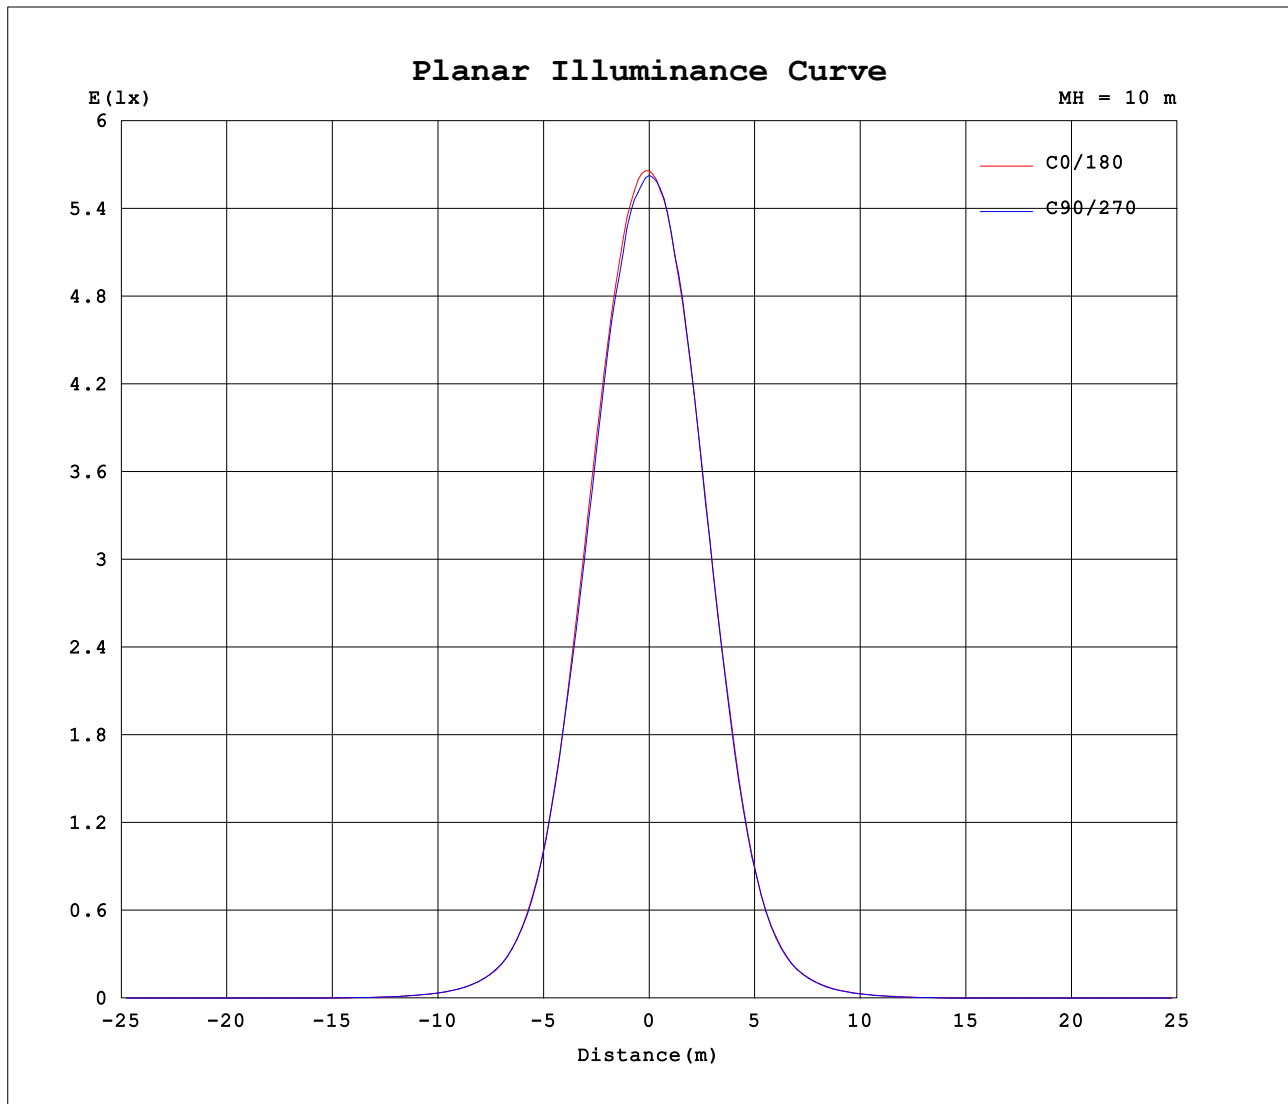


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.83V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.447x1 lm		
NAME:Nuit 100-100mm-RGBW RED-40D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

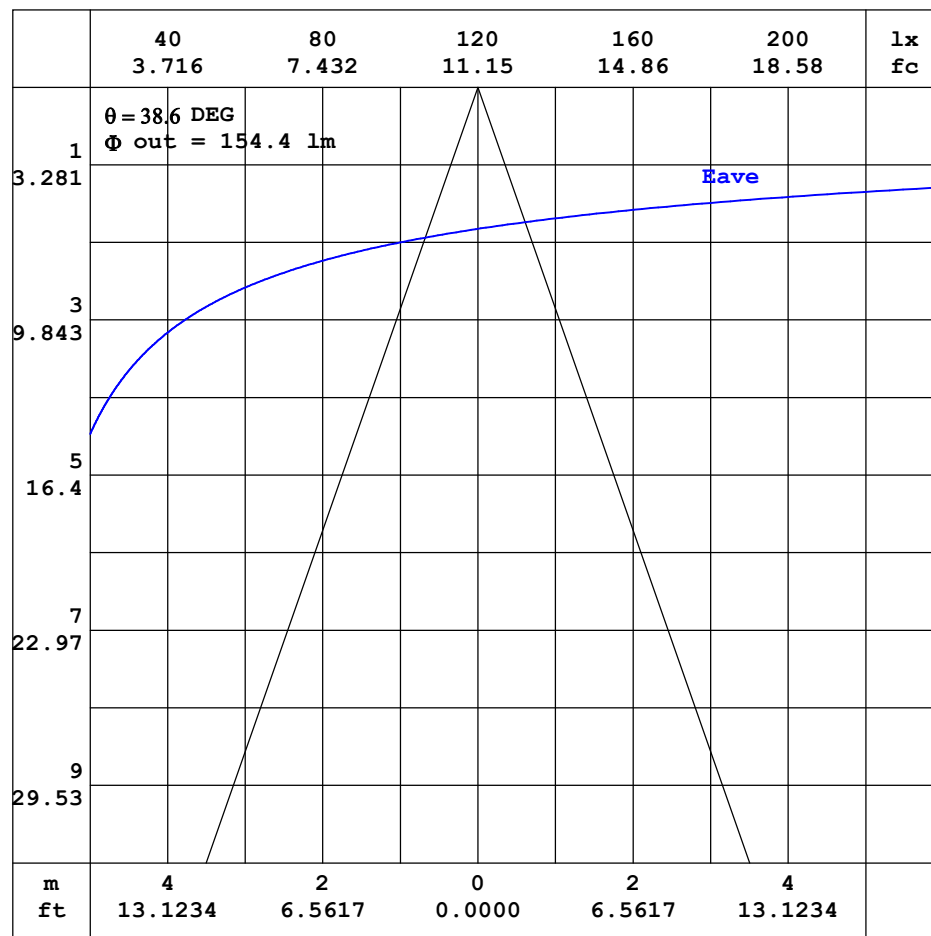

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: 01
 Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.83V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.447x1 lm		
NAME:Nuit 100-100mm-RGBW RED-40D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:40 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.10	0.18	0.31	0.49	0.71	0.93	1.15	1.31	1.45	1.58	1.64
-170	0.03	0.04	0.04	0.04	0.04	0.04	0.05	0.06	0.10	0.16	0.28	0.45	0.66	0.89	1.10	1.26	1.36	1.41	1.50
-160	0.03	0.04	0.05	0.05	0.04	0.04	0.05	0.06	0.08	0.13	0.22	0.34	0.50	0.67	0.84	0.99	1.09	1.19	1.25
-150	0.03	0.05	0.05	0.06	0.05	0.05	0.05	0.06	0.06	0.09	0.14	0.20	0.28	0.38	0.48	0.59	0.68	0.75	0.79
-140	0.03	0.05	0.06	0.07	0.06	0.05	0.05	0.06	0.06	0.06	0.07	0.09	0.12	0.14	0.18	0.24	0.30	0.33	0.35
-130	0.03	0.05	0.07	0.08	0.08	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.05	0.06	0.07	0.09	0.11
-120	0.03	0.06	0.08	0.09	0.10	0.10	0.10	0.09	0.07	0.07	0.06	0.06	0.06	0.06	0.05	0.05	0.05	0.05	0.04
-110	0.03	0.06	0.08	0.10	0.12	0.13	0.14	0.13	0.12	0.11	0.10	0.09	0.09	0.08	0.06	0.05	0.04	0.03	0.02
-100	0.03	0.06	0.09	0.11	0.14	0.16	0.18	0.16	0.16	0.15	0.14	0.13	0.12	0.11	0.09	0.07	0.05	0.03	0.02
-90	0.03	0.06	0.09	0.12	0.15	0.18	0.21	0.20	0.20	0.19	0.18	0.17	0.16	0.13	0.11	0.09	0.06	0.04	0.02
-80	0.03	0.07	0.11	0.14	0.18	0.22	0.26	0.25	0.25	0.24	0.23	0.22	0.21	0.18	0.16	0.13	0.11	0.09	0.06
-70	0.03	0.07	0.11	0.16	0.20	0.25	0.29	0.29	0.28	0.27	0.27	0.26	0.25	0.24	0.23	0.21	0.20	0.18	0.15
-60	0.03	0.08	0.13	0.17	0.22	0.26	0.29	0.30	0.30	0.32	0.37	0.42	0.50	0.57	0.63	0.67	0.70	0.71	0.69
-50	0.03	0.08	0.13	0.18	0.22	0.26	0.28	0.35	0.46	0.61	0.79	0.99	1.57	2.37	3.11	3.81	4.38	4.73	4.78
-40	0.03	0.08	0.13	0.18	0.22	0.25	0.34	0.52	0.78	1.26	2.68	4.43	6.86	9.72	13.0	16.2	18.9	20.7	21.0
-30	0.03	0.08	0.13	0.18	0.22	0.28	0.45	0.75	1.61	3.63	7.09	11.9	19.2	29.2	42.7	59.1	74.9	85.7	88.1
-20	0.03	0.08	0.13	0.18	0.21	0.31	0.57	1.02	2.91	6.48	12.7	24.0	44.4	78.5	127	181	230	266	277
-10	0.03	0.07	0.12	0.17	0.21	0.34	0.64	1.38	3.84	8.66	17.6	35.1	72.6	142	241	339	419	468	485
0	0.03	0.07	0.11	0.15	0.20	0.34	0.64	1.43	3.91	8.86	18.1	36.6	77.1	153	261	379	477	543	566
10	0.03	0.07	0.11	0.15	0.19	0.32	0.60	1.16	3.42	7.82	15.8	31.1	62.8	122	209	308	400	460	479
20	0.03	0.07	0.11	0.14	0.18	0.27	0.50	0.86	2.31	5.23	10.3	19.3	34.9	62.2	106	161	216	249	259
30	0.03	0.06	0.10	0.13	0.16	0.21	0.37	0.63	0.98	2.56	5.14	9.18	15.2	23.6	35.1	49.4	63.4	73.6	76.3
40	0.03	0.06	0.08	0.12	0.14	0.17	0.23	0.39	0.61	0.88	1.80	3.20	5.26	7.78	10.6	13.3	15.6	17.2	17.5
50	0.03	0.05	0.07	0.10	0.12	0.14	0.17	0.21	0.30	0.44	0.60	0.78	0.99	1.77	2.43	2.97	3.40	3.66	3.69
60	0.03	0.05	0.06	0.08	0.10	0.11	0.13	0.14	0.15	0.18	0.21	0.27	0.33	0.40	0.48	0.55	0.59	0.62	0.62
70	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.10	0.10	0.10	0.10	0.11	0.12	0.13	0.15	0.16	0.17	0.18
80	0.03	0.03	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.03	0.04	0.05	0.06	0.07	0.07
90	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
100	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00
110	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00
120	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.03	0.02	0.02	0.02	0.01	0.00
130	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.06	0.05	0.04
140	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.06	0.09	0.14	0.18	0.21	0.23	0.24	0.24
150	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.07	0.13	0.22	0.32	0.43	0.53	0.61	0.63	0.63
160	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.09	0.16	0.26	0.40	0.58	0.74	0.90	1.02	1.08	1.09
170	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.08	0.14	0.25	0.41	0.60	0.80	0.99	1.15	1.30	1.39	1.41
180	0.03	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.10	0.18	0.31	0.49	0.71	0.93	1.15	1.31	1.45	1.58	1.61

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.83V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:267.447x1 lm																		
NAME:Nuit 100-100mm-RGBW RED-40D-REV1									TYPE:RGBW-RED					WEIGHT:				
SPEC.:40 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.56	1.51	1.40	1.24	1.01	0.75	0.51	0.31	0.16	0.08	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-170	1.46	1.41	1.32	1.16	0.94	0.70	0.48	0.29	0.15	0.07	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.01	
-160	1.21	1.13	1.03	0.88	0.71	0.53	0.35	0.22	0.12	0.06	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	
-150	0.76	0.70	0.61	0.50	0.40	0.29	0.20	0.14	0.08	0.05	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	
-140	0.33	0.30	0.25	0.19	0.15	0.12	0.08	0.06	0.04	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	
-130	0.11	0.09	0.07	0.05	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	
-120	0.04	0.03	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	
-110	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01	
-100	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
-90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	
-80	0.07	0.07	0.07	0.08	0.08	0.08	0.07	0.05	0.04	0.03	0.02	0.01	0.01	0.02	0.02	0.02	0.01	0.01	
-70	0.16	0.16	0.16	0.16	0.16	0.16	0.14	0.12	0.10	0.08	0.06	0.04	0.04	0.03	0.03	0.03	0.02	0.01	
-60	0.69	0.67	0.62	0.55	0.49	0.40	0.32	0.24	0.18	0.14	0.11	0.09	0.08	0.06	0.05	0.04	0.03	0.01	
-50	4.59	4.14	3.53	2.82	2.08	1.14	0.89	0.68	0.47	0.31	0.19	0.15	0.12	0.09	0.07	0.05	0.03	0.01	
-40	20.0	17.8	14.7	11.3	8.57	6.01	3.91	2.34	1.00	0.67	0.41	0.23	0.16	0.12	0.09	0.06	0.04	0.01	
-30	82.8	69.8	53.2	38.5	26.3	17.0	10.6	6.22	3.36	1.15	0.70	0.39	0.21	0.14	0.10	0.07	0.04	0.01	
-20	260	220	169	116	70.9	40.3	22.2	12.0	6.26	3.01	0.98	0.55	0.29	0.17	0.12	0.08	0.05	0.01	
-10	459	408	325	231	139	72.8	35.9	18.0	9.08	4.27	1.43	0.68	0.34	0.19	0.13	0.08	0.05	0.01	
0	550	492	398	283	171	89.7	42.1	20.7	10.2	4.77	1.80	0.72	0.37	0.20	0.14	0.09	0.05	0.01	
10	454	384	288	196	117	62.3	31.4	16.2	8.22	3.89	1.31	0.65	0.34	0.19	0.13	0.09	0.05	0.01	
20	245	209	152	96.0	54.5	29.8	17.1	9.64	5.08	2.40	0.89	0.51	0.28	0.18	0.12	0.08	0.05	0.01	
30	72.0	60.7	46.4	32.3	21.3	13.3	7.95	4.37	2.33	0.94	0.60	0.36	0.21	0.15	0.11	0.08	0.05	0.01	
40	16.8	15.0	12.5	9.76	7.03	4.63	2.82	1.22	0.78	0.53	0.35	0.22	0.17	0.13	0.10	0.07	0.04	0.01	
50	3.57	3.24	2.77	2.17	1.35	0.92	0.71	0.53	0.38	0.26	0.19	0.16	0.13	0.10	0.08	0.05	0.04	0.01	
60	0.60	0.57	0.52	0.45	0.38	0.30	0.24	0.19	0.16	0.14	0.13	0.11	0.09	0.08	0.06	0.04	0.03	0.01	
70	0.17	0.16	0.15	0.13	0.11	0.10	0.10	0.10	0.08	0.08	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	
80	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	
90	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	
110	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	
120	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
130	0.05	0.06	0.06	0.07	0.05	0.04	0.02	0.02	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
140	0.25	0.24	0.22	0.19	0.15	0.10	0.06	0.03	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
150	0.64	0.61	0.55	0.45	0.34	0.24	0.15	0.08	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
160	1.10	1.05	0.94	0.78	0.61	0.44	0.29	0.16	0.08	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
170	1.44	1.34	1.20	1.05	0.86	0.64	0.43	0.26	0.13	0.06	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
180	1.56	1.51	1.40	1.24	1.01	0.75	0.51	0.31	0.16	0.08	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: