

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1105.4 cd per klm.
(Luminaire orientation as tested.)		4.0 degrees vertical
		7.0 degrees horizontal
Beam Spread	At 10% of Imax	85.8V x 86.4H
	At 50% of Imax	57.4V x 59.7H
	At 90% of Imax	28.2V x 35.3H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	946.9 lumens per klm.
	To 50% of Imax	681.6 lumens per klm.
	To 90% of Imax	235.1 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.4 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.76V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:318.818x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-60D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

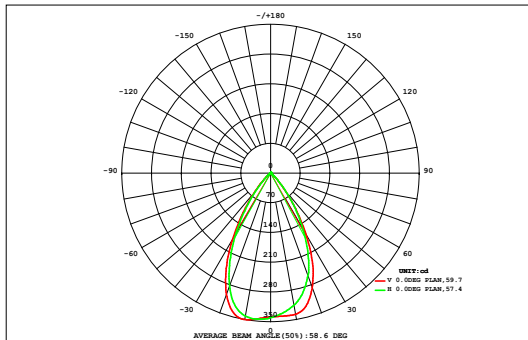

DATA OF LAMP		Eff:40.36lm/W	
MODEL		Imax(cd)	352.4
NOMINAL POWER(W)	30	AVAILABILITY(%)	94.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	301.9
NOMINAL FLUX(lm)	318.818	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	318.8
TEST VOLTAGE(V)	220	θ @50% (H,V)	60,57DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
72	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.12	0.00
64	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.11	0.13	0.12	0.10	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.70	0.00
56	0.00	0.00	0.01	0.02	0.06	0.16	0.32	0.48	0.57	0.56	0.44	0.28	0.14	0.05	0.01	0.00	0.00	0.00	3.10	0.76
48	0.00	0.00	0.01	0.06	0.20	0.51	1.03	1.53	1.79	1.76	1.45	0.93	0.44	0.16	0.04	0.01	0.00	0.00	9.93	8.64
40	0.00	0.01	0.03	0.13	0.46	1.21	2.27	3.20	3.64	3.60	3.08	2.12	1.08	0.38	0.11	0.02	0.00	0.00	21.4	20.5
32	0.00	0.01	0.05	0.24	0.86	2.10	3.61	4.85	5.42	5.38	4.73	3.45	1.92	0.77	0.22	0.04	0.01	0.00	33.7	32.9
24	0.00	0.01	0.07	0.35	1.24	2.85	4.67	5.97	6.49	6.49	5.93	4.57	2.78	1.22	0.35	0.07	0.01	0.00	43.1	42.4
16	0.00	0.01	0.08	0.42	1.46	3.28	5.17	6.36	6.67	6.76	6.52	5.33	3.40	1.54	0.45	0.09	0.01	0.00	47.6	47.0
8	0.00	0.01	0.09	0.44	1.50	3.32	5.14	6.20	6.43	6.53	6.41	5.35	3.45	1.58	0.47	0.09	0.01	0.00	47.0	46.4
0	0.00	0.01	0.08	0.39	1.34	2.98	4.65	5.59	5.92	6.02	5.70	4.66	2.95	1.32	0.38	0.07	0.01	0.00	42.1	41.4
-8	0.00	0.01	0.06	0.29	1.00	2.26	3.55	4.43	4.91	4.94	4.44	3.48	2.11	0.90	0.26	0.05	0.01	0.00	32.7	32.0
-16	0.00	0.01	0.04	0.17	0.58	1.33	2.23	2.95	3.36	3.35	2.91	2.13	1.20	0.48	0.14	0.03	0.00	0.00	20.9	20.0
-24	0.00	0.00	0.02	0.08	0.25	0.58	1.05	1.50	1.75	1.73	1.44	0.97	0.50	0.20	0.06	0.01	0.00	0.00	10.2	8.83
-32	0.00	0.00	0.01	0.03	0.09	0.19	0.34	0.51	0.61	0.59	0.48	0.30	0.16	0.07	0.02	0.01	0.00	0.00	3.41	0.96
-40	0.00	0.00	0.01	0.01	0.02	0.05	0.09	0.13	0.15	0.14	0.11	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.84	0.00
-48	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.17	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.03	0.10	0.55	2.66	9.11	20.9	34.2	43.9	47.9	48.0	43.8	33.7	20.2	8.70	2.52	0.50	0.08	0.02	317	---
Φ a	0.00	0.00	0.00	0.76	7.89	19.9	33.3	42.9	47.0	47.1	42.9	32.8	19.2	7.47	0.77	0.00	0.00	0.00	---	302

one-half-peak spread: U:34.4,D:23.4 , L:22.6,R:19.4


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.76V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:318.818x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-60D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

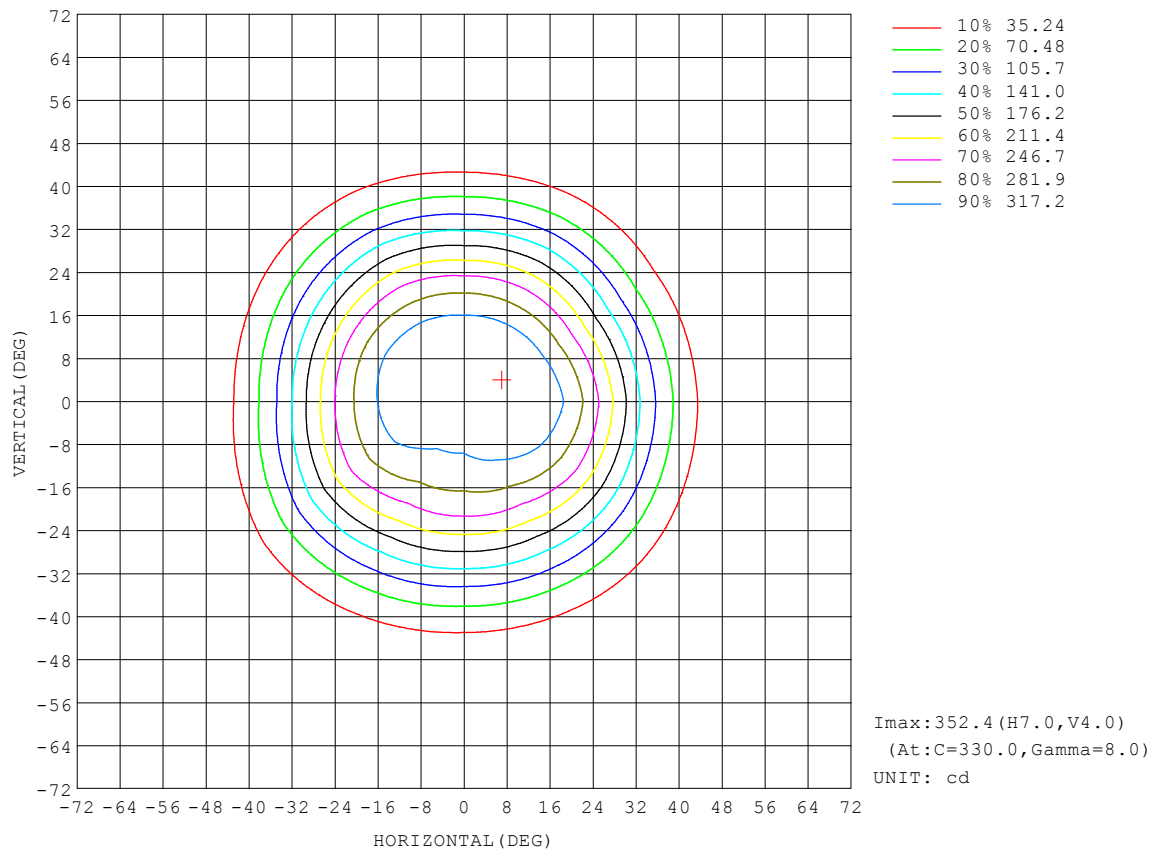


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.76V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:318.818x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-60D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

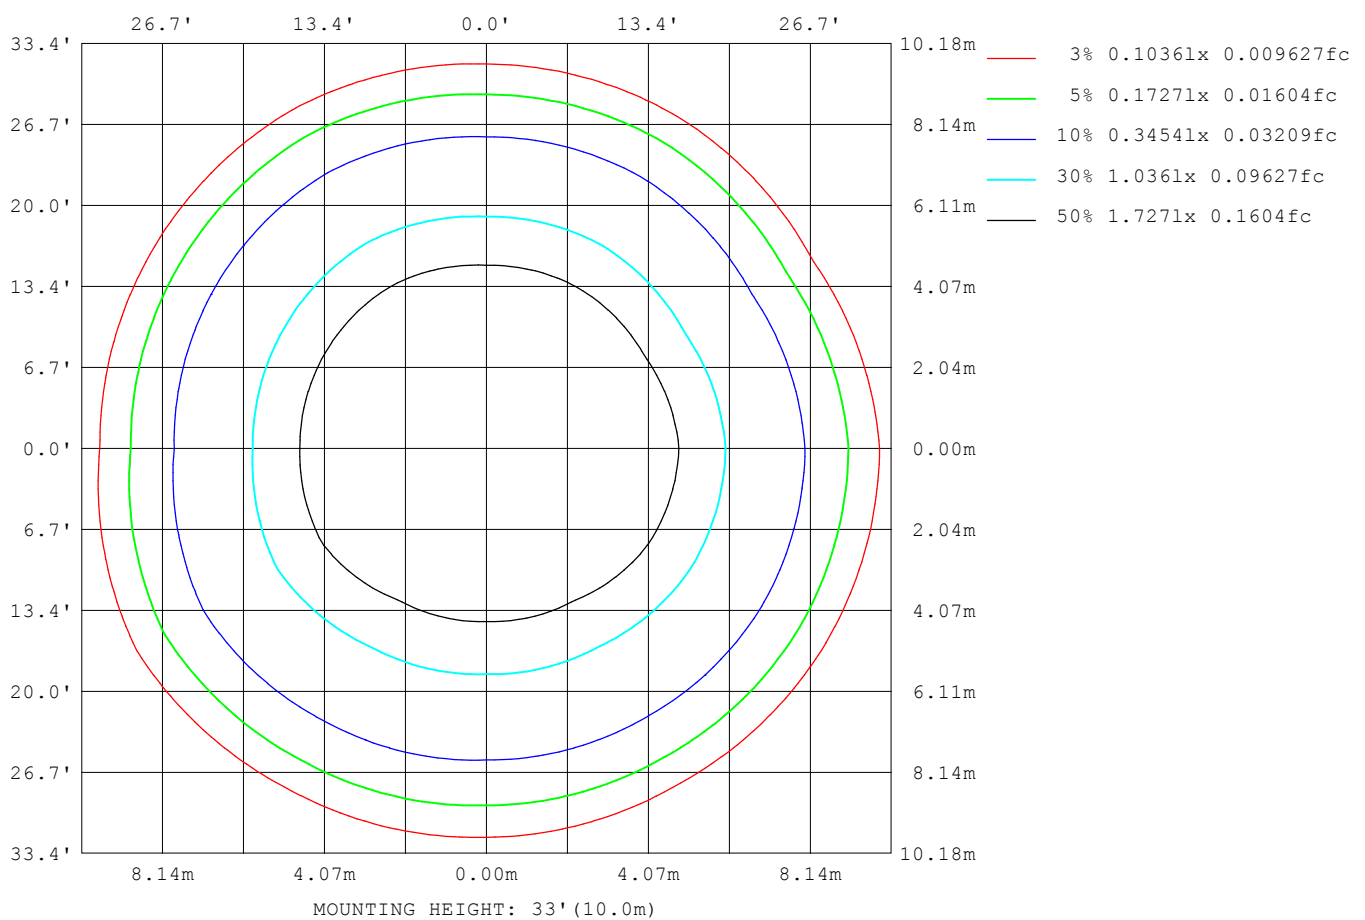

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

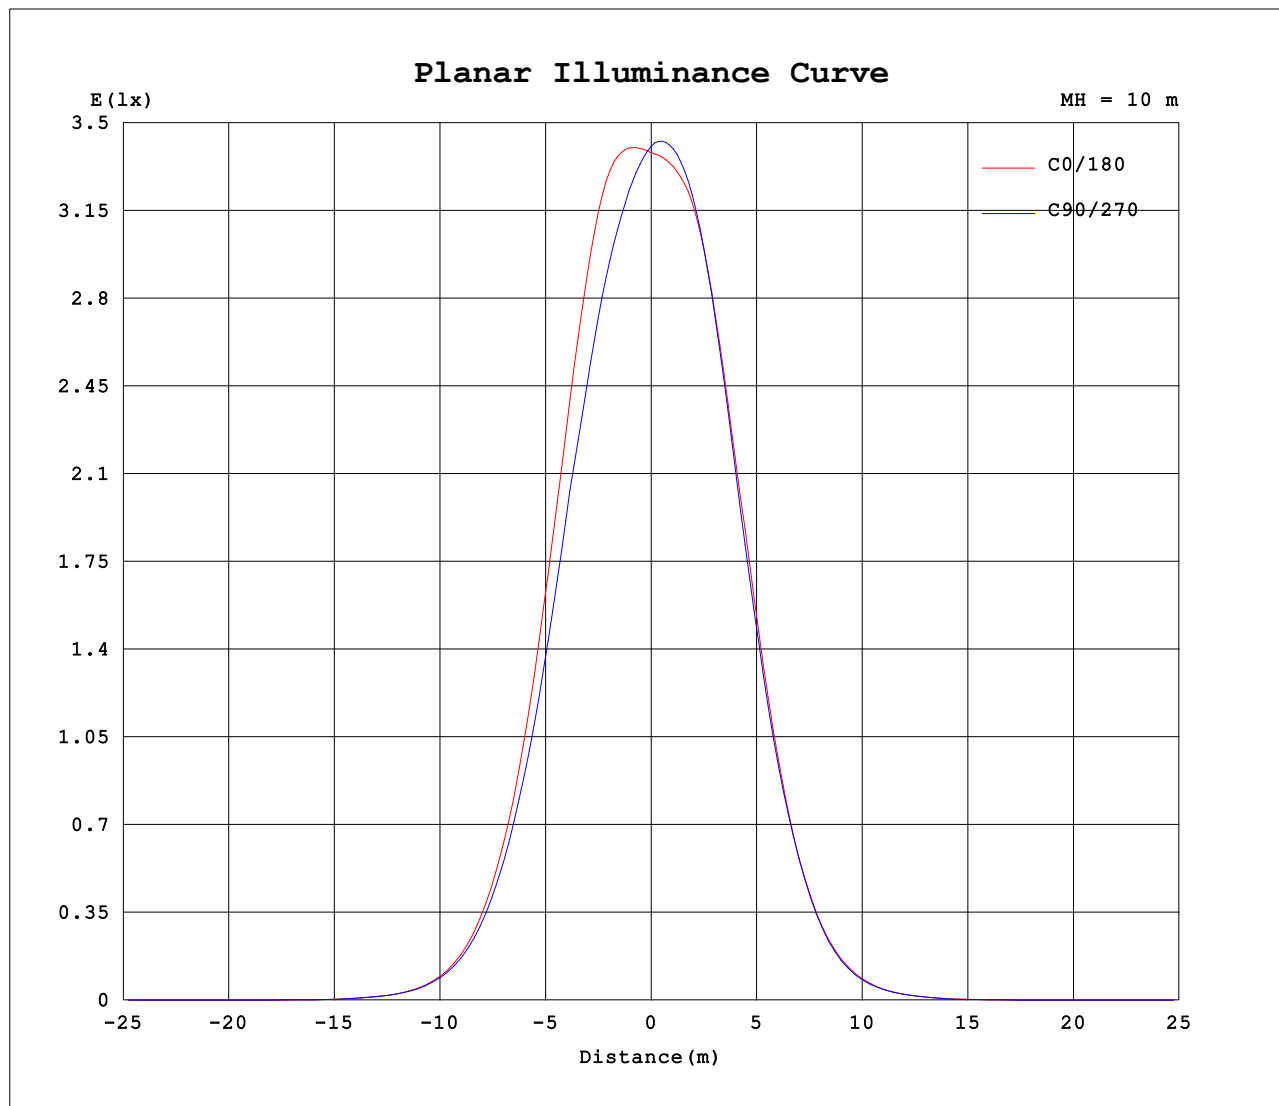


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.76V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:318.818x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-60D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

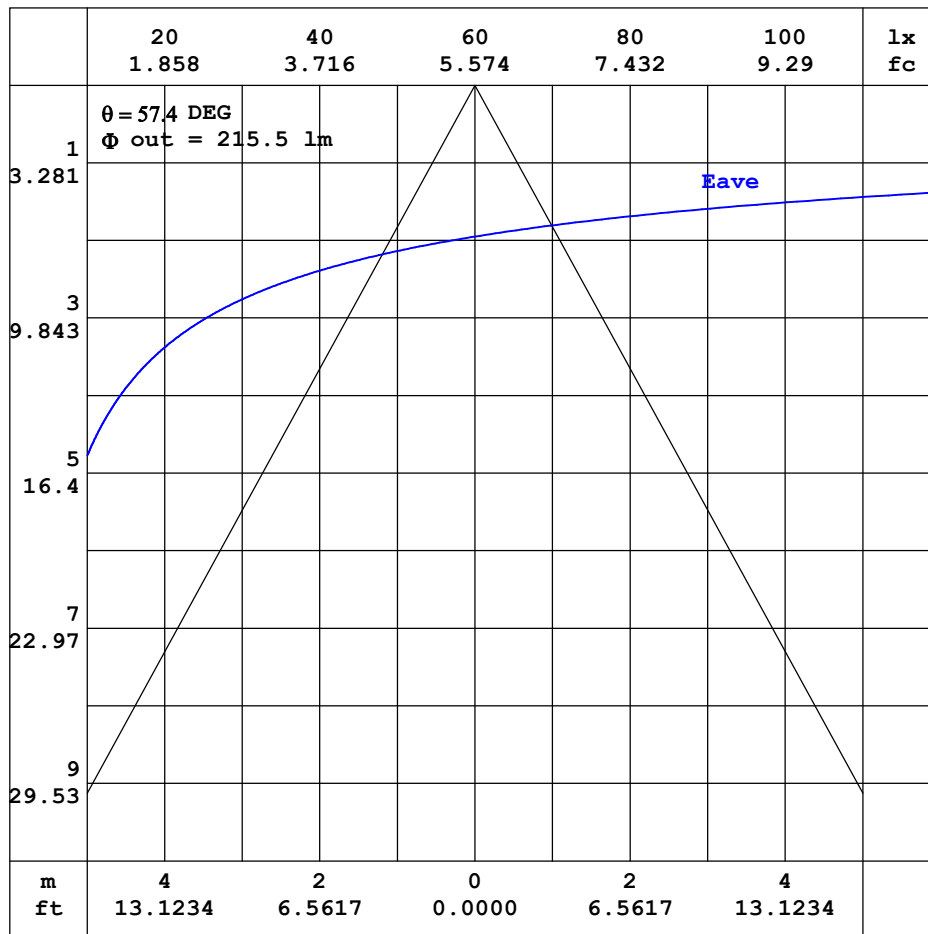

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: 01
 Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.76V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:318.818x1 lm		
NAME:Nuit 100-100mm-RGBW 3000K-60D-REV1	TYPE:RGBW-3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.04	0.04	0.04	0.04	0.04	0.05	0.08	0.14	0.22	0.35	0.51	0.67	0.85	0.97	1.10	1.23	1.37	1.51	1.54
-170	0.04	0.05	0.05	0.05	0.05	0.05	0.08	0.13	0.21	0.33	0.49	0.66	0.82	0.97	1.10	1.21	1.29	1.36	1.43
-160	0.04	0.05	0.06	0.06	0.05	0.06	0.07	0.11	0.18	0.28	0.40	0.55	0.71	0.84	0.95	1.02	1.09	1.17	1.22
-150	0.04	0.06	0.06	0.06	0.06	0.06	0.07	0.09	0.13	0.20	0.28	0.37	0.48	0.59	0.68	0.75	0.83	0.89	0.92
-140	0.04	0.06	0.07	0.07	0.07	0.06	0.07	0.08	0.10	0.13	0.16	0.21	0.26	0.33	0.38	0.44	0.50	0.54	0.56
-130	0.04	0.06	0.08	0.08	0.08	0.08	0.07	0.08	0.08	0.09	0.09	0.09	0.11	0.12	0.15	0.19	0.21	0.24	0.25
-120	0.04	0.06	0.08	0.09	0.10	0.10	0.10	0.09	0.08	0.08	0.08	0.08	0.07	0.07	0.07	0.07	0.08	0.08	0.09
-110	0.04	0.07	0.09	0.11	0.12	0.13	0.14	0.13	0.11	0.10	0.09	0.09	0.08	0.07	0.06	0.05	0.05	0.04	0.03
-100	0.04	0.07	0.09	0.11	0.14	0.16	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.09	0.08	0.07	0.05	0.04	0.02
-90	0.04	0.07	0.10	0.12	0.15	0.18	0.21	0.19	0.18	0.17	0.15	0.14	0.13	0.11	0.09	0.07	0.06	0.04	0.02
-80	0.04	0.07	0.10	0.13	0.17	0.21	0.26	0.25	0.23	0.22	0.21	0.20	0.19	0.16	0.14	0.12	0.09	0.07	0.05
-70	0.04	0.07	0.11	0.15	0.20	0.24	0.28	0.29	0.28	0.27	0.26	0.25	0.24	0.23	0.21	0.20	0.18	0.16	0.14
-60	0.04	0.07	0.12	0.16	0.21	0.25	0.29	0.32	0.31	0.34	0.39	0.47	0.57	0.68	0.81	0.93	1.04	1.09	1.09
-50	0.04	0.07	0.12	0.17	0.22	0.26	0.29	0.38	0.53	0.79	1.22	1.89	3.27	4.86	6.47	8.10	9.42	10.2	10.3
-40	0.04	0.07	0.12	0.17	0.22	0.26	0.37	0.65	1.27	2.81	5.73	9.95	15.9	23.8	32.8	42.3	49.7	54.3	55.0
-30	0.04	0.07	0.12	0.17	0.22	0.30	0.55	1.21	3.39	8.33	17.4	32.4	54.0	79.2	104	125	141	151	153
-20	0.04	0.07	0.12	0.17	0.21	0.36	0.77	2.16	6.61	16.0	35.9	69.9	115	157	195	223	240	254	257
-10	0.04	0.07	0.11	0.16	0.21	0.40	0.96	3.05	9.17	23.1	51.9	98.1	156	217	266	299	311	313	316
0	0.04	0.06	0.10	0.14	0.19	0.39	0.98	3.25	9.48	24.3	54.4	104	167	234	287	324	338	338	338
10	0.04	0.06	0.10	0.14	0.19	0.37	0.88	2.67	8.35	20.9	47.6	92.3	149	212	268	309	334	343	342
20	0.04	0.06	0.10	0.14	0.18	0.30	0.65	1.70	5.45	13.3	29.7	59.5	103	150	199	239	266	280	283
30	0.04	0.06	0.09	0.12	0.16	0.22	0.43	0.93	2.23	6.23	13.2	25.9	46.6	74.6	105	133	152	162	163
40	0.04	0.05	0.08	0.11	0.14	0.18	0.26	0.45	0.87	1.75	4.11	7.93	13.5	21.1	30.8	40.5	48.2	52.7	53.1
50	0.04	0.05	0.07	0.09	0.12	0.14	0.17	0.22	0.34	0.53	0.85	1.39	2.23	3.89	5.54	7.11	8.31	9.05	9.16
60	0.04	0.04	0.06	0.07	0.09	0.11	0.13	0.14	0.16	0.17	0.22	0.28	0.38	0.49	0.59	0.68	0.76	0.80	0.79
70	0.04	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.11	0.12	0.13	0.14	0.15	0.16
80	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.04	0.03	0.03	0.02	0.02	0.02	0.03	0.04	0.05	0.06	0.07
90	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01
100	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
110	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01
120	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01
130	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.02	0.03	0.06	0.08	0.11	0.14	0.14	0.15	0.15	0.14
140	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.05	0.09	0.15	0.21	0.27	0.32	0.36	0.38	0.39	0.39
150	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.04	0.07	0.12	0.19	0.29	0.39	0.49	0.57	0.65	0.69	0.71	0.70
160	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.07	0.13	0.22	0.33	0.45	0.57	0.69	0.80	0.90	0.97	1.01	1.01
170	0.04	0.04	0.04	0.04	0.04	0.04	0.06	0.11	0.19	0.30	0.44	0.59	0.74	0.87	0.98	1.09	1.21	1.30	1.32
180	0.04	0.04	0.04	0.04	0.04	0.05	0.08	0.14	0.22	0.35	0.51	0.67	0.85	0.97	1.10	1.23	1.37	1.51	1.54

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.76V I:0.0420A P:7.9000W PF:0.9000 Freq:49.38Hz Lamp Flux:318.818x1 lm																		
NAME:Nuit 100-100mm-RGBW 3000K-60D-REV1									TYPE:RGBW-3000K					WEIGHT:				
SPEC.:60 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.47	1.39	1.28	1.15	1.02	0.87	0.70	0.52	0.35	0.21	0.11	0.05	0.01	0.01	0.01	0.01	0.01	0.02	
-170	1.37	1.32	1.23	1.12	1.00	0.84	0.68	0.50	0.34	0.21	0.11	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-160	1.18	1.10	1.04	0.96	0.85	0.73	0.57	0.42	0.28	0.17	0.09	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.02
-150	0.90	0.84	0.77	0.70	0.61	0.50	0.40	0.30	0.20	0.12	0.07	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.02
-140	0.54	0.51	0.46	0.40	0.34	0.28	0.22	0.16	0.12	0.08	0.05	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.02
-130	0.24	0.22	0.19	0.16	0.13	0.11	0.08	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-120	0.08	0.06	0.05	0.04	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-110	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.02
-100	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-90	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02
-80	0.05	0.06	0.06	0.06	0.06	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02
-70	0.14	0.15	0.15	0.15	0.15	0.14	0.12	0.11	0.09	0.06	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02
-60	1.04	0.94	0.80	0.64	0.51	0.40	0.30	0.23	0.16	0.12	0.09	0.08	0.06	0.05	0.04	0.03	0.03	0.02	
-50	9.83	8.77	7.26	5.55	3.82	2.18	1.40	0.86	0.51	0.30	0.18	0.13	0.10	0.07	0.06	0.04	0.03	0.02	
-40	53.1	47.5	39.1	29.3	20.4	13.2	8.03	4.29	1.77	0.86	0.41	0.22	0.14	0.10	0.07	0.05	0.03	0.02	
-30	150	139	121	98.3	72.2	46.9	26.8	13.8	6.64	2.25	0.92	0.39	0.19	0.13	0.08	0.06	0.03	0.02	
-20	256	241	222	191	150	104	62.3	31.7	14.2	5.83	1.70	0.63	0.27	0.15	0.11	0.07	0.04	0.02	
-10	321	319	303	269	218	156	97.9	51.5	22.9	9.10	2.77	0.87	0.34	0.17	0.12	0.08	0.04	0.02	
0	344	350	340	304	248	179	114	60.3	27.0	10.5	3.42	0.97	0.37	0.18	0.12	0.08	0.04	0.02	
10	344	334	307	264	210	148	92.0	47.7	21.2	8.41	2.53	0.82	0.33	0.17	0.12	0.08	0.04	0.02	
20	277	261	232	189	140	92.1	53.0	26.5	12.1	4.80	1.45	0.57	0.26	0.16	0.12	0.07	0.04	0.02	
30	159	147	126	97.2	66.8	40.1	21.4	10.5	4.80	1.71	0.74	0.35	0.19	0.14	0.09	0.06	0.04	0.02	
40	51.2	45.4	37.0	27.3	18.2	11.3	6.29	2.65	1.21	0.61	0.34	0.21	0.15	0.12	0.09	0.06	0.03	0.02	
50	8.74	7.73	6.35	4.66	2.91	1.71	1.03	0.61	0.37	0.25	0.18	0.14	0.12	0.09	0.07	0.05	0.03	0.02	
60	0.76	0.69	0.59	0.47	0.36	0.28	0.22	0.17	0.15	0.13	0.12	0.10	0.08	0.07	0.05	0.04	0.03	0.02	
70	0.15	0.14	0.13	0.11	0.10	0.09	0.08	0.08	0.08	0.07	0.07	0.06	0.05	0.04	0.03	0.03	0.02	0.02	
80	0.06	0.05	0.04	0.03	0.02	0.01	0.02	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
110	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
120	0.02	0.03	0.04	0.04	0.04	0.04	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
130	0.15	0.15	0.15	0.14	0.12	0.09	0.06	0.04	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
140	0.40	0.39	0.37	0.33	0.28	0.22	0.17	0.11	0.06	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
150	0.71	0.70	0.66	0.59	0.50	0.41	0.31	0.21	0.13	0.07	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
160	1.03	1.00	0.93	0.83	0.72	0.60	0.48	0.35	0.23	0.13	0.06	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02
170	1.35	1.25	1.12	1.01	0.89	0.77	0.62	0.46	0.31	0.19	0.09	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.02
180	1.47	1.39	1.28	1.15	1.02	0.87	0.70	0.52	0.35	0.21	0.11	0.05	0.01	0.01	0.01	0.01	0.01	0.01	0.02

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: