

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1130.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		9.0 degrees horizontal
Beam Spread	At 10% of Imax	86.0V x 86.1H
	At 50% of Imax	58.1V x 58.0H
	At 90% of Imax	29.7V x 29.6H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	946.5 lumens per klm.
	To 50% of Imax	668.6 lumens per klm.
	To 90% of Imax	203.1 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.4 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.80V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:934.95x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-60D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

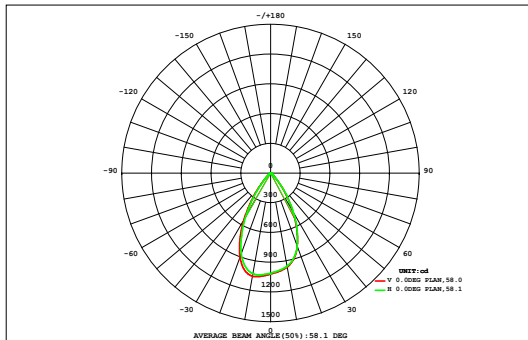

DATA OF LAMP		Eff:32.24lm/W	
MODEL		Imax(cd)	1057
NOMINAL POWER(W)	30	AVAILABILITY(%)	94.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	883.7
NOMINAL FLUX(lm)	934.95	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	935.0
TEST VOLTAGE(V)	220	θ @50% (H,V)	58,58DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.12	0.00
72	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.38	0.00
64	0.00	0.00	0.01	0.01	0.01	0.02	0.04	0.05	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	2.09	0.00
56	0.00	0.00	0.01	0.02	0.05	0.11	0.22	0.32	0.38	0.37	0.29	0.18	0.08	0.04	0.02	0.01	0.00	0.00	9.26	2.35
48	0.00	0.01	0.02	0.06	0.20	0.49	0.94	1.42	1.71	1.67	1.31	0.82	0.40	0.14	0.04	0.01	0.01	0.00	29.3	25.4
40	0.00	0.01	0.04	0.17	0.59	1.50	3.01	4.50	5.38	5.29	4.26	2.70	1.28	0.47	0.12	0.03	0.01	0.00	63.0	60.2
32	0.00	0.02	0.08	0.39	1.34	3.45	6.49	9.36	11.0	10.9	9.15	6.14	3.09	1.11	0.31	0.06	0.01	0.00	99.1	96.9
24	0.00	0.02	0.14	0.70	2.42	5.84	10.2	14.1	16.3	16.4	14.2	10.1	5.54	2.21	0.63	0.12	0.02	0.00	126	124
	0.01	0.03	0.21	1.02	3.48	7.89	13.0	17.2	19.3	19.6	17.7	13.4	8.14	3.56	1.03	0.20	0.03	0.01	138	136
	0.01	0.03	0.25	1.23	4.09	8.93	14.3	18.0	19.6	20.1	19.4	15.8	10.1	4.60	1.36	0.27	0.03	0.01	137	135
	0.01	0.03	0.26	1.27	4.18	8.99	14.2	17.6	18.9	19.6	19.2	15.9	10.2	4.73	1.40	0.27	0.03	0.01	123	121
	0.01	0.03	0.23	1.13	3.74	8.12	12.9	16.2	17.8	18.2	17.2	13.7	8.64	3.90	1.14	0.23	0.03	0.01	96.7	94.6
-24	0.01	0.03	0.17	0.83	2.80	6.21	10.0	13.1	14.9	15.1	13.5	10.3	6.17	2.65	0.76	0.15	0.02	0.00	62.0	59.2
-32	0.00	0.02	0.11	0.50	1.63	3.75	6.39	8.78	10.2	10.2	8.73	6.23	3.50	1.41	0.42	0.08	0.02	0.00	30.1	26.0
-40	0.00	0.01	0.05	0.24	0.72	1.69	3.06	4.44	5.28	5.22	4.26	2.81	1.48	0.59	0.18	0.04	0.01	0.00	10.2	2.87
-48	0.00	0.01	0.03	0.08	0.26	0.57	1.03	1.53	1.83	1.79	1.41	0.90	0.47	0.20	0.06	0.02	0.01	0.00	2.51	0.00
-56	0.00	0.01	0.01	0.03	0.07	0.15	0.26	0.37	0.44	0.43	0.34	0.22	0.11	0.05	0.02	0.01	0.00	0.00	0.50	0.00
-64	0.00	0.01	0.01	0.01	0.02	0.03	0.05	0.06	0.07	0.07	0.06	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.16	0.00
-72	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	---	884
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.07	0.27	1.64	7.72	25.6	57.8	96.2	127	143	145	131	99.3	59.3	25.7	7.51	1.52	0.24	0.06	929	---
Φ a	0.00	0.00	0.00	1.97	21.7	54.6	93.3	124	140	142	128	96.3	56.1	21.9	2.27	0.00	0.00	0.00	---	884

one-half-peak spread: U:28.7,D:21.7 , L:37.0,R:21.3


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.80V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:934.95x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-60D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

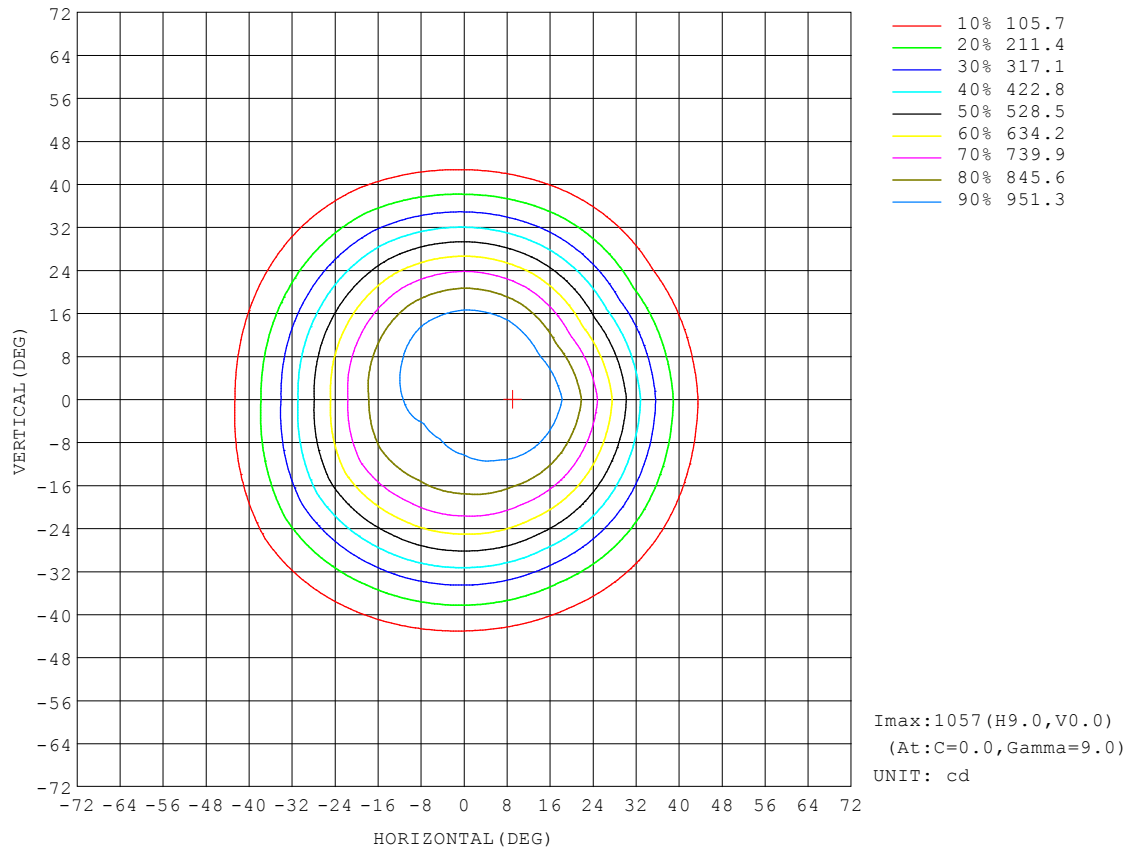


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.80V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:934.95x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-60D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

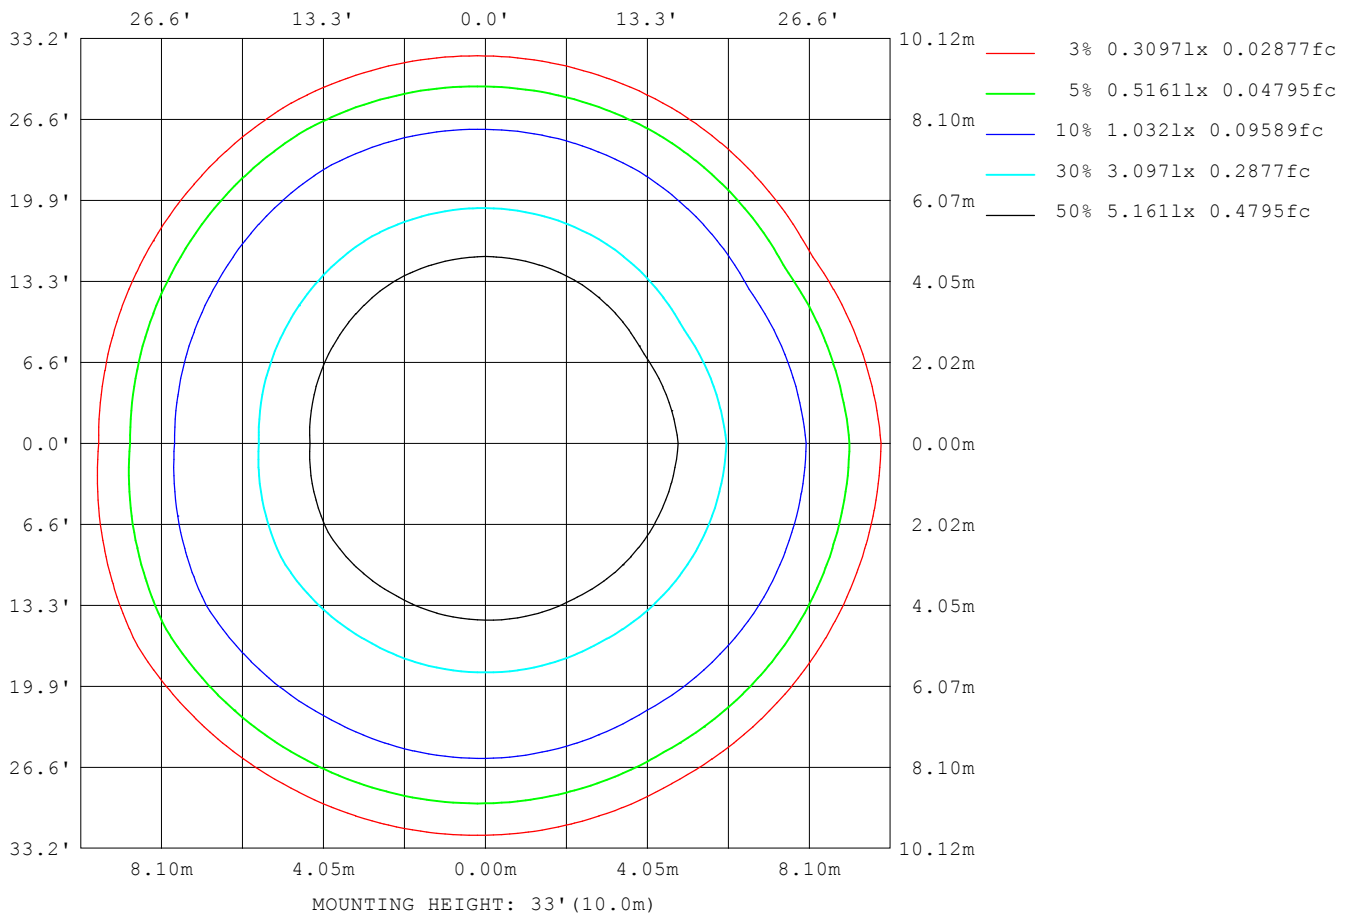

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

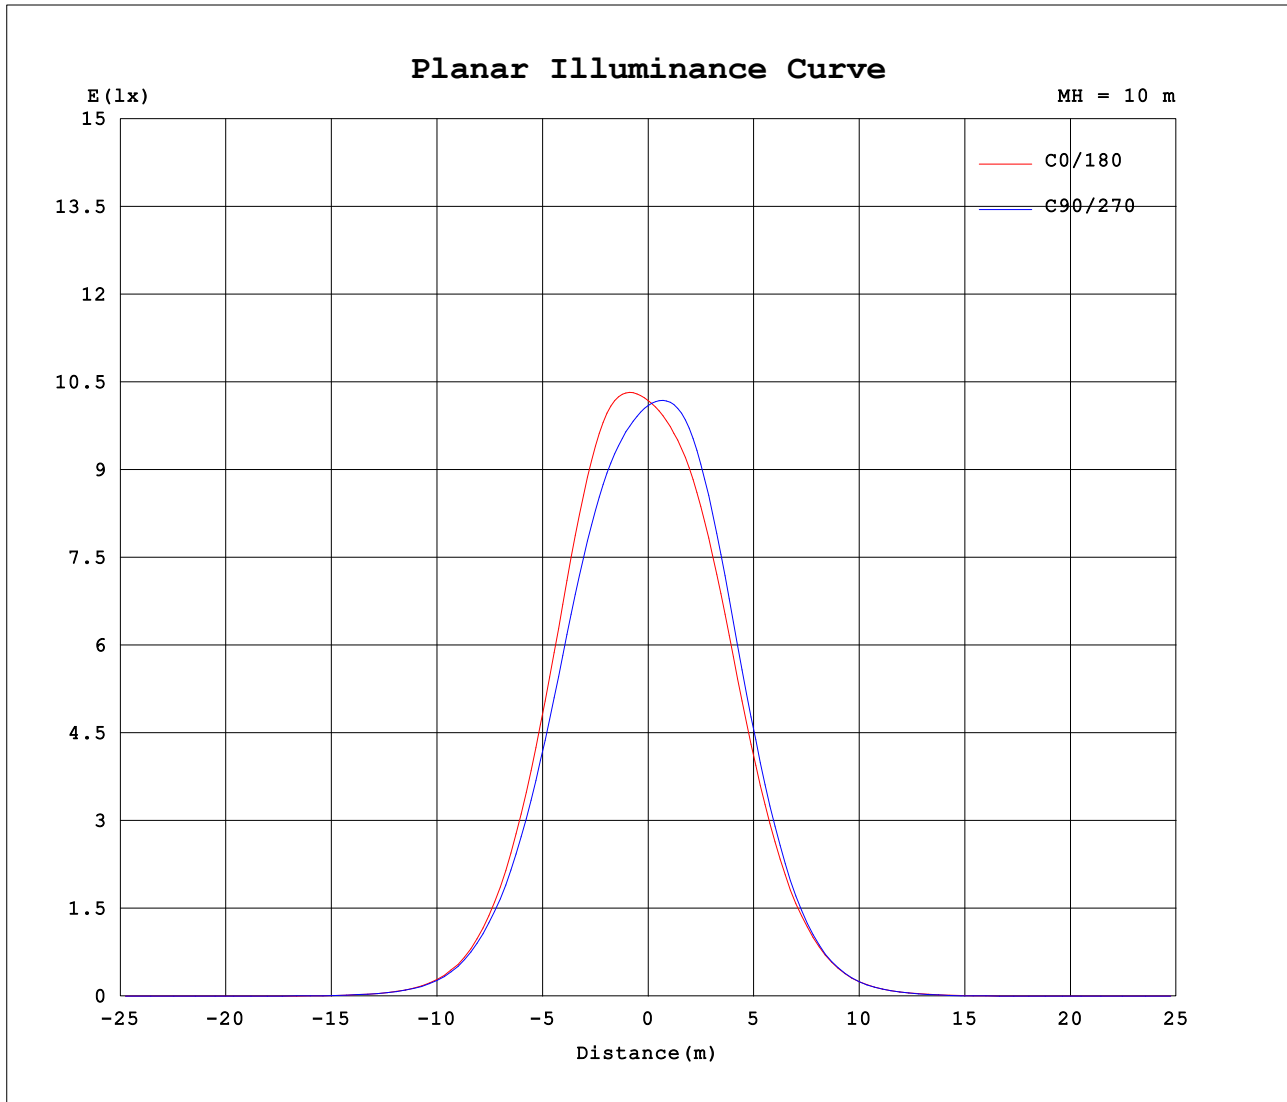


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.80V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:934.95x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-60D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

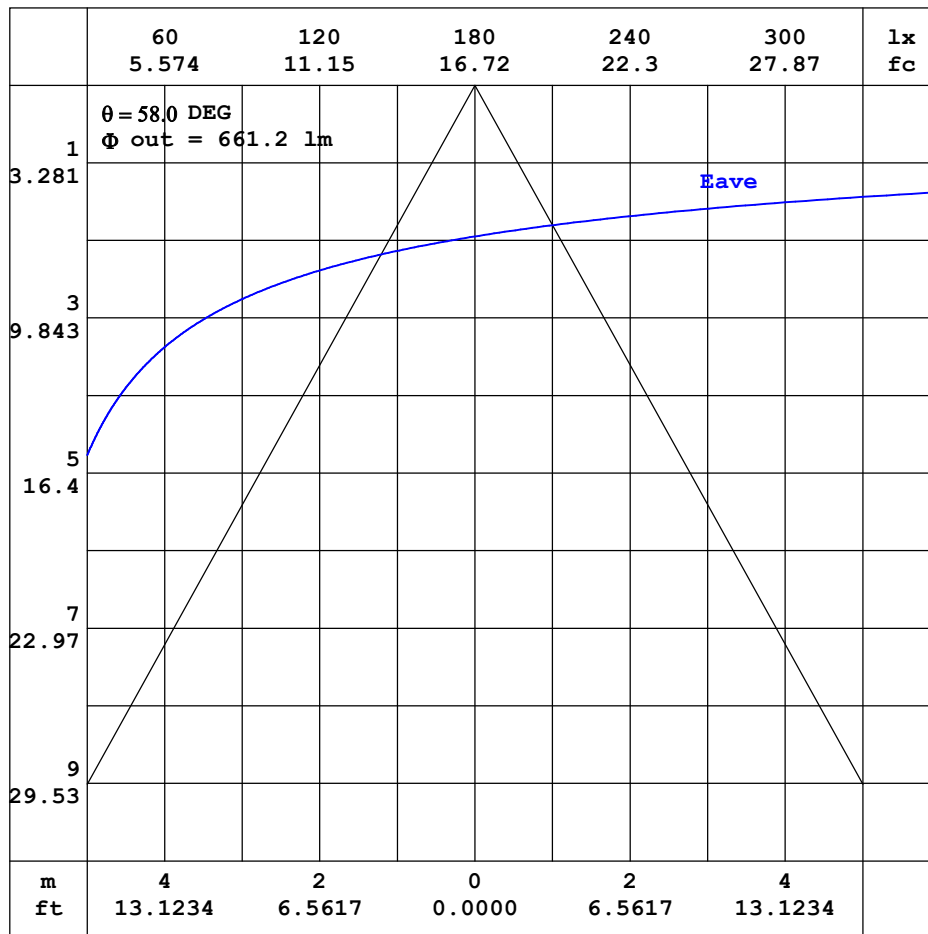

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.80V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:934.95x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-60D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.08	0.08	0.08	0.09	0.09	0.12	0.21	0.36	0.63	1.01	1.48	1.97	2.46	2.91	3.33	3.74	4.14	4.52	4.71
-170	0.08	0.09	0.09	0.10	0.10	0.13	0.20	0.35	0.60	0.96	1.41	1.90	2.40	2.84	3.22	3.53	3.81	4.01	4.19
-160	0.08	0.09	0.09	0.10	0.10	0.13	0.18	0.30	0.49	0.78	1.16	1.59	2.03	2.45	2.80	3.07	3.28	3.45	3.55
-150	0.08	0.09	0.10	0.10	0.11	0.12	0.15	0.22	0.35	0.55	0.80	1.11	1.44	1.76	2.05	2.31	2.51	2.65	2.71
-140	0.08	0.10	0.11	0.11	0.12	0.12	0.14	0.17	0.23	0.32	0.45	0.62	0.81	1.01	1.21	1.39	1.53	1.61	1.65
-130	0.08	0.10	0.11	0.12	0.12	0.13	0.14	0.15	0.16	0.18	0.22	0.27	0.35	0.42	0.51	0.60	0.68	0.72	0.75
-120	0.08	0.10	0.12	0.13	0.13	0.14	0.14	0.15	0.14	0.14	0.14	0.13	0.13	0.14	0.17	0.20	0.22	0.24	0.25
-110	0.08	0.11	0.13	0.14	0.16	0.16	0.17	0.16	0.15	0.14	0.14	0.13	0.13	0.12	0.11	0.10	0.10	0.09	0.09
-100	0.08	0.11	0.13	0.15	0.17	0.19	0.21	0.20	0.18	0.17	0.16	0.15	0.14	0.13	0.11	0.10	0.08	0.07	0.06
-90	0.08	0.11	0.14	0.16	0.19	0.22	0.24	0.23	0.22	0.20	0.19	0.18	0.16	0.14	0.13	0.11	0.09	0.07	0.06
-80	0.08	0.11	0.15	0.19	0.24	0.30	0.35	0.35	0.35	0.35	0.35	0.34	0.34	0.32	0.30	0.28	0.26	0.23	0.21
-70	0.08	0.11	0.17	0.24	0.31	0.39	0.46	0.49	0.51	0.52	0.54	0.55	0.57	0.58	0.58	0.58	0.58	0.56	0.54
-60	0.08	0.12	0.20	0.29	0.38	0.47	0.56	0.63	0.69	0.83	1.03	1.28	1.61	1.98	2.40	2.83	3.15	3.32	3.32
-50	0.08	0.13	0.23	0.33	0.44	0.54	0.67	0.97	1.45	2.27	3.61	5.62	9.83	14.4	19.2	23.9	27.9	30.3	30.8
-40	0.08	0.14	0.25	0.37	0.49	0.63	1.01	1.86	3.75	8.23	17.1	29.1	46.7	70.2	97.5	126	148	164	169
-30	0.08	0.14	0.26	0.39	0.53	0.81	1.59	3.60	10.1	24.3	50.2	92.5	153	225	298	366	421	456	467
-20	0.08	0.15	0.27	0.41	0.57	1.02	2.29	6.41	19.6	46.5	102	195	313	435	552	649	721	769	787
-10	0.08	0.15	0.27	0.41	0.58	1.17	2.88	9.21	27.2	66.9	147	272	426	590	740	845	903	933	954
0	0.08	0.14	0.26	0.40	0.57	1.18	2.93	9.86	28.4	70.7	156	288	454	628	787	901	965	995	1018
10	0.08	0.14	0.26	0.39	0.55	1.10	2.66	8.09	25.0	61.4	136	258	413	584	743	872	959	1009	1032
20	0.08	0.13	0.24	0.37	0.52	0.90	1.95	5.18	16.5	39.4	86.5	167	284	422	563	687	784	842	866
30	0.08	0.12	0.22	0.34	0.46	0.66	1.29	2.80	6.76	18.9	39.3	75.9	134	213	301	385	447	488	501
40	0.08	0.11	0.19	0.29	0.40	0.52	0.77	1.36	2.63	5.40	12.5	23.8	40.0	62.6	91.2	120	143	158	161
50	0.08	0.10	0.17	0.24	0.32	0.41	0.51	0.66	1.01	1.59	2.60	4.24	6.76	11.8	16.7	21.2	24.9	27.1	27.4
60	0.08	0.09	0.14	0.18	0.24	0.30	0.36	0.42	0.49	0.56	0.72	0.93	1.20	1.51	1.81	2.12	2.36	2.49	2.48
70	0.08	0.08	0.10	0.13	0.16	0.20	0.23	0.26	0.29	0.31	0.34	0.36	0.39	0.41	0.44	0.46	0.48	0.50	0.50
80	0.08	0.08	0.08	0.08	0.09	0.10	0.12	0.12	0.13	0.13	0.13	0.13	0.14	0.15	0.17	0.18	0.19	0.20	0.20
90	0.08	0.08	0.07	0.06	0.06	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03
100	0.08	0.08	0.07	0.06	0.06	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03
110	0.08	0.08	0.07	0.06	0.06	0.05	0.05	0.04	0.04	0.04	0.05	0.05	0.06	0.05	0.05	0.05	0.05	0.04	0.03
120	0.08	0.08	0.07	0.07	0.06	0.05	0.05	0.04	0.05	0.05	0.06	0.07	0.10	0.12	0.12	0.13	0.14	0.14	0.13
130	0.08	0.08	0.07	0.07	0.06	0.06	0.05	0.05	0.05	0.09	0.14	0.20	0.27	0.34	0.40	0.45	0.49	0.51	0.51
140	0.08	0.08	0.07	0.07	0.07	0.06	0.06	0.08	0.13	0.21	0.34	0.48	0.65	0.82	0.98	1.11	1.20	1.26	1.26
150	0.08	0.08	0.08	0.07	0.07	0.07	0.09	0.16	0.27	0.43	0.65	0.92	1.21	1.49	1.73	1.94	2.09	2.17	2.18
160	0.08	0.08	0.08	0.08	0.08	0.09	0.14	0.24	0.42	0.69	1.02	1.40	1.76	2.14	2.46	2.72	2.91	3.04	3.07
170	0.08	0.08	0.08	0.09	0.08	0.11	0.18	0.32	0.56	0.90	1.33	1.78	2.23	2.64	3.00	3.35	3.66	3.88	3.94
180	0.08	0.08	0.08	0.09	0.09	0.12	0.21	0.36	0.63	1.01	1.48	1.97	2.46	2.91	3.33	3.74	4.14	4.52	4.65

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.80V I:0.1350A P:29.000W PF:0.9000 Freq:49.37Hz Lamp Flux:934.95x1 lm		
NAME:Nuit 100-100mm-RGBW ALL-60D-REV1	TYPE:RGBW W=3000K	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.48	4.20	3.85	3.45	3.02	2.54	2.02	1.53	1.06	0.67	0.38	0.21	0.10	0.04	0.04	0.04	0.04	0.05	
-170	4.08	3.89	3.62	3.28	2.89	2.43	1.94	1.46	1.01	0.64	0.37	0.20	0.10	0.05	0.05	0.04	0.04	0.05	
-160	3.46	3.29	3.09	2.81	2.46	2.05	1.62	1.21	0.83	0.53	0.31	0.17	0.09	0.05	0.05	0.04	0.04	0.05	
-150	2.65	2.53	2.34	2.08	1.79	1.48	1.15	0.85	0.58	0.37	0.22	0.13	0.07	0.05	0.05	0.04	0.04	0.05	
-140	1.62	1.55	1.41	1.24	1.05	0.85	0.66	0.48	0.34	0.23	0.14	0.09	0.06	0.05	0.05	0.04	0.04	0.05	
-130	0.73	0.69	0.63	0.54	0.46	0.36	0.29	0.22	0.17	0.12	0.10	0.07	0.06	0.05	0.05	0.04	0.04	0.05	
-120	0.24	0.22	0.19	0.16	0.14	0.11	0.10	0.08	0.08	0.07	0.07	0.06	0.05	0.05	0.04	0.04	0.04	0.05	
-110	0.08	0.07	0.06	0.05	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.05	
-100	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	
-90	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.04	0.04	0.04	0.04	0.05	0.05	
-80	0.21	0.21	0.21	0.21	0.21	0.20	0.18	0.16	0.14	0.12	0.10	0.08	0.07	0.07	0.06	0.06	0.06	0.05	
-70	0.54	0.53	0.51	0.49	0.47	0.44	0.40	0.36	0.31	0.27	0.23	0.18	0.16	0.13	0.11	0.08	0.07	0.05	
-60	3.17	2.87	2.45	1.97	1.55	1.23	0.96	0.74	0.57	0.47	0.38	0.31	0.26	0.20	0.16	0.12	0.08	0.05	
-50	29.3	25.9	21.4	16.4	11.5	6.56	4.24	2.68	1.62	1.00	0.64	0.47	0.37	0.28	0.21	0.14	0.09	0.05	
-40	160	141	116	86.0	59.9	39.0	23.9	13.0	5.34	2.73	1.36	0.75	0.49	0.36	0.26	0.17	0.10	0.05	
-30	455	417	357	286	210	137	78.3	40.7	19.9	6.77	2.88	1.27	0.64	0.43	0.31	0.20	0.11	0.05	
-20	780	737	667	565	438	305	184	93.5	42.2	17.6	5.23	1.97	0.87	0.49	0.34	0.22	0.12	0.05	
-10	968	961	906	793	638	461	291	153	68.3	27.3	8.39	2.70	1.06	0.54	0.37	0.23	0.13	0.05	
0	1044	1057	1016	904	733	536	340	181	81.3	31.7	10.4	2.99	1.14	0.56	0.38	0.24	0.13	0.05	
10	1033	997	907	774	615	437	270	141	63.0	25.1	7.68	2.52	1.02	0.53	0.37	0.23	0.13	0.05	
20	847	789	688	556	407	262	152	77.6	35.6	14.2	4.47	1.71	0.81	0.48	0.34	0.22	0.12	0.05	
30	483	437	366	280	192	116	61.7	30.5	14.0	5.16	2.23	1.07	0.60	0.42	0.31	0.20	0.11	0.05	
40	153	134	109	79.6	53.1	32.9	18.4	7.89	3.65	1.83	1.03	0.64	0.47	0.36	0.26	0.17	0.10	0.05	
50	26.1	23.0	18.8	13.8	8.68	5.13	3.11	1.87	1.14	0.74	0.54	0.44	0.36	0.28	0.21	0.14	0.09	0.05	
60	2.37	2.15	1.83	1.52	1.21	0.96	0.74	0.58	0.49	0.43	0.37	0.31	0.25	0.21	0.16	0.12	0.08	0.05	
70	0.49	0.47	0.45	0.43	0.40	0.37	0.34	0.31	0.28	0.24	0.21	0.19	0.16	0.13	0.11	0.08	0.07	0.05	
80	0.19	0.18	0.17	0.16	0.14	0.13	0.12	0.12	0.11	0.10	0.09	0.08	0.07	0.07	0.06	0.06	0.06	0.05	
90	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.05	
100	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.05	
110	0.04	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.05	
120	0.14	0.14	0.14	0.13	0.13	0.11	0.08	0.06	0.05	0.04	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.05	
130	0.52	0.50	0.47	0.42	0.37	0.29	0.22	0.16	0.11	0.06	0.04	0.03	0.04	0.04	0.04	0.04	0.04	0.05	
140	1.26	1.21	1.12	0.99	0.84	0.68	0.51	0.37	0.24	0.15	0.09	0.05	0.04	0.04	0.04	0.04	0.04	0.05	
150	2.17	2.08	1.93	1.72	1.50	1.22	0.95	0.68	0.46	0.29	0.17	0.09	0.05	0.04	0.04	0.04	0.04	0.05	
160	3.04	2.90	2.69	2.42	2.11	1.75	1.41	1.05	0.72	0.45	0.26	0.14	0.07	0.04	0.04	0.04	0.04	0.05	
170	3.92	3.65	3.28	2.96	2.63	2.24	1.80	1.37	0.95	0.60	0.34	0.18	0.09	0.04	0.04	0.04	0.04	0.05	
180	4.48	4.20	3.85	3.45	3.02	2.54	2.02	1.53	1.06	0.67	0.38	0.21	0.10	0.04	0.04	0.04	0.04	0.05	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: