

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1139.9 cd per klm.
(Luminaire orientation as tested.)	-10.5 degrees vertical
	-6.0 degrees horizontal

Beam Spread	At 10% of Imax	86.6V x 86.9H
	At 50% of Imax	57.4V x 58.4H
	At 90% of Imax	22.8V x 28.1H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	938.8 lumens per klm.
	To 50% of Imax	660.3 lumens per klm.
	To 90% of Imax	165.4 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.77V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.7337x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-60D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

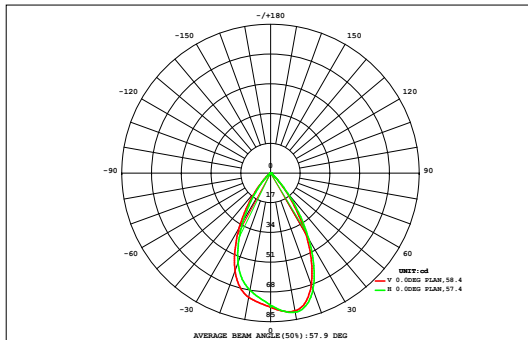

DATA OF LAMP		Eff:8.76lm/W	
MODEL		Imax(cd)	82.91
NOMINAL POWER(W)	30	AVAILABILITY(%)	94.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	68.38
NOMINAL FLUX(lm)	72.7337	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	72.73
TEST VOLTAGE(V)	220	θ @50% (H,V)	58,57DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	0.11
48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.01	1.66
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.14	3.91
32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.58	6.39
24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.68	8.51
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.1	9.96
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.8	10.7
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.5	10.3
-24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.62	8.45
-32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.72	5.51
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.84	2.54
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.99	0.40
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.02	0.04	0.16	0.70	2.30	5.16	8.36	10.6	11.3	10.7	9.21	6.86	4.14	1.88	0.60	0.14	0.03	0.01	72	---
Φ a	0.00	0.00	0.00	0.23	2.00	4.90	8.12	10.4	11.1	10.5	8.97	6.61	3.86	1.55	0.16	0.00	0.00	0.00	---	68

one-half-peak spread: U:21.3,D:26.4 , L:21.2,R:37.5


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.77V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.7337x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-60D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

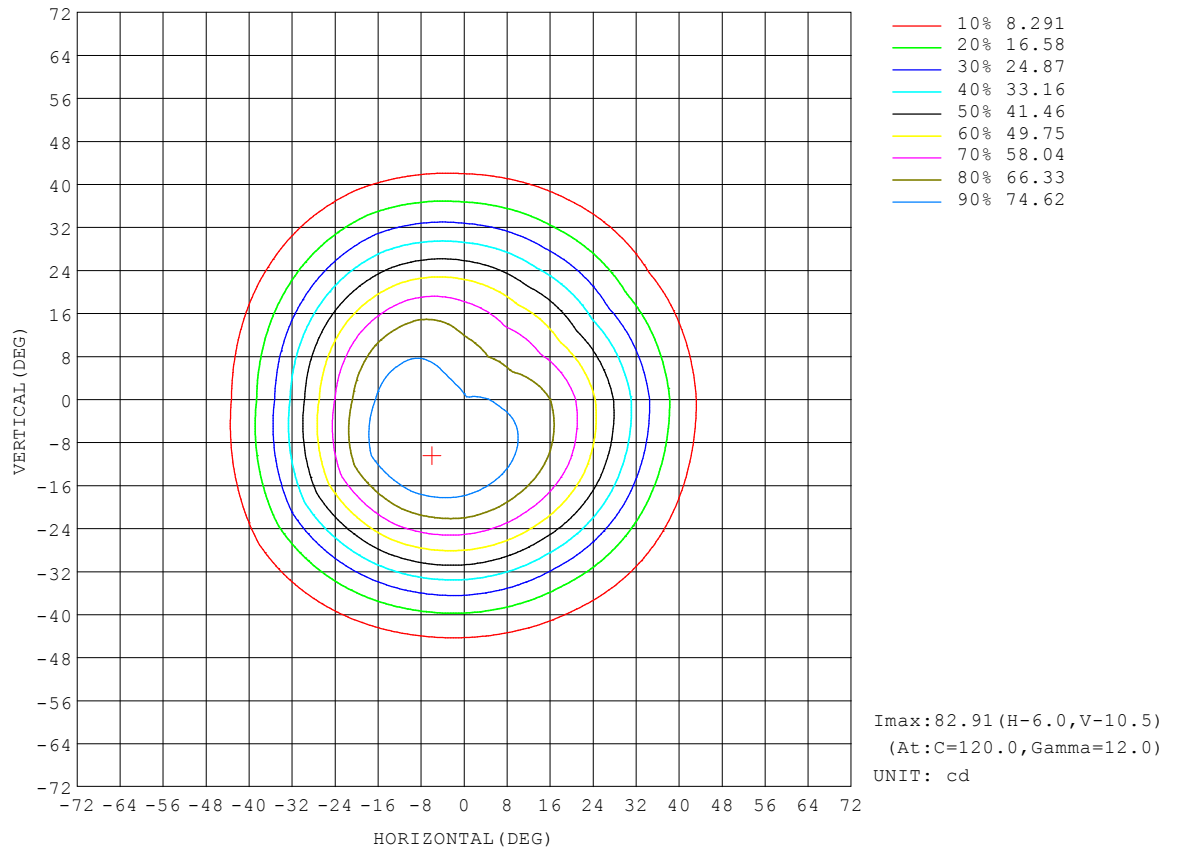


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.77V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.7337x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-60D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

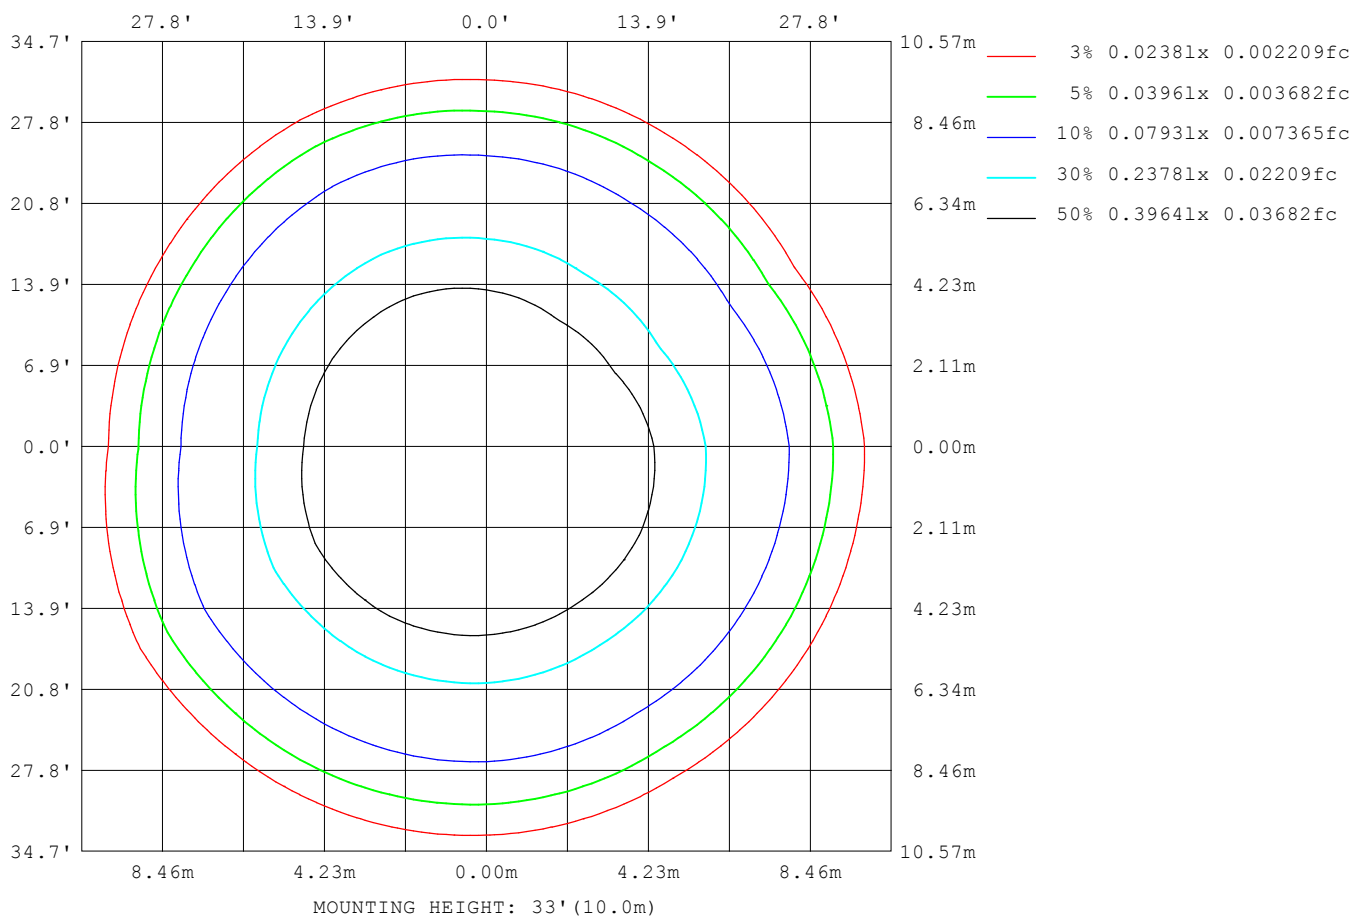

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

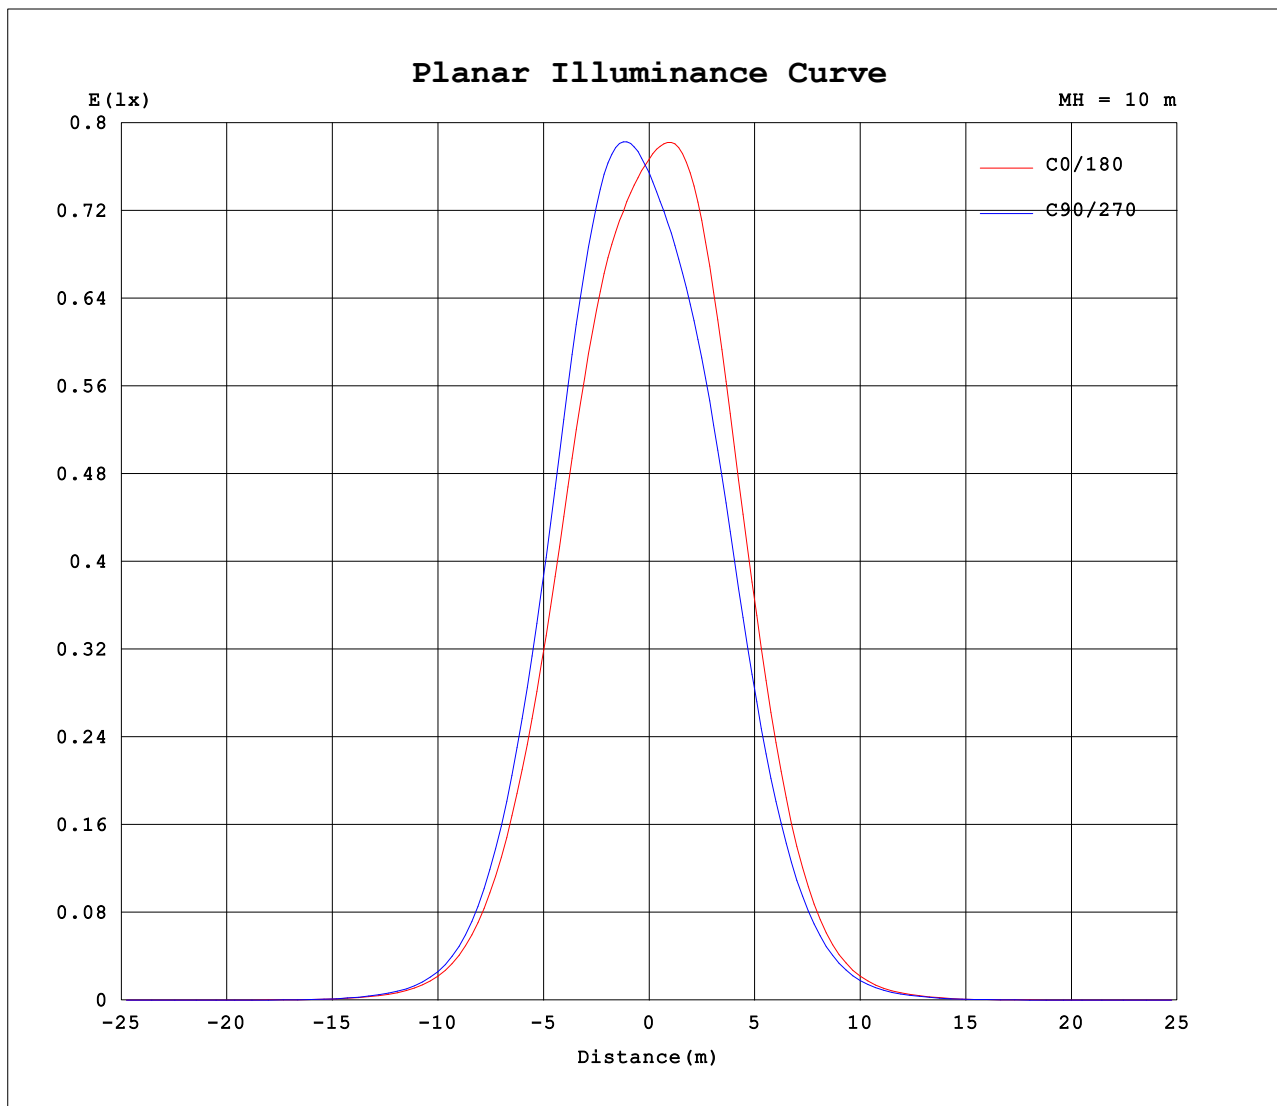


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.77V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.7337x1 lm		
NAME:Nuit 100-100mm-RGBW BLUE-60D-REV1	TYPE:RGBW-BLUE	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

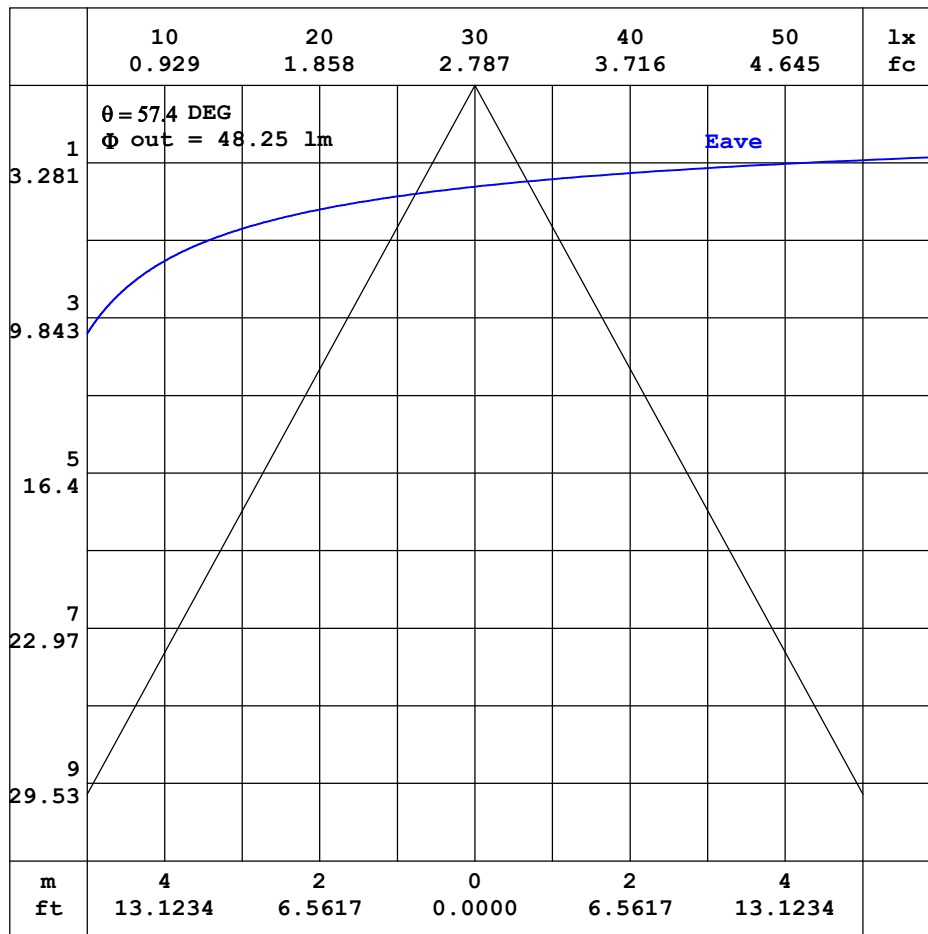

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.77V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.7337x1 lm																		
NAME:Nuit 100-100mm-RGBW BLUE-60D-REV1									TYPE:RGBW-BLUE					WEIGHT:				
SPEC.:60 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.05	0.08	0.11	0.15	0.19	0.21	0.25	0.28	0.31	0.32	0.32
-170	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.05	0.07	0.11	0.14	0.18	0.21	0.24	0.26	0.26	0.27	0.32
-160	0.03	0.03	0.03	0.03	0.03	0.02	0.03	0.04	0.05	0.06	0.09	0.12	0.15	0.17	0.18	0.19	0.20	0.23	0.25
-150	0.03	0.03	0.04	0.04	0.03	0.03	0.03	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.11	0.12	0.15	0.17	0.19
-140	0.03	0.04	0.04	0.05	0.05	0.04	0.03	0.03	0.03	0.04	0.04	0.05	0.05	0.04	0.04	0.06	0.08	0.10	0.11
-130	0.03	0.04	0.05	0.06	0.06	0.06	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.06
-120	0.03	0.04	0.06	0.07	0.08	0.08	0.08	0.07	0.05	0.05	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01
-110	0.03	0.05	0.07	0.09	0.10	0.11	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00
-100	0.03	0.05	0.07	0.10	0.12	0.14	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.08	0.07	0.05	0.03	0.02	0.00
-90	0.03	0.05	0.08	0.11	0.14	0.17	0.20	0.18	0.17	0.16	0.15	0.13	0.12	0.10	0.08	0.06	0.04	0.02	0.00
-80	0.03	0.05	0.09	0.12	0.16	0.19	0.23	0.22	0.21	0.19	0.18	0.16	0.15	0.12	0.10	0.08	0.06	0.03	0.00
-70	0.03	0.06	0.09	0.13	0.17	0.20	0.24	0.24	0.22	0.21	0.20	0.18	0.17	0.15	0.13	0.11	0.09	0.07	0.05
-60	0.03	0.06	0.10	0.14	0.17	0.21	0.23	0.25	0.23	0.22	0.22	0.23	0.25	0.27	0.29	0.31	0.33	0.33	0.31
-50	0.03	0.06	0.10	0.14	0.17	0.20	0.22	0.24	0.25	0.31	0.43	0.62	0.99	1.48	1.97	2.47	2.88	3.11	3.14
-40	0.03	0.06	0.10	0.14	0.17	0.19	0.21	0.27	0.45	0.84	1.75	2.98	4.76	7.06	9.78	12.5	14.6	15.9	16.0
-30	0.03	0.06	0.10	0.13	0.16	0.18	0.23	0.41	1.02	2.46	5.03	9.12	15.2	22.5	29.9	36.6	41.3	43.8	43.9
-20	0.03	0.06	0.09	0.12	0.15	0.18	0.29	0.64	1.93	4.50	9.79	19.0	31.1	42.9	53.8	62.6	68.5	71.1	71.0
-10	0.03	0.06	0.08	0.12	0.13	0.17	0.32	0.89	2.56	6.16	13.5	25.4	40.1	55.3	68.9	78.1	81.9	82.7	80.7
0	0.03	0.05	0.07	0.10	0.12	0.16	0.32	0.91	2.59	6.21	13.7	25.5	40.4	55.4	68.0	76.7	80.0	79.1	76.7
10	0.03	0.05	0.07	0.10	0.11	0.15	0.29	0.75	2.23	5.29	11.6	21.8	34.8	48.3	60.0	68.3	72.1	71.9	68.0
20	0.03	0.05	0.06	0.09	0.11	0.14	0.24	0.51	1.46	3.37	7.17	13.8	22.9	33.2	42.7	50.1	54.8	56.2	54.6
30	0.03	0.04	0.06	0.08	0.10	0.11	0.17	0.31	0.64	1.62	3.27	6.15	10.6	16.4	22.4	27.5	30.5	31.7	31.2
40	0.03	0.04	0.06	0.07	0.09	0.10	0.12	0.18	0.30	0.53	1.09	1.97	3.25	4.97	7.06	8.97	10.4	11.1	10.9
50	0.03	0.03	0.05	0.06	0.07	0.09	0.09	0.10	0.14	0.19	0.28	0.42	0.62	1.03	1.40	1.74	1.99	2.13	2.12
60	0.03	0.03	0.05	0.05	0.06	0.06	0.07	0.08	0.08	0.08	0.09	0.10	0.13	0.16	0.19	0.22	0.26	0.27	0.28
70	0.03	0.03	0.03	0.04	0.05	0.04	0.05	0.05	0.05	0.04	0.04	0.04	0.03	0.04	0.05	0.05	0.06	0.07	0.08
80	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.01	0.02	0.02	0.03	0.03
90	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00
130	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.03	0.03	0.02	0.02
140	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.09	0.09	0.09	0.09	0.08
150	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.04	0.08	0.11	0.14	0.17	0.17	0.17	0.16
160	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.03	0.05	0.07	0.10	0.14	0.18	0.21	0.24	0.24	0.23
170	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.04	0.06	0.09	0.12	0.15	0.17	0.19	0.22	0.27	0.31	0.29
180	0.03	0.02	0.02	0.02	0.02	0.02	0.03	0.04	0.05	0.08	0.11	0.15	0.19	0.21	0.25	0.28	0.31	0.32	0.32

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.77V I:0.0430A P:8.3000W PF:0.9000 Freq:49.37Hz Lamp Flux:72.7337x1 lm																		
NAME:Nuit 100-100mm-RGBW BLUE-60D-REV1									TYPE:RGBW-BLUE					WEIGHT:				
SPEC.:60 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.31	0.29	0.27	0.24	0.21	0.18	0.14	0.09	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
-170	0.28	0.28	0.28	0.25	0.22	0.19	0.14	0.10	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
-160	0.23	0.21	0.20	0.20	0.19	0.16	0.13	0.09	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
-150	0.17	0.16	0.14	0.12	0.11	0.10	0.08	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
-140	0.10	0.09	0.07	0.05	0.05	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
-130	0.05	0.03	0.02	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
-120	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	
-80	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	
-70	0.06	0.06	0.06	0.07	0.08	0.07	0.06	0.04	0.03	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	
-60	0.31	0.29	0.26	0.23	0.19	0.16	0.12	0.09	0.07	0.05	0.03	0.02	0.01	0.02	0.02	0.01	0.01	0.01	
-50	2.96	2.61	2.14	1.64	1.16	0.69	0.45	0.28	0.17	0.10	0.06	0.05	0.03	0.02	0.02	0.02	0.01	0.01	
-40	14.9	12.9	10.3	7.68	5.43	3.62	2.23	1.26	0.54	0.27	0.14	0.08	0.06	0.04	0.03	0.03	0.01	0.01	
-30	41.5	37.0	30.8	24.1	17.3	11.3	6.62	3.58	1.81	0.68	0.30	0.14	0.08	0.06	0.04	0.03	0.02	0.01	
-20	67.7	62.1	54.6	45.3	34.4	23.7	14.3	7.51	3.58	1.59	0.54	0.22	0.11	0.07	0.05	0.03	0.02	0.01	
-10	78.3	74.2	67.7	58.4	46.4	33.5	21.4	11.6	5.43	2.33	0.83	0.30	0.14	0.08	0.06	0.04	0.02	0.01	
0	74.5	72.2	67.7	59.6	48.3	35.9	23.7	13.2	6.21	2.60	1.00	0.34	0.16	0.08	0.06	0.04	0.02	0.01	
10	64.2	60.9	55.2	47.5	38.3	28.1	18.3	10.2	4.84	2.11	0.76	0.29	0.14	0.08	0.06	0.04	0.02	0.01	
20	51.2	45.6	39.8	32.7	24.6	16.6	10.4	5.72	2.84	1.30	0.48	0.21	0.12	0.08	0.05	0.04	0.02	0.01	
30	29.3	26.0	21.6	16.8	12.1	7.82	4.53	2.42	1.28	0.53	0.26	0.15	0.09	0.07	0.05	0.03	0.02	0.01	
40	10.3	8.97	7.33	5.51	3.88	2.57	1.58	0.77	0.40	0.22	0.14	0.10	0.08	0.06	0.04	0.03	0.02	0.01	
50	2.04	1.84	1.56	1.22	0.82	0.50	0.33	0.21	0.14	0.11	0.09	0.07	0.06	0.04	0.04	0.03	0.01	0.01	
60	0.26	0.24	0.20	0.16	0.12	0.11	0.09	0.07	0.07	0.06	0.06	0.05	0.04	0.04	0.03	0.02	0.01	0.01	
70	0.07	0.06	0.05	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.01	
80	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
120	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
130	0.02	0.03	0.03	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
140	0.09	0.10	0.11	0.10	0.08	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
150	0.17	0.18	0.19	0.16	0.13	0.10	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
160	0.25	0.26	0.23	0.20	0.17	0.13	0.09	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
170	0.32	0.29	0.25	0.22	0.20	0.17	0.13	0.09	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	
180	0.31	0.29	0.27	0.24	0.21	0.18	0.14	0.09	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:20DEG
 Operators:01
 Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:7.700m [K=1.0000]
 Remarks: