

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1149.1 cd per klm.
(Luminaire orientation as tested.)	7.0 degrees vertical
	4.0 degrees horizontal

Beam Spread	At 10% of Imax	85.9V x 86.5H
	At 50% of Imax	56.7V x 59.0H
	At 90% of Imax	21.6V x 31.2H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	941.4 lumens per klm.
	To 50% of Imax	655.9 lumens per klm.
	To 90% of Imax	163.7 lumens per klm.

Upward LOR	0.6 %
Downward LOR	99.4 %


Luminaire Efficiency (Light Output Ratio)	100.0 %
---	---------

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.78V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:338.165x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-60D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

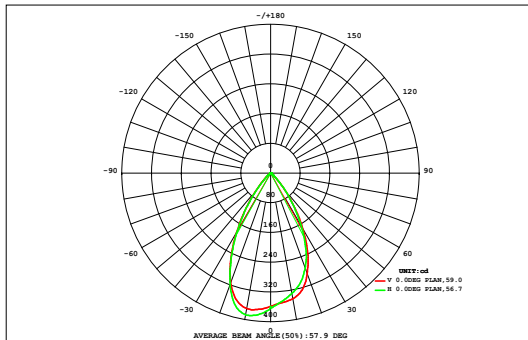

DATA OF LAMP		Eff:43.35lm/W	
MODEL		Imax(cd)	388.6
NOMINAL POWER(W)	30	AVAILABILITY(%)	94.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	318.4
NOMINAL FLUX(lm)	338.165	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	338.2
TEST VOLTAGE(V)	220	θ @50% (H,V)	59,57DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.00
72	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.19	0.00
64	0.00	0.00	0.01	0.01	0.02	0.04	0.08	0.11	0.14	0.13	0.11	0.07	0.04	0.02	0.01	0.00	0.00	0.00	0.80	0.00
56	0.00	0.00	0.01	0.02	0.07	0.18	0.33	0.49	0.60	0.59	0.46	0.29	0.15	0.06	0.02	0.01	0.00	0.00	3.29	0.69
48	0.00	0.01	0.02	0.07	0.21	0.53	1.05	1.60	1.95	1.93	1.56	0.98	0.45	0.17	0.05	0.01	0.00	0.00	10.6	9.11
40	0.00	0.01	0.03	0.15	0.50	1.27	2.38	3.44	3.99	3.96	3.36	2.24	1.10	0.39	0.11	0.03	0.01	0.00	23.0	21.9
32	0.00	0.01	0.06	0.27	0.93	2.22	3.86	5.29	6.04	6.02	5.19	3.64	1.96	0.77	0.22	0.05	0.01	0.00	36.5	35.7
24	0.00	0.01	0.08	0.40	1.35	3.02	4.94	6.43	7.22	7.29	6.43	4.73	2.84	1.23	0.35	0.07	0.01	0.00	46.4	45.7
	0.00	0.01	0.10	0.48	1.60	3.41	5.30	6.61	7.17	7.38	6.92	5.52	3.48	1.57	0.46	0.10	0.01	0.00	50.2	49.5
	0.00	0.01	0.10	0.50	1.62	3.38	5.10	6.15	6.63	6.93	6.76	5.57	3.58	1.63	0.48	0.10	0.02	0.00	48.6	47.9
	0.00	0.01	0.10	0.45	1.42	2.98	4.54	5.42	5.99	6.41	6.14	4.94	3.11	1.37	0.40	0.08	0.01	0.00	43.4	42.7
-24	0.00	0.01	0.07	0.33	1.06	2.25	3.47	4.34	5.05	5.33	4.88	3.76	2.26	0.95	0.28	0.06	0.01	0.00	34.1	33.3
-32	0.00	0.01	0.05	0.21	0.64	1.37	2.22	2.96	3.54	3.65	3.20	2.34	1.31	0.53	0.16	0.03	0.01	0.00	22.2	21.2
-40	0.00	0.01	0.02	0.10	0.30	0.65	1.11	1.58	1.88	1.91	1.63	1.11	0.58	0.23	0.07	0.02	0.01	0.00	11.2	9.70
-48	0.00	0.01	0.01	0.04	0.11	0.24	0.41	0.59	0.71	0.70	0.57	0.37	0.20	0.08	0.03	0.01	0.00	0.00	4.09	1.21
-56	0.00	0.00	0.01	0.01	0.03	0.06	0.11	0.16	0.19	0.18	0.15	0.09	0.05	0.02	0.01	0.00	0.00	0.00	1.10	0.00
-64	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.23	0.00
-72	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.09	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.05	0.13	0.67	3.06	9.90	21.7	35.0	45.2	51.2	52.5	47.4	35.7	21.1	9.04	2.65	0.59	0.12	0.04	336	---
Φ a	0.00	0.00	0.00	0.90	8.48	20.5	33.8	44.2	50.1	51.4	46.4	34.6	20.0	7.56	0.66	0.00	0.00	0.00	---	318

one-half-peak spread: U:36.9,D:20.2 , L:37.3,R:22.0


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.78V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:338.165x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-60D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

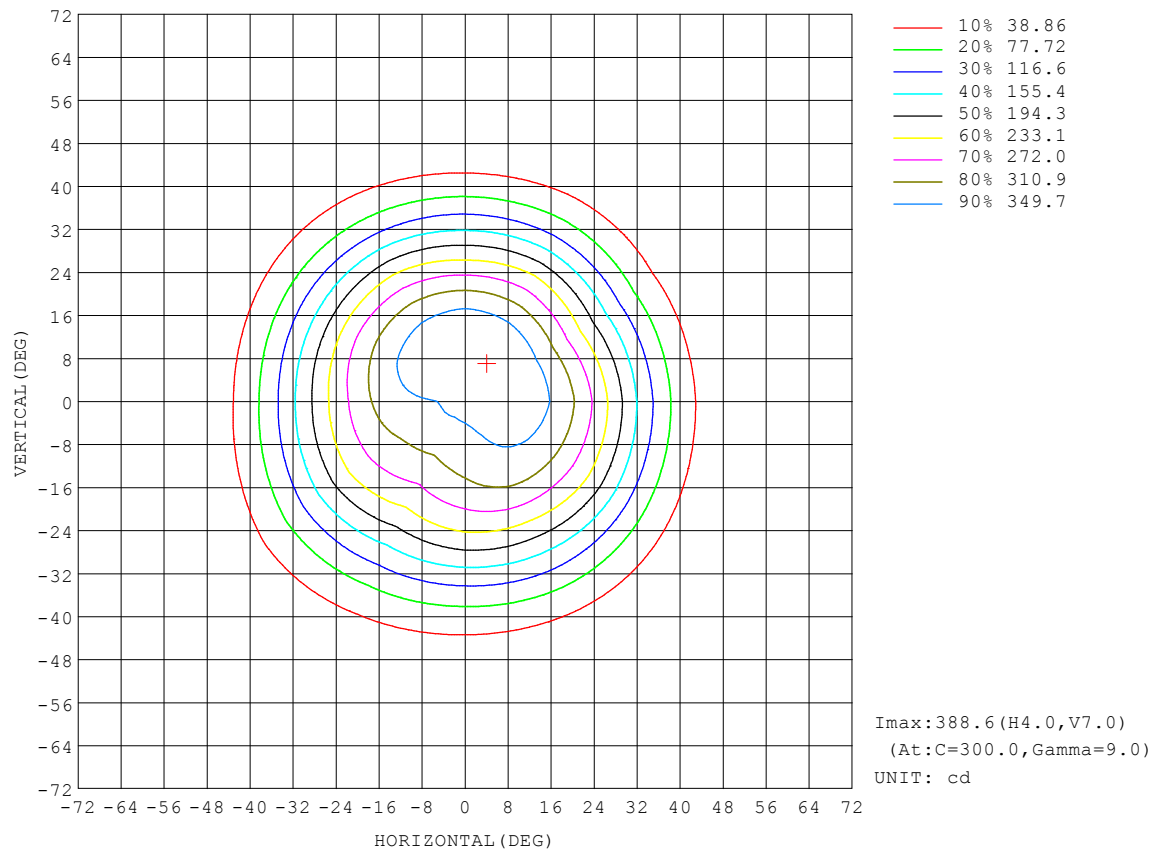


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.78V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:338.165x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-60D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

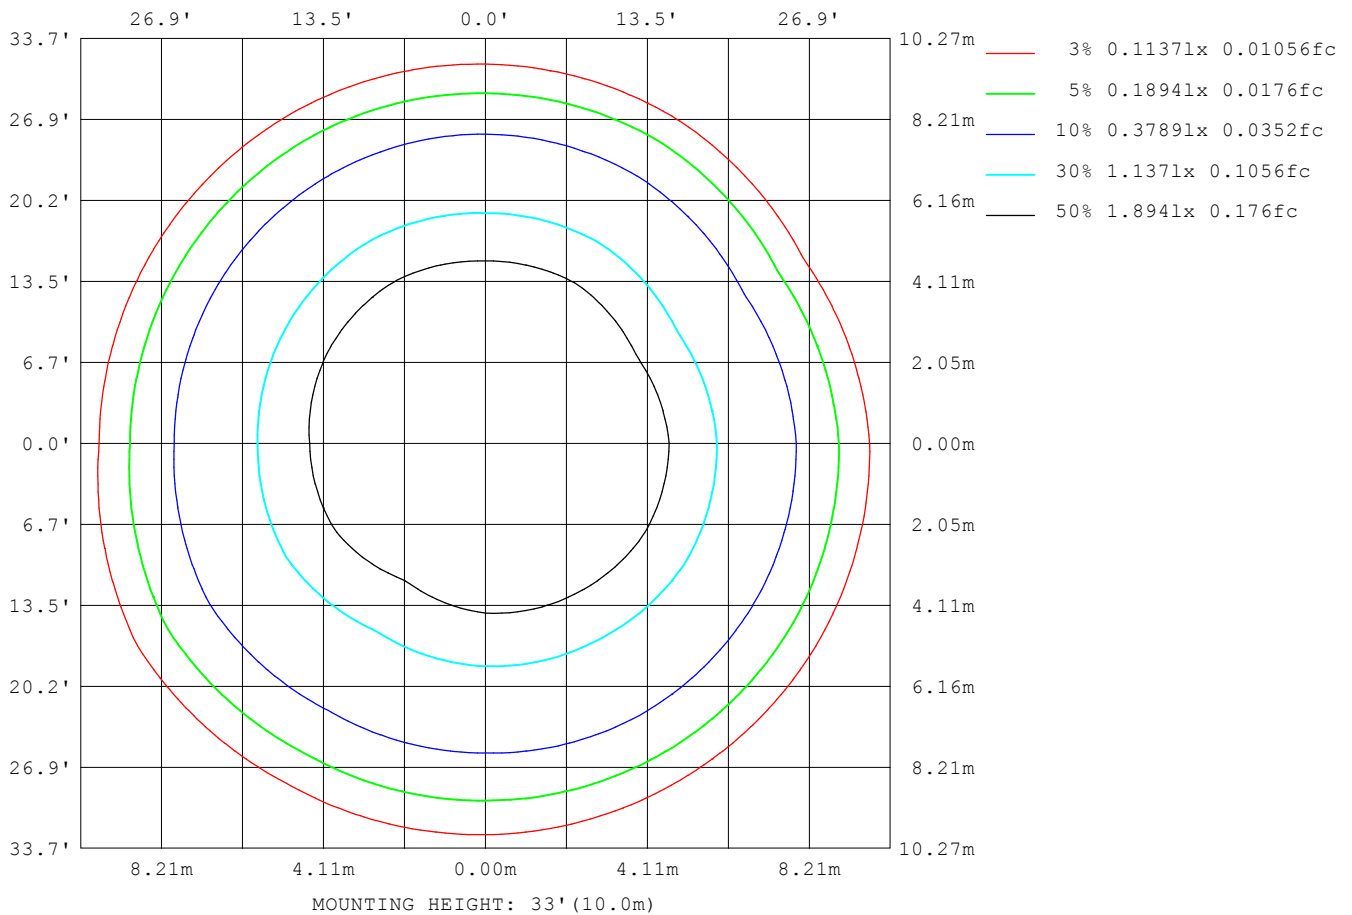

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

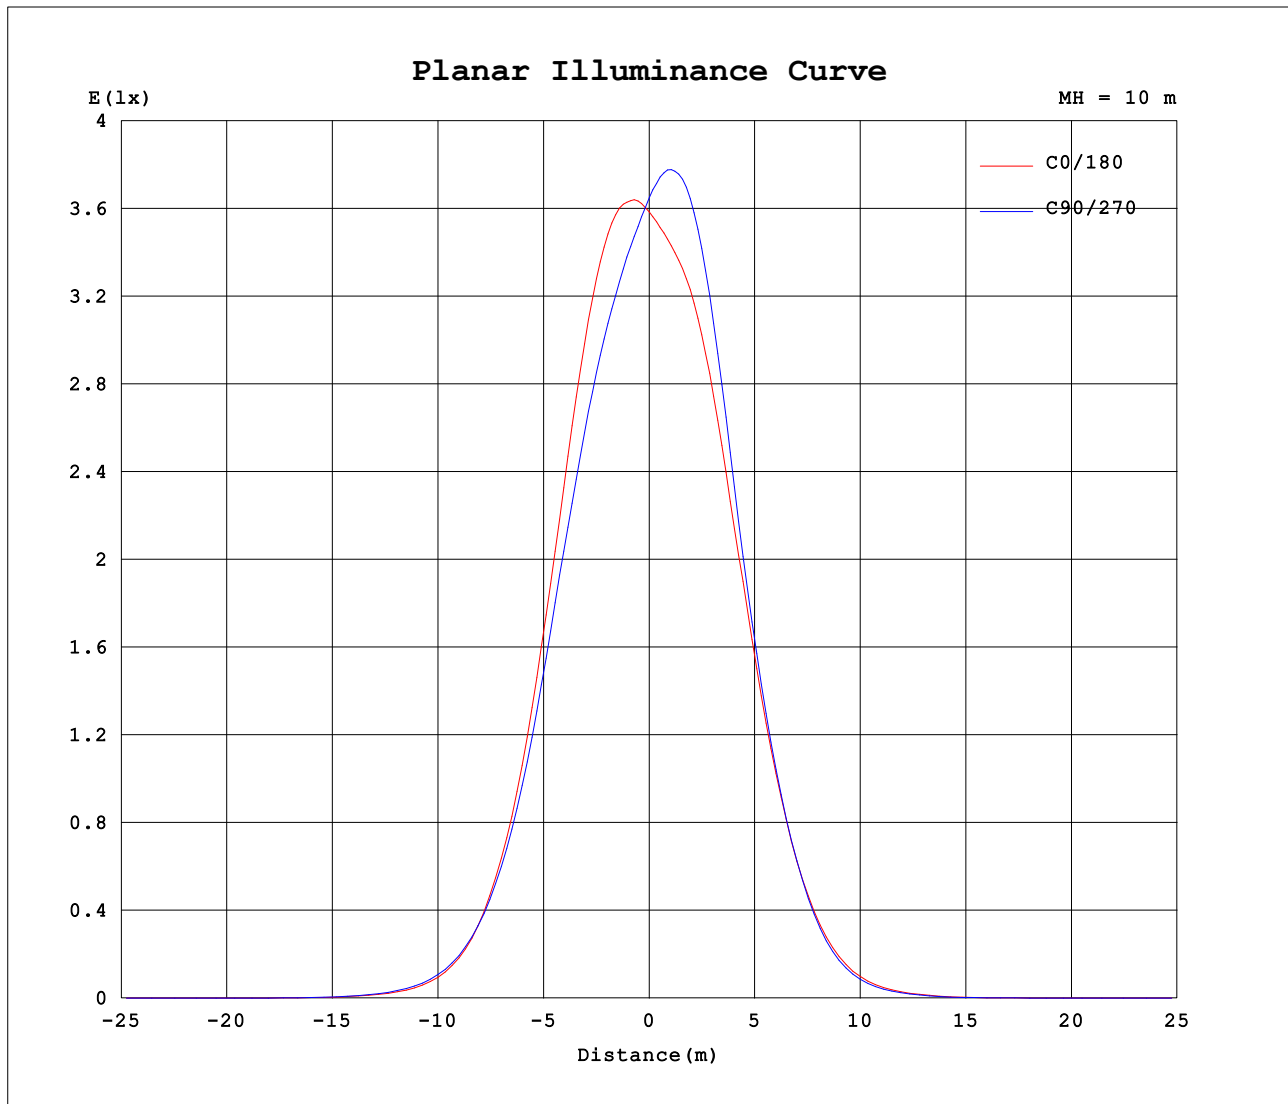


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.78V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:338.165x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-60D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

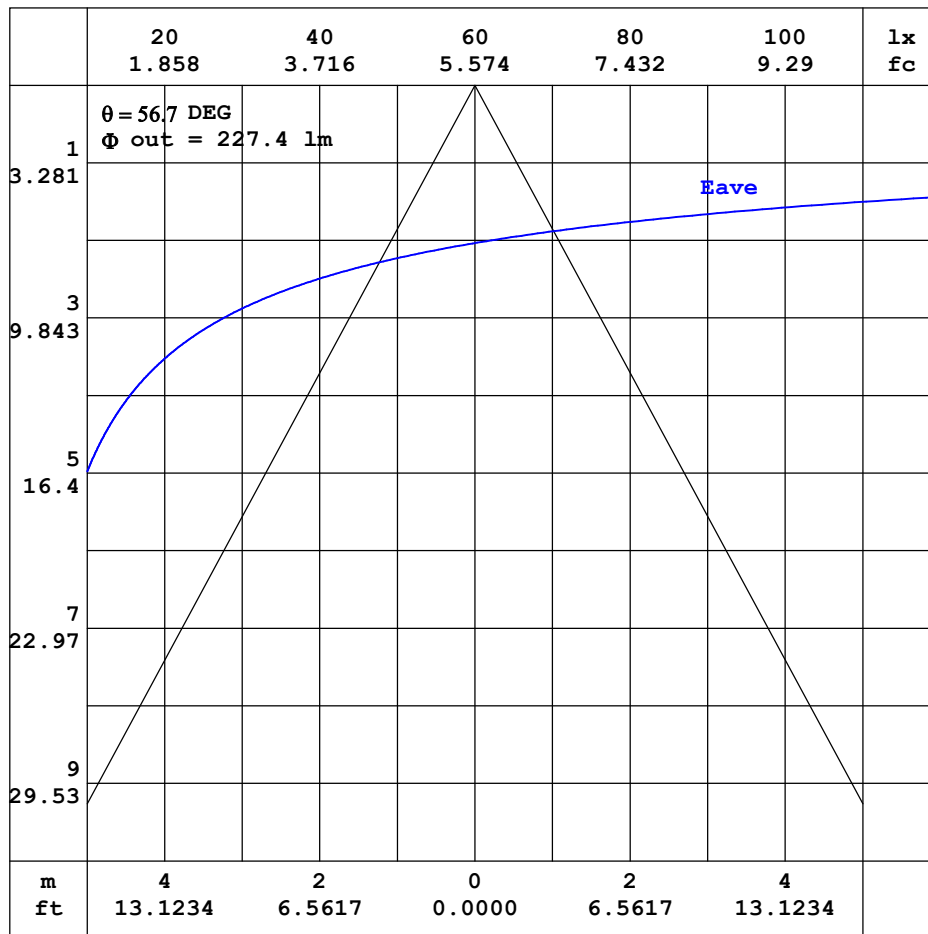

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.78V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:338.165x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-60D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.05	0.05	0.05	0.05	0.05	0.05	0.07	0.13	0.23	0.36	0.53	0.71	0.90	1.05	1.19	1.34	1.48	1.61	1.63
-170	0.05	0.05	0.05	0.05	0.05	0.06	0.08	0.13	0.22	0.35	0.50	0.70	0.88	1.05	1.19	1.30	1.39	1.45	1.53
-160	0.05	0.06	0.06	0.06	0.06	0.06	0.07	0.12	0.18	0.29	0.42	0.58	0.75	0.90	1.03	1.12	1.19	1.27	1.32
-150	0.05	0.06	0.07	0.07	0.06	0.06	0.08	0.09	0.14	0.20	0.29	0.40	0.52	0.64	0.74	0.83	0.92	0.98	1.02
-140	0.05	0.06	0.07	0.08	0.07	0.07	0.07	0.09	0.09	0.13	0.16	0.22	0.28	0.35	0.42	0.49	0.55	0.59	0.61
-130	0.05	0.07	0.08	0.09	0.09	0.08	0.08	0.08	0.08	0.08	0.09	0.10	0.12	0.14	0.17	0.20	0.23	0.26	0.28
-120	0.05	0.07	0.09	0.09	0.10	0.11	0.10	0.09	0.08	0.08	0.08	0.08	0.08	0.07	0.07	0.07	0.08	0.09	0.09
-110	0.05	0.07	0.09	0.11	0.12	0.13	0.14	0.13	0.12	0.10	0.10	0.09	0.09	0.08	0.07	0.06	0.05	0.04	0.04
-100	0.05	0.07	0.09	0.12	0.14	0.16	0.18	0.16	0.15	0.13	0.13	0.12	0.11	0.09	0.08	0.06	0.05	0.03	0.02
-90	0.05	0.08	0.10	0.13	0.16	0.18	0.21	0.20	0.18	0.17	0.16	0.14	0.13	0.11	0.09	0.07	0.06	0.04	0.02
-80	0.05	0.08	0.12	0.15	0.20	0.24	0.29	0.29	0.29	0.28	0.27	0.26	0.24	0.22	0.21	0.18	0.16	0.14	0.11
-70	0.05	0.08	0.13	0.19	0.25	0.31	0.36	0.38	0.38	0.38	0.38	0.38	0.38	0.37	0.36	0.35	0.33	0.31	0.29
-60	0.05	0.09	0.16	0.23	0.29	0.36	0.41	0.45	0.47	0.51	0.58	0.66	0.77	0.90	1.05	1.21	1.35	1.42	1.42
-50	0.05	0.09	0.17	0.25	0.33	0.39	0.46	0.57	0.74	1.05	1.60	2.43	4.16	6.33	8.47	10.5	12.1	13.0	13.2
-40	0.05	0.10	0.19	0.27	0.35	0.43	0.57	0.89	1.68	3.43	7.46	12.6	19.6	28.0	37.0	46.6	54.9	60.4	62.3
-30	0.05	0.10	0.20	0.28	0.37	0.48	0.78	1.61	4.33	10.4	21.0	36.6	57.4	81.3	105	125	144	159	166
-20	0.05	0.10	0.20	0.29	0.38	0.55	1.06	2.67	8.21	19.1	40.2	73.5	115	155	191	217	236	259	272
-10	0.05	0.10	0.19	0.28	0.39	0.60	1.29	3.77	11.0	26.6	57.3	103	159	215	261	287	302	314	329
0	0.05	0.10	0.18	0.27	0.38	0.60	1.31	3.84	11.2	28.1	62.0	114	175	238	289	326	343	350	358
10	0.05	0.10	0.18	0.27	0.37	0.57	1.20	3.20	9.71	23.8	53.1	100	159	222	281	327	359	377	387
20	0.05	0.09	0.17	0.25	0.34	0.49	0.93	2.13	6.32	14.9	32.8	64.3	109	159	212	258	292	312	319
30	0.05	0.08	0.16	0.23	0.31	0.41	0.65	1.28	2.69	7.03	14.4	27.9	49.2	77.2	109	139	163	177	180
40	0.05	0.07	0.14	0.20	0.26	0.34	0.45	0.69	1.23	2.18	4.70	8.63	14.2	21.9	31.5	41.6	50.5	56.5	58.2
50	0.05	0.06	0.12	0.17	0.22	0.27	0.33	0.41	0.54	0.80	1.22	1.79	2.67	4.39	6.00	7.55	8.74	9.45	9.54
60	0.05	0.06	0.09	0.13	0.17	0.20	0.24	0.28	0.31	0.36	0.42	0.51	0.64	0.79	0.93	1.05	1.14	1.19	1.19
70	0.05	0.05	0.06	0.09	0.11	0.14	0.16	0.17	0.19	0.21	0.21	0.23	0.24	0.26	0.28	0.30	0.32	0.33	0.34
80	0.05	0.05	0.05	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.09	0.09	0.08	0.09	0.10	0.12	0.13	0.13	0.14
90	0.05	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01
100	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00
110	0.05	0.04	0.04	0.04	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00
120	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.03	0.03	0.04	0.05	0.05	0.04	0.04	0.03	0.03
130	0.05	0.05	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.03	0.04	0.07	0.10	0.13	0.15	0.16	0.17	0.17	0.16
140	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.06	0.11	0.15	0.23	0.30	0.36	0.40	0.42	0.43	0.42
150	0.05	0.05	0.04	0.04	0.04	0.03	0.04	0.04	0.08	0.13	0.21	0.31	0.42	0.53	0.63	0.71	0.74	0.76	0.75
160	0.05	0.05	0.04	0.04	0.04	0.04	0.05	0.08	0.14	0.23	0.35	0.48	0.62	0.75	0.87	0.96	1.03	1.07	1.07
170	0.05	0.05	0.05	0.05	0.04	0.05	0.07	0.11	0.19	0.31	0.46	0.63	0.79	0.93	1.05	1.17	1.29	1.39	1.40
180	0.05	0.05	0.05	0.05	0.05	0.05	0.07	0.13	0.23	0.36	0.53	0.71	0.90	1.05	1.19	1.34	1.48	1.61	1.63

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.78V I:0.0410A P:7.8000W PF:0.9000 Freq:49.37Hz Lamp Flux:338.165x1 lm		
NAME:Nuit 100-100mm-RGBW GREEN-60D-REV1	TYPE:RGBW-GREEN	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.57	1.48	1.36	1.22	1.07	0.90	0.72	0.54	0.37	0.23	0.12	0.05	0.02	0.02	0.02	0.02	0.02	0.02	
-170	1.46	1.40	1.32	1.20	1.06	0.89	0.71	0.53	0.36	0.23	0.12	0.05	0.02	0.02	0.02	0.02	0.02	0.02	
-160	1.28	1.20	1.13	1.04	0.92	0.78	0.61	0.45	0.30	0.19	0.10	0.05	0.03	0.02	0.02	0.02	0.02	0.02	
-150	0.99	0.94	0.85	0.76	0.66	0.54	0.43	0.32	0.22	0.14	0.07	0.04	0.02	0.02	0.02	0.02	0.02	0.02	
-140	0.60	0.56	0.50	0.43	0.37	0.30	0.23	0.18	0.12	0.08	0.05	0.03	0.02	0.02	0.02	0.02	0.02	0.02	
-130	0.27	0.24	0.21	0.17	0.14	0.11	0.09	0.07	0.05	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.02	
-120	0.08	0.07	0.05	0.05	0.02	0.02	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.02	0.02
-110	0.03	0.03	0.02	0.02	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02	0.02
-100	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02
-90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02
-80	0.12	0.12	0.13	0.13	0.13	0.13	0.11	0.09	0.07	0.06	0.05	0.03	0.02	0.02	0.03	0.03	0.03	0.03	0.02
-70	0.30	0.30	0.30	0.29	0.29	0.27	0.25	0.22	0.19	0.16	0.13	0.11	0.09	0.07	0.06	0.04	0.03	0.02	
-60	1.37	1.25	1.09	0.92	0.76	0.64	0.52	0.42	0.34	0.28	0.24	0.19	0.16	0.13	0.09	0.06	0.04	0.02	
-50	12.6	11.1	9.25	7.08	4.99	2.91	1.89	1.22	0.79	0.53	0.36	0.29	0.23	0.18	0.13	0.09	0.05	0.02	
-40	60.6	54.8	45.7	35.0	24.5	15.9	9.59	5.31	2.39	1.24	0.69	0.43	0.30	0.23	0.16	0.11	0.06	0.02	
-30	164	152	134	110	79.9	51.8	29.8	15.7	7.68	2.95	1.32	0.66	0.39	0.28	0.20	0.13	0.07	0.02	
-20	276	266	242	207	161	111	66.0	33.7	15.6	6.69	2.28	0.98	0.51	0.31	0.22	0.15	0.07	0.02	
-10	343	341	322	283	230	164	102	53.2	23.8	9.93	3.46	1.27	0.60	0.35	0.24	0.16	0.08	0.02	
0	368	370	354	315	254	183	116	60.9	27.2	11.1	4.09	1.39	0.64	0.36	0.25	0.16	0.08	0.02	
10	385	365	325	272	215	151	93.4	47.9	21.3	9.01	3.17	1.22	0.59	0.35	0.24	0.16	0.08	0.02	
20	310	288	250	200	144	92.9	52.9	26.5	12.5	5.42	1.97	0.91	0.49	0.32	0.23	0.15	0.07	0.02	
30	175	159	135	102	69.0	40.9	21.5	10.8	5.38	2.24	1.13	0.62	0.39	0.28	0.20	0.13	0.07	0.02	
40	55.6	48.8	39.2	28.3	18.6	11.6	6.80	3.30	1.70	0.99	0.61	0.41	0.31	0.24	0.17	0.11	0.06	0.02	
50	9.15	8.18	6.83	5.24	3.55	2.28	1.51	1.01	0.68	0.48	0.36	0.30	0.24	0.19	0.14	0.09	0.05	0.02	
60	1.16	1.09	0.98	0.85	0.71	0.59	0.48	0.39	0.32	0.28	0.24	0.21	0.17	0.14	0.10	0.07	0.04	0.02	
70	0.33	0.31	0.29	0.27	0.25	0.23	0.21	0.20	0.18	0.16	0.15	0.13	0.10	0.09	0.07	0.05	0.03	0.02	
80	0.13	0.12	0.11	0.10	0.09	0.07	0.07	0.07	0.06	0.06	0.05	0.05	0.05	0.04	0.03	0.03	0.03	0.02	
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02
100	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02
110	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02
120	0.03	0.04	0.05	0.05	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02
130	0.17	0.17	0.16	0.15	0.14	0.10	0.07	0.05	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02
140	0.43	0.42	0.39	0.35	0.30	0.24	0.17	0.11	0.07	0.04	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.02
150	0.76	0.73	0.69	0.61	0.52	0.42	0.32	0.22	0.14	0.08	0.04	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02
160	1.08	1.05	0.97	0.86	0.74	0.60	0.48	0.37	0.24	0.15	0.08	0.03	0.01	0.02	0.02	0.02	0.02	0.02	0.02
170	1.43	1.33	1.19	1.05	0.93	0.79	0.63	0.48	0.33	0.20	0.11	0.04	0.02	0.02	0.02	0.02	0.02	0.02	0.02
180	1.57	1.48	1.36	1.22	1.07	0.90	0.72	0.54	0.37	0.23	0.12	0.05	0.02	0.02	0.02	0.02	0.02	0.02	0.02

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: