

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1122.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		-3.0 degrees horizontal
Beam Spread	At 10% of Imax	85.2V x 85.1H
	At 50% of Imax	57.7V x 57.7H
	At 90% of Imax	30.8V x 31.1H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	945.9 lumens per klm.
	To 50% of Imax	676.9 lumens per klm.
	To 90% of Imax	250.8 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.79V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:273.148x1 lm		
NAME:Nuit 100-100mm-RGBW RED-60D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

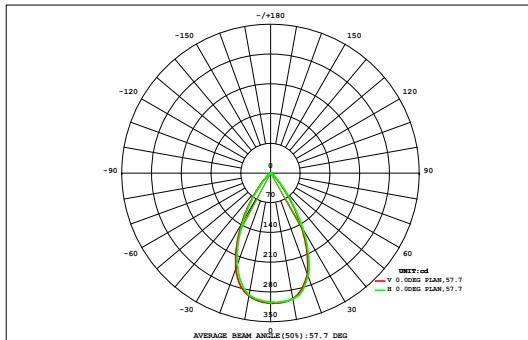

DATA OF LAMP		Eff:32.52lm/W	
MODEL		Imax(cd)	306.5
NOMINAL POWER(W)	30	AVAILABILITY(%)	94.6
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	258.3
NOMINAL FLUX(lm)	273.148	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	273.1
TEST VOLTAGE(V)	220	θ @50% (H,V)	58,58DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00
72	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.12	0.00
64	0.00	0.00	0.00	0.01	0.01	0.03	0.05	0.08	0.09	0.09	0.07	0.05	0.02	0.01	0.01	0.00	0.00	0.00	0.54	0.00
56	0.00	0.00	0.01	0.02	0.05	0.12	0.23	0.35	0.42	0.41	0.32	0.20	0.10	0.04	0.01	0.00	0.00	0.00	2.28	0.32
48	0.00	0.00	0.01	0.04	0.15	0.38	0.76	1.14	1.36	1.33	1.07	0.67	0.31	0.12	0.03	0.01	0.00	0.00	7.41	6.20
40	0.00	0.00	0.02	0.10	0.36	0.94	1.75	2.48	2.87	2.81	2.36	1.57	0.77	0.27	0.08	0.02	0.00	0.00	16.4	15.6
32	0.00	0.01	0.04	0.19	0.69	1.68	2.87	3.95	4.43	4.36	3.74	2.59	1.39	0.54	0.15	0.03	0.01	0.00	26.7	26.0
24	0.00	0.01	0.06	0.28	1.03	2.34	3.82	4.99	5.45	5.40	4.74	3.46	2.06	0.89	0.25	0.05	0.01	0.00	34.8	34.2
	0.00	0.01	0.07	0.35	1.25	2.78	4.43	5.49	5.85	5.77	5.27	4.15	2.58	1.16	0.33	0.07	0.01	0.00	39.6	39.0
	0.00	0.01	0.07	0.37	1.31	2.93	4.61	5.64	5.92	5.87	5.43	4.33	2.69	1.22	0.35	0.07	0.01	0.00	40.8	40.3
	0.00	0.01	0.07	0.34	1.20	2.73	4.35	5.38	5.76	5.64	5.08	3.92	2.38	1.04	0.29	0.06	0.01	0.00	38.3	37.7
-24	0.00	0.01	0.05	0.25	0.90	2.12	3.43	4.44	4.94	4.82	4.12	3.01	1.76	0.72	0.20	0.04	0.01	0.00	30.8	30.2
-32	0.00	0.01	0.03	0.15	0.52	1.26	2.19	2.96	3.40	3.31	2.71	1.87	1.01	0.39	0.11	0.02	0.00	0.00	20.0	19.2
-40	0.00	0.00	0.02	0.07	0.23	0.55	1.04	1.49	1.72	1.66	1.32	0.84	0.42	0.17	0.05	0.01	0.00	0.00	9.61	8.48
-48	0.00	0.00	0.01	0.03	0.08	0.18	0.33	0.49	0.58	0.55	0.43	0.27	0.14	0.06	0.02	0.01	0.00	0.00	3.18	1.09
-56	0.00	0.00	0.01	0.01	0.02	0.04	0.08	0.12	0.14	0.13	0.10	0.06	0.03	0.01	0.01	0.00	0.00	0.00	0.77	0.00
-64	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.16	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.03	0.09	0.46	2.23	7.81	18.1	30.0	39.1	43.0	42.2	36.8	27.0	15.7	6.63	1.89	0.41	0.08	0.02	271	---
Φ a	0.00	0.00	0.00	0.61	6.73	17.2	29.2	38.3	42.2	41.4	36.0	26.2	14.8	5.47	0.36	0.00	0.00	0.00	---	258

one-half-peak spread: U:27.3,D:27.7 , L:26.4,R:29.6


NEMA Beam Type: Type 5

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.79V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:273.148x1 lm		
NAME:Nuit 100-100mm-RGBW RED-60D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

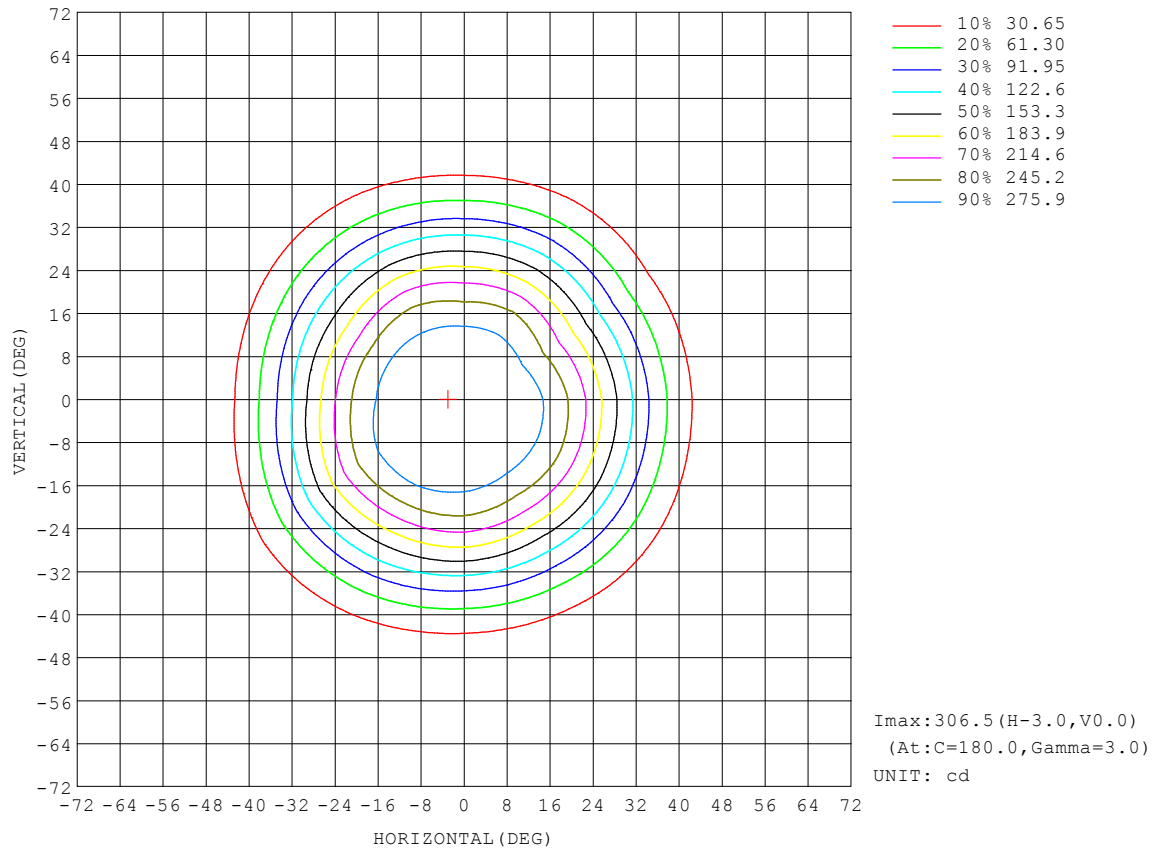


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:219.79V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:273.148x1 lm		
NAME:Nuit 100-100mm-RGBW RED-60D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

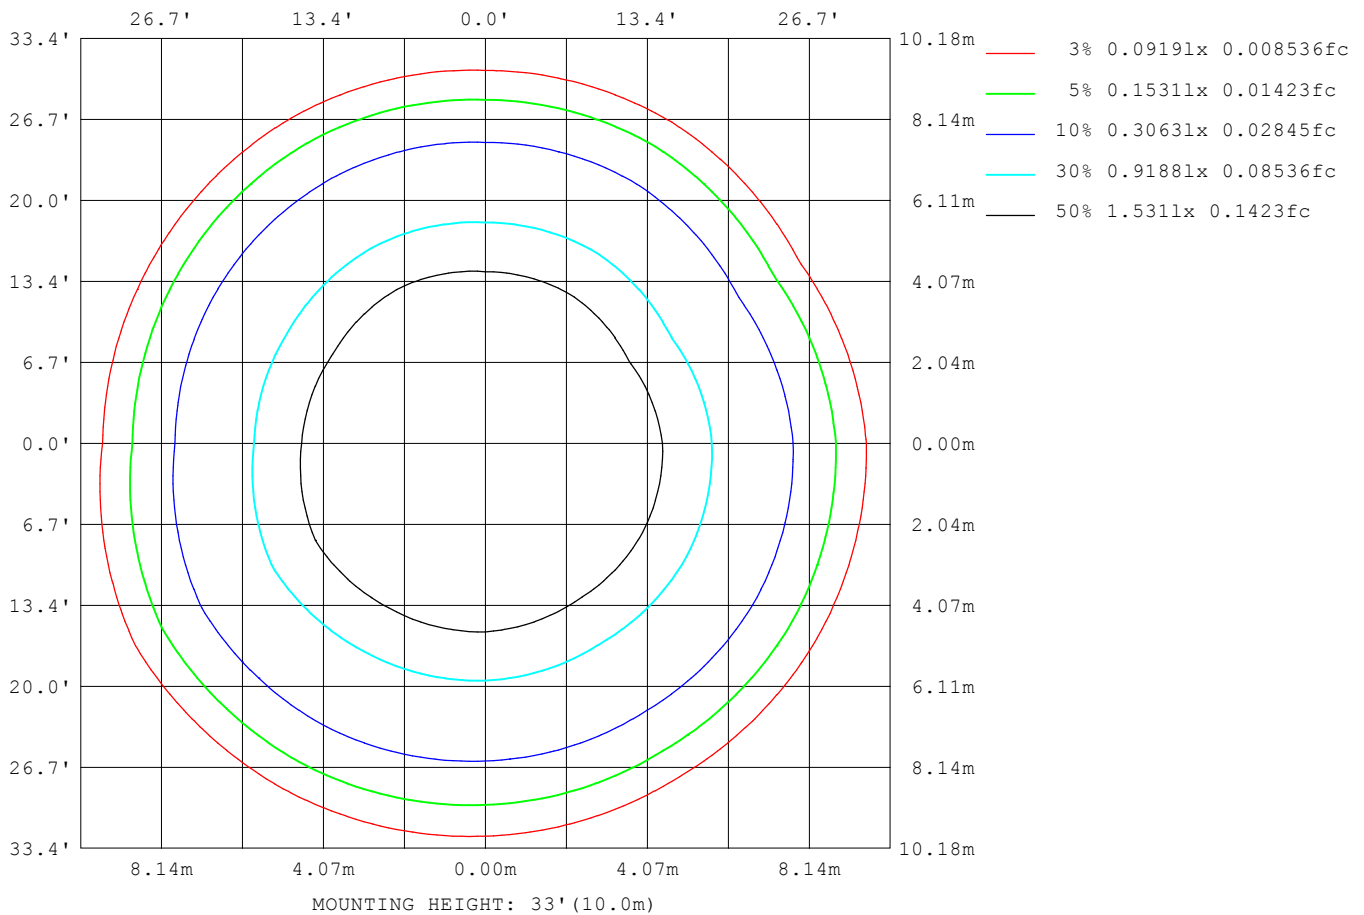

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

Planar Illuminance Curve

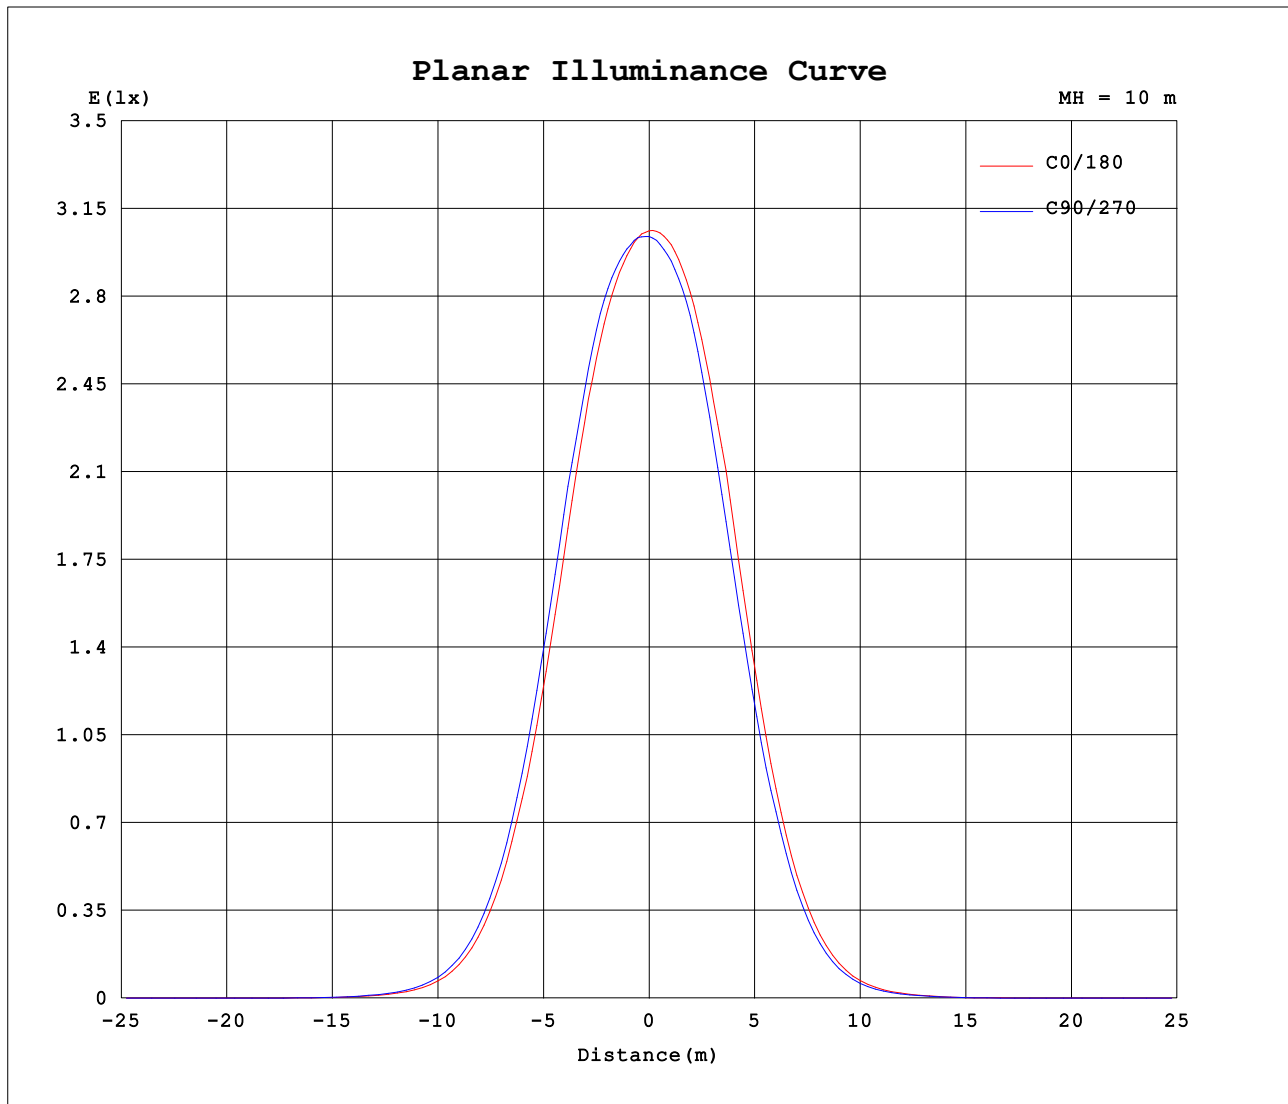


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

AAI CURVES

Test:U:219.79V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:273.148x1 lm		
NAME:Nuit 100-100mm-RGBW RED-60D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

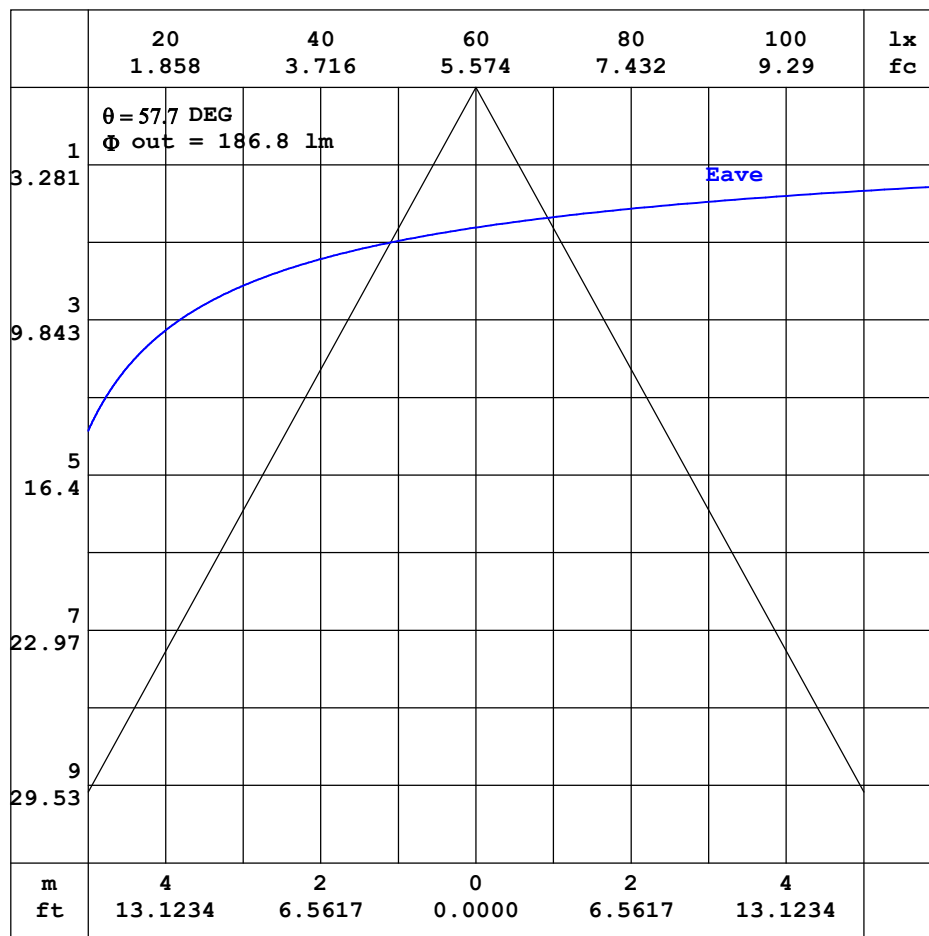

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: 01
Test Date: 2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.79V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:273.148x1 lm		
NAME:Nuit 100-100mm-RGBW RED-60D-REV1	TYPE:RGBW-RED	WEIGHT:
SPEC.:60 DEG	DIA.:100mm	SERIAL No.:
MFR.: 001	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.04	0.04	0.04	0.04	0.04	0.04	0.06	0.11	0.17	0.26	0.39	0.53	0.67	0.80	0.92	1.05	1.16	1.29	1.32
-170	0.04	0.05	0.05	0.05	0.05	0.05	0.06	0.10	0.16	0.25	0.37	0.50	0.64	0.77	0.88	0.98	1.06	1.11	1.19
-160	0.04	0.05	0.06	0.06	0.05	0.05	0.07	0.09	0.14	0.21	0.30	0.42	0.54	0.65	0.74	0.81	0.87	0.93	0.98
-150	0.04	0.06	0.06	0.06	0.06	0.06	0.06	0.07	0.10	0.15	0.21	0.28	0.36	0.44	0.51	0.58	0.64	0.70	0.73
-140	0.04	0.06	0.07	0.07	0.07	0.06	0.06	0.07	0.08	0.10	0.12	0.15	0.19	0.23	0.27	0.33	0.38	0.41	0.43
-130	0.04	0.06	0.08	0.08	0.09	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.08	0.11	0.13	0.16	0.18	0.19
-120	0.04	0.07	0.08	0.09	0.10	0.10	0.10	0.08	0.08	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.07
-110	0.04	0.07	0.09	0.11	0.12	0.13	0.13	0.13	0.12	0.10	0.09	0.08	0.07	0.07	0.06	0.05	0.04	0.03	0.02
-100	0.04	0.07	0.09	0.12	0.14	0.16	0.17	0.16	0.15	0.13	0.12	0.11	0.10	0.09	0.07	0.06	0.04	0.03	0.01
-90	0.04	0.07	0.10	0.13	0.16	0.19	0.22	0.20	0.19	0.17	0.15	0.14	0.12	0.10	0.09	0.07	0.05	0.03	0.01
-80	0.04	0.07	0.11	0.15	0.19	0.22	0.27	0.26	0.25	0.24	0.23	0.21	0.20	0.18	0.16	0.14	0.11	0.09	0.07
-70	0.04	0.07	0.12	0.17	0.22	0.26	0.31	0.32	0.31	0.30	0.29	0.29	0.28	0.26	0.25	0.23	0.22	0.19	0.17
-60	0.04	0.08	0.13	0.19	0.24	0.29	0.33	0.35	0.35	0.37	0.41	0.48	0.56	0.65	0.75	0.85	0.93	0.97	0.97
-50	0.04	0.08	0.14	0.20	0.25	0.30	0.34	0.41	0.53	0.75	1.11	1.67	2.85	4.43	6.02	7.55	8.80	9.50	9.57
-40	0.04	0.08	0.15	0.21	0.26	0.31	0.40	0.62	1.15	2.37	5.15	9.12	14.9	22.7	32.2	41.4	48.5	52.6	52.8
-30	0.04	0.08	0.14	0.21	0.26	0.33	0.53	1.09	2.95	7.38	15.6	29.4	50.3	76.0	103	125	141	152	155
-20	0.04	0.08	0.14	0.21	0.26	0.37	0.71	1.83	5.70	13.9	31.8	63.1	106	149	189	220	244	256	258
-10	0.04	0.08	0.14	0.20	0.25	0.40	0.86	2.54	7.75	19.6	45.4	87.5	141	198	249	280	297	303	301
0	0.04	0.07	0.13	0.19	0.24	0.38	0.86	2.60	7.82	20.0	46.6	89.3	144	202	254	283	300	306	306
10	0.04	0.07	0.13	0.18	0.24	0.37	0.79	2.14	6.70	16.8	39.3	77.0	125	174	220	259	280	288	291
20	0.04	0.07	0.12	0.17	0.22	0.32	0.61	1.42	4.31	10.3	23.4	47.9	82.5	121	157	192	219	230	229
30	0.04	0.07	0.11	0.15	0.20	0.26	0.42	0.83	1.75	4.81	9.97	19.7	35.8	56.9	79.8	101	117	126	128
40	0.04	0.06	0.10	0.14	0.18	0.22	0.28	0.44	0.79	1.44	3.17	5.93	9.85	15.4	22.4	29.7	35.7	39.3	39.8
50	0.04	0.06	0.09	0.12	0.15	0.18	0.21	0.25	0.35	0.50	0.78	1.18	1.76	2.98	4.13	5.20	6.04	6.54	6.61
60	0.04	0.05	0.07	0.09	0.11	0.14	0.16	0.18	0.19	0.22	0.26	0.32	0.39	0.48	0.58	0.67	0.74	0.78	0.78
70	0.04	0.04	0.05	0.07	0.08	0.10	0.10	0.11	0.12	0.12	0.13	0.13	0.14	0.15	0.16	0.18	0.19	0.20	0.21
80	0.04	0.04	0.04	0.05	0.05	0.05	0.06	0.06	0.05	0.05	0.05	0.04	0.04	0.05	0.06	0.07	0.07	0.08	0.09
90	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01
100	0.04	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00
110	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.00
120	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.05	0.04	0.03	0.02	0.01	0.00
130	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.02	0.03	0.04	0.07	0.10	0.12	0.13	0.13	0.13	0.13
140	0.04	0.04	0.04	0.04	0.03	0.02	0.02	0.02	0.01	0.03	0.07	0.12	0.18	0.23	0.29	0.33	0.35	0.37	0.37
150	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.05	0.09	0.14	0.23	0.32	0.42	0.50	0.58	0.62	0.65	0.66
160	0.04	0.04	0.04	0.04	0.04	0.03	0.04	0.06	0.10	0.16	0.25	0.35	0.46	0.58	0.69	0.79	0.86	0.90	0.91
170	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.08	0.14	0.23	0.34	0.47	0.59	0.71	0.82	0.93	1.05	1.14	1.15
180	0.04	0.04	0.04	0.04	0.04	0.04	0.06	0.11	0.17	0.26	0.39	0.53	0.67	0.80	0.92	1.05	1.16	1.29	1.32

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.79V I:0.0440A P:8.4000W PF:0.9000 Freq:49.37Hz Lamp Flux:273.148x1 lm																		
NAME:Nuit 100-100mm-RGBW RED-60D-REV1									TYPE:RGBW-RED					WEIGHT:				
SPEC.:60 DEG									DIA.:100mm					SERIAL No.:				
MFR.: 001									SUR.:					Shielding Angle:				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.28	1.20	1.12	1.01	0.89	0.74	0.59	0.43	0.29	0.17	0.08	0.03	0.01	0.01	0.01	0.01	0.01	0.02	
-170	1.14	1.11	1.05	0.95	0.84	0.70	0.56	0.41	0.27	0.16	0.08	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-160	0.95	0.90	0.85	0.79	0.70	0.59	0.46	0.34	0.22	0.14	0.07	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-150	0.71	0.67	0.61	0.55	0.48	0.39	0.31	0.23	0.16	0.09	0.05	0.03	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-140	0.42	0.39	0.35	0.29	0.25	0.21	0.16	0.12	0.09	0.06	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.02
-130	0.18	0.17	0.14	0.11	0.08	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-120	0.06	0.05	0.04	0.03	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-110	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
-100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.02
-90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02
-80	0.07	0.07	0.08	0.08	0.08	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.02
-70	0.18	0.18	0.18	0.18	0.18	0.18	0.15	0.14	0.12	0.09	0.07	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.02
-60	0.93	0.85	0.73	0.61	0.51	0.42	0.34	0.26	0.20	0.16	0.12	0.11	0.08	0.07	0.05	0.04	0.03	0.02	
-50	9.02	7.92	6.48	4.89	3.41	1.97	1.28	0.80	0.50	0.33	0.21	0.16	0.13	0.10	0.08	0.06	0.04	0.02	
-40	49.8	43.3	34.7	25.5	17.5	11.2	6.73	3.68	1.62	0.80	0.43	0.26	0.18	0.14	0.10	0.07	0.04	0.02	
-30	147	131	110	86.3	61.5	38.8	21.6	11.1	5.44	2.02	0.86	0.42	0.23	0.17	0.12	0.08	0.05	0.02	
-20	248	228	200	166	126	86.4	50.2	24.6	11.0	4.71	1.54	0.63	0.32	0.19	0.14	0.09	0.05	0.02	
-10	295	283	261	225	175	125	77.0	39.4	17.1	6.97	2.36	0.83	0.38	0.21	0.15	0.10	0.05	0.02	
0	302	293	274	239	190	136	85.9	44.7	19.5	7.82	2.82	0.92	0.41	0.22	0.16	0.11	0.05	0.02	
10	286	270	238	200	157	111	67.4	34.5	15.2	6.29	2.14	0.80	0.38	0.22	0.16	0.10	0.05	0.02	
20	225	209	179	142	103	64.9	37.2	18.7	8.69	3.78	1.33	0.59	0.31	0.20	0.14	0.10	0.05	0.02	
30	124	112	94.3	71.1	47.8	28.3	15.0	7.46	3.72	1.50	0.74	0.40	0.24	0.18	0.13	0.09	0.05	0.02	
40	38.1	33.5	26.9	19.6	13.0	8.07	4.69	2.23	1.14	0.64	0.39	0.26	0.19	0.15	0.11	0.08	0.05	0.02	
50	6.34	5.67	4.73	3.62	2.43	1.51	1.00	0.65	0.44	0.30	0.23	0.19	0.15	0.12	0.09	0.06	0.04	0.02	
60	0.76	0.71	0.63	0.53	0.44	0.36	0.29	0.23	0.20	0.17	0.15	0.13	0.11	0.09	0.07	0.05	0.03	0.02	
70	0.20	0.19	0.18	0.16	0.14	0.13	0.12	0.12	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.02	
80	0.08	0.07	0.06	0.05	0.04	0.03	0.04	0.04	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.02
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02
110	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02
120	0.02	0.02	0.03	0.03	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02
130	0.14	0.14	0.14	0.13	0.12	0.09	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02
140	0.38	0.37	0.36	0.32	0.27	0.21	0.15	0.09	0.05	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.02
150	0.67	0.66	0.63	0.56	0.47	0.38	0.28	0.19	0.12	0.06	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
160	0.92	0.91	0.85	0.76	0.66	0.54	0.42	0.31	0.20	0.11	0.05	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02
170	1.18	1.09	0.98	0.89	0.79	0.67	0.53	0.39	0.26	0.15	0.07	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.02
180	1.28	1.20	1.12	1.01	0.89	0.74	0.59	0.43	0.29	0.17	0.08	0.03	0.01	0.01	0.01	0.01	0.01	0.01	0.02

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:01
Test Date:2026-02-06

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:7.700m [K=1.0000]
Remarks: